

# Symantec™ Cluster Server

## 6.1 Agent Developer's Guide

### - AIX, Linux, Solaris, Windows

# Symantec™ Cluster Server Agent Developer's Guide

The software described in this book is furnished under a license agreement and may be used only in accordance with the terms of the agreement.

Product version: VCS 6.1

Document version: 6.1 Rev 1

## Legal Notice

Copyright © 2014 Symantec Corporation. All rights reserved.

Symantec, the Symantec Logo, the Checkmark Logo, Veritas, Veritas Storage Foundation, CommandCentral, NetBackup, Enterprise Vault, and LiveUpdate are trademarks or registered trademarks of Symantec Corporation or its affiliates in the U.S. and other countries. Other names may be trademarks of their respective owners.

The product described in this document is distributed under licenses restricting its use, copying, distribution, and decompilation/reverse engineering. No part of this document may be reproduced in any form by any means without prior written authorization of Symantec Corporation and its licensors, if any.

THE DOCUMENTATION IS PROVIDED "AS IS" AND ALL EXPRESS OR IMPLIED CONDITIONS, REPRESENTATIONS AND WARRANTIES, INCLUDING ANY IMPLIED WARRANTY OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT, ARE DISCLAIMED, EXCEPT TO THE EXTENT THAT SUCH DISCLAIMERS ARE HELD TO BE LEGALLY INVALID. SYMANTEC CORPORATION SHALL NOT BE LIABLE FOR INCIDENTAL OR CONSEQUENTIAL DAMAGES IN CONNECTION WITH THE FURNISHING, PERFORMANCE, OR USE OF THIS DOCUMENTATION. THE INFORMATION CONTAINED IN THIS DOCUMENTATION IS SUBJECT TO CHANGE WITHOUT NOTICE.

The Licensed Software and Documentation are deemed to be commercial computer software as defined in FAR 12.212 and subject to restricted rights as defined in FAR Section 52.227-19 "Commercial Computer Software - Restricted Rights" and DFARS 227.7202, "Rights in Commercial Computer Software or Commercial Computer Software Documentation", as applicable, and any successor regulations, whether delivered by Symantec as on premises or hosted services. Any use, modification, reproduction release, performance, display or disclosure of the Licensed Software and Documentation by the U.S. Government shall be solely in accordance with the terms of this Agreement.

Symantec Corporation  
350 Ellis Street  
Mountain View, CA 94043

<http://www.symantec.com>

# Technical Support

Symantec Technical Support maintains support centers globally. Technical Support's primary role is to respond to specific queries about product features and functionality. The Technical Support group also creates content for our online Knowledge Base. The Technical Support group works collaboratively with the other functional areas within Symantec to answer your questions in a timely fashion. For example, the Technical Support group works with Product Engineering and Symantec Security Response to provide alerting services and virus definition updates.

Symantec's support offerings include the following:

- A range of support options that give you the flexibility to select the right amount of service for any size organization
- Telephone and/or Web-based support that provides rapid response and up-to-the-minute information
- Upgrade assurance that delivers software upgrades
- Global support purchased on a regional business hours or 24 hours a day, 7 days a week basis
- Premium service offerings that include Account Management Services

For information about Symantec's support offerings, you can visit our website at the following URL:

[www.symantec.com/business/support/index.jsp](http://www.symantec.com/business/support/index.jsp)

All support services will be delivered in accordance with your support agreement and the then-current enterprise technical support policy.

## Contacting Technical Support

Customers with a current support agreement may access Technical Support information at the following URL:

[www.symantec.com/business/support/contact\\_techsupp\\_static.jsp](http://www.symantec.com/business/support/contact_techsupp_static.jsp)

Before contacting Technical Support, make sure you have satisfied the system requirements that are listed in your product documentation. Also, you should be at the computer on which the problem occurred, in case it is necessary to replicate the problem.

When you contact Technical Support, please have the following information available:

- Product release level
- Hardware information

- Available memory, disk space, and NIC information
- Operating system
- Version and patch level
- Network topology
- Router, gateway, and IP address information
- Problem description:
  - Error messages and log files
  - Troubleshooting that was performed before contacting Symantec
  - Recent software configuration changes and network changes

## Licensing and registration

If your Symantec product requires registration or a license key, access our technical support Web page at the following URL:

[www.symantec.com/business/support/](http://www.symantec.com/business/support/)

## Customer service

Customer service information is available at the following URL:

[www.symantec.com/business/support/](http://www.symantec.com/business/support/)

Customer Service is available to assist with non-technical questions, such as the following types of issues:

- Questions regarding product licensing or serialization
- Product registration updates, such as address or name changes
- General product information (features, language availability, local dealers)
- Latest information about product updates and upgrades
- Information about upgrade assurance and support contracts
- Information about the Symantec Buying Programs
- Advice about Symantec's technical support options
- Nontechnical presales questions
- Issues that are related to CD-ROMs or manuals

## Support agreement resources

If you want to contact Symantec regarding an existing support agreement, please contact the support agreement administration team for your region as follows:

Asia-Pacific and Japan [customercare\\_apac@symantec.com](mailto:customercare_apac@symantec.com)

Europe, Middle-East, and Africa [semea@symantec.com](mailto:semea@symantec.com)

North America and Latin America [supportsolutions@symantec.com](mailto:supportsolutions@symantec.com)

## Documentation

Product guides are available on the media in PDF format. Make sure that you are using the current version of the documentation. The document version appears on page 2 of each guide. The latest product documentation is available on the Symantec website.

<https://sort.symantec.com/documents>

Your feedback on product documentation is important to us. Send suggestions for improvements and reports on errors or omissions. Include the title and document version (located on the second page), and chapter and section titles of the text on which you are reporting. Send feedback to:

[doc\\_feedback@symantec.com](mailto:doc_feedback@symantec.com)

For information regarding the latest HOWTO articles, documentation updates, or to ask a question regarding product documentation, visit the Storage and Clustering Documentation forum on Symantec Connect.

<https://www-secure.symantec.com/connect/storage-management/forums/storage-and-clustering-documentation>

## About Symantec Connect

Symantec Connect is the peer-to-peer technical community site for Symantec's enterprise customers. Participants can connect and share information with other product users, including creating forum posts, articles, videos, downloads, blogs and suggesting ideas, as well as interact with Symantec product teams and Technical Support. Content is rated by the community, and members receive reward points for their contributions.

<http://www.symantec.com/connect/storage-management>

# Contents

Technical Support .....	4
Chapter 1	
Introduction .....	16
About VCS agents .....	16
What's new in this release .....	17
How agents work .....	18
About the agent framework .....	18
About intelligent monitoring framework (IMF) .....	18
Resource type definitions .....	19
About agent functions (entry points) .....	19
About on-off, on-only, and persistent resources .....	19
About attributes .....	20
About intentional offline of applications .....	25
About developing an agent .....	25
Considerations for the application .....	25
High-level overview of the agent development process .....	26
Chapter 2	
Agent entry point overview .....	28
About agent entry points .....	28
Supported entry points .....	28
How the agent framework interacts with entry points .....	29
Agent entry points described .....	30
About the open entry point .....	30
About the monitor entry point .....	30
About the online entry point .....	31
About the offline entry point .....	31
About the clean entry point .....	32
About the action entry point .....	33
About the info entry point .....	34
About the attr_changed entry point .....	36
About the close entry point .....	37
About the shutdown entry point .....	37
About the imf_init entry point .....	38
About the imf_register entry point .....	38
About the imf_getnotification entry point .....	38

About the migrate entry point .....	39
Return values for entry points .....	39
Considerations for using C++ or script entry points .....	41
About the VCSAgStartup routine .....	42
About the agent information file .....	43
Example agent information file (UNIX) .....	43
Implementing the agent XML information file .....	46
About the ArgList and ArgListValues attributes .....	47
ArgListValues attribute for agents registered as V50 and later .....	47
Overview of the name-value tuple format .....	48
ArgListValues attribute for different agents versions .....	49
About the entry point timeouts .....	50

Chapter 3	Creating entry points in C++ .....	52
	About creating entry points in C++ .....	52
	Entry point examples in this chapter .....	53
	Data Structures .....	53
	Syntax for C++ entry points .....	54
	Syntax for C++ VCSAgStartup .....	55
	Syntax for C++ monitor .....	56
	Syntax for C++ info .....	57
	Syntax for C++ online .....	61
	Syntax for C++ offline .....	62
	Syntax for C++ clean .....	63
	Syntax for C++ action .....	64
	Syntax for C++ attr_changed .....	66
	Syntax for C++ open .....	67
	Syntax for C++ close .....	68
	Syntax for C++ shutdown .....	69
	Syntax for C++ migrate .....	69
	Agent framework primitives .....	70
	VCSAgGetMonitorLevel .....	70
	VCSAgGetFwVersion .....	71
	VCSAgGetRegVersion .....	71
	VCSAgRegisterEPStruct .....	72
	VCSAgSetCookie2 .....	72
	VCSAgRegister .....	73
	VCSAgUnregister .....	74
	VCSAgGetCookie .....	75
	VCSAgStrlcpy .....	76
	VCSAgStrlcat .....	76



VCSAgSprintf	76
VCSAgCloseFile	77
VCSAgDelString	77
VCSAgExec	77
VCSAgExecWithTimeout	79
VCSAgGenSnmpTrap	80
VCSAgSendTrap	80
VCSAgLockFile	80
VCSAgInitEntryPointStruct	80
VCSAgSetStackSize	81
VCSAgUnlockFile	81
VCSAgValidateAndSetEntryPoint	82
VCSAgSetLogCategory	82
VCSAgGetProductName	82
VCSAgMonitorReturn	82
VCSAgSetResEPTimeout	83
VCSAgDecryptKey	83
VCSAgGetConfDir	83
VCSAgGetHomeDir	84
VCSAgGetLogDir	84
VCSAgGetSystemName	84
VCSAG_CONSOLE_LOG_MSG	84
VCSAG_LOG_MSG	85
VCSAG_LOGDBG_MSG	85
VCSAG_RES_LOG_MSG	85
Agent Framework primitives for container support	86
VCSAgIsContainerUp	86
VCSAgGetContainerTypeEnum	86
VCSAgExecInContainer2	86
VCSAgIsContainerCapable	87
VCSAgExecInContainerWithTimeout	87
VCSAgGetUID	87
VCSAgIsPidInContainer	88
VCSAgIsProclnContainer	88
VCSAgGetContainerID2	88
VCSAgGetContainerName2	89
VCSAgGetContainerBasePath	89
VCSAgGetContainerEnabled	90
Chapter 4	
Creating entry points in scripts	92
About creating entry points in scripts	92
Rules for using script entry points	93

Parameters and values for script entry points .....	93
ArgList attributes .....	93
Examples .....	93
Syntax for script entry points .....	94
Syntax for the monitor script .....	94
Syntax for the online script .....	95
Syntax for the offline script .....	95
Syntax for the clean script .....	95
Syntax for the action script .....	96
Syntax for the attr_changed script .....	96
Syntax for the info script .....	96
Syntax for the open script .....	96
Syntax for the close script .....	97
Syntax for the shutdown script .....	97
Syntax for the imf_init script .....	97
Syntax for the imf_register script .....	97
Syntax for the imf_getnotification script .....	98
Syntax for migrate script .....	98
Agent framework primitives .....	98
VCSAG_GET_MONITOR_LEVEL .....	98
VCSAG_GET_AGFW_VERSION .....	100
VCSAG_GET_REG_VERSION .....	100
VCSAG_SET_RES_EP_TIMEOUT .....	100
VCSAG_GET_ATTR_VALUE .....	101
VCSAG_SET_RESINFO .....	103
VCSAG_MONITOR_EXIT .....	103
VCSAG_SYSTEM .....	105
VCSAG_SU .....	105
VCSAG_RETURN_IMF_RESID .....	106
VCSAG_RETURN_IMF_EVENT .....	106
VCSAG_BLD_PSCOMM .....	106
VCSAG_PHANTOM_STATE .....	106
VCSAG_SET_ENVS .....	107
VCSAG_LOG_MSG .....	107
VCSAG_LOGDBG_MSG .....	107
VCSAG_SQUEEZE_SPACES .....	107
Agent Framework primitives with container support .....	108
VCSAG_GET_CONTAINER_BASE_PATH .....	108
VCSAG_GET_CONTAINER_INFO .....	109
VCSAG_IS_PROC_IN_CONTAINER .....	110
VCSAG_EXEC_IN_CONTAINER .....	111
Example script entry points .....	111
Online entry point for FileOnOff .....	112

	Monitor entry point for FileOnOff .....	112
	Monitor entry point with intentional offline .....	113
	Offline entry point for FileOnOff .....	115
	Monitor entry point for agent having basic (level-1) and detailed (level-2) monitoring .....	115
Chapter 5	Logging agent messages .....	118
	About logging agent messages .....	118
	Logging in C++ and script-based entry points .....	118
	Agent messages: format .....	119
	C++ agent logging APIs .....	121
	Agent application logging macros for C++ entry points .....	121
	Agent debug logging macros for C++ entry points .....	122
	Severity arguments for C++ macros .....	123
	Initializing function_name using VCSAG_LOG_INIT .....	124
	Log category .....	124
	Examples of logging APIs used in a C++ agent .....	125
	Script entry point logging functions .....	129
	Using functions in scripts .....	129
	VCSAG_SET_ENVS .....	129
	VCSAG_LOG_MSG .....	132
	VCSAG_LOGDBG_MSG .....	133
	Example of logging functions used in a script agent .....	135
Chapter 6	Building a custom agent .....	136
	Files for use in agent development .....	136
	Script based agent binaries .....	136
	C++ based agent binaries .....	137
	Creating the type definition file for a custom agent .....	137
	Naming convention for the type definition file .....	137
	Example: FileOnOffTypes.cf .....	138
	Example: Type definition for a custom agent that supports intentional offline .....	138
	Requirements for creating the agentTypes.cf file .....	138
	Adding the custom type definition to the configuration .....	138
	Building a custom agent on UNIX .....	139
	Implementing entry points using scripts .....	139
	Example: Using script entry points on UNIX .....	140
	Example: Using VCSAgStartup() and script entry points on UNIX .....	141
	Implementing entry points using C++ .....	143
	Example: Using C++ entry points on UNIX .....	143

	Example: Using C++ and script entry points on UNIX .....	147
	Installing the custom agent .....	150
	Defining resources for the custom resource type .....	151
	Sample resource definition .....	151
	Agent framework versions details .....	152
Chapter 7	Building a script based IMF-aware custom agent .....	154
	About building a script based IMF-aware custom agent .....	154
	Linking AMF plugins with script agent .....	155
	Creating XML file required for AMF plugins to do resource registration for online and offline state monitoring .....	155
	Example of amfregister.xml for registration of process-based resource with AMF for online monitoring .....	158
	Example of amfregister.xml for registration of process-based resource with AMF for offline monitoring .....	160
	Example of amfregister.xml for online and offline IMF monitoring for a given process .....	161
	Examples for adding RepeatName tag in amfregister.xml .....	162
	Adding IMF and IMFRegList attributes in configuration .....	163
	Monitor without IMF integration .....	164
	Monitor without IMF but with LevelTwo monitor frequency .....	165
	Monitor with IMF integration .....	166
	Monitor with IMF but with LevelTwo monitor frequency .....	167
	Installing the IMF-aware script-based custom agent .....	168
Chapter 8	Testing agents .....	169
	About testing agents .....	169
	Using debug messages .....	169
	Debugging agent functions (entry points). .....	169
	Debugging the agent framework .....	171
	Debugging using AdvDbg attribute .....	171
	Working of AdvDbg attribute .....	171
	Impact of AdvDbg attribute on existing functionality of the entry point .....	172
	Using the engine process to test agents .....	173
	Test commands .....	173
	Using the AgentServer utility to test agents .....	174

Chapter 9	Static type attributes .....	179
	About static attributes .....	179
	Overriding static type attributes .....	179
	Static type attribute definitions .....	180
	ActionTimeout .....	180
	AdvDbg .....	180
	AEPTimeout .....	182
	AgentClass .....	182
	AgentDirectory .....	183
	AgentFailedOn .....	183
	AgentFile .....	183
	AgentPriority .....	183
	AgentReplyTimeout .....	183
	AgentStartTimeout .....	184
	AlertOnMonitorTimeouts .....	184
	ArgList .....	184
	AttrChangedTimeout .....	185
	CleanRetryLimit .....	185
	CleanTimeout .....	185
	CloseTimeout .....	186
	ContainerOpts .....	186
	ConflInterval .....	186
	EPClass .....	187
	EPPriority .....	187
	ExternalStateChange .....	187
	FaultOnMonitorTimeouts .....	188
	FaultPropagation .....	188
	FireDrill .....	188
	IMF .....	189
	IMFRegList .....	189
	InfoInterval .....	190
	InfoTimeout .....	190
	IntentionalOffline .....	190
	LevelTwoMonitorFreq .....	191
	LogDbg .....	191
	LogFileSize .....	192
	ManageFaults .....	192
	MonitorInterval .....	193
	MonitorStatsParam .....	193
	MonitorTimeout .....	194
	MigrateTimeout .....	194
	MigrateWaitLimit .....	194

	NumThreads .....	195
	OfflineMonitorInterval .....	195
	OfflineTimeout .....	195
	OfflineWaitLimit .....	196
	OnlineClass .....	196
	OnlinePriority .....	196
	OnlineRetryLimit .....	196
	OnlineTimeout .....	197
	OnlineWaitLimit .....	197
	OpenTimeout .....	197
	Operations .....	197
	RegList .....	198
	RestartLimit .....	199
	ScriptClass .....	199
	ScriptPriority .....	200
	SourceFile .....	200
	SupportedActions .....	200
	SupportedOperations .....	201
	ToleranceLimit .....	201
Chapter 10	State transition diagram .....	202
	State transitions .....	202
	State transitions with respect to ManageFaults attribute .....	216
Chapter 11	Internationalized messages .....	221
	About internationalized messages .....	221
	Creating SMC files .....	222
	SMC format .....	222
	Example SMC file .....	222
	Formatting SMC files .....	223
	Naming SMC files, BMC files .....	223
	Message examples .....	224
	Using format specifiers .....	224
	Converting SMC files to BMC files .....	224
	Storing BMC files .....	225
	Displaying the contents of BMC files .....	225
	Using BMC Map Files .....	225
	Location of BMC Map Files .....	225
	Creating BMC Map Files .....	226
	Example BMC Map File .....	226
	Updating BMC Files .....	227

Appendix A	Using pre-5.0 VCS agents .....	228
	Using pre-5.0 VCS agents and registering them with V50 or later .....	228
	Outline of steps to change V40 agents to V50 or later .....	228
	Example script in V40 and V50 or later .....	229
	Sourcing ag_i18n_inc modules in script entry points .....	229
	Guidelines for using pre-VCS 4.0 Agents .....	230
	Log messages in pre-VCS 4.0 agents .....	230
	Mapping of log tags (pre-VCS 4.0) to log severities (VCS 4.0) .....	231
	How Pre-VCS 4.0 Messages are Displayed by VCS 4.0 and Later .....	231
	Comparing Pre-VCS 4.0 APIs and VCS 4.0 Logging Macros .....	231
	Pre-VCS 4.0 Message APIs .....	232
	VCSAgLogConsoleMsg .....	232
	VCSAgLogI18NMsg .....	233
	VCSAgLogI18NMsgEx .....	234
	VCSAgLogI18NConsoleMsg .....	234
	VCSAgLogI18NConsoleMsgEx .....	235
Index .....		237

# Introduction

This chapter includes the following topics:

- [About VCS agents](#)
- [What's new in this release](#)
- [How agents work](#)
- [About developing an agent](#)

## About VCS agents

Agents are programs that manage resources, such as a disk group or a mount point, within a cluster environment. Each type of resource requires an agent. The agent acts as an intermediary between VCS and the resources it manages, typically by bringing them online, monitoring their state, or taking them offline.

VCS agents are classified as follows:

- **Bundled agents**  
These agents are part of the VCS infrastructure and are packaged along with VCS. Examples of bundled agents include the IP (Internet Protocol) and NIC (network interface card) agents. For more information on VCS bundled agents, including their attributes and modes of operation, see the *Symantec Cluster Server Bundled Agents Reference Guide*.
- **Enterprise agents**  
These agents manage enterprise databases including Oracle, Sybase, and DB2, and are packaged along with VCS.
- **High availability agents**  
High availability agents manage various applications and are available through a release vehicle called Agent Pack. The Agent Pack is released every quarter



independent of the VCS release. The agents are classified based on the application type as follows:

- **Application agents**  
These agents manage enterprise applications, such as WebLogic, WebSphere, and SAP.
- **Database agents**  
These agents manage database applications, such as MySQL, SAP MaxDB, and Informix.
- **Replication agents**  
These agents manage hardware and software replication technologies, such as SRDF and HP EVACA.

The Agent Pack is available as a free download from the following locations:

- **Symantec Operations Readiness Tool (SORT)**  
The agents are available as individual tarballs from:  
<https://sort.symantec.com/agents>
- **Custom agents:** These are agents that are developed outside of Symantec and are not supported by Symantec Technical Support.

## What's new in this release

The following features/updates are introduced in VCS 6.1:

- **Added a new agent Script60Agent in this release.**  
See “[Script based agent binaries](#)” on page 136.
- **Support for migration is added in Script60Agent with the help of new entry point migrate.**  
See “[About the migrate entry point](#)” on page 39.
- **New attributes:**
  - **MigrateWaitLimit** - You can set a number of monitor intervals to wait for a resource to migrate.  
See “[MigrateWaitLimit](#)” on page 194.
  - **MigrateTimeout** - You can set a time limit (in seconds) within which the migrate procedure must complete or the migration process gets terminated.  
See “[MigrateTimeout](#)” on page 194.

## How agents work

A single agent manages multiple resources of the same type on one system. For example, the NIC agent manages all NIC resources. The resources to be managed are those defined within the VCS configuration.

As part of the VCS processes, a high availability daemon (HAD) is responsible for making applications highly available on a system.

When the VCS process HAD comes up on a system, it automatically starts the agents required for the types of resources that are to be managed on the system.

The VCS HAD process provides the agents with the specific configuration information for the resources that are configured under VCS.

An agent carries out the commands received from HAD to bring resources online, offline, migrate, and monitor their status, as needed. When an agent crashes or hangs, VCS detects the fault and restarts the agent.

## About the agent framework

The agent framework is a set of predefined functions compiled into the agent for each resource type. These functions include the ability to connect to the VCS engine and to understand the common configuration attributes, such as `RestartLimit` and `MonitorInterval`. When an agent is built using C++, the agent framework is compiled in the agent with an include statement. When an agent is built using script languages, such as shell or Perl, the user can use the different agent binaries on UNIX shipped with VCS that provides framework functions. The agent framework handles much of the complexity that need not concern the agent developer.

See [“Script based agent binaries”](#) on page 136.

## About intelligent monitoring framework (IMF)

With the IMF, VCS supports intelligent resource monitoring in addition to the poll-based monitoring. IMF is an extension to the VCS agent framework. Many VCS agents use IMF for monitoring resources. You can enable and disable the IMF functionality of the VCS agents as needed. However, IMF is enabled by default for all agents that can use IMF.

The benefits of intelligent monitoring over poll-based monitoring are as follows:

- Provides faster notification of resource state changes.
- Reduces VCS system utilization due to reduced monitor function footprint, which enables VCS to effectively monitor a large number of resources.

## Resource type definitions

The agent for each type of resource requires a resource type definition that describes the information an agent needs to control resources of that type. The type definition file can be considered similar to a header file in a C program. The type definition defines the attributes and their data types, and provides default values for certain attributes that affect all resources of that resource type.

For example, one of the attributes that is defined for the IP resource type is the Address attribute, which stores the IP address of a specific IP resource. This attribute is defined as a 'string-scalar'.

## About agent functions (entry points)

An entry point is either a C++ function or a script (shell or Perl, for example) used by the agent to carry out a specific task on a resource. The agent framework supports a specific set of entry points, each of which is expected to do a different task and return. For example, the online entry point brings a resource online.

See [“Supported entry points”](#) on page 28.

An agent developer should implement the entry points for a resource type that the agent uses to carry out the required tasks on the resources of that type. For example, in the online entry point for the Mount resource type, the agent developer includes the logic to mount a file system based on the parameters provided to the entry point. These parameters are attributes for a particular resource, for example, mount point, device name, and mount options. In the monitor entry point, the agent developer checks the state of the mount resource and returns a code to indicate whether the mount resource is online or offline.

See [“About agent entry points”](#) on page 28.

## About on-off, on-only, and persistent resources

Different types of resources require different types of control. Resources can be classified as on-off, on-only, or persistent.

- On-off resources  
Most resources are on-off, meaning agents start and stop them as required. For example, VCS assigns an IP address to a specified NIC when bringing a resource online and removes the assigned IP address when taking the resource offline. Another example is the DiskGroup resource. VCS imports a disk group when needed and deports it when it is no longer needed. For agents of on-off resources, all entry points can be implemented.
- On-only resources

An on-only resource is brought online, but it is not taken offline when the associated service group is taken offline. For example, in the case of the FileOnOnly resource, the engine creates the specified file when required, but does not delete the file if the associated service group is taken offline. For agents of on-only resources, the offline entry point is not needed or invoked.

- Persistent resources

Persistent resource has an operation value of None. It cannot be brought online or taken offline, yet the resource must be present in the configuration to allow the resource to be monitored. For example, a NIC resource cannot be started or stopped, but it is required to be operational in order for the associated IP address to function properly. The agent monitors persistent resources to ensure their status and operation. An agent for a persistent resource does not require or invoke the online or offline entry points. It uses only the monitor entry points.

## About attributes

VCS has the following types of attributes, depending on the object the attribute applies to.

Resource type attributes	<p>Attributes associated with resource types in VCS. These can be further classified as:</p> <ul style="list-style-type: none"><li>■ <b>Type-independent</b>—Attributes that all agents (or resource types) understand. Examples: <code>RestartLimit</code>, <code>MonitorInterval</code>, <code>Enabled</code>, and <code>Probed</code>; these can be set for any resource type. Typically, these attributes are set for all resources of a specific type. For example, if you set the <code>MonitorInterval</code> for the IP resource type, the same value applies to all resources of type IP. You can also override the values of these attributes, that is, you can configure a different attribute value for each resource of this type.</li><li>■ <b>Type-dependent</b>—Attributes that apply to a particular resource type. Examples: The <code>MountPoint</code> attribute applies only to the <code>Mount</code> resource type. The <code>Address</code> attribute applies only to the IP resource type. Attributes defined in the <code>types</code> file (<code>types.cf</code>) apply to all resources of the resource type. When you configure resources, you can assign resource-specific values to these attributes, which appear in the <code>main.cf</code> file. For example, the <code>PathName</code> attribute for the <code>FileOnOff</code> resource type is type-dependent, and can take a resource-specific value when configured.</li><li>■ <b>Static</b>—These attributes apply to all resource types and can have a different value per resource type. You can override some static attributes and assign them resource-specific values. These attributes are prefixed with the term <code>static</code> and are not included in the resource's argument list. Examples: <code>MonitorInterval</code> and <code>ToleranceLimit</code>.</li></ul>
--------------------------	--

## Attribute data types

VCS supports the following data types for attributes.

String	<p>A string is a sequence of characters. If the string contains double quotes, the quotes must be immediately preceded by a backslash. A backslash is represented in a string as <code>\\</code>. Quotes are not required if a string begins with a letter, and contains only letters, numbers, dashes (<code>-</code>), and underscores (<code>_</code>). For example, a string defining a network interface such as <code>hme0</code> or <code>eth0</code> does not require quotes as it contains only letters and numbers. However a string defining an IP address contains periods and requires quotes, such as: <code>"192.168.100.1"</code></p>
Integer	<p>Signed integer constants are a sequence of digits from 0 to 9. They may be preceded by a dash, and are interpreted in base 10. Integers cannot exceed the value of a 32-bit signed integer: 21471183247.</p>

**Boolean**                      A Boolean is an integer, the possible values of which are 0 (false) and 1 (true).

## Attribute dimensions

VCS attributes have the following dimensions.

**Scalar**                      A scalar has only one value.  
For example:

```
MountPoint = "/Backup"
```

**Vector**                      A vector is an ordered list of values. Each value is indexed using a positive integer beginning with zero.  
Use a comma (,) or a semi-colon (;) to separate values.  
A set of brackets ([]) after the attribute name denotes that the dimension is a vector.  
Example snippet from the type definition file for an agent:

```
str BackupSys[]
```

When values are assigned to a vector attribute in the main.cf configuration file, the attribute definition might resemble:

```
BackupSys[] = { sysA, sysB, sysC }
```

For example, an agent's ArgList is defined as:

```
static str ArgList[] = {RVG, DiskGroup, Primary,  
SRL, Links}
```

**Keylist**

A Keylist is an unordered list of strings, and each string is unique within the list.

Use a comma (,) or a semi-colon (;) to separate values.

For example, to designate the list of systems on which a service group will be started with VCS (usually at system boot):

```
AutoStartList = {SystemA; SystemB; SystemC}
```

For example:

```
keylist BackupVols = {}
```

When values are assigned to a keylist attribute in the main.cf file, it might resemble:

```
BackupVols = { vol1, vol2 }
```

**Association**

An association is an unordered list of name-value pairs.

Use a comma (,) or a semi-colon (;) to separate values.

A set of braces ({} ) after the attribute name denotes that an attribute is an association.

For example, to designate the list of systems on which the service group is configured to run and the system's priorities:

```
SystemList = {SystemA=1, SystemB=2, SystemC=3}
```

For example:

```
int BackupSysList {}
```

When values are assigned to an association attribute in the main.cf file, it might resemble:

```
BackupSysList{} = { sysa=1, sysb=2, sysc=3 }
```

## Attribute scope across systems: global and local attributes

An attribute whose value is the same across all systems on which the service group is configured global in scope. An attribute whose value applies on a per-system basis is local in scope.

The at operator (@) indicates the system to which a local value applies.

In the following example of the MultiNICA resource type, attributes applying locally are indicated by "@system" following the attribute name:

```
MultiNICA mnic (
Device@sysa = { le0 = "166.98.16.103", qfe3 =
    "166.98.16.105" }
Device@sysb = { le0 = "166.98.16.104", qfe3 =
    "166.98.16.106" }
NetMask = "255.255.255.0"
ArpDelay = 5
RouteOptions@sysa = "default 166.98.16.103 0"
RouteOptions@sysb = "default 166.98.16.104 0"
)
```

In the preceding example, the value of the NetMask attribute is "255.255.255.0" on all systems, whereas the values of the Device attribute and the RouteOptions attribute are different on sysa and sysb.

## Attribute life: temporary attributes

You can define temporary attributes in the types file. The values of temporary attributes remain in memory as long as the VCS HAD process is running. Values of temporary attributes are not available when the HAD process is restarted.

These attribute values are not stored in the main.cf file.

Temporary attributes cannot be converted to permanent and vice-versa. When you save a configuration, VCS saves the temporary attribute definitions and their default values in the type definition file.

You can modify attribute values only while VCS is running.

In the following example of RVGSnapshot resource type, FDFile is the temporary attribute.

```
type RVGSnapshot (
    static keylist RegList = { Prefix }
    static int NumThreads = 1
    static str ArgList[] = { RvgResourceName, CacheObj,
Prefix, DestroyOnOffline }
    str RvgResourceName
    str CacheObj
    str Prefix
    boolean DestroyOnOffline = 1
    temp str FDFile
)
```



## About intentional offline of applications

Certain agents can identify when an application has been intentionally shut down outside of VCS control.

If an administrator intentionally shuts down an application outside of VCS control, VCS does not treat it as a fault. VCS sets the service group state as offline or partial, depending on the state of other resources in the service group.

This feature allows administrators to stop applications without causing failovers.

See [“IntentionalOffline”](#) on page 190.

## About developing an agent

Before creating the agent, some considerations and planning are required, especially regarding the type of the resource for which the agent is being created.

### Considerations for the application

The application for which an agent for VCS is developed must lend itself to being controlled by the agent and be able to operate in a cluster environment. The following criteria describe an application that can successfully operate in a cluster:

- The application must be capable of being started by a defined procedure if new agent is of type OnOff or OnOnly. There must be some means of starting the application's external resources such as file systems that store databases, or IP addresses used for listener processes, and so on.
- Each instance of an application must be capable of being stopped by a defined procedure if new agent is of type OnOff. Other instances of the application must not be affected.
- The application must be capable of being stopped cleanly, by forcible means if necessary.
- Each instance of an application must be capable of being monitored uniquely. Monitoring can be simple or in-depth so as to achieve a high level of confidence in the operation of the application. Monitoring an application becomes more effective when the monitoring procedure resembles the actual activity of the application's user.
- For failover capability, the application must be capable of storing data on shared disks rather than locally or in memory, and each system must be capable of accessing the data and all information required to run the application.
- The application must be crash-tolerant. It must be capable of being run on a system that crashes and of being started on a failover node in a known state.

This typically means that data is regularly written to shared storage rather than stored in memory.

- The application must be host-independent within a cluster; that is, there are no licensing requirements or host name dependencies that prevent successful failover.
- The application must run properly with other applications in the cluster.
- The applications configured under VCS control must not write data on stdout and stderr stream. This may interfere with VCS agent functionality. For such applications to run under VCS control, you must redirect the application's stdout and stderr stream.

## High-level overview of the agent development process

The steps to create and implement an agent are described by example in later chapters.

### Creating the type definition file

The types definition file contains definitions of resource types. Place a custom resource type definition in a file that specifies the name of the custom resource; for example, `MyResourceTypes.cf`. This file is referenced as an "include" statement in the VCS configuration file, `main.cf`.

Decide about attributes, attribute types, and attribute dimension of this new agent. Based on these create the type definition file for this agent.

See [“Creating the type definition file for a custom agent”](#) on page 137.

### Developing the entry points

Decide whether to implement the agent entry points using C++ code, scripts, or a combination of the two.

See [“Considerations for using C++ or script entry points”](#) on page 41.

Create the entry points.

For more information on developing entry points, refer to the following links.

See [“About creating entry points in C++”](#) on page 52.

See [“About creating entry points in scripts”](#) on page 92.

### Building the agent

Build the agent, create required files, and place the agent in specific directories.

See [“Creating the type definition file for a custom agent”](#) on page 137.

See [“Files for use in agent development”](#) on page 136.

For building an agent, sample files are provided.

## Testing the agent

Test the agent using the Agent Server utility or by defining the resource type in a configuration.

See [“About testing agents”](#) on page 169.

# Agent entry point overview

This chapter includes the following topics:

- [About agent entry points](#)
- [Agent entry points described](#)
- [Return values for entry points](#)
- [Considerations for using C++ or script entry points](#)
- [About the agent information file](#)
- [About the ArgList and ArgListValues attributes](#)

## About agent entry points

Developing an agent involves developing the entry points that the agent can call to perform operations on a resource, such as to bring a resource online, to take a resource offline, or to monitor the resource.

## Supported entry points

The agent framework supports the following entry points:

- `open` - initializes the environment for a resource before the agent starts to manage it
- `monitor` - determines the status of a resource
- `online` - brings a resource online
- `offline` - takes a resource offline
- `clean` - terminates ongoing tasks associated with an online or partially-online resource and then forcefully brings the resource offline

- `action` - starts a defined action for a resource
- `info` - provides information about an online resource
- `attr_changed` - responds to a resource's attribute's value change
- `close` - terminates the environment associated with a resource before the agent stops managing it
- `shutdown` - called when the agent shuts down
- `imf_init` - initializes the agent to interface with the IMF notification module
- `imf_register` - registers or unregisters resource entities with the IMF notification module
- `imf_getnotification` - gets notifications about the resource state changes from IMF notification module

---

**Note:** IMF entry points are supported only on V51 or later versions of agent.

---

- `migrate` - migrates a resource.

---

**Note:** The migration is supported only on V60 or later agent versions.

---

See [“Agent entry points described”](#) on page 30.

## How the agent framework interacts with entry points

The agent framework ensures that only one entry point is running for a given resource at one time. If multiple requests are received or multiple events are scheduled for the same resource, the agent queues them and processes them one at a time. An exception to this behavior is an optimization such that the agent framework discards internally generated periodic monitoring requests for a resource that is already being monitored or that has a monitor request as the last request in resource command queue.

The agent framework is multithreaded. This means a single agent process can run entry points for multiple resources simultaneously. However, if an agent receives a request to take a given resource offline and simultaneously receives a request to close it, it calls the `offline` entry point first. The `close` entry point is called only after the `offline` request returns or times out. If the `offline` request is received for one resource, and the `close` request is received for another, the agent can call both simultaneously.

The entry points supported by agent framework are described in the following sections. With the exception of `monitor`, other entry points are optional. Each may be implemented in C++ or scripts.

## Agent entry points described

This section describes each entry point in detail.

### About the open entry point

The status of the `open` entry point is passed as an argument to the next monitor entry point. The name of the argument is `OpenStatus`. The possible value for `OpenStatus` is 0 and 2. A value of 0 means that the open entry point completed successfully. A value of 2 means that the open entry point has timed out.

When an agent starts, the `open` entry point of each configured and enabled resource is called before its `online`, `offline`, or `monitor` entry points are called. This allows you to include initialization for specific resources. Most agents do not require this functionality and will not implement this entry point.

The `open` entry point is also called whenever the `Enabled` attribute for the resource changes from 0 to 1. The entry point receives the resource name and `ArgList` attribute values as input and returns no value.

A resource can be brought online, taken offline, and monitored only if it is managed by an agent. For an agent to manage a resource, the value of the resource's `Enabled` attribute must be set to 1. The open entry point creates the environment needed for other entry points to function. For example, the entry point could create files required by other entry points for the resource, or perform some resource-specific setup.

### About the monitor entry point

The `monitor` entry point typically contains the logic to determine the status of a resource. For example, the `monitor` entry point of the IP agent checks whether or not an IP address is configured, and returns the state `online`, `offline`, or `unknown`.

---

**Note:** This entry point is mandatory.

---

The agent framework calls the `monitor` entry point after completing the `online`, `offline` and `migrate` entry points to determine if bringing the resource online, offline or migration operations were effective. The agent framework also calls this

entry point periodically to detect if the resource was brought online or taken offline unexpectedly.

By default, the monitor entry point runs every 60 seconds (the default value of the `MonitorInterval` attribute) when a resource is online.

When a resource is expected to be offline, the entry point runs every 300 seconds (the default value for the `OfflineMonitorInterval` attribute).

The `monitor` entry point receives a resource name and `ArgList` attribute values as input (See [“ArgList reference attributes”](#) on page 185.).

The entry point returns the resource status and the confidence level.

See [“Return values for entry points”](#) on page 39.

The entry point returns confidence level only when the resource status is online. The confidence level is informative only and is not used by the engine. It can be referenced by examining the value of `ConfidenceLevel` attribute.

A C++ entry point can return a confidence level of 0–100. A script entry point combines the status and the confidence level in a single number.

See [“Syntax for script entry points”](#) on page 94.

## About the online entry point

The `online` entry point typically contains the code to bring a resource online. For example, the `online` entry point for an IP agent configures an IP address. When the online procedure completes, the `monitor` entry point is automatically called by the framework to verify that the resource is online.

The `online` entry point receives a resource name and `ArgList` attribute values as input. It returns an integer indicating the number of seconds to wait for the online to take effect. The typical return value is 0. If the return value is not zero, the agent framework waits the number of seconds indicated by the return value before calling the `monitor` entry point for the resource.

## About the offline entry point

The `offline` entry point takes a resource offline. For example, the `offline` entry point for an IP agent removes an IP address from the system. When the offline procedure completes, the `monitor` entry point is automatically called by the framework to verify that the resource is offline.

The `offline` entry point receives a resource name and `ArgList` attribute values as input. It returns an integer indicating the number of seconds to wait for the offline to take effect. The typical return value is 0. If the return value is not zero, the agent

framework waits the number of seconds indicated by the return value to call the `monitor` entry point for the resource.

## About the clean entry point

The `clean` entry point is called by the agent framework when all ongoing tasks associated with a resource must be terminated and the resource must be taken offline, perhaps forcibly. The entry point receives as input the resource name, an encoded reason describing why the entry point is being called, and the `ArgList` attribute values. It must return 0 if the operation is successful and 1 if unsuccessful.

The reason for calling the entry point is encoded according to the following `enum` type:

```
enum VCSAgWhyClean {  
    VCSAgCleanOfflineHung,  
    VCSAgCleanOfflineIneffective,  
    VCSAgCleanOnlineHung,  
    VCSAgCleanOnlineIneffective,  
    VCSAgCleanUnexpectedOffline,  
    VCSAgCleanMonitorHung  
};
```

For script-based Clean entry points, the Clean reason is passed as an integer:

```
0 => offline hung  
1 => offline ineffective  
2 => online hung  
3 => online ineffective  
4 => unexpected offline  
5 => monitor hung
```

The above is an `enum` type, so same integer value is passed irrespective of whether the entry point is written in C++ or is script-based.

- **VCSAgCleanOfflineHung**  
The `offline` entry point did not complete within the expected time.  
See “[OfflineTimeout](#)” on page 195.
- **VCSAgCleanOfflineIneffective**  
The `offline` entry point was ineffective. The `monitor` entry point scheduled for the resource after the `offline` entry point invocation returned a status other than OFFLINE.
- **VCSAgCleanOnlineHung**  
The `online` entry point did not complete within the expected time.



( See [“OnlineTimeout”](#) on page 197.)

- **VCSAgCleanOnlineIneffective**  
The `online` entry point was ineffective. The `monitor` entry point scheduled for the resource after the `online` entry point invocation returned a status other than `ONLINE`.
- **VCSAgCleanUnexpectedOffline**  
The online resource faulted because it was taken offline unexpectedly.  
( See [“ToleranceLimit”](#) on page 201.)
- **VCSAgCleanMonitorHung**  
The online resource faulted because the `monitor` entry point consistently failed to complete within the expected time.  
(See [“FaultOnMonitorTimeouts”](#) on page 188.)

The agent supports the following tasks when the `clean` entry point is implemented:

- Automatically restarts a resource on the local system when the resource faults.  
See [“RestartLimit”](#) on page 199.
- Automatically retries the `online` entry point when the attempt to bring a resource online fails.  
See [“OnlineRetryLimit”](#) on page 196.
- Enables the engine to bring a resource online on another system when the resource faults on the local system.

For the above actions to occur, the `clean` entry point must run successfully, that is, return an exit code of 0.

## About the action entry point

Runs a pre-specified action on a resource. Use the entry point to run non-periodic actions like suspending a database or resuming the suspended database.

The `SupportedActions` attribute is a keylist attribute that lists all the actions that are intended on being supported. Each action is identified by a name (`action_token`).

See [“SupportedActions”](#) on page 200.

For an agent, all action entry points must be either C++ or script-based; you cannot use both C++ and scripts.

If all actions are script based, make sure the action scripts reside within an `actions` directory under the agent directory. Create a script for each action. Use the correct `action_token` as the script name.

For example, a script called `suspend` defines the actions to be performed when the `action_token` "suspend" is invoked via the `hares -action` command.

For C++ entry points, actions are implemented via a switch statement that defines a case for each possible `action_token`.

See [“Syntax for C++ action”](#) on page 64.

The following shows the syntax for the `-action` option used with the `hares` command:

```
hares -action <res> <token> [-actionargs <arg1> ...]  
                                -sys <system> [-clus <cluster> | -localclus]
```

The following example commands show the invocation of the `action` entry point using the example action tokens, `DBSuspend` and `DBResume`:

```
hares -action DBResource DBSuspend -actionargs dbsuspend -sys  
Sys1
```

Also,

```
hares -action DBResource DBResume -actionargs dbstart -sys Sys1
```

## Return values for action entry point

The `action` entry point exits with a 0 if it is successful, or 1 if not successful. The command `hares -action` exits with 0 if the `action` entry point exits with a 0 and 1 if the `action` entry point is not successful.

The agent framework limits the output of the script-based action entry point to 2048 bytes.

Output refers to information that the script prints to `stdout` or `stderr`. When users run the `hares -action` command, the command prints this output. The output is also logged to the HAD log file.

## About the info entry point

The `info` entry point enables agents to obtain information about an online resource. For example, the Mount agent's `info` entry point could be used to report on space available in the file system. All information the `info` entry point collects is stored in the "temp" attribute `ResourceInfo`.

See [“About the ResourceInfo attribute”](#) on page 35.

See the *Administrator's Guide* for information about "temp" attributes.

The entry point can optionally modify a resource's `ResourceInfo` attribute by adding or updating other name-value pairs using the following commands:

```
hares -modify res ResourceInfo -add key value
```

or

```
hares -modify res ResourceInfo -update key value
```

Refer to the `hares` manual page for more information on modifying values of string-association attributes.

See [“About the ResourceInfo attribute”](#) on page 35.

See [“Syntax for C++ entry points”](#) on page 54.

## Return values for info entry point

- If the `info` entry point exits with 0 (success), the output captured on stdout for the script entry point, or the contents of the `info_output` argument for C++ entry point, is dumped to the `Msg` key of the `ResourceInfo` attribute. The `Msg` key is updated only when the `info` entry point is successful. The `State` key is set to the value: `Valid`.
- If the entry point exits with a non-zero value, `ResourceInfo` is updated to indicate the error; the script's stdout or the C++ entry point's `info_output` is ignored. The `State` key is set to the value: `Invalid`. The error message is written to the agent's log file.
- If the `info` entry point times out, output from the entry point is ignored. The `State` key is set to the value: `Invalid`. The error message is written to the agent's log file.
- If a user kills the `info` entry point (for example, `kill -15 pid`), the `State` key is set to the value: `Invalid`. The error message is written to the agent's log file. See [“About logging agent messages”](#) on page 118.
- If the resource for which the entry point is invoked goes offline or faults, the `State` key is set to the value: `Stale`.
- If the `info` entry point is not implemented, the `State` key is set to the value: `Stale`. The error message is written to the agent's log file.

## About the ResourceInfo attribute

The `ResourceInfo` attribute is a string association that stores name-value pairs. By default, there are three such name-value pairs:

- `State` indicates the status (valid, invalid, stale) of the information contained in the `ResourceInfo` attribute.
- `Msg` indicates the output of the `info` entry point, if any.
- `TS` indicates the timestamp of when the `ResourceInfo` attribute was last updated.

These keys are updated only by the agent framework, not the entry point. The entry point can define and add other keys (name-value pairs) and update them.

The `ResourceInfo` (string-association) is a temporary attribute, the scope of which is set by the engine to be global for failover groups or local for parallel groups. Because `ResourceInfo` is a temporary attribute, its values are never dumped to the configuration file.

You can display the value of the `ResourceInfo` by using the `hares` command. The output of `hares -display` shows the first 20 characters of the current value; the output of `hares -value resource ResourceInfo` shows all name-value pairs in the keylist.

The resource for which the `info` entry point is invoked must be online.

When a resource goes offline or faults, the `State` key is marked "Stale" because the information is not current. If the `info` entry point exits abnormally, the `State` key is marked "Invalid" because not all of the information is known to be valid. Other key data, including `Msg` and `TS` keys, are not touched. You can manually clear values of the `ResourceInfo` attribute by using the `hares -flushinfo` command. This command deletes any optional keys for the `ResourceInfo` attribute and sets the three mandatory keys to their default values.

For more information on `hares -flushinfo` command, refer the `hares` manual page.

## Invoking the info entry point

You can invoke the `info` entry point from the command line for a given online resource using the `hares -refreshinfo` command.

By setting the `InfoInterval` attribute to some value other than 0, you can configure the agent to invoke the `info` entry point periodically for an online resource.

See ["InfoInterval"](#) on page 190.

## About the `attr_changed` entry point

This entry point provides a way to respond to resource attribute value changes.

The `attr_changed` entry point is called when a resource attribute is modified, and only if that resource attribute is registered with the agent framework for notification.

Registering can be accomplished either through `VCSAgRegister` api or by definition in the `RegList`. Script-based agents can register only through the `RegList` attribute definition.

See ["VCSAgRegister"](#) on page 73.

See “[VCSAgUnregister](#)” on page 74.

See “[RegList](#)” on page 198.

The `attr_changed` entry point receives as input the resource name registered with the agent framework for notification, the name of the changed resource, the name of the changed attribute, and the new attribute value. It does not return a value.

## About the close entry point

The `close` entry point is called whenever the `Enabled` attribute for a resource changes from 1 to 0, or when a resource is deleted from the configuration on a running cluster and the state of the resource permits running the close entry point.

Note that a resource is monitored only if it is managed by an agent. For an agent to manage a resource, the resource's `Enabled` attribute value must be set to 1.

See the table below to find out which states of the resource allow running of the close entry point when the resource is deleted on a running cluster. It receives a resource name and `ArgList` attribute values as input and returns no value. This entry point typically deinitializes the resource if implemented. Most agents do not require this functionality and will not implement this entry point.

**Table 2-1** States in which CLOSE entry point runs - based on operations type of resource

Resource Type	Online State	Offline State	Probing	Going Offline Waiting	Going Online Waiting
None (persistent)	Yes	N/A	Yes	Yes	N/A
OnOnly	Yes	Yes	Yes	Yes	Yes
OnOff	Yes	Yes	Yes	Yes	Yes

The open and close entry points are related in the sense that the open entry point creates the environment needed for other entry points, while the close entry points clean the setup created by the open entry point.

## About the shutdown entry point

The `shutdown` entry point is called before the agent shuts down. It performs any agent cleanup required before the agent exits. It receives no input and returns no value. Most agents do not require this functionality and do not implement this entry point.

## About the imf\_init entry point

This is a type-specific entry point. The agent framework invokes this entry point when the agent starts. Agent developers can use this entry point to initialize the agent to interface with the IMF notification module.

## About the imf\_register entry point

The agent framework invokes this entry point to either register or unregister a resource with IMF.

The agent framework schedules a command to register a resource with IMF after resource is in either steady ONLINE or steady OFFLINE state. In steady ONLINE state, the previous and current state of the resource is ONLINE as reported by the monitor entry point. In steady OFFLINE, the previous and current state of the resource is OFFLINE, as reported by the monitor entry point.

The agent framework schedules the command to unregister a resource from IMF under following circumstances:

- When MonitorFreq key of IMF attribute has non-zero values and traditional monitor entry point detects any of the following state changes of a resource:
  - ONLINE to OFFLINE
  - OFFLINE to ONLINE
  - ONLINE to UNKNOWN
  - OFFLINE to UNKNOWN
- When you modify Mode key of the IMF attribute.
- When the ContainerInfo attribute of a resource is changed.
- If IMFRegList attribute or any attribute defined in IMFRegList is changed.
- If IMFRegList is undefined and if ArgList attribute or any attribute defined in ArgList gets changed.

## About the imf\_getnotification entry point

The Agent framework invokes this entry point after agent is started and the imf\_init entry point returns success. Agent framework expects this as a blocking entry point and remains blocked until an event is received. After processing the event, agent framework again blocks on this entry point. When agent framework receives a notification for some resource then it confirms the resource state changes of the scheduled monitor entry point.

This is a type-specific entry point like shutdown and imf\_init entry points.

## About the migrate entry point

The `migrate` entry point migrates a resource. For example, the migrate entry point for an LDom agent migrates the LDom resource from a source system to a target system. When the migration is complete, the monitor entry point is automatically called by the framework to verify whether the resource has migrated. The migrate entry point receives a resource name, ArgList attribute and VCSInfo values as input. VCSInfo is an internally-generated information that contains the TargetHost name.

## Return values for entry points

The following table summarizes the return values for each entry point.

**Table 2-2** Return values for entry points

Entry Point	Return Values
Monitor	<p>C++ Based Returns ResStateValues:</p> <ul style="list-style-type: none"><li>■ VCSAgResOnline</li><li>■ VCSAgResOffline</li><li>■ VCSAgResUnknown</li><li>■ VCSAgResIntentionalOffline</li></ul> <p>Script-Based Exit values:</p> <ul style="list-style-type: none"><li>■ 99 - Unknown</li><li>■ 100 - Offline</li><li>■ 101-110 - Online</li><li>■ 200 - Intentional Offline</li><li>■ Other values - Unknown.</li></ul>
Info	0 if successful; non-zero value if not successful
Online	Integer specifying number of seconds to wait before monitor can check the state of the resource; typically 0, that is, check resource state immediately.
Offline	Integer specifying number of seconds to wait before monitor can check the state of the resource; typically 0, that is, check resource state immediately.

**Table 2-2** Return values for entry points (*continued*)

Entry Point	Return Values
Clean	<p>0 if successful; non-zero value if not successful</p> <p>If clean fails, the resource remains in a transition state awaiting the next periodic monitor. After the periodic monitor, clean is attempted again. The sequence of clean attempt followed by monitoring continues until clean succeeds or CleanRetryLimit is not reached if it is set to non-zero value.</p> <p>For detailed descriptions of internal transition states, See <a href="#">"State transitions"</a> on page 202.</p>
Action	0 if successful; non-zero value if not successful
Attr_changed	None
Open	None
Close	None
Shutdown	None
imf_init	0 if successful; 1 if unsuccessful
imf_register	0 if successful; 1 if unsuccessful
imf_getnotification	0 if successful; 1 if failure; 3 if interrupted (failure case); 4 if critical failure



**Table 2-2** Return values for entry points (*continued*)

Entry Point	Return Values
migrate	<ul style="list-style-type: none"> <li>An integer in the range of 0 to 100. The typical return value is 0. If the return value is not zero, the agent framework waits for the number of seconds indicated by the (return value * 10) to call the monitor entry point for the resource. For example, for a return value of 1, agent framework schedules monitor after 1*10=10 seconds. Similarly, for a return value of 5 monitor is scheduled after 50 seconds.</li> <li>255 indicating that migration verification has failed and there is no need to schedule a monitor to verify whether resource has migrated. The subsequent monitor is a scheduled based on the MonitorInterval value.</li> </ul> <p>All other values in the range of 101 to 254 are reserved for future use. Agent framework ignores any value returned between this range and returns to previous state to continue with rest of the operations. Refer to MigrateWaitLimit and MigrateTimeout, before implementing this entry point.</p> <p>See <a href="#">“MigrateTimeout”</a> on page 194.</p> <p>See <a href="#">“MigrateWaitLimit”</a> on page 194.</p> <p>See <a href="#">“SupportedOperations”</a> on page 201.</p>

## Considerations for using C++ or script entry points

You may implement an entry point as a C++ function or a script.

- The advantage to using C++ is that entry points are compiled and linked with the agent framework library. They run as part of the agent process, so no system overhead for creating a new process is required when they are called. Also, since the entry point invocation is just a function call, the execution of the entry point is relatively faster. However, if the functionality of an entry point needs to be changed, the agent would need to be recompiled to make the changes take effect.
- The advantage to using scripts is that you can modify the entry points dynamically. However, to run the script, a new process is created for each entry point invocation, so the execution of an entry point is relatively slower and uses more system resource compared to the C++ implementation.

Note that you may use C++ or scripts in any combination to implement multiple entry points for a single agent. This allows you to implement each entry point in the most advantageous manner. For example, you may use scripts to implement most

entry points while using C++ to implement the `monitor` entry point, which is called often. If the `monitor` entry point were written in script, the agent must create a new process to run the monitor entry point each time it is called.

See [“About creating entry points in C++”](#) on page 52.

See [“About creating entry points in scripts”](#) on page 92.

## About the VCSAgStartup routine

When an agent starts, it uses the routine named `VCSAgStartup` to initialize the agent's data structures.

### If you implement entry points using scripts

If you implement all of the agent's entry points as scripts:

On UNIX, the user can use one of the different agent binaries which are provided with VCS.

See [“Script based agent binaries”](#) on page 136.

The built-in implementation of `VCSAgStartup()` in these binaries initializes the agent's data structures such that it causes the agent to look for and execute the scripts for the entry points.

See [“About creating entry points in scripts”](#) on page 92.

### If you implement all or some of the entry points in C++

If you develop an agent with at least one entry point implemented in C++, you must implement the function `VCSAgStartup()` and use the required C++ primitives to register the C++ entry point with the agent framework.

### Example: VCSAgStartup with C++ and script entry points

When using C++ to implement an entry point, use the `VCSAgValidateAndSetEntryPoint` API and specify the entry point and the function name. In the following example, the function `my_shutdown` is defined as the Shutdown entry point.

```
#include "VCSAgApi.h"
void my_shutdown() {
    ...
}

void VCSAgStartup()
```

```

{
    VCSAG_LOG_INIT("VCSAgStartup");

    VCSAgSetLogCategory(10051);
    VCSAgInitEntryPointStruct(v51);

    VCSAgValidateAndSetEntryPoint(VCSAgEPShutdown, my_shutdown);
}

```

Note that the `monitor` entry point, which is mandatory, is not specified. This indicates that it is implemented using scripts. For an entry point whose field is not set, the agent automatically looks for the correct script to execute as per following path:

UNIX: `$VCS_HOME/bin/<resource_type>/<entry_point>`

The path where agent searches the entry point can be different, given that the `AgentDirectory` attribute is set. You can refer to the *Symantec Cluster Server Administrator's Guide* for information on `AgentDirectory` attribute.

See [“AgentDirectory”](#) on page 183.

## About the agent information file

The graphical user interface (GUI), Cluster Manager, can display information about the attributes of a given resource type. For each custom agent, developers can create an XML file that contains the attribute information for use by the GUI. The XML file also contains information to be used by the GUI to allow or disallow certain operations on resources managed by the agent.

### Example agent information file (UNIX)

The agent's information file is an XML file, named *agent\_name.xml*, located in the agent directory. The file contains information about the agent, such as its name and version, and the description of the arguments for the resource type attributes. For example, the following file contains information for the `FileOnOff` agent:

```

<?xml version="1.0" encoding="us-ascii"?>
<agent name="FileOnOff" version="version">
    <agent_description>Creates, removes,
        and monitors files.</agent_description>
    <!--Platform the agent runs on-->
    <platform>Cross-Platform</platform>
    <!--Type of agent : script-Binary-Mixed-->
    <agenttype>Binary</agenttype>
    <!--The minimum VCS version needed for this agent-->

```

```

<minvcsversion>5.0</minvcsversion>
<!--The agent vendor name-->
<vendor>VendorName</vendor>
<!--Is Info Entry Point Implemented-->
<info_implemented>No</info_implemented>
<!--Attributes list for this agent-->
<attributes>
    <PathName type="str" dimension="Scalar" editable="True"
important="True" mustconfigure="True" unique="True"
persistent="True" range="" default="" displayname="File Name">
        <attr_description>Specifies the complete pathname,
starting with the slash (/) preceding the file name.
</attr_description>
    </PathName>
</attributes>
<!--List of files installed by this agent-->
<agentfiles>
    <file name="$VCS_HOME/bin/FileOnOff/FileOnOffAgent" />
</agentfiles>
</agent>

```

Agent information

The information describing the agent is contained in the first section of the XML file. The following table describes this information, which is also contained in the previous file example:

Table 2-3 Agent information in the agent information XML file

Agent Information	Example
Agent name	name="FileOnOff"
Version	version="x.y"
Agent description	<agent_description>Creates, removes, and monitors files.</agent_description>
Platform. For example, AIX, HP-UX, Linux, Solaris, or Cross-Platform.	<platform>Cross-Platform</platform>
Agent vendor	<vendor>VendorName</vendor>

**Table 2-3** Agent information in the agent information XML file (*continued*)

Agent Information	Example
<code>info</code> entry point implemented or not; Yes, or No; if not indicated, <code>info</code> entry point is assumed not implemented	<code>&lt;info_implemented&gt;No&lt;/info_implemented&gt;</code>
Agent type, for example, Binary, Script or Mixed	<code>&lt;agenttype&gt;Binary&lt;/agenttype&gt;</code>
Compatibility with Cluster Server; the minimum version required to support the agent	<code>&lt;minvcversion&gt;5.0&lt;/minvcversion&gt;</code>

## Attribute argument details

The agent's attribute information is described by several arguments. The following table describes them. Refer also to the previous XML file example for the FileOnOff agent and see how the `PathName` attribute information is included in the file.

**Table 2-4** Description of attribute argument details in XML file

Argument	Description
<code>type</code>	Possible values for attribute type, such as "str" for strings. See <a href="#">"Attribute data types"</a> on page 21.
<code>dimension</code>	Values for the attribute dimension, such as "Scalar;" See <a href="#">"About attributes"</a> on page 20.
<code>editable</code>	Possible Values = "True" or "False"  Indicates if the attribute is editable or not. In most cases, the resource attributes are editable.
<code>important</code>	Possible Values = "True" or "False"  Indicates whether or not the attribute is important enough to display. In most cases, the value is True.

**Table 2-4** Description of attribute argument details in XML file (*continued*)

Argument	Description
mustconfigure	<p>Possible Values = "True" or "False"</p> <p>Indicates whether the attribute must be configured to bring the resource online. The GUI displays such attributes with a special indication.</p> <p>If no value is specified for an attribute where the <code>mustconfigure</code> argument is true, the resource state becomes "UNKNOWN" in the first monitor cycle. Example of such attributes are <code>Address</code> for the IP agent, <code>Device</code> for the NIC agent, and <code>FsckOpt</code> for the Mount agent).</p>
unique	<p>Possible Values = "True" or "False"</p> <p>Indicates if the attribute value must be unique in the configuration; that is, whether or not two resources of same resource type may have the same value for this attribute. Example of such an attribute is <code>Address</code> for the IP agent. Not used in the GUI.</p>
persistent	<p>Possible Values = "True". This argument should always be set to "True"; it is reserved for future use.</p>
range	<p>Defines the acceptable range of the attribute value. GUI or any other client can use this value for attribute value validation.</p> <p>Value Format: The range is specified in the form {a,b} or [a,b]. Square brackets indicate that the adjacent value is included in the range. The curly brackets indicate that the adjacent value is not included in the range. For example, {a,b} indicates that the range is from a to b, contains b, and excludes a. In cases where the range is greater than "a" and does not have an upper limit, it can be represented as {a,] and, similarly, as {,b} when there is no minimum value.</p>
default	<p>It indicates the default value of attribute</p>
displayname	<p>It is used by GUI or clients to show the attribute in user friendly manner. For example, for <code>FsckOpt</code> its value could be "fsck option".</p>

## Implementing the agent XML information file

When the agent XML information file is created, you can implement it as follows:

### To implement the agent XML information file in the GUI

- 1 Make sure the XML file, *agent.xml*, is in the `$VCS_HOME/bin/resource_type` directory or in the directory mentioned in the `AgentDirectory` attribute.
- 2 Make sure that the command server is running on each node in the cluster.
- 3 Restart the GUI to have the agent's information shown in the GUI.

## About the ArgList and ArgListValues attributes

The ArgList attribute specifies which attributes need to be passed to agent entry points. The agent framework populates the ArgListValues attribute with the list of attributes and their associated values.

In C++ agents, the value of the ArgListValues attribute is passed through a parameter of type `void **`. For example, the signature of the online entry point is:

```
unsigned int  
res_online(const char *res_name, void **attr_val);
```

In script agents, the value of the ArgListValues attribute is passed as command-line arguments to the entry point script.

The number of values in the ArgListValues should not exceed more than 425. This requirement becomes a consideration if an attribute in the ArgList is a keylist, a vector, or an association. Such type of non-scalar attributes can typically take any number of values, and when they appear in the ArgList, the agent has to compute ArgListValues from the value of such attributes. If the non-scalar attribute contains many values, it will increase the size of ArgListValues. Hence when developing an agent, this consideration should be kept in mind when adding a non-scalar attribute in the ArgList. Users of the agent need to be notified that the attribute should not be configured to be so large that it pushes that number of values in the ArgListValues attribute to be more than 425.

### ArgListValues attribute for agents registered as V50 and later

For agents registered as V50 or later, the ArgListValues attribute specifies the attributes and their values in tuple format.

- For scalar attributes, there are three components that define the ArgListValues attribute.
  - The name of the attribute
  - The number of elements in the value, which for scalar attributes is always 1
  - The value itself
- For non-scalar attributes (vector, keylist, and association), for each attribute there are N+2 components in the ArgListValues attribute, where N equals the number of elements in the attribute's value.
  - The name of the attribute
  - The number of elements in the attribute's value

- The remaining N elements correspond to the attribute's value. Note that N could be zero.

## Overview of the name-value tuple format

For agents registered with agent version V40 and earlier, it's required that the arguments passed to the entry point to be in the order indicated by the ArgList attribute as it was defined in the resource type. The order of parsing the arguments was determined by their position in the resource type definition.

With the agent framework for V50 and later, agents can use entry points that can be passed attributes and their values in a format of name-value tuples. Such a format means that attributes and their values are parsed by the name of the attribute and not by their position in the ArgList Attribute.

The general tuple format for attributes in the ArgList is:

<name> <number\_of\_elements\_in\_value> <value>

### Scalar attribute format

For scalar attributes, whether string, integer, or Boolean, the formatting is:

<attribute\_name> 1 <value>

Example is:

DiskGroupName 1 mydg

### Vector attribute format

For vector attributes, whether string or integer, the formatting is:

<attribute\_name> <number\_of\_values\_in\_vector> <values\_in\_vector>

Examples are:

MyVector 3 aa cc dd

MyEmptyVector 0

### Keylist attribute format

For string keylist attributes, the formatting is:

<attribute\_name> <number\_of\_keys\_in\_keylist> <keys>

Examples are:

DiskAttr 4 hdisk3 hdisk4 hdisk5 hdisk6

DiskAttr 0



## Association attribute format

For association attributes, whether string or integer, the formatting is:

<attribute\_name> <number\_of\_keys\_and\_values> <key\_value\_pair>

Examples are:

MyAssoc 4 key1 val1 key2 val2

MyAssoc 0

## ArgListValues attribute for different agents versions

For agents registered as V40 and earlier, the ArgListValues attribute is an ordered list of attribute values. The attribute values are listed in the same order as in the ArgList attribute.

For example, if Type "Foo" is defined in the file `types.cf` as:

```
Type Foo (
    str Name
    int IntAttr
    str StringAttr
    str VectorAttr[]
    str AssocAttr{}
    static str ArgList[] = { IntAttr, StringAttr,
                           VectorAttr, AssocAttr }
)
```

And if a resource "Bar" is defined in the file `main.cf` as:

```
Foo Bar (
    IntAttr = 100
    StringAttr = "Oracle"
    VectorAttr = { "vol1", "vol2", "vol3" }
    AssocAttr = { "disk1" = "1024", "disk2" = "512" }
)
```

Then, for V50 and later, the parameter `attr_val` is:

```
attr_val[0] = "IntAttr"
attr_val[1] = "1"      // Number of components in
                       // IntAttr attr value
attr_val[2] = "100"    // Value of IntAttr
attr_val[3] = "StringAttr"
attr_val[4] = "1"      // Number of components in
                       // StringAttr attr value
```

```
attr_val[5] = "Oracle" // Value of StringAttr
attr_val[6] = "VectorAttr"
attr_val[7] = "3"      // Number of components in
                        // VectorAttr attr value

attr_val[8] = "vol1"
attr_val[9] = "vol2"
attr_val[10] = "vol3"
attr_val[11] = "AssocAttr"
attr_val[12] = "4"     // Number of components in
                        // AssocAttr attr value

attr_val[13] = "disk1"
attr_val[14] = "1024"
attr_val[15] = "disk2"
attr_val[16] = "512"
attr_val[17] = NULL    // Last element
```

Or, for V40 and earlier, the parameter `attr_val` is:

```
attr_val[0] ==> "100"  // Value of IntAttr, the first
                        // ArgList attribute.
attr_val[1] ==> "Oracle" // Value of StringAttr.
attr_val[2] ==> "3"     // Number of components in
                        // VectorAttr.

attr_val[3] ==> "vol1"
attr_val[4] ==> "vol2"
attr_val[5] ==> "vol3"
attr_val[6] ==> "4"     // Number of components in
                        // AssocAttr.

attr_val[7] ==> "disk1"
attr_val[8] ==> "1024"
attr_val[9] ==> "disk2"
attr_val[10] ==> "512"
attr_val[11] ==> NULL    // Last element.
```

## About the entry point timeouts

Use the `AEPTimeout` attribute to append the timeout value for a particular entry point.

This feature does not apply to pre-V50 agents.

If you set `AEPTimeout` to 1, the agent framework passes the timeout value for an entry point as an argument for the entry point in the name-value tuple format.

The name of the attribute that gets passed is called AEPTIMEOUT.

This makes the task of retrieving information about entry point timeout values easy for agent developers. Instead of looking for different strings like MonitorTimeout and CleanTimeout, agent developers just need to look for the string AEPTIMEOUT.

For example, if an agent uses an attribute called PathName set to /tmp/foo, the parameters passed to the monitor entry point are:

If AEPTIMEOUT is set to 0:     <resource-name> PathName 1 /tmp/foo

If AEPTIMEOUT is set to 1:     <resource-name> PathName 1 /tmp/foo AEPTIMEOUT 1 <value of MonitorTimeout attribute>

Applying the same example for the clean entry point, the parameters are:

If AEPTIMEOUT is set to 0:     <resource-name> <clean reason> PathName 1 /tmp/foo

If AEPTIMEOUT is set to 1:     <resource-name> <clean reason> PathName 1 /tmp/foo  
                                   AEPTIMEOUT 1 <value of CleanTimeout attribute>

If the timeout attribute is overridden at the resource level, this mechanism takes care of passing the overridden value to the entry points for that resource.

See [“AEPTIMEOUT”](#) on page 182.

# Creating entry points in C++

This chapter includes the following topics:

- [About creating entry points in C++](#)
- [Data Structures](#)
- [Syntax for C++ entry points](#)
- [Agent framework primitives](#)
- [Agent Framework primitives for container support](#)

## About creating entry points in C++

Because the agent framework is multithreaded, all C++ code written by the agent developer must be MT-safe. For best results, avoid using global variables. If you do use them, access must be serialized (for example, by using mutex locks).

The following guidelines also apply:

- Do not use C library functions that are unsafe in multithreaded applications. Instead, use the equivalent reentrant versions, such as `readdir_r()` instead of `readdir()`. Access manual pages for either of these commands by entering:  
`man command.`
- When acquiring resources (dynamically allocating memory or opening a file, for example), use thread-cancellation handlers to ensure that resources are freed properly. See the manual pages for `pthread_cleanup_push` and `pthread_cleanup_pop` for details. Access manual pages for either of these commands by entering: `man command.`

If you develop an agent with at least one entry point implemented in C++, you must implement the function `VCSAgStartup()` and use the required C++ primitives to register the C++ entry point with the agent framework.

A sample file containing templates for creating an agent using C++ entry points is located in:

UNIX: `$VCS_HOME/src/agent/Sample`

You can use C++ to develop agents for monitoring applications that run in containers, including non-global zones. VCS provides APIs for container support.

See [“Agent Framework primitives for container support”](#) on page 86.

## Entry point examples in this chapter

In this chapter, the example entry points are shown for an agent named `Foo`. The example agent has the following resource type definition:

In the `types.cf` format:

```
type Foo (  
    str PathName  
    static str ArgList[] = {PathName}  
)
```

For this resource type, the entry points defined are as follows:

online	Creates a file as specified by the Pathname attribute
monitor	Checks for the existence of a file specified by the PathName attribute
offline	Deletes the file specified by the PathName attribute
clean	Forcibly deletes the file specified by the PathName attribute
action	Runs a pre-specified action
info	Populates the ResourceInfo attribute with the values of the attributes specified by the PathName attribute

## Data Structures

This section describes the various enumerations in relation to the entry points.

- **VCSAgResState:**  
The `VCSAgResState` enumeration describes what state the monitor entry point can return.

```
enum VCSAgResState {  
    VCSAgResOffline, // Resource is OFFLINE  
    VCSAgResOnline, // Resource is ONLINE  
    VCSAgResUnknown, // Resource state is UNKNOWN  
    VCSAgResIntentionalOffline, // Resource state is OFFLINE, but is  
        intentionally done. Only in V51 and later agents)  
};
```

- **VCSAgWhyClean**

This VCSAgWhyClean enumeration describes the reason why the clean entry point is called.

```
enum VCSAgWhyClean {  
    VCSAgCleanOfflineHung, // offline entry point did not complete  
        within the expected time.  
    VCSAgCleanOfflineIneffective, // offline entry point was  
        ineffective.  
    VCSAgCleanOnlineHung, // online entry point did not complete  
        within the expected time.  
    VCSAgCleanOnlineIneffective, // online entry point was  
        ineffective.  
    VCSAgCleanUnexpectedOffline, // The resource became offline  
        unexpectedly.  
    VCSAgCleanMonitorHung, // monitor entry point did not complete  
        within the expected time.  
};
```

- **VCSAgResInfoOp**

The VCSAgResInfoOp enumeration indicates whether to initialize or update the data in the ResourceInfo attribute.

```
enum VCSAgResInfoOp {  
    VCSAgResInfoAdd = 1, // Add non-default keys to the  
        ResourceInfo attribute.  
    VCSAgResInfoUpdate, // Update only the non-default  
        key-value data pairs in the ResourceInfo attribute.  
};
```

## Syntax for C++ entry points

This section describes the syntax for C++ entry points.

## Syntax for C++ VCSAgStartup

```
void VCSAgStartup();
```

Note that the name of the C++ function must be `VCSAgStartup()`.

For example:

```
// This example shows the VCSAgStartup() function
// implementation, assuming that the monitor, online, offline
// and clean entry points are implemented in C++ and the
// respective function names are res_monitor, res_online,
// res_offline, and res_clean.

#include "VCSAgApi.h"
void VCSAgStartup()
{
    VCSAG_LOG_INIT("VCSAgStartup");

    VCSAgSetLogCategory(10051);
    VCSAgInitEntryPointStruct(V51);

    VCSAgValidateAndSetEntryPoint(VCSAgEPMonitor, res_monitor);
    VCSAgValidateAndSetEntryPoint(VCSAgEPOnline, res_online);
    VCSAgValidateAndSetEntryPoint(VCSAgEPOffline, res_offline);
    VCSAgValidateAndSetEntryPoint(VCSAgEPClean, res_clean);
}

VCSAgResState res_monitor(const char *res_name, void
                           **attr_val, int
*conf_level) {
    ...
}

unsigned int res_online(const char *res_name,
                        void **attr_val) {
    ...
}

unsigned int res_offline(const char *res_name,
                         void **attr_val) {
    ...
}

unsigned int res_clean(const char *res_name,
```

```
VCSAgWhyClean reason, void **attr_val) {
...
}
```

## Syntax for C++ monitor

```
VCSAgResState
res_monitor(const char *res_name, void **attr_val, int
*conf_level);
```

You may select any name for the function.

The parameter `conf_level` is an output parameter. The return value, which indicates the resource status, must be a defined `VCSAgResState` value.

See [“Return values for entry points”](#) on page 39.

For example:

```
#include "VCSAgApi.h"

VCSAgResState
res_monitor(const char *res_name, void **attr_val, int
*conf_level)
{

    // Code to determine the state of a resource.
    VCSAgResState res_state = ...
    if (res_state == VCSAgResOnline) {
        // Determine the confidence level (0 to 100).
        *conf_level = ...
    }
    else {
        *conf_level = 0;
    }
    return res_state;
}

void VCSAgStartup()
{
    VCSAG_LOG_INIT("VCSAgStartup");

    VCSAgSetLogCategory(10051);
    VCSAgInitEntryPointStruct(V51);
}
```



```
VCSAgValidateAndSetEntryPoint(VCSAgEPMonitor, res_monitor);
}
```

## Syntax for C++ info

```
unsigned int res_info (const char *res_name,
                      VCSAgResInfoOp resinfo_op, void **attr_val, char
                      **info_output, char ***opt_update_args, char
                      ***opt_add_args);
```

You may select any name for the function.

### resinfo\_op

The `resinfo_op` parameter indicates whether to initialize or update the data in the `ResourceInfo` attribute. The values of this field and their significance are described in the following table:

Value of <code>resinfo_op</code>	Significance
1	<p>Add non-default keys to the three default keys State, Msg, and TS and initialize the name-value data pairs in the <code>ResourceInfo</code> attribute.</p> <p>This invocation indicates to the entry point that the current value of the <code>ResourceInfo</code> attribute contains only the basic three keys State, Msg, and TS.</p>
2	<p>Update only the non-default key-value data pairs in the <code>ResourceInfo</code> attribute, not the default keys State, Msg, and TS.</p> <p>This invocation indicates that <code>ResourceInfo</code> attribute contains non-default keys in addition to the default keys and only the non-default keys are to be updated. Attempt to add keys with this invocation will result in errors.</p>

### info\_output

The parameter `info_output` is a character string that stores the output of the `info` entry point. The output value could be any summarized data for the resource. The `Msg` key in the `ResourceInfo` attribute is updated with `info_output`. If the `info` entry point exits with success (0), the output stored in `info_output` is dumped into the `Msg` key of the `ResourceInfo` attribute.

The `info` entry point is responsible for allocating memory for `info_output`. The agent framework handles the deletion of any memory allocated to this argument.

Since memory is allocated in the entry point and deleted in the agent framework, the entry point needs to pass the address of the allocated memory to the agent framework.

## opt\_update\_args

The `opt_update_args` parameter is an array of character strings that represents the various name-value pairs in the `ResourceInfo` attribute. This argument is allocated memory in the `info` entry point, but the memory allocated for it will be freed in the agent framework. The `ResourceInfo` attribute is updated with these name-value pairs. The names in this array must already be present in the `ResourceInfo` attribute.

For example:

```
ResourceInfo = { State = Valid, Msg = "Info entry point output",  
                TS = "Wed May 28 10:34:11 2003",  
                FileOwner = root, FileGroup = root, FileSize = 100 }
```

A valid `opt_update_args` array for this `ResourceInfo` attribute would be:

```
opt_update_args = { "FileSize", "102" }
```

This array of name-value pairs updates the dynamic data stored in the `ResourceInfo` attribute.

An invalid `opt_update_args` array would be one that specifies a key not already present in the `ResourceInfo` attribute or one that specifies any of the keys: `State`, `Msg`, or `TS`. These three keys can only be updated by the agent framework and not by the entry point.

## opt\_add\_args

`opt_add_args` is an array of character strings that represent the various name-value pairs to be added to the `ResourceInfo` attribute. The names in this array represent keys that are not already present in the `ResourceInfo` association list and have to be added to the attribute. This argument is allocated memory in the `info` entry point, but this memory is freed in the agent framework. The `ResourceInfo` attribute is populated with these name-value pairs.

For example:

```
ResourceInfo = { State = Valid, Msg = "Info entry point output",  
                TS = "Wed May 28 10:34:11 2003" }
```

A valid `opt_add_args` array for this would be:

```
opt_add_args = { "FileOwner", "root", "FileGroup",
"root", "FileSize", "100" }
```

This array of name-value pairs adds to and initializes the static and dynamic data stored in the `ResourceInfo` attribute.

An invalid `opt_add_args` array would be one that specifies a key that is already present in the `ResourceInfo` attribute, or one that specifies any of the keys `State`, `Msg`, or `TS`; these are keys that can be updated only by the agent framework, not by the entry point.

## Example: info entry point implementation in C++

Set the `VCSAgValidateAndSetEntryPoint()` parameter to the name of the entry point's function (`res_info`).

Allocate the `info` output buffer in the entry point as shown in the example below. The buffer can be any size (the example uses 80), but the agent framework truncates it to 2048 bytes. For the optional name-value pairs, name and value each have a limit of 4096 bytes (the example uses 15).

Example V51 entry point:

```
extern "C" unsigned int res_info(const char *res_name,
VCSAgResInfoOp resinfo_op, void **attr_val, char **info_output,
char ***opt_update_args, char ***opt_add_args)
{
    struct stat stat_buf;
    int I;
    char **args = NULL;
    char *out = new char [80];

    *info_output = out;

    VCSAgSnprintf(out, 80, "Output of info entry point - updates
        the \"Msg\" key in ResourceInfo attribute");

    // Use the stat system call on the file to get its
    // information The attr_val array will look like "PathName"
    // "1" "<pathname value>" ... Assuming that PathName is the
    // first attribute in the attr_val array, the value
    // of this attribute will be in index 2 of this attr_val
    // array

    if (attr_val[2]) {
```

```
if ((strlen((CHAR *) (attr_val[2])) != 0) &&
    (stat((CHAR *) (attr_val[2]), &stat_buf) == 0)) {

    if (resinfo_op == VCSAgResInfoAdd) {
        // Add and initialize all the static and
        // dynamic keys in the ResourceInfo attribute
        args = new char * [7];
        for (I = 0; I < 6; I++) {
            args[i] = new char [15];
        }

        // All the static information - file owner
        // and group
        VCSAgSnprintf(args[0], 15, "%s", "Owner");
        VCSAgSnprintf(args[1], 15, "%d",
            stat_buf.st_uid);
        VCSAgSnprintf(args[2], 15, "%s", "Group");
        VCSAgSnprintf(args[3], 15, "%d",
            stat_buf.st_gid);

        // Initialize the dynamic information for the file
        VCSAgSnprintf(args[4], 15, "%s", "FileSize");
        VCSAgSnprintf(args[5], 15, "%d",
            stat_buf.st_size);
        args[6] = NULL;
        *opt_add_args = args;
    }
    else {

        // Simply update the dynamic keys in the
        // ResourceInfo attribute. In this case, the
        // dynamic info on the file
        args = new char * [3];
        for (I = 0; I < 2; I++) {
            args[i] = new char [15];
        }
        VCSAgSnprintf(args[0], 15, "%s", "FileSize");
        VCSAgSnprintf(args[1], 15, "%d",
            stat_buf.st_size);
        args[2] = NULL;
        *opt_update_args = args;
    }
}
```

```

    }
    else {
        // Set the output to indicate the error
        VCSAgSnprintf(out, 80, "Stat on the file %s failed",
            attr_val[2]);
        return 1;
    }
}
else {
    // Set the output to indicate the error
    VCSAgSnprintf(out, 80, "Error in arglist values passed to
        the info entry point");
    return 1;
}

// Successful completion of the info entry point
return 0;

} // End of entry point definition

```

## Syntax for C++ online

```

unsigned int
res_online(const char *res_name, void **attr_val);

```

You may select any name for the function.

Set the `VCSAgValidateAndSetEntryPoint()` parameter to the name of the entry point's function.

In the following example, the function `res_online` is defined as the Online entry point.

For example:

```

#include "VCSAgApi.h"

unsigned int
res_online(const char *res_name, void **attr_val) {
    // Implement the code to online a resource here.
    ...
    // If monitor can check the state of the resource
    // immediately, return 0. Otherwise, return the
    // appropriate number of seconds to wait before
    // calling monitor.
}

```

```

        return 0;
    }

void VCSAgStartup()
{
    VCSAG_LOG_INIT("VCSAgStartup");

    VCSAgSetLogCategory(10051);
    VCSAgInitEntryPointStruct(V51);

    VCSAgValidateAndSetEntryPoint(VCSAgEPOnline, res_online);
}

```

## Syntax for C++ offline

```

unsigned int
res_offline(const char *res_name, void **attr_val);

```

You may select any name for the function.

Set the `VCSAgValidateAndSetEntryPoint()` parameter to the name of the entry point's function.

In the following example, the function `res_offline` is defined as the Offline entry point.

For example:

```

#include "VCSAgApi.h"

unsigned int
res_offline(const char *res_name, void **attr_val) {
    // Implement the code to offline a resource here.
    ...
    // If monitor can check the state of the resource
    // immediately, return 0. Otherwise, return the
    // appropriate number of seconds to wait before
    // calling monitor.
    return 0;
}

void VCSAgStartup()
{
    VCSAG_LOG_INIT("VCSAgStartup");
}

```

```
VCSAgSetLogCategory(10051);  
VCSAgInitEntryPointStruct(V51);  
  
VCSAgValidateAndSetEntryPoint(VCSAgEPOffline, res_offline);}
```

## Syntax for C++ clean

```
unsigned int  
res_clean(const char *res_name, VCSAgWhyClean reason, void  
**attr_val);
```

You may select any name for the function.

Set the `VCSAgValidateAndSetEntryPoint()` parameter to the name of the entry point's function.

In the following example, the function `res_clean` is defined as the Clean entry point.

For example:

```
#include "VCSAgApi.h"  
  
unsigned int  
res_clean(const char *res_name, VCSAgWhyClean reason,  
          void **attr_val) {  
    // Code to forcibly offline a resource.  
    ...  
    // If the procedure is successful, return 0; else  
    // return 1.  
    return 0;  
  
void VCSAgStartup()  
{  
    VCSAG_LOG_INIT("VCSAgStartup");  
  
    VCSAgSetLogCategory(10051);  
    VCSAgInitEntryPointStruct(V51);  
  
    VCSAgValidateAndSetEntryPoint(VCSAgEPClean, res_clean);}
```

## Syntax for C++ action

```
unsigned int
action(const char *res_name, const char *action_token,
       void **attr_val, char **args, char *action_output);
```

The parameters passed to the C++ action entry point are described as follows using the example that the user fires

```
$> hares -action res1 myaction...
```

from the command-line or the equivalent from the GUI.

- **res\_name:** This is an input parameter. The name of the resource in whose context the action entry point is being invoked. In the above example, **res\_name** would be set to "res1".
- **action\_token:** This is an input parameter. This gives the name of the action that the user wants to run. In the above example, **action\_token** would be set to "myaction".

If the user ran

```
$> hares -action res1 youraction ...
```

then the same function above will get invoked but **action\_token** will be set to "youraction". This parameter enables different actions to be implemented for the same agent which will all get handled in the same function above.

- **attr\_val:** This is an input parameter. This contains the ArgListValues of the resource for which the action is invoked.
- **args:** This is an input parameter. This contains the list of strings that are passed to the "-actionargs" switch when invoking the "hares -action" command.

```
$> hares -action res1 myaction -actionargs foo bar fubar -sys
...
```

would give "foo", "bar" and "fubar" in the args parameter.

- **action\_output:** This is an output parameter. Any output that the agent developer wants the user to see as a result of invoking the "hares -action" command needs to be filled into the buffer whose pointer is given by this parameter. The maximum number of characters that will be displayed to the user is 2048 (2K).

Use the `VCSAgValidateAndSetEntryPoint()` API to register the name of the function that implements the action entry-point for the agent.

For example:



```
extern "C"
unsigned int res_action (const char *res_name, const char
    *token,void **attr_val, char **args, char
    *action_output)
{
const int output_buffer_size = 2048;
    //
    // checks on the attr_val entry point arg list
    // perform an action based on the action token passed in

if (!strcmp(token, "token1")) {
    //
    // Perform action corresponding to token1
    //
} else if (!strcmp(token, "token2")) {
    //
    // Perform action corresponding to token2
    //
}
:
:
:
} else {
    //
    // a token for which no action is implemented yet
    //
VCSAgSprintf(action_output, output_buffer_size, "No implementation
provided for token(%s)", token);
}

    //
    // Any other checks to be done
    //
    //
    // return value should indicate whether the ep succeeded or
    // not:
    // return 0 on success
    // any other value on failure
    //
if (success) {
return 0;
}
else {
return 1;
}
```

```

}
}
void VCSAgStartup()
{
VCSAG_LOG_INIT("VCSAgStartup");
VCSAgSetLogCategory(10051);
VCSAgInitEntryPointStruct(V51);
VCSAgValidateAndSetEntryPoint(VCSAgEPAction, res_action);
}

```

## Syntax for C++ attr\_changed

```

void
res_attr_changed(const char *res_name, const char
                *changed_res_name,
                const char *changed_attr_name,
                void **new_val);

```

The parameter `new_val` contains the attribute's new value. The encoding of `new_val` is similar to the encoding described under *About the ArgList and ArgListValues attributes*.

See [“About the ArgList and ArgListValues attributes”](#) on page 47.

You may select any name for the function.

Set the `VCSAgValidateAndSetEntryPoint()` parameter to the name of the entry point's function.

In the following example, the function `res_attr_changed` is defined as the `attr_changed` entry point.

---

**Note:** This entry point is called only if you register for change notification using the primitive `VCSAgRegister` or the agent parameter `RegList`.

---

See [“RegList”](#) on page 198.

For example:

```

#include "VCSAgApi.h"

void
res_attr_changed(const char *res_name,
                const char *changed_res_name,
                const char *changed_attr_name,

```

```

        void **new_val) {
// When the value of attribute Foo changes, take some action.
if ((strcmp(res_name, changed_res_name) == 0) &&
    (strcmp(changed_attr_name, "Foo") == 0)) {
    // Extract the new value of Foo. Here, it is assumed
    // to be a string.
    const char *foo_val = (char *)new_val[0];
    // Implement the action.
    ...
}
// Resource Oral managed by this agent needs to
// take some action when the Size attribute of
// the resource Disk1 is changed.
if ((strcmp(res_name, "Oral") == 0) &&
    (strcmp(changed_attr_name, "Size") == 0) &&
    (strcmp(changed_res_name, "Disk1") == 0)) {

    // Extract the new value of Size. Here, it is
    // assumed to be an integer.
    int sizeval = atoi((char *)new_val[0]);
    // Implement the action.
    ...
}
}

void VCSAgStartup()
{
    VCSAG_LOG_INIT("VCSAgStartup");

    VCSAgSetLogCategory(10051);
    VCSAgInitEntryPointStruct(V51);

    VCSAgValidateAndSetEntryPoint(VCSAgEPAttrChanged,
res_attr_changed);}

```

## Syntax for C++ open

```
void res_open(const char *res_name, void **attr_val);
```

You may select any name for the function.

Set the `VCSAgValidateAndSetEntryPoint()` parameter to the name of the entry point's function.

In the following example, the function `res_open` is defined as the Open entry point.

For example:

```
#include "VCSAgApi.h"

void res_open(const char *res_name, void **attr_val) {
    // Perform resource initialization, if any.
    // Register for attribute change notification, if needed.
}

void VCSAgStartup()
{
    VCSAG_LOG_INIT("VCSAgStartup");

    VCSAgSetLogCategory(10051);
    VCSAgInitEntryPointStruct(V51);

    VCSAgValidateAndSetEntryPoint(VCSAgEPOpen, res_open);
}
```

## Syntax for C++ close

```
void res_close(const char *res_name, void **attr_val);
```

You may select any name for the function.

Set the `VCSAgValidateAndSetEntryPoint()` parameter to the name of the entry point's function.

In the following example, the function `res_close` is defined as the Close entry point.

For example:

```
#include "VCSAgApi.h"

void res_close(const char *res_name, void **attr_val) {
    // Resource-specific de-initialization, if needed.
    // Unregister for attribute change notification, if any.
}

void VCSAgStartup()
{
    VCSAG_LOG_INIT("VCSAgStartup");
}
```

```

VCSAgSetLogCategory(10051);
VCSAgInitEntryPointStruct(V51);

VCSAgValidateAndSetEntryPoint(VCSAgEPClose, res_close);
}

```

## Syntax for C++ shutdown

```
void shutdown();
```

You may select any name for the function.

Set the `VCSAgValidateAndSetEntryPoint()` parameter to the name of the entry point's function.

In the following example, the function `shutdown` is defined as the `Shutdown` entry point.

For example:

```

#include "VCSAgApi.h"

void shutdown() {
    // Agent-specific de-initialization, if any.
}

void VCSAgStartup()
{
    VCSAG_LOG_INIT("VCSAgStartup");

    VCSAgSetLogCategory(10051);
    VCSAgInitEntryPointStruct(V51);

    VCSAgValidateAndSetEntryPoint(VCSAgEPShutdown, shutdown);
}

```

## Syntax for C++ migrate

```
unsigned int res_migrate (const char *res_name, void **attr_val)
```

You can assign any name to the function.

Set the `VCSAgValidateAndSetEntryPoint()` parameter as the name of function of the entry point.

Refer to See [“Return values for entry points”](#) on page 39.

In the following example, the function `res_migrate` is defined as the migrate entry point.

For example:

```
#include "VCSAgApi.h"
unsigned int
res_migrate(const char *res_name, void **attr_val) {
// Implement the code to migrate a resource here.

}
void VCSAgStartup()
{
VCSAG_LOG_INIT("VCSAgStartup");
VCSAgSetLogCategory(10051);
VCSAgInitEntryPointStruct(V60);
VCSAgValidateAndSetEntryPoint(VCSAgEPMigrate, res_migrate);
}
```

## Agent framework primitives

Primitives are C++ methods implemented by the agent framework. The following sections define the primitives.

See also:

See [“Agent Framework primitives for container support”](#) on page 86.

### VCSAgGetMonitorLevel

```
int VCSAgGetMonitorLevel(int *level_one, int *level_two);
```

The agent developer can use this primitive to query if the LevelOne (Basic) monitoring or the LevelTwo (Detail) monitoring or both need to be scheduled.

- Output parameters:
  - `level_one` - This parameter will be updated to 1 or 0. The value of 0 indicates that the basic monitoring should not be scheduled. And the value of 1 indicates that the basic monitoring should be scheduled.  
See [“IMF”](#) on page 189.
  - `level_two` - This parameter will be updated to 0, 1, or 2. The value of 0 indicates that the detail monitoring should not be scheduled, and the value of 1 indicates that the detail monitoring should be scheduled. And the value

of 2 indicates that the detail monitoring should be scheduled if basic monitoring (level\_one) reports the state as online in current running monitor.

- Return values: It can be set to VCSAgSuccess or VCSAgFailure based on whether the api passes or fails.

The following example outlines the process of setting the output parameters: For example, if you set LevelTwoMonitorFrequency to 5 and the resource state is ONLINE, then every fifth monitor cycle, level\_two will have the value as 1. If the resource state is OFFLINE, then every monitor cycle level\_two will have the value as 2.

See [“LevelTwoMonitorFreq”](#) on page 191.

If you set MonitorFreq to 5 and the resource is registered with IMF, then every fifth monitor cycle level\_one parameter will have the value of 1.

See [“IMF”](#) on page 189.

- Usage:

```
int ret = VCSAgFailure;  
ret = VCSAgGetMonitorLevel(&level_one, &level_two);
```

---

**Note:** This API can only be used in monitor entry point. It does not reflect correct monitor levels when you call this API in other entry points.

---

See [“VCSAG\\_GET\\_MONITOR\\_LEVEL”](#) on page 98.

## VCSAgGetFwVersion

```
int VCSAgGetFwVersion();
```

This primitive will return the latest agent framework version.

See [“VCSAG\\_GET\\_AGFW\\_VERSION”](#) on page 100.

## VCSAgGetRegVersion

```
int VCSAgGetRegVersion();
```

This primitive will return the currently registered agent framework version.

See [“VCSAG\\_GET\\_REG\\_VERSION”](#) on page 100.

## VCSAgRegisterEPStruct

```
void VCSAgRegisterEPStruct (VCSAgAgentVersion version, void *  
ep_struct);
```

This primitive requests that the agent framework use the entry point implementations designated in `ep_struct`. It must be called only from the `VCSAgStartup` function.

## VCSAgSetCookie2

```
void *VCSAgSetCookie2(const char *name, void *cookie)
```

This primitive requests the agent framework to store a cookie given by the `void *cookie` parameter. If there is a value already associated with the cookie, the primitive sets the new value and atomically returns the old value. If there is no value associated with the cookie then it sets a new value in the cookie and returns `NULL`.

This value, which is transparent to the agent framework, can be obtained by calling the primitive `VCSAgGetCookie()`. A cookie is not stored permanently. It is lost when the agent process exits. This primitive can be called from any entry point. For example:

```
#include "VCSAgApi.h"  
...  
// Assume that the online, offline, and monitor  
// operations on resource require a certain key. Also  
// assume that obtaining this key is time consuming, but  
// that it can be reused until this process is  
// terminated.  
//  
//  
// In this example, the open entry point obtains the key  
// and stores it as a cookie. Subsequent online,  
// offline, and monitor entry points get the cookie and  
// use the key.  
//  
// Note that the cookie name can be any unique string.  
// This example uses the resource name as the cookie  
// name.  
//  
void *get_key() {  
    ...  
}  
  
void res_open(const char *res_name, void **attr_val) {  
    if (VCSAgGetCookie(res_name) == NULL) {
```



```

        void *key = get_key();
        VCSAgSetCookie2(res_name, key);
    }
}

VCSAgResState res_monitor(const char *res_name, void
    **attr_val, int *conf_level_ptr) {
    VCSAgResState state = VCSAgResUnknown;
    *conf_level_ptr = 0;
    void *key = VCSAgGetCookie(res_name);
    if (key == NULL) {
        // Take care of the rare cases when
        // the open entry point failed to
        // obtain the key and set the the cookie.
        key = get_key();
        VCSAgSetCookie2(res_name, key);
    }
    // Use the key for testing if the resource is
    // online, and set the state accordingly.
    ...
    return state;
}

```

## VCSAgRegister

```

void
VCSAgRegister(const char *notify_res_name,
               const char *res_name,
               const char *attr_name);

```

This primitive requests that the agent framework notify the resource `notify_res_name` when the value of the attribute `attr_name` of the resource `res_name` is modified. The notification is made by calling the `attr_changed` entry point for `notify_res_name`.

Note that `notify_res_name` can be the same as `res_name`.

This primitive can be called from any entry point, but it is useful only when the `attr_changed` entry point is implemented. For example:

```

#include "VCSAgApi.h"
...
void res_open(const char *res_name, void **attr_val) {

    // Register to get notified when the

```

```

// "CriticalAttr" of this resource is modified.
VCSAgRegister(res_name, res_name, "CriticalAttr");

// Register to get notified when the "CriticalAttr"
// of current resource is modified. It is assumed
// that the name of the current resource is given
// as the first ArgList attribute.
VCSAgRegister((const char *) attr_val[0], (const
    char *) attr_val[0], "CriticalAttr");

// Register to get notified when the
// "CriticalAttr" of "CentralRes" is modified.
VCSAgRegister(res_name, "CentralRes",
    "CriticalAttr");

// Register to get notified when the
// "CriticalAttr" of another resource is modified.
// It is assumed that the name of the other resource
// is given as the first ArgList attribute.
VCSAgRegister(res_name, (const char *)attr_val[0],
    "CriticalAttr");
}

```

## VCSAgUnregister

```

void
VCSAgUnregister(const char *notify_res_name, const char
    *res_name,
    const char *attr_name);

```

This primitive requests that the agent framework stop notifying the resource `notify_res_name` when the value of the attribute `attr_name` of the resource `res_name` is modified. This primitive can be called from any entry point. For example:

```

#include "VCSAgApi.h"
...
void res_close(const char *res_name, void **attr_val) {

    // Unregister for the "CriticalAttr" of this resource.
    VCSAgUnregister(res_name, res_name, "CriticalAttr");

    // Unregister for the "CriticalAttr" of another
    // resource. It is assumed that the name of the

```

```

    // other resource is given as the first ArgList
    // attribute.
    VCSAgUnregister(res_name, (const char *)
        attr_val[0], "CriticalAttr");
}

```

## VCSAgGetCookie

```
void *VCSAgGetCookie(const char *name);
```

This primitive requests that the agent framework get the cookie set by an earlier call to `VCSAgSetCookie2()`. It returns `NULL` if cookie was not previously set. This primitive can be called from any entry point. For example:

```

#include "VCSAgApi.h"
...
// Assume that the online, offline, and monitor
// operations on resource require a certain key. Also
// assume that obtaining this key is time consuming, but
// that it can be reused until this process is terminated.
//
// In this example, the open entry point obtains the key
// and stores it as a cookie. Subsequent online,
// offline, and monitor entry points get the cookie and
// use the key.
//
// Note that the cookie name can be any unique string.
// This example uses the resource name as the cookie name.
//

void *get_key() {
    ...
}

void res_open(const char *res_name, void **attr_val) {
    if (VCSAgGetCookie(res_name) == NULL) {
        void *key = get_key();
        VCSAgSetCookie2(res_name, key);
    }
}

VCSAgResState res_monitor(const char *res_name, void
    **attr_val, int *conf_level_ptr) {
    VCSAgResState state = VCSAgResUnknown;
}

```

```

        *conf_level_ptr = 0;
        void *key = VCSAgGetCookie(res_name);
        if (key == NULL) {
            // Take care of the rare cases when the open
            // entry point failed to obtain the key and
            // set the the cookie.
            key = get_key();
            VCSAgSetCookie2(res_name, key);
        }
        // Use the key for testing if the resource is
        // online, and set the state accordingly.
        ...
        return state;
    }

```

## VCSAgStrlcpy

```
void VCSAgStrlcpy(CHAR *dst, const CHAR *src, int size)
```

This primitive copies the contents from the input buffer "src" to the output buffer "dst" up to a maximum of "size" number of characters. Here, "size" refers to the size of the output buffer "dst." This helps prevent any buffer overflow errors. The output contained in the buffer "dst" may be truncated if the buffer is not big enough.

## VCSAgStrlcat

```
void VCSAgStrlcat(CHAR *dst, const CHAR *src, int size)
```

This primitive concatenates the contents of the input buffer "src" to the contents of the output buffer "dst" up to a maximum such that the total number of characters in the buffer "dst" do not exceed the value of "size." Here, "size" refers to the size of the output buffer "dst."

This helps prevent any buffer overflow errors. The output contained in the buffer "dst" may be truncated if the buffer is not big enough.

## VCSAgSnprintf

```
int VCSAgSnprintf(CHAR *dst, int size, const char *format, ...)
```

This primitive accepts a variable number of arguments and works like the C library function "sprintf." The difference is that this primitive takes in, as an argument, the size of the output buffer "dst." The primitive stores only a maximum of "size" number of characters in the output buffer "dst." This helps prevent buffer overflow errors.

The output contained in the buffer "dst" may be truncated if the buffer is not big enough.

## VCSAgCloseFile

```
void VCSAgCloseFile(void *vp)
```

Thread cleanup handler to close a file. The input (that is, vp) must be a file descriptor.

## VCSAgDelString

```
void VCSAgDelString(void *vp)
```

Thread cleanup handler to delete a (char \*). The input (vp) must be a pointer to memory allocated using "new char[xx]".

## VCSAgExec

```
int VCSAgExec(const char *path, char *const argv[], char *buf, long
buf_size, unsigned long *exit_codep)
```

Fork a new process, exec a program, wait for it to complete, and return the status. Also, capture the messages from stdout and stderr to buf. Caller must ensure that buf is of size  $\geq$  buf\_size.

VCSAgExec is a forced cancellation point. Even if the C++ entry point that calls VCSAgExec disables cancellation before invoking this API, the thread can get canceled inside VCSAgExec. Therefore, the entry point must make sure that it pushes appropriate cancellation cleanup handlers before calling VCSAgExec. The forced cancellation ensures that a service thread running a timed-out entry point does not keep running or waiting for the child process created by this API to exit, but instead honors a cancellation request when it receives one.

Explanation of arguments to the function:

path	Name of the program to be executed.
argv	Arguments to the program. argv[0] must be same as path. The last entry of argv must be NULL. (Same as execv syntax)
buf	Buffer to hold the messages from stdout or stderr. Caller must supply it. This function will not allocate. When this function returns, buf will be NULL-terminated.
bufsize	Size of buf. If the total size of the messages to stdout/stderr is more than bufsize, only the first (buf_size - 1) characters will be returned.

`exit_codep`      Pointer to a location where the exit code of the executed program will be stored. This value should be interpreted as described by `wait()` on Unix

Return value: `VCSAgSuccess` if the execution was successful.

Example:

```
//
// ...
//
char **args = new char* [3];
char buf[100];
unsigned int status;

args[0] = "/usr/bin/ls";
args[1] = "/tmp";
args[2] = NULL;
int result = VCSAgExec(args[0], args, buf, 100, &status);

if (result == VCSAgSuccess) {

    // Unix:
    if (WIFEXITED(status)) {
        printf("Child process returned %d\n", WEXITSTATUS(status));
    }
    else {
        printf("Child process terminated abnormally(%x)\n", status);
    }

}
else {
    printf("Error executing %s\n", args[0]);
}
//
// ...
//
```

## VCSAgExecWithTimeout

```
int VCSAgExecWithTimeout(const char *path, char *const argv[],
    unsigned int timeout, char *buf, long buf_size, unsigned long
    *exit_codep)
```

Fork a new process, exec a program, wait for it to complete, return the status. If the process does not complete within the timeout value, kill it. Also, capture the messages from stdout or stderr to buf. The caller must ensure that buf is of size  $\geq$  buf\_size. VCSAgExecWithTimeout is a forced cancellation point. Even if the C++ entry point that calls VCSAgExecWithTimeout disables cancellation before invoking this API, the thread can get canceled inside VCSAgExecWithTimeout. So the entry point needs to make sure that it pushes the appropriate cancellation cleanup handlers before calling VCSAgExecWithTimeout. The forced cancellation ensures that a service thread running a timed out entry point does not keep running or waiting for the child process created by this API to exit but instead honors a cancellation request when it receives one.

Explanation of arguments to the function:

path	Name of the program to be executed.
argv	Arguments to the program. argv[0] must be same as path. The last entry of argv must be NULL. (Same as execv syntax).
timeout	Number of seconds within which the process should complete its execution. If zero is specified, this API defaults to VCSAgExec(), meaning the timeout is to be ignored. If the timeout value specified exceeds the time left for the entry point itself to timeout, the maximum possible timeout value is automatically used by this API. For example, if the timeout value specified in the API is 40 seconds, but the entry point itself times out after the next 20 seconds, the agent internally sets the timeout value for this API to $20-3=17$ seconds. The 3 seconds are a grace period between the timeout for the process created using this API and the entry point process timeout.
buf	Buffer to hold the messages from stdout/stderr. The caller must supply it. This function does not allocate. When this function returns, buf is NULL-terminated.
bufsize	Size of buf. If the total size of the messages to stdout/stderr is more than bufsize, only the first (buf_size - 1) characters is returned.
exit_codep	Pointer to a location where the exit code of the executed program is stored. This value should be interpreted as described by wait() on Unix.

Return value: VCSAgSuccess if the execution is successful.

## VCSAgGenSnmptTrap

```
void VCSAgGenSnmptTrap(int trap_num, const char *msg, VCSAgBool  
is_global)
```

This API is used to send a notification via SNMP and/or SMTP. The `clusterOutOfBandTrap` is used to send notification messages from the agent entry points.

Explanation of arguments to the function:

trap_num	The trap identifier. This number is appended to the agents trap oid to generate a unique trap oid for this event.
msg	The notification message to be sent.
is_global	A Boolean value indicating whether or not the event for which the notification is being generated is local to the system where the agent is running.

## VCSAgSendTrap

```
void VCSAgSendTrap(const CHAR *msg)
```

This API is used to send a notification through the notifier process. The input (that is, `msg`) is the notification message to be sent.

## VCSAgLockFile

```
int VCSAgLockFile(const char *fname, VCSAgLockType ltype,  
VCSAgBlockingType btype, VCSAgErrnoType *errp)
```

Get a read or write (that is, shared or exclusive) lock on the given file. Both blocking and non-blocking modes are supported. Returns 0 if the lock could be obtained, or returns `VCSAgErrWouldBlock` if non-blocking is requested and the lock is busy. Otherwise returns -1. Each thread is considered a distinct owner of locks.

---

**Warning:** Do not do any operations on the file (ex, open, or close) within this process, except through the `VCSAgReadLockFile()`, `VCSAgWriteLockFile()`, and `VCSAgUnlockFile()` interfaces.

---

## VCSAgInitEntryPointStruct

```
void VCSAgInitEntryPointStruct(VCSAgAgentVersion agent_version)
```



This primitive enables agents to initialize the entry point struct depending on the agent framework version passed to this API. It must be called only from the `VCSAgStartup` function.

Examples:

```
VCSAgInitEntryPointStruct(V50);
VCSAgInitEntryPointStruct(V51);
```

V40 and V50

- open
- monitor
- online
- offline
- clean
- action
- info
- attr\_changed
- close
- shutdown

V51

- imf\_init
- imf\_register
- imf\_getnotification

V60

- migrate

For information on available registration version numbers, check the `VCSAgApiDefs.h` header file available in the following location:

```
/opt/VRTSvcs/include/VCSAgApiDefs.h
```

## VCSAgSetStackSize

```
void VCSAgSetStackSize(int I)
```

The agent framework sets the default stack size for threads in agents to 1MB. Use `VCSAgStackSize` to set the calling thread's stack size to the specified value.

## VCSAgUnlockFile

```
int VCSAgUnlockFile(const char *fname, VCSAgErrnoType *errp)
```

Release read or write (i.e shared or exclusive) lock on the given file. Returns 0, if the lock could be released, or else returns -1.

Mt-safe; deferred cancel safe.

---

**Warning:** Do not do any operations on the file (ex, open, or close) within this process, except through the `VCSAgReadLockFile()`, `VCSAgWriteLockFile()`, and `VCSAgUnlockFile()` interfaces.

---

## VCSAgValidateAndSetEntryPoint

```
void VCSAgValidateAndSetEntryPoint(VCSAgEntryPoint ep, f_ptr)
```

This primitive enables an agent developer to register any C++ entry point with the agent framework. And also performs the signature check for the entry point function at compile time.

`VCSAgEntryPoint` is an enumerated data type defined in `VCSAgApiDefs.h`.

Usage:

```
VCSAgValidateAndSetEntryPoint(VCSAgEPMonitor, my_monitor_func);
```

## VCSAgSetLogCategory

```
void VCSAgSetLogCategory(int cat_id)
```

Sets the log category of the agent to the value specified in `cat_id`.

## VCSAgGetProductName

```
const CHAR *VCSAgGetProductName()
```

This API fetches the name of the product for logging purposes

## VCSAgMonitorReturn

```
VCSAgResState VCSAgMonitorReturn(VCSAgResState state, s32  
conf_level, const CHAR *conf_msg)
```

`VCSAgResState state`: The state of the resource as found by the monitor entry point.

`int conf_level`: The confidence level with which the resource was found to be online. This can be a number from 10 to 100.

`const char * conf_msg`: If the resource is being reported as ONLINE from the monitor entry point with a confidence level lower than 100, this parameter accepts a string

containing the reason for the lower confidence level for the resource. If the confidence level reported is 100 or if the resource state is reported as Offline or IntentionalOffline, the confidence message will get automatically cleared even if agent developer provides a confidence message string to this API.

---

**Note:** You can also call this API using the macro `VCSAG_MONITOR_RETURN` with the same arguments as passed to `VCSAgMonitorReturn` API.

---

## VCSAgSetResEPTimeout

```
void VCSAgSetResEPTimeout(s32 tmo)
```

This API allows an agent entry point to extend its timeout value dynamically from within the entry point's execution context. This might be required if a command executed from the entry point takes longer than expected to complete and the entry point does not want to timeout. Symantec recommends using this API with caution because the intent of timeouts is to make sure that entry points finish on time.

Usage:

```
VCSAgSetResEPTimeout(tmo);
```

See [“VCSAG\\_SET\\_RES\\_EP\\_TIMEOUT”](#) on page 100.

## VCSAgDecryptKey

```
VCSAgDecryptKey(char *key, char *outbuf, int buflen);
```

This API lets you decrypt an encrypted string passed in the ArgListValues by the user. Typically users encrypt string attribute values for passwords using the encryption commands provided by VCS. An entry point can use this API to decrypt the encrypted string and get the original string.

## VCSAgGetConfDir

```
void VCSAgGetConfDir(char *buf, int bufsize)
```

Returns the name of the VCS configuration directory.

If the `VCS_CONF` environment variable is set, the command returns the value of the variable, otherwise it returns the default value. .

Caller must supply the buffer

## VCSAgGetHomeDir

```
void VCSAgGetHomeDir(char *buf, int bufsize)
```

Returns the name of VCS home directory. If the VCS\_HOME environment is configured, the command returns the value of the variable, otherwise it returns the default value.

Caller must supply the buffer

## VCSAgGetLogDir

```
VCSAgGetLogDir(char *buf, int bufsize)
```

Returns the name of VCS log directory. If the VCS\_LOG environment variable is set, the command returns the value of the variable, otherwise it returns the default value if not set.

Caller must supply the buffer

## VCSAgGetSystemName

```
void VCSAgGetSystemName(char *buf, int bufsize)
```

Returns the name of the system on which the agent is currently running.

Caller must supply the buffer

## VCSAG\_CONSOLE\_LOG\_MSG

```
VCSAG_CONSOLE_LOG_MSG(sev, msgid, flags, fmt, variable_args...)
```

Use the VCSAG\_CONSOLE\_LOG\_MSG macro to send messages to the HAD log. If the messages are of CRITICAL or ERROR severity, then the messages are also logged to the console.

Usage:

```
VCSAG_CONSOLE_LOG_MSG(VCS_ERROR, 14002, VCS_DEFAULT_FLAGS,  
"Resource could not be brought down because,  
the attempt to remove the file(%s) failed with error(%d)", (CHAR *) (*attr_val
```

See [“C++ agent logging APIs”](#) on page 121.

## VCSAG\_LOG\_MSG

```
VCSAG_LOG_MSG(sev, msgid, flags, fmt, variable_args...)
```

You can use the macro `VCSAG_LOG_MSG` within C++ agent entry points to log all messages ranging in severity from CRITICAL to INFORMATION to the agent log file.

Usage:

```
VCSAG_LOG_MSG(VCS_ERROR, 14002, VCS_DEFAULT_FLAGS,  
"Resource could not be brought down because the attempt to remove the file(%s  
failed with error(%d)", (CHAR *) (*attr_val), errno);
```

See [“C++ agent logging APIs”](#) on page 121.

## VCSAG\_LOGDBG\_MSG

Use the macros `VCSAG_LOGDBG_MSG` within agent entry points to log debug messages of a specific severity level to the agent log. The `VCSAG_LOGDBG_MSG` macro controls logging at the level of the resource type level.

```
VCSAG_LOGDBG_MSG(dbgsev, flags, fmt, variable_args);
```

The `VCSAG_LOGDBG_MSG` macro controls logging at the level of the resource type level.

Usage:

```
VCSAG_LOGDBG_MSG(VCS_DBG5, VCS_DEFAULT_FLAGS,  
"Received AMF monitor stop. Unregistering the group");
```

See [“C++ agent logging APIs”](#) on page 121.

## VCSAG\_RES\_LOG\_MSG

The macro `VCSAG_RES_LOG_MSG` can be used to print debug log message at resource level for a specific resource by enabling debugging at resource level by overriding LogDbg attribute. It only accepts debug severities i.e. DBG\_1 to DBG\_21.

```
VCSAG_RES_LOG_MSG(dbgsev, flags, fmt, variable_args);
```

The `VCSAG_RES_LOG_MSG` macro controls logging at the level of the resource type level.

Usage:

```
VCSAG_RES_LOG_MSG(VCS_DBG4, VCS_DEFAULT_FLAGS,
    "PathName is (%s)", (CHAR *) (*attr_val));
```

See [“C++ agent logging APIs”](#) on page 121.

## Agent Framework primitives for container support

The following APIs are for use in agents that run in AIX WPARs, XRM containers and Solaris zones. Note that zones are supported by Solaris version 10 and above.

---

**Note:** Container support is available only with agent version V50 or later.

---

### VCSAgIsContainerUp

```
int VCSAgIsContainerUp();
```

This API returns either True or False. If the container configured under Service Group is up and running, this API returns True, else it returns False.

### VCSAgGetContainerTypeEnum

```
VCSAgContainerType VCSAgGetContainerTypeEnum(const char *ctype);
```

This primitive takes a Container type name and returns a corresponding VCSAgContainerType enum value.

### VCSAgExecInContainer2

```
int VCSAgExecInContainer2(const CHAR *path, CHAR *const argv[], char
    *buf, long buf_size, unsigned long *exit_codep);
```

This API is the same as VCSAgExec; however, this API should be used by an agent only to execute a particular command or script in a specific container on the system. If the container is not enabled or invalid container is specified or if OS does not support container, then the API executes the command or script in the global container. If there are no containers configured on the system, or if the agent has no need to execute a script in a specific container, use the VCSAgExec API.

Memory for buf and exit\_codep must be allocated by the calling function.

See [“VCSAgExec”](#) on page 77.

See [“VCSAG\\_EXEC\\_IN\\_CONTAINER ”](#) on page 111.

## VCSAgsContainerCapable

```
VCSAgBool VCSAgIsContainerCapable();
```

This API returns either True or False.

- For Solaris zones  
 If the agent is running on a Solaris 10 (or higher version) system, the API returns True; otherwise it returns False.  
 Agents can use this API to decide whether or not to perform zone-specific operations like comparing the zone\_id field in the psinfo structure with the ID of the zone name specified in the resource configuration to confirm whether the found process is indeed the process the agent is looking for.
- For XRM  
 If the agent is running on a system that has xrm available, the API returns True; otherwise it returns False.
- For WPARs  
 If the agent is running on a system that has WPARs available, the API returns True; otherwise it returns False.

## VCSAgExecInContainerWithTimeout

```
int VCSAgExecInContainerWithTimeout((const CHAR *path, CHAR *const
argv[] u32 timeout, CHAR *buf, long buf_size, unsigned long
*exit_codep);
```

This API is similar to the VCSAgExecWithTimeout API. This API can be used by an agent only to execute a particular command or script in a specific container on the system. If the container is not enabled or invalid container is specified or if OS does not support container, then the API executes the command or script in the global container. If there are no containers configured on the system, or if the agent has no need to exec a script in a specific container, the VCSAgExecWithTimeout API should be used.

Memory for buf and exit\_codep should be allocated by the calling function.

## VCSAgGetUID

```
int VCSAgGetUID(const CHAR *user, int *uid, int *euid, int
*home_exists);
```

This API checks if the given user is valid inside the container as specified in the resource object. The API returns the uid and euid of the user either inside the container if container info is set for the resource or on the global container if container

info is not set for the resource. The `home_exists` parameter indicates if the specified user's home directory exists within the container.

Memory for `uid`, `euid` and `home_exists` must be allocated by the calling function

The API returns 0 on success and 1 on failure

## VCSAgsPidInContainer

```
int VCSAgsPidInContainer(VCSPID pid);
```

This API checks if the given pid is running inside the container as specified in the resource object. If the container is not enabled then the API checks that the pid is running in the global container.

Return values

- 1 if the proc pid is running inside the container
- 0 if the proc pid is not running inside the container
- -1 if the API cannot verify the container info for the process. This is possible if `ContainerType` is an invalid value.

## VCSAgsProcInContainer

```
int VCSAgsProcInContainer(void *psinfo);
```

This API checks if the process corresponding to the given psinfo structure is running inside the container as specified in the resource object. If the container is not enabled then the API checks that the process is running in the global container.

Return values

- 1 if the proc pid is running inside the container
- 0 if the proc pid is not running inside the container
- -1 if the API cannot verify the container info for the process. This is possible if `ContainerType` is an invalid value.

See [“VCSAG\\_IS\\_PROC\\_IN\\_CONTAINER”](#) on page 110.

## VCSAgGetContainerID2

```
int VCSAgGetContainerID2()
```

This API retrieves the ID of the container.



Based on the thread that is implementing the entry point, the agent identifies the resource for which this API is invoked and returns the container ID for that resource. The container ID is the ID of the container specified in the ContainerInfo attribute as the value of the Name key.

Return Values

- -1, if the resource or container name is NULL or the container is DOWN or the container is not applicable to the OS version the agent is running on.
- Non-negative container-id, if the container name is valid and the container is UP.

## VCSAgGetContainerName2

```
char *VCSAgGetContainerName2();
```

For Solaris Zones, this API retrieves the name of the container, if set for the specified resource.

For XRM, the API retrieves the name of the Execution Context.

For WPARs, the API retrieves the name of the WPAR.

The API returns a pointer to the container name. It is the responsibility of the caller to free the memory associated with the returned pointer.

The name of the container is the value set in the group-level attribute ContainerInfo for the group the resource belongs to.

## VCSAgGetContainerBasePath

```
int VCSAgGetContainerBasePath (char *buf, int bufsize, int *exit_info)
```

This API returns the base path of the container mentioned under the ContainerInfo attribute at group level. This API must be called from the global zone or WPAR.

For Solaris zones:

- If the agent is running on a Solaris machine, the API returns the base path of the zone where zone is installed.

For WPARs

- If the agent is running on an AIX machine, the API returns the base path of the WPAR where WPAR is installed.

Input parameters:

<code>buf</code>	Buffer to store the base path of the container. Caller must make the provision to reserve and release the memory for the buffer.
<code>bufsize</code>	Size of the buffer passed.

#### Output parameters:

<code>buf</code>	Buffer to store the base path of the container at the end of its execution.
<code>exit_info</code>	Provides extended information to the caller in certain cases as described under Return values.

#### Return values:

0	<p>If ContainerInfo attribute is set properly, which means:</p> <ul style="list-style-type: none"> <li>■ Name is set to &lt;valid_container_name&gt;</li> <li>■ Type is set to &lt;valid_container_type&gt;</li> <li>■ Enabled is set to 1</li> </ul> <p>Container's base path is returned in the buf parameter.</p>
1	If <code>buf</code> is passed as null.
2	<p>If the buffer size is smaller than the size of the container's base path.</p> <p>The <code>exit_info</code> parameter is updated to reflect the correct value of the buffer size needed to be passed.</p>
3	If the Enable key of the ContainerInfo attribute is set to 0 or 2. Container's base path is returned in buf parameter only if Name key is set to <valid_container_name>.
4	If the ContainerInfo attribute is not set for the resource. For example, Name key of ContainerInfo is "" or Type key of ContainerInfo is invalid.
5	If command to obtain the base path of the container fails. The <code>exit_info</code> parameter is updated accordingly with the exit status of the command.
6	If OS is not container capable.

See ["VCSAG\\_GET\\_CONTAINER\\_BASE\\_PATH"](#) on page 108.

## VCSAgGetContainerEnabled

This API returns the Enabled key of ContainerInfo attribute.

#### Return values:

- 0                    If ContainerInfo is not defined at group level then it returns the default value of the enabled key.
- 0, 1, or 2        If ContainerInfo is defined at group level then it returns the current value of the enabled key.

Refer to the *SFHA virtualization guide* for more information on the values of the enabled key.

# Creating entry points in scripts

This chapter includes the following topics:

- [About creating entry points in scripts](#)
- [Syntax for script entry points](#)
- [Agent framework primitives](#)
- [Agent Framework primitives with container support](#)
- [Example script entry points](#)

## About creating entry points in scripts

On UNIX, script agents use one of the different agent binaries that are shipped with the VCS product. The agent binaries are located at:

`$VCS_HOME/bin/`

See [“Script based agent binaries”](#) on page 136.

You can implement entry points using C++ or scripts. If you are implementing even one entry point in c++ then you must implement the `VCSAgStartup` function. If you do not implement any entry points in C++, then you do not need to implement the `VCSAgStartup` function since the default implementation of `VCSAgStartup` is present in the script agent binary provided by VCS as mentioned above.

See [“About the VCSAgStartup routine”](#) on page 42.

You can use Perl or shell scripts to develop entry points.

## Rules for using script entry points

Script entry points can be executables or scripts, such as shell or Perl (the product includes a Perl distribution).

Adhere to the following rules when implementing a script entry point:

### On UNIX platforms

- In the `VCSAgStartup` function, if you do not set a C++ function for an entry point using the `VCSAgValidateAndSetEntryPoint()` API, then the agent framework assumes the entry point is script-based.  
See [“About the VCSAgStartup routine”](#) on page 42.
- Verify the name of the script file is the same as the entry point name.
- Place the file in the `$VCS_HOME/bin/resource_type` directory or in the directory mentioned in the `AgentDirectory` attribute. If for example, the `online` entry point for Oracle were implemented using Perl, the `online` script must be:

```
$VCS_HOME/bin/Oracle/online
```

- If you write scripts in shell, verify the `PATH` environment variable includes the directory where `sh` is installed.

## Parameters and values for script entry points

The input parameters of script entry points are passed as command-line arguments. The first command-line argument for all the entry points is the name of the resource (except `shutdown`, which has no arguments).

Some entry points have an output parameter that is returned through the program exit value. See the entry point description for more information.

See [“Syntax for script entry points”](#) on page 94.

## ArgList attributes

Specifies the attributes that must be passed to the agent entry points.

See [“About the ArgList and ArgListValues attributes”](#) on page 47.

## Examples

If Type "Foo" is defined in `types.cf` as:

```
Type Foo (  
    str Name  
    int IntAttr  
    str StringAttr  
    str VectorAttr[]  
    str AssocAttr{}  
    static str ArgList[] = { IntAttr, StringAttr,  
                             VectorAttr, AssocAttr }  
)
```

And if a resource "Bar" is defined in the VCS configuration file main.cf as:

```
Foo Bar (  
    IntAttr = 100  
    StringAttr = "Oracle"  
    VectorAttr = { "vol1", "vol2", "vol3" }  
    AssocAttr = { "disk1" = "1024", "disk2" = "512" }  
)
```

The online script for a V51 agent, when invoked for Bar, resembles:

```
online Bar IntAttr 1 100 StringAttr 1 Oracle VectorAttr 3 vol1  
vol2 vol3 AssocAttr 4 disk1 1024 disk2 512
```

See [“About the ArgList and ArgListValues attributes”](#) on page 47.

## Syntax for script entry points

The following paragraphs describe the syntax for script entry points.

### Syntax for the monitor script

```
monitor resource_name ArgList_attribute_values
```

A script entry point combines the status and the confidence level in the exit value.  
For example:

- 99 indicates unknown.
- 100 indicates offline.
- 101 indicates online and a confidence level of 10.
- 102–109 indicates online and confidence levels 20–90.
- 110 indicates online and confidence level 100.

- 200 indicates intentional offline.

If the exit value is not one of the above values, the status is considered unknown.

## Syntax for the online script

```
online resource_name ArgList_attribute_values
```

The exit value is interpreted as the expected time (in seconds) for the online procedure to be effective. It also means the time (in seconds) that must pass before executing the monitor entry point to validate proper operation. The exit value is typically 0.

## Syntax for the offline script

```
offline resource_name ArgList_attribute_values
```

The exit value is interpreted as the expected time (in seconds) for the offline procedure to be effective. The exit value is typically 0.

It also means the time (in seconds) that must pass before executing the monitor entry point to validate proper operation.

## Syntax for the clean script

```
clean resource_name clean_reason argList_attribute_values
```

The variable *clean\_reason* equals one of the following values:

0 - The `offline` entry point did not complete within the expected time.

(See [“OfflineTimeout”](#) on page 195.)

1 - The `offline` entry point was ineffective.

2 - The `online` entry point did not complete within the expected time.

( See [“OnlineTimeout”](#) on page 197.)

3 - The `online` entry point was ineffective.

4 - The resource was taken offline unexpectedly.

5 - The `monitor` entry point consistently failed to complete within the expected time.

(See [“FaultOnMonitorTimeouts”](#) on page 188.)

The exit value is 0 (if successful) or 1 (if unsuccessful).

## Syntax for the action script

```
action resource_name
ArgList_attribute_values_AND_action_arguments
```

The exit value is 0 (if successful) or 1 (if unsuccessful).

The agent framework limits the action entry point output to 2048 bytes.

## Syntax for the attr\_changed script

```
attr_changed resource_name changed_resource_name
              changed_attribute_name new_attribute_value
```

The exit value is ignored.

---

**Note:** This entry point is called only if you register for change notification using the primitive `VCSAgRegister()` ( See “[VCSAgRegister](#)” on page 73.), or the agent parameter `RegList` (See “[RegList](#)” on page 198.).

---

## Syntax for the info script

```
info resource_name resinfo_op ArgList_attribute_values
```

The attribute `resinfo_op` can have the values 1 or 2.

Values of resinfo_op	Significance
1	Add and initialize static and dynamic name-value data pairs in the <code>ResourceInfo</code> attribute.
2	Update just the dynamic data in the <code>ResourceInfo</code> attribute.

This entry point can add and update static and dynamic name-value pairs to the `ResourceInfo` attribute. The `info` entry point has no specific output, but rather, it updates the `ResourceInfo` attribute.

## Syntax for the open script

```
open resource_name ArgList_attribute_values
```

The exit value is ignored.



## Syntax for the close script

```
close resource_name ArgList_attribute_values
```

The exit value is ignored.

## Syntax for the shutdown script

```
shutdown
```

The exit value is ignored.

## Syntax for the imf\_init script

```
imf_init type_name
```

where `type_name` is the type of agent. For example, Mount, Process, Application and so on.

The exit value is 0 (zero) if successful and 1 (one) if unsuccessful.

## Syntax for the imf\_register script

```
imf_register res_name mswitch rstate ArgList_attribute_values
```

`res_name` Name of the resource that is required to be registered.

`mswitch` Possible value of this parameter is either VCSAgIMFMonitorStop or VCSAgIMFMonitorStart.  
 If its value is VCSAgIMFMonitorStart, then it registers a resource with underlying module. If its value is VCSAgIMFMonitorStop, then it unregisters a resource from underlying module. This is passed by the agent framework.

`rstate` Possible value for this parameter is either VCSAgIMFResOffline or VCSAgIMFResOnline.  
 If its value is VCSAgIMFResOffline, then it registers a resource with underlying module for OFFLINE monitoring. If its value is VCSAgIMFResOnline, then it registers underlying module for ONLINE monitoring.

The exit value is 0 (zero) if successful or non-zero if unsuccessful.

---

**Note:** The `imf_register` entry point also returns the resource ID to agent framework by writing the resource ID to the exposed PIPE FD.

---

## Syntax for the `imf_getnotification` script

```
imf_getnotification type_name
```

`type_name`                      Type of the agent. For example, Mount, Process, Application and so on.

The exit value is 0 (zero) if successful; 1 if failure; 3 if interrupted (failure case); 4 if critical failure.

---

**Note:** The `imf_getnotification` entry point also returns the resource event notification to the agent framework by writing the event information to the exposed PIPE FD.

---

## Syntax for migrate script

```
migrate resource_name attribute_values
```

The exit value is interpreted as the expected time (in seconds) for the migrate procedure to be effective. The exit values is an integer in the range of 0 to 100. The agent framework waits for the number of seconds as indicated by the value (return value \* 10) to call the monitor entry point for the resource to validate proper operation. The exit value is typically 0. For more information refer to return code of migrate entry point.

See [“Return values for entry points ”](#) on page 39.

# Agent framework primitives

Primitives are Perl/Shell based methods implemented by the agent framework. The following sections define the primitives.

## VCSAG\_GET\_MONITOR\_LEVEL

The agent developer can use this primitive to query if the LevelOne (Basic) monitoring or the LevelTwo (Detail) monitoring or both need to be scheduled.

Output parameters:

- **level\_one**: This parameter will be updated to 1 or 0 if basic monitoring needs to be scheduled or not. A value of 0 means that basic monitoring should not be scheduled while a value of 1 means that basic monitoring should be scheduled. See “IMF” on page 189.
- **level\_two**: This parameter will be updated to 0, 1, or 2 based on the present state of the resource, and if detail monitoring needs to be scheduled. A value of 0 means that detail monitoring should not be scheduled, a value of 1 means that detail monitoring should be scheduled, and a value of 2 means that detail monitoring should be scheduled if basic monitoring (**level\_one**) reports state as online  
Following example describes setting of output parameters,  
If you set `LevelTwoMonitorFrequency` to 5 and the resource state is ONLINE, then every fifth monitor cycle, **level\_two** will have the value as 1. If the resource state is OFFLINE, then every monitor cycle **level\_two** will have the value as 2. See “`LevelTwoMonitorFreq`” on page 191.  
If you set `MonitorFreq` to 5 and the resource is registered with IMF, then every fifth monitor cycle **level\_one** parameter will have the value of 1.  
See “IMF” on page 189.

This API is typically used as Perl/Shell based script.

#### Perl based:

This API return the value of **level\_one** and **level\_\_two** and status as return value.

Usage: `($ret, $level_one, $level_two) = VCSAG_GET_MONITOR_LEVEL();`

- **\$ret** : Checks whether the API passed or failed.
- **\$level\_one** : Holds the value of level one monitor flag if API is passed.
- **\$level\_two** : Holds the value of level two monitor flag if API is passed.

#### Shell based:

This API return the value of **level\_one** and **level\_\_two** as environment variable `VCSAG_MONITOR_LEVEL_ONE` and `VCSAG_MONITOR_LEVEL_TWO`, and status as return value.

Usage: `VCSAG_GET_MONITOR_LEVEL`

Fetches the value of the `LevelOne` and `LevelTwo` monitoring flag as below if API passes,

- `level_one=${VCSAG_MONITOR_LEVEL_ONE}`
- `level_two=${VCSAG_MONITOR_LEVEL_TWO}`

## VCSAG\_GET\_AGFW\_VERSION

This API can be used to get the latest agent version.

- **Perl based:** Returns the version information as return value.

Usage:

```
my $agfw_ver = VCSAG_GET_AGFW_VERSION();
```

- **Shell based:** Returns the version information in environment variable `VCSAG_AGFW_VERSION_VALUE`, and provides success or failure as return value.

Usage:

```
VCSAG_GET_AGFW_VERSION agfw_ver=${VCSAG_AGFW_VERSION_VALUE}
```

## VCSAG\_GET\_REG\_VERSION

This API can be used to get the registered agent version.

- **Perl based:** Returns the version information as return value.

Usage:

```
my $agfw_reg_ver = VCSAG_GET_REG_VERSION();
```

- **Shell based:** Returns the version information in environment variable `VCSAG_REG_VERSION_VALUE`, and provides success or failure as return value.

Usage:

```
VCSAG_GET_REG_VERSION agfw_reg_ver=${VCSAG_REG_VERSION_VALUE}
```

## VCSAG\_SET\_RES\_EP\_TIMEOUT

This API allows an agent entry point to extend its timeout value dynamically from within the entry point's execution context. This might be required if a command executed from the entry point takes longer than expected to complete and the entry point does not want to timeout. Symantec recommends using this API with caution because the intent of timeouts is to make sure that entry points finish on time.

- **Perl based usage:**

```
VCSAG_SET_RES_EP_TIMEOUT($time);
```

- **Shell based usage:**

```
VCSAG_SET_RES_EP_TIMEOUT${time}
```

## VCSAG\_GET\_ATTR\_VALUE

This API can be used to get the values of attribute. The attribute can be scalar type, key list type, and association type.

Input parameters:

- attribute name: The first argument holds the name of the attribute whose value and index needs to be founded.
- index of attribute: It is optional argument.
  - Should be specified as -1 for getting values of scalar attribute
  - Do not specify this argument, if you need to fetch only the number of keys in key list, vector, association attribute and the index of the attribute.
  - Should be the index of attribute if you need to fetch any particular key from the key list, vector and association attribute.
- index of value required.
  - Should be specified as 1 for fetching the values of scalar attribute.
  - Do not specify this argument, if you need to fetch only the number of keys in key list, vector, association attribute and the index of the attribute.
  - Should be the index of key if you need to fetch the value key from the key list, vector and association attribute.
- arglist : A list of attributes along with values. `ResourceName` and `CleanReason` should not be passed in this list.

Output parameters for Perl-based API:

- `ret_val`: This API returns value 0 on success and non-zero value on failure. The error gets printed at debug level `DBG_1`.

Using `VCSAG_GET_ATTR_VALUE` API to fetch value of scalar attribute

- Shell:

```
VCSAG_GET_ATTR_VALUE "MountPoint" -1 1 @ARGV
```

The environment variable `VCSAG_ATTR_VALUE` stores the value.

- Perl:

```
my ($ret, $MountPoint) =  
VCSAG_GET_ATTR_VALUE ("MountPoint", -1, 1, @ARGV);
```

Using `VCSAG_GET_ATTR_VALUE` API to fetch the value of key list, vector and association type attribute

- The user needs to get the number of keys in key list attribute and index of attribute in argument list, and then calls the API in loop. The user can get the key or values in the key list, vector and association attributes.

## To get number of keys in the key list attribute and the index of attribute in argument list

Shell:

```
VCSAG_GET_ATTR_VALUE "PidFiles" "$@"
```

The number of values will be stored in environment variable `VCSAG_ATTR_VALUE` , and the environment variable `VCSAG_ATTR_INDEX` holds the index of attribute in the argument list.

Perl:

For example:

```
my ($retval, $NumOfArgs, $indexofattr) =  
VCSAG_GET_ATTR_VALUE("ACTION_ARGS", @ARGV);
```

## To get a particular key in the key list and vector attribute

Shell:

```
VCSAG_GET_ATTR_VALUE "PidFiles" ${VCSAG_ATTR_INDEX} $index "$@"
```

The variable `VCSAG_ATTR_VALUE` holds the value of the key at the index (\$index).

Perl:

```
my ($retval, $value_of_key) =  
VCSAG_GET_ATTR_VALUE("ACTION_ARGS", $indexofattr, $index_of_key, @ARGV);
```

By getting the value of the number of keys as mentioned above and by calling this API in the loop, the user can get all the keys of key list and vector attribute.

## To get the number of keys in the association attribute, and index of attribute in the argument list

Shell:

```
VCSAG_GET_ATTR_VALUE "RHEVMInfo" "$@argv "
```

Perl:

```
my ($ret_val, $ NumOfArgs, $indexofattr) =  
VCSAG_GET_ATTR_VALUE ("RHEVMInfo", @argv);
```

## To get a particular key or value in the association attribute:

Shell:

```
VCSAG_GET_ATTR_VALUE " RHEVMInfo " ${VCSAG_ATTR_INDEX} $index "$@"
```

The variable `VCSAG_ATTR_VALUE` holds the value of key at the index (\$index).

Perl:

```
($retval, $value) =  
VCSAG_GET_ATTR_VALUE("RHEVMInfo", $indexofattr, $index_of_key_or_val, @argv);
```

By getting the value of the number of keys as mentioned above and by calling this API in the loop, the user can get all the keys of association attribute.

## VCSAG\_SET\_RESINFO

This API sets or modifies the `ResourceInfo` with specified key and value.

Input parameters:

- `info_type`: Set to '1' when you call this API for the first time so that the corresponding key value pair can be added to the attribute `ResourceInfo`, and it is set to '2' second time to update the values of key.
- `key_name`: Specifies the key that needs to be added or update.
- `key_val`: Specifies the value of the key that needs to be added or updated.

Output parameters:

- Returns `VCSAG_SUCCESS` when it successful adds or updates the key-value pair.

Shell:

```
VCSAG_SET_RESINFO "${info_type}" "${key_name}" "${key_val}"
```

Perl:

```
VCSAG_SET_RESINFO(${info_type}, ${key_name}, ${key_val});
```

## VCSAG\_MONITOR\_EXIT

This API exits the entry point with online/offline/unknown status along with setting the `ConfidenceLevel` and `ConfidenceMsg` attributes, if desired.

Input parameters:

- Exit status of resource

- `VCSAG_RES_UNKNOWN`: Monitor should return this value when resource state is unknown.
- `VCSAG_RES_OFFLINE`: Monitor should return this value when resource state is OFFLINE.
- `VCSAG_RES_ONLINE`: Monitor should return this value when resource state is ONLINE.
- `VCSAG_RES_INTENTIONALOFFLINE`: Monitor should return this value when resource state is detected as intentionally offline.
- New confidence level when exit status is online, else ignored (optional). Confidence level is between 10 to 100%.
- New confidence message when exit status is online but confidence level is below 100%, else ignored (optional)

Perl usage:

- `VCSAG_MONITOR_EXIT($exit_code);`
- `VCSAG_MONITOR_EXIT($exit_code, $confidence_level);`
- `VCSAG_MONITOR_EXIT($exit_code, $confidence_level, $confidence_message);`

Example:

- `VCSAG_MONITOR_EXIT($VCSAG_RES_UNKNOWN);`
- `VCSAG_MONITOR_EXIT($VCSAG_RES_OFFLINE);`
- `VCSAG_MONITOR_EXIT($VCSAG_RES_ONLINE, 90);`
- `VCSAG_MONITOR_EXIT($VCSAG_RES_ONLINE, 20, "block device is 80% full");`

Shell usage:

- `VCSAG_MONITOR_EXIT $exit_code`
- `VCSAG_MONITOR_EXIT $exit_code $confidence_level`
- `VCSAG_MONITOR_EXIT $exit_code $confidence_level $confidence_message`

Example:

- `VCSAG_MONITOR_EXIT $VCSAG_RES_UNKNOWN`
- `VCSAG_MONITOR_EXIT $VCSAG_RES_OFFLINE`
- `VCSAG_MONITOR_EXIT $VCSAG_RES_ONLINE 90`
- `VCSAG_MONITOR_EXIT $VCSAG_RES_ONLINE 20 "block device is 80% full"`



## VCSAG\_SYSTEM

Entry points must use this function if they need to fork a command using system call.

Shell:

- Input parameter: A string of command with arguments.
- Usage:

```
VCSAG_SYSTEM "$command"; echo $?
```

User can do `echo $?` to get the exit value of the command.

Perl:

- Input parameter: A string of command with arguments.
- Output parameter : Return value of system (\$command).
- Usage:

```
$retval = VCSAG_SYSTEM($command);
```

## VCSAG\_SU

Entry points must use this function if they need to run a command in a different user's context.

Input parameters:

- User name
- A string of *su* options (if the string is space separated then needs quoted string)
- A string of command with arguments

Output parameters:

- Return value of system(\$command)

Shell usage:

```
VCSAG_SU "${user}" "-" "${program}"
```

Perl usage:

```
VCSAG_SU($user,"-", $program);
```

## VCSAG\_RETURN\_IMF\_RESID

This API is used by `imf_register` entry point to return the resource ID registered with underlying IMF notification module to the agent.

Shell usage: `VCSAG_RETURN_IMF_RESID`

Perl usage: `VCSAG_RETURN_IMF_RESID()`

## VCSAG\_RETURN\_IMF\_EVENT

`imf_getnotification` entry point uses this API to return the resource ID whose notification arrived from underlying IMF notification module to the agent.

Shell usage: `VCSAG_RETURN_IMF_EVENT`

Perl usage: `VCSAG_RETURN_IMF_EVENT ()`

## VCSAG\_BLD\_PSCOMM

This API builds the `ps` command based on platform and Container type.

---

**Note:** This API is applicable only for Perl-based usage.

---

Output:

Built PS command. The output can be used to list the processes. The user must call `VCSAG_IS_PROC_IN_CONTAINER` to check if the process lies in the container in which the resource is managed.

Usage:

```
$cmd = VCSAG_BLD_PSCOMM();  
open (PIDS, "$cmd |");
```

## VCSAG\_PHANTOM\_STATE

This API determines "phantom" state of a resource, and it requires `State` and `IState` of the resource as input arguments

Input parameters: `State` and `IState`

Output: "phantom" state of the resource.

---

**Note:** This API is applicable only for Perl-based usage.

---

Perl usage:

```
$ret_state=VCSAG_PHANTOM_STATE($state, $istate);
```

## VCSAG\_SET\_ENVS

The VCSAG\_SET\_ENVS function is used in each script-based entry point file. Its purpose is to set and export environment variables

See [“Script entry point logging functions”](#) on page 129.

## VCSAG\_LOG\_MSG

This API can be used to log messages in the engine log from agent's script entry point.

See [“Script entry point logging functions”](#) on page 129.

## VCSAG\_LOGDBG\_MSG

This API can be used to log debug messages in the engine log from agent's script entry point.

See [“Script entry point logging functions”](#) on page 129.

## VCSAG\_SQUEEZE\_SPACES

This API removes leading and trailing spaces, and also squeezes the spaces in the value that is passed as arguments.

Input parameters: Any strings with extra spaces.

Output parameters: Space squeezed strings.

---

**Note:** This API is applicable only for Perl-based usage.

---

Usage:

```
($a1,$b1...) = VCSAG_SQUEEZE_SPACES ($a, $b...);
```

Example:

```
$str1 = VCSAG_SQUEEZE_SPACES ($str1);  
($str1, $str2) = VCSAG_SQUEEZE_SPACES ($str1, $str2);  
@str = VCSAG_SQUEEZE_SPACES (@str);
```

# Agent Framework primitives with container support

The following APIs are for use in agents that run in AIX WPARs, Solaris zones and Project. Note that zones are supported by Solaris version 10 and above.

**Note:** Container support is available only with agent version V50 or later.

## VCSAG\_GET\_CONTAINER\_BASE\_PATH

This API returns the base path of the container as mentioned under the ContainerInfo attribute at group level. This API must be called from the global zone or WPAR.

- For Solaris zones:  
If the agent is running on a Solaris machine, the API returns the base path of the zone where zone is installed.
- For WPARs  
If the agent is running on an AIX machine, the API returns the base path of the WPAR where WPAR is installed.

**Perl based:** Returns the API exits status, command status and container base path as return value.

Return values:

0	<p>If <code>VCSAG_GET_CONTAINER_INFO</code> is called before and ContainerInfo is set properly, which means</p> <ul style="list-style-type: none"><li>■ Name is set to <code>&lt;valid_container_name&gt;</code></li><li>■ Type is set to <code>&lt;valid_container_type&gt;</code></li><li>■ Enabled is set to 1</li></ul> <p>Container's base path will be returned as return value.</p>
4	<p>If <code>VCSAG_GET_CONTAINER_INFO</code> API is not called before or if ContainerInfo attribute is not set for the resource. For example, Name key of ContainerInfo is "" or Type key of ContainerInfo is invalid etc.</p>
5	<p>If command to fetch base path of container fails. the command status is returned as return value.</p>

Usage:

```
my ($ret, $cmdstatus, $container_base_path) =  
VCSAG_GET_CONTAINER_BASE_PATH();
```

### Shell based:

This API returns the base path of container in environment variable `VCSAG_CONTAINER_BASE_PATH` and the status of the command which is used by api to fetch base path name in the environment variable `VCSAG_CMD_STATUS`. The API returns the exit status in the environment variable `VCSAG_BASE_PATH_RET_VAL`.

Return values:

0	<p>If <code>VCSAG_GET_CONTAINER_INFO</code> is called before and <code>ContainerInfo</code> is set properly, which means</p> <ul style="list-style-type: none"> <li>■ Name is set to <code>&lt;valid_container_name&gt;</code></li> <li>■ Type is set to <code>&lt;valid_container_type&gt;</code></li> <li>■ Enabled is set to 1</li> </ul> <p>Container's base path will be stored in environment variable <code>VCSAG_CONTAINER_BASE_PATH</code> parameter.</p>
4	<p>If <code>VCSAG_GET_CONTAINER_INFO</code> API is not called before or if <code>ContainerInfo</code> attribute is not set for the resource. For example, Name key of <code>ContainerInfo</code> is "" or Type key of <code>ContainerInfo</code> is invalid etc.</p>
5	<p>If command to fetch base path of container fails. The environment variable <code>VCSAG_CMD_STATUS</code>, will be updated accordingly with exit status of the command.</p>

### Usage:

```
VCSAG_GET_CONTAINER_BASE_PATH  
base_path=${VCSAG_CONTAINER_BASE_PATH}
```

---

**Note:** Before you use this API, the user should call the API

`VCSAG_GET_CONTAINER_INFO`. `VCSAG_GET_CONTAINER_INFO` API will set container name and type appropriately which will be required for this API.

---

## VCSAG\_GET\_CONTAINER\_INFO

Shell:

This API populates `VCSAG_CONTAINER_NAME` and `VCSAG_CONTAINER_TYPE` environment variables appropriately based on the `ContainerInfo` attribute passed to `ArgList`.

Input parameter: `ArgList`

Output parameter

- Return `VCSAG_INFO_NOT_AVAIL` when `ContainerInfo` is not passed in the entry point.
- Return `VCSAG_INFO_DONT_CARE` when Container is disabled which means Enabled is set 2 in the `ContainerInfo` attribute at the group level.
- Return `VCSAG_INFO_AVAIL` when successful. `VCSAG_CONTAINER_NAME` and `VCSAG_CONTAINER_TYPE` will be set appropriately.

Usage:

```
VCSAG_GET_CONTAINER_INFO "$@"
```

Perl:

This API returns the container information, such as container name and container type, under which the resource is managed.

Input parameter: `ArgList`

Output parameter: Returns the name of container and container type as return value along with success and failure of the API.

Return value:

- `$VCSAG_INFO_NOT_AVAIL` – The Container Info is not available. You cannot use the values *cname* and *ctype*.
- `$VCSAG_INFO_AVAIL` - The Container Info is available. You can use the values *cname* and *ctype*.
- `$VCSAG_INFO_DONT_CARE` - The Container is disabled which means Enabled is set 2 in the `ContainerInfo` attribute at the group level.

Usage:

```
($ret, $cname, $ctype) = VCSAG_GET_CONTAINER_INFO(@ARGV);
```

## VCSAG\_IS\_PROC\_IN\_CONTAINER

This API checks if the process is part of the container in which resource is managed. The API `VCSAG_BLD_PSCOMM` should be used for building the *ps* command while finding process name.

---

**Note:** This API is applicable only for Perl-based usage. And also applicable for solaris zone, project, and aix wpar.

---

Input:

*\$psout* - Process entry from the output of ps command as generated by API VCSAG\_BLD\_PSCOMM for the process that needs to be checked.

Return values:

- 1 - Process is part of the Container
- 0 - Process runs outside the Container

Usage:

```
$ret = VCSAG_IS_PROC_IN_CONTAINER($psout);
```

## VCSAG\_EXEC\_IN\_CONTAINER

Perl/Shell based:

Executes the command that are passed as an argument to this API inside the appropriate container.

If RIC is set to 1, do not use this API as entry point runs inside the container and zlogin/clogin/newtask command will fail; instead use VCSAG\_SYSTEM API.

Input parameter: Command that needs to be run.

Output parameter: Return value of command executed in the appropriate container.

Shell Usage:

```
retval=VCSAG_EXEC_IN_CONTAINER "$cmd"
```

Perl Usage:

```
$retval = VCSAG_EXEC_IN_CONTAINER($cmd);
```

---

**Note:** Before using this API user should call

VCSAG\_GET\_CONTAINER\_INFO.VCSAG\_GET\_CONTAINER\_INFO API will set the container name and type appropriately which are required. This API will execute the command in global container when the user fails to call VCSAG\_GET\_CONTAINER\_INFO API.

---

## Example script entry points

The following example shows entry points written in a shell script.

## Online entry point for FileOnOff

The FileOnOff example entry point is simple. When the agent's `online` entry point is called by the agent, the entry point expects the name of the resource as the first argument, followed by the values of the remaining ArgList attributes.

- For agents that are registered as less than V50, the entry point expects the values of the attributes in the order the attributes have been specified in the ArgList attribute.
- For agents registered as V50 and greater, the entry point expects the ArgList in tuple format: the name of the attribute, the number of elements in the attribute's value, and the value.

The below mentioned example is applicable for agent version V50 and later.

```
#!/bin/sh
# FileOnOff Online script
# Expects ResourceName and Pathname
. "${CLUSTER_HOME}/bin/ag_il8n_inc.sh"
RESNAME=$1
VCSAG_SET_ENVS $RESNAME
#check if second attribute provided
if [ -z "$4" ]
then
    VCSAG_LOG_MSG "W" "The value for PathName is not
    specified" 1020
else
    #create the file
    touch $4
fi
exit 0;
```

---

**Note:** The actual VCS FileOnOff entry points are written in C++, but in this example, shell script is used.

---

## Monitor entry point for FileOnOff

When the agent's `monitor` entry point is called by the agent, the entry point expects the name of the resource as the first argument, followed by the values of the remaining ArgList attributes.

- For agents that are registered as less than V50, the entry point expects the values of the attributes in the order the attributes have been specified in the ArgList attribute.



- For agents registered as V50 and greater, the entry point expects the ArgList in tuple format: the name of the attribute, the number of elements in the attribute's value, and the value.

If the file exists it returns exit code 110, indicating the resource is online with 100% confidence. If the file does not exist the monitor returns 100, indicating the resource is offline. If the state of the file cannot be determined, the monitor returns 99.

The below mentioned example is applicable for agent version V50 and later.

```
#!/bin/sh
# FileOnOff Monitor script
# Expects Resource Name and Pathname

. "${CLUSTER_HOME}/bin/ag_i18n_inc.sh"
RESNAME=$1
VCSAG_SET_ENVS $RESNAME
#check if second attribute provided
#Exit with unknown and log error if not provided.
if [ -z "$4" ]
then
    VCSAG_LOG_MSG "W" "The value for PathName is not specified" 1020
    exit 99
else
    if [ -f $4 ]; then exit 110;
    # Exit online (110) if file exists
    # Exit offline (100) if file does not exist
    else exit 100;
    fi
fi
```

## Monitor entry point with intentional offline

This script includes the intentional offline functionality for the MyCustomApp agent.

See [“About on-off, on-only, and persistent resources”](#) on page 19.

Note that the method to detect intentional offline of an application depends on the type of application. The following example assumes that the application writes a status code into a file if the application is intentionally stopped.

```
#!/bin/sh

. "${CLUSTER_HOME}/bin/ag_i18n_inc.sh"

ResName=$1; shift;
```

```
VCSAG_SET_ENVS $ResName
// Obtain the attribute values from ArgListValues
parse_arglist_values();
RETVAL=$?

if [ ${RETVAL} -eq ${VCSAG_RES_UNKNOWN} ]; then
    // Could not get all the required attributes from
    ArgListValues
    exit $VCSAG_RES_UNKNOWN;
fi

// Check if the application's process is present in the ps
// output
check_if_app_is_running();
RETVAL=$?

if [ ${REVAL} -eq ${VCSAG_RES_ONLINE} ]; then
    // Application process found
    exit $VCSAG_RES_ONLINE;
fi

// Application process was not found; Check if user gracefully
// shutdown the application
grep "MyCustomAppCode 123 : User initiated shutdown command"
${APPLICATION_CREATED_STATUS_FILE}
RETVAL=$?

if [ ${REVAL} -eq 0 ]; then
    // Found MyCustomAppCode 123 in the application's status
    // file that gets created by the application on graceful
    // shutdown
    exit $VCSAG_RES_INTENTIONALOFFLINE;
else
    // Did not find MyCustomAppCode 123; hence application has
    // crashed or gone down unintentionally
    exit $VCSAG_RES_OFFLINE;
fi

// Monitor should never come here
exit $VCSAG_RES_UNKNOWN;
```

## Offline entry point for FileOnOff

When the agent's `offline` entry point is called by the agent, the entry point expects the name of the resource as the first argument, followed by the values of the remaining ArgList attributes.

- For agents that are registered as less than V50, the entry point expects the values of the attributes in the order the attributes have been specified in the ArgList attribute.
- For agents registered as V50 and greater, the entry point expects the ArgList in tuple format: the name of the attribute, the number of elements in the attribute's value, and the value.

The below mentioned example is applicable for agent version V50 and later.

```
#!/bin/sh
# FileOnOff Offline script
# Expects ResourceName and Pathname
#
. "${CLUSTER_HOME}bin/ag_il8n_inc.sh"
RESNAME=$1
VCSAG_SET_ENVS $RESNAME
#check if second attribute provided
if [ -z "$4" ]
then
    VCSAG_LOG_MSG "W" "The value for PathName is not specified"\
    1020
else
#remove the file
/bin/rm Df $4
fi
exit 0;
```

## Monitor entry point for agent having basic (level-1) and detailed (level-2) monitoring

When the agent calls its entry point, the entry point expects the name of the resource as the first argument, followed by the values of the remaining ArgList attributes.

Following implementation is for the agents that are registered as V51. Implementation is same even if the agent is an IMF-aware agent.

---

**Note:** IMF is supported for agent version V51 and later.

---

```
# Implementation of Monitor entry point, which does Level-1
# and Level-2 monitoring.
#

eval 'exec /opt/VRTSperl/bin/perl -I ${CLUSTER_HOME}/lib
-S $0 ${1+"$@"}'
    if 0;

use strict;
use warnings;

my ($Resource, $state) = ("", "ONLINE");

$Resource = $ARGV[0]; shift;

use ag_il8n_inc;
VCSAG_SET_ENVS ($Resource);

# Fetch the value of level-1 and level-2
my ($ret, $level_one, $level_two)=(0,0,0);
($ret, $level_one, $level_two) = VCSAG_GET_MONITOR_LEVEL();

# Check if level-1 monitoring need to be performed
if ( $level_one == 1 ) {
    # Do level-1 monitoring i.e. basic monitoring
    # This would return state as ONLINE or OFFLINE or
    # unknown
    state = do_level_one_monitoring();
}

# Check if level-2 monitoring need to be performed
if ( ($state eq "ONLINE") && ($level_two != 0) ) {
    # Do level-2 monitoring i.e. detailed monitoring
    state = do_level_two_monitoring();
}

if ( $state -eq "ONLINE" ) {
    exit 110;
}

if ( $state -eq "OFFLINE" ) {
    exit 100;
}
```

```
# unknown state  
exit 99;
```

# Logging agent messages

This chapter includes the following topics:

- [About logging agent messages](#)
- [Logging in C++ and script-based entry points](#)
- [C++ agent logging APIs](#)
- [Script entry point logging functions](#)

## About logging agent messages

This chapter describes APIs and functions that developers can use within their custom agents to generate log file messages conforming to a standard message logging format.

More information is available about how to create and manage messages for internationalization.

See [“About internationalized messages”](#) on page 221.

More information is also available about APIs that are used by VCS 3.5 and earlier.

See [“Log messages in pre-VCS 4.0 agents”](#) on page 230.

## Logging in C++ and script-based entry points

Developers creating C++ agent entry points can use a set of macros for logging application messages or debug messages. Developers of script-based entry points can use a set of methods, or “wrappers,” that call the `halog` utility to generate application or debug messages.

Symantec recommends using the `ag_i18n_inc` subroutines for logging. The subroutines set the category ID for the messages and provide a header for the log message, which includes the resource name and the entry point name.

## Agent messages: format

An agent log message consists of five fields. The format of the message is:

*<Timestamp> <Mnemonic> <Severity> <UMI> <MessageText>*

The following is an example message, of severity `ERROR`, generated by the `FileOnOff` agent's `online` entry point. The message is generated when the agent attempts to bring online a resource, a file named "MyFile":

```
Sep 26 2010 11:32:56 VCS ERROR V-16-2001-14001
FileOnOff:MyFile:online:Resource could not be brought up
because, the attempt to create the file (filename) failed
with error (Is a Directory)
```

The first four fields of the message above consists of the *timestamp*, an uppercase *mnemonic* that represents the product, the *severity*, and the *UMI* (unique message ID). The subsequent lines contain the *message text*.

### Timestamp

The timestamp indicates when the message was generated. It is formatted according to the locale.

### Mnemonic

The mnemonic field is used to indicate the product.

The mnemonic, must use all capital letters. All VCS bundled agents, enterprise agents, and custom agents use the mnemonic: `VCS`

### Severity

The severity of each message displays in the third field of the message (`Critical`, `Error`, `Warning`, `Notice`, or `Information` for normal messages; 1-21 for debug messages). All C++ logging macros and script-based logging functions provide a means to define the severity of messages, both normal and debugging.

## UMI

The UMI (unique message identifier) includes an originator ID, a category ID, and a message ID.

- The originator ID is a decimal number preceded by a "V-" that defines the product that the message comes from. This ID is assigned by Symantec.
- The category ID is a number in the range of 0 to 65536 assigned by Symantec. The category ID indicates the agent that message came from. For each custom agent, you must contact Symantec so that a unique category ID can be registered for the agent.
  - For C++ messages, the category ID is defined in the `VCSAgStartup` function. See ["Log category"](#) on page 124.
  - For script-based entry points, the category is set within the `VCSAG_SET_ENVS` function. See ["VCSAG\\_SET\\_ENVS"](#) on page 129.
  - For debug messages, the category ID, which is 50 by default, need not be defined within logging functions.
- Message IDs can range from 0 to 65536 for a category ID. Each normal message (that is, non-debug message) generated by an agent must be assigned a message ID. For C++ entry points, the `msgid` is set as part of the `VCSAG_LOG_MSG` and `VCSAG_CONSOLE_LOG_MSG` macros. For script-based entry points, the `msgid` is set using the `VCSAG_LOG_MSG` function. The `msgid` field is not used by debug functions or required in debug messages. See ["VCSAG\\_LOG\\_MSG"](#) on page 132.

## Message text

The message text is a formatted message string preceded by a dynamically generated header consisting of three colon-separated fields. namely, *<name of the agent>*: *<resource>*:*<name of the entry point>*:*<message>*. For example:

```
FileOnOff:MyFile:online:Resource could not be brought up
because,the attempt to create the file (MyFile) failed
with error (Is a Directory)
```

- In the case of C++ entry points, the header information is generated.
- In the case of script-based entry points, the header information is set within the `VCSAG_SET_ENVS` function ( See ["VCSAG\\_SET\\_ENVS"](#) on page 129.).



## C++ agent logging APIs

The agent framework provides four logging APIs (macros) for use in agent entry points written in C++.

These APIs include two application logging macros:

```
VCSAG_CONSOLE_LOG_MSG(sev, msgid, flags, fmt, variable_args...)
VCSAG_LOG_MSG(sev, msgid, flags, fmt, variable_args...)
```

and the macros for debugging:

```
VCSAG_LOGDBG_MSG(dbgsev, flags, fmt, variable_args...)
VCSAG_RES_LOG_MSG(dbgsev, flags, fmt, variable_args...)
```

## Agent application logging macros for C++ entry points

You can use the macro `VCSAG_LOG_MSG` within C++ agent entry points to log all messages ranging in severity from `CRITICAL` to `INFORMATION` to the agent log file. Use the `VCSAG_CONSOLE_LOG_MSG` macro to send messages to the HAD log. Where the messages are of `CRITICAL` or `ERROR` severity, the message is also logged to the console.

The following table describes the argument fields for the application logging macros:

<code>sev</code>	Severity of the message from the application. The values of <code>sev</code> are macros <code>VCS_CRITICAL</code> , <code>VCS_ERROR</code> , <code>VCS_WARNING</code> , <code>VCS_NOTICE</code> , and <code>VCS_INFORMATION</code> ; see <a href="#">Severity arguments for C++ macros</a> .
<code>msgid</code>	The 16-bit integer message ID.
<code>flags</code>	Default flags (0) prints UMI, NEWLINE. A macro, <code>VCS_DEFAULT_FLAGS</code> , represents the default value for the flags.
<code>fmt</code>	A formatted string containing formatting specifier symbols. For example: "Resource could not be brought down because the attempt to remove the file (%s) failed with error (%d)"
<code>variable_args</code>	Variable number (as many as 6) of type <code>char</code> , <code>char *</code> , or integer

In the following example, the macros are used to log an error message to the agent log and to the console:

```

.
.
VCSAG_LOG_MSG(VCS_ERROR, 14002, VCS_DEFAULT_FLAGS,
    "Resource could not be brought down because the
    attempt to remove the file(%s) failed with error(%d)",
    (CHAR *) (*attr_val), errno);

VCSAG_CONSOLE_LOG_MSG(VCS_ERROR, 14002, VCS_DEFAULT_FLAGS,
    "Resource could not be brought down because, the
    attempt to remove the file(%s) failed with error(%d)",
    (CHAR *) (*attr_val), errno);

```

## Agent debug logging macros for C++ entry points

Use the macros `VCSAG_RES_LOG_MSG` and `VCSAG_LOGDBG_MSG` within agent entry points to log debug messages of a specific severity level to the agent log.

Use the `LogDbg` attribute to specify a debug message severity level. See the description of the `LogDbg` attribute (See [“LogDbg”](#) on page 191.). Set the `LogDbg` attribute at the resource type level. The attribute can be overridden to be set at the level for a specific resource.

The `VCSAG_LOGDBG_MSG` macro controls logging at the level of the resource type level, whereas `VCSAG_RES_LOG_MSG` macro can enable logging debug messages at the level of a specific resource.

The following table describes the argument fields for the application logging macros:

dbgsev	<p>Debug severity of the message. The values of <code>dbgsev</code> are macros ranging from <code>VCS_DBG1</code> to <code>VCS_DBG21</code>.</p> <p>See <a href="#">Severity arguments for C++ macros</a>.</p>
flags	<p>Describes the logging options.</p> <p>Default flags (0) prints UMI, NEWLINE. A macro, <code>VCS_DEFAULT_FLAGS</code>, represents the default value for the flags</p>
fmt	<p>A formatted string containing symbols. For example: "PathName is (%s)"</p>
variable_args	<p>Variable number (as many as 6) of type <code>char</code>, <code>char *</code> or integer</p>

For example:

```
VCSAG_RES_LOG_MSG(VCS_DBG4, VCS_DEFAULT_FLAGS, "PathName is
(%s)",
    (CHAR *) (*attr_val));
```

For the example shown, the specified message is logged to the agent log if the specific resource has been enabled (that is, the `LogDbg` attribute is set) for logging of debug messages at the severity level `DBG4`.

## Severity arguments for C++ macros

A severity argument for a logging macro, for example, `VCS_ERROR` or `VCS_DBG1`, is in fact a macro itself that expands to include the following information:

- actual message severity
- function name
- name of the file that includes the function
- line number where the logging macro is expanded

For example, the application severity argument `VCS_ERROR` within the `monitor` entry point for the `FileOnOff` agent would expand to include the following information:

```
ERROR, res_monitor, FileOnOff.C, 28
```

Application severity macros map to application severities defined by the enum `VCSAgAppSev` and the debug severity macros map to severities defined by the enum `VCSAgDbgSev`. For example, in the `VCSAgApiDefs.h` header file, these enumerated types are defined as:

```
enum VCSAgAppSev {
    AG_CRITICAL,
    AG_ERROR,
    AG_WARNING,
    AG_NOTICE,
    AG_INFORMATION
};

enum VCSAgDbgSev {
    DBG1,
    DBG2,
    DBG3,
    .
```

```

        .
        DBG21,
        DBG_SEV_End
};

```

With the severity macros, agent developers need not specify the name of the function, the file name, and the line number in each log call. The name of the function, however, must be initialized by using the macro `VCSAG_LOG_INIT`. See [Initializing function\\_name using VCSAG\\_LOG\\_INIT](#).

## Initializing function\_name using VCSAG\_LOG\_INIT

One requirement for logging of messages included in C++ functions is to initialize the *function\_name* variable within each function. The macro, `VCSAG_LOG_INIT`, defines a local constant character string to store the function name:

```

VCSAG_LOG_INIT(func_name) const char *_function_name_ =
func_name

```

For example, the function named "res\_offline" would contain:

```

void res_offline (int a, char *b)
{
    VCSAG_LOG_INIT("res_offline");
    .
    .
}

```

---

**Note:** If the function name is not initialized with the `VCSAG_LOG_INIT` macro, when the agent is compiled, errors indicate that the name of the function is not defined.

---

More examples of the `VCSAG_LOG_INIT` macro are available.

See the [Examples of logging APIs used in a C++ agent](#).

## Log category

The log category for the agent is defined using the primitive `VCSAgSetLogCategory (cat_ID)` within the `VCSAgStartup` function. In the following example, the log category is set to 10051:

```

VCSEXPORT void VCSDECL VCSAgStartup()

```

```

{
    VCSAG_LOG_INIT("VCSAgStartup");
    VCSAgInitEntryPointStruct (V51);

    VCSAgValidateAndSetEntryPoint (VCSAgEPMonitor,
res_monitor);
    VCSAgValidateAndSetEntryPoint (VCSAgEPOnline,
res_online);
    VCSAgValidateAndSetEntryPoint (VCSAgEPOffline,
res_offline);
    VCSAgValidateAndSetEntryPoint (VCSAgEPClean, res_clean);

    VCSAgSetLogCategory(10051);

    char *s = setlocale(LC_ALL, NULL);
    VCSAG_LOGDBG_MSG(VCS_DBG1, VCS_DEFAULT_FLAGS, "Locale is
        %s", s);
}

```

You do not need to set the log category for debug messages, which is 50 by default.

## Examples of logging APIs used in a C++ agent

```

#include <stdio.h>
#include <locale.h>
#include "VCSAgApi.h"

void res_attr_changed(const char *res_name, const char
    *changed_res_name, const char *changed_attr_name, void
    **new_val)
{
    /*
    * NOT REQUIRED if the function is empty or is not logging
    * any messages to the agent log file
    */
    VCSAG_LOG_INIT("res_attr_changed");
}

extern "C" unsigned int
res_clean(const char *res_name, VCSAgWhyClean wc, void
    **attr_val)
{
    VCSAG_LOG_INIT("res_clean");
}

```

```

        if ((attr_val) && (*attr_val)) {
            if ((remove((CHAR *) (*attr_val)) == 0) || (errno
                == ENOENT)) { return 0;          // Success
            }
        }
        return 1;          // Failure
    }

void res_close(const char *res_name, void **attr_val)
{
    VCSAG_LOG_INIT("res_close");
}
//
// Determine if the given file is online (file exists) or
// offline (file does not exist).
//
extern "C" VCSAgResState
res_monitor(const char *res_name, void **attr_val, int
*conf_level)
{
    VCSAG_LOG_INIT("res_monitor");

    VCSAgResState state = VCSAgResUnknown;
    *conf_level = 0;

    /*
    * This msg will be printed for all resources if VCS_DBG4
    * is enabled for the resource type. Else it will be
    * logged only for that resource that has the dbg level
    * VCS_DBG4 enabled
    */

    VCSAG_RES_LOG_MSG(VCS_DBG4, VCS_DEFAULT_FLAGS, "PathName
        is(%s)", (CHAR *) (*attr_val));

    if ((attr_val) && (*attr_val)) {
        struct stat stat_buf;
        if ( (stat((CHAR *) (* attr_val), &stat_buf) == 0)
            && (strlen((CHAR *) (* attr_val)) != 0) ) {
            state = VCSAgResOnline; *conf_level = 100;
        }
        else {

```

```

        state = VCSAgResOffline;
        *conf_level = 0;
    }
}

VCSAG_RES_LOG_MSG(VCS_DBG7, VCS_DEFAULT_FLAGS, "State is
(%d)", (int)state);
return state;
}

extern "C" unsigned int
res_online(const char *res_name, void **attr_val) {
    int fd = -1;
    VCSAG_LOG_INIT("res_online");
    if ((attr_val) && (*attr_val)) {
        if (strlen((CHAR *) (*attr_val)) == 0) {
            VCSAG_LOG_MSG(VCS_WARNING, 3001, VCS_DEFAULT_FLAGS,
                "The value for PathName attribute is not
                specified");

            VCSAG_CONSOLE_LOG_MSG(VCS_WARNING, 3001,
                VCS_DEFAULT_FLAGS,
                "The value for PathName attribute is not
                specified");

            return 0;
        }
        if (fd = creat((CHAR *) (*attr_val), S_IRUSR|S_IWUSR) < 0) {

            VCSAG_LOG_MSG(VCS_ERROR, 3002, VCS_DEFAULT_FLAGS,
                "Resource could not be brought up because, "
                "the attempt to create the file(%s) failed "
                "with error(%d)", (CHAR *) (*attr_val), errno);

            VCSAG_CONSOLE_LOG_MSG(VCS_ERROR, 3002,
                VCS_DEFAULT_FLAGS,
                "Resource could not be brought up because, "
                "the attempt to create the file(%s) failed "
                "with error(%d)", (CHAR *) (*attr_val), errno);
            return 0;
        }

        close(fd);
    }
    return 0;
}

```

```

}

extern "C" unsigned int
res_offline(const char *res_name, void **attr_val)
{
    VCSAG_LOG_INIT("res_offline");
    if ((attr_val) && (*attr_val) && (remove((CHAR*)
(*attr_val)) != 0) && (errno != ENOENT)) {

        VCSAG_LOG_MSG(VCS_ERROR, 14002, VCS_DEFAULT_FLAGS,
            "Resource could not be brought down because, the
            attempt to remove the file(%s) failed with
            error(%d)", (CHAR *) (*attr_val), errno);

        VCSAG_CONSOLE_LOG_MSG(VCS_ERROR, 14002,
            VCS_DEFAULT_FLAGS, "Resource could not be brought
            down because, the attempt to remove the file(%s)
            failed with error(%d)", (CHAR *) (*attr_val), errno);
    }
    return 0;
}

void res_open(const char *res_name, void **attr_val)
{
    VCSAG_LOG_INIT("res_open");
}

VCSEXPORT void VCSDECL VCSAgStartup()
{
    VCSAG_LOG_INIT("VCSAgStartup");
    VCSAgInitEntryPointStruct(V51);

    VCSAgValidateAndSetEntryPoint(VCSAgEPMonitor,
res_monitor);
    VCSAgValidateAndSetEntryPoint(VCSAgEPOnline,
res_online);
    VCSAgValidateAndSetEntryPoint(VCSAgEPOffline,
res_offline);
    VCSAgValidateAndSetEntryPoint(VCSAgEPClean, res_clean);

    VCSAgSetLogCategory(2001);

    char *s = setlocale(LC_ALL, NULL);
    VCSAG_LOGDBG_MSG(VCS_DBG1, VCS_DEFAULT_FLAGS, "Locale is

```



```
%s", s);  
  
}
```

## Script entry point logging functions

For script based entry points, use the functions described in this section for message logging purposes.

---

**Note:** Symantec recommends that you do not use the `halog` command in script entry points.

---

The logging functions are available in the `ag_i18n_inc` module.

VCSAG_SET_ENVS	See <a href="#">“VCSAG_SET_ENVS”</a> on page 129.
VCSAG_LOG_MSG	See <a href="#">“VCSAG_LOG_MSG”</a> on page 132.
VCSAG_LOGDBG_MSG	See <a href="#">“VCSAG_LOGDBG_MSG”</a> on page 133.

## Using functions in scripts

The script-based entry points require a line that specifies the file defining the logging functions. Include the following line exactly once in each script. The line should precede the use of any of the log functions.

- Shell Script include file

```
. "${CLUSTER_HOME}/bin/ag_i18n_inc.sh"
```

- Perl Script include file

```
use ag_i18n_inc;
```

## VCSAG\_SET\_ENVS

The `VCSAG_SET_ENVS` function is used in each script-based entry point file. Its purpose is to set and export environment variables that identify the agent's category ID, the agent's name, the resource's name, and the entry point's name. With this information set up in the form of environment variables, the logging functions can

handle messages and their arguments in the unified logging format without repetition within the scripts.

The `VCSAG_SET_ENVS` function sets the following environment variables for a resource:

<code>VCSAG_LOG_CATEGORY</code>	<p>Sets the category ID. For custom agents, Symantec assigns the category ID.</p> <p>See <a href="#">“UMI”</a> on page 120.</p> <p>NOTE: For bundled agents, the category ID is pre-assigned, based on the platform (Solaris, Linux, or AIX) for which the agent is written.</p>
<code>VCSAG_LOG_AGENT_NAME</code>	<p>The absolute path to the agent.</p> <p>For example:</p> <p>UNIX: <code>/opt/VRTSvcs/bin/resource_type</code></p> <p>Since the entry points are invoked using their absolute paths, this environment variable is set at invocation. If the agent developer wishes, this agent name can also be hard coded and passed as an argument to the <code>VCSAG_SET_ENVS</code> function.</p>
<code>VCSAG_LOG_SCRIPT_NAME</code>	<p>The absolute path to the entry point script.</p> <p>For example:</p> <p>UNIX: <code>/opt/VRTSvcs/bin/resource_type/online</code></p> <p>Since the entry points are invoked using their absolute paths, this environment variable is set at invocation. The script name variable is can be overridden.</p>
<code>VCSAG_LOG_RESOURCE_NAME</code>	<p>The resource is specified in the call within the entry point:</p> <p><code>VCSAG_SET_ENVS \$resource_name</code></p>

## VCSAG\_SET\_ENVS examples, Shell script entry points

The `VCSAG_SET_ENVS` function must be called before any of the other logging functions.

- A minimal call:

```
VCSAG_SET_ENVS ${resource_name}
```

- Setting the category ID:

```
VCSAG_SET_ENVS ${resource_name} ${category_ID}
VCSAG_SET_ENVS ${resource_name} 1062
```

- Overriding the default script name:

```
VCSAG_SET_ENVS ${resource_name} ${script_name}
VCSAG_SET_ENVS ${resource_name} "monitor"
```

- Setting the category ID and overriding the script name:

```
VCSAG_SET_ENVS ${resource_name} ${script_name}
${category_id}
VCSAG_SET_ENVS ${resource_name} "monitor" 1062
```

Or,

```
VCSAG_SET_ENVS ${resource_name} ${category_id}
${script_name}
VCSAG_SET_ENVS ${resource_name} 1062 "monitor"
```

## VCSAG\_SET\_ENVS examples, Perl script entry points

- A minimal call:

```
VCSAG_SET_ENVS ($resource_name);
```

- Setting the category ID:

```
VCSAG_SET_ENVS ($resource_name, $category_ID);
VCSAG_SET_ENVS ($resource_name, 1062);
```

- Overriding the script name:

```
VCSAG_SET_ENVS ($resource_name, $script_name);
VCSAG_SET_ENVS ($resource_name, "monitor");
```

- Setting the category ID and overriding the script name:

```
VCSAG_SET_ENVS ($resource_name, $script_name, $category_id);
VCSAG_SET_ENVS ($resource_name, "monitor", 1062);
```

Or,

```
VCSAG_SET_ENVS ($resource_name, $category_id, $script_name);
VCSAG_SET_ENVS ($resource_name, 1062, "monitor");
```

## VCSAG\_LOG\_MSG

The `VCSAG_LOG_MSG` function can be used to pass normal agent messages to the `halog` utility for logging into the engine log. At a minimum, the function must include the severity, the message within quotes, and a message ID. Optionally, the function can also include parameters and specify an encoding format.

Severity Levels (sev)	"C" - critical, "E" - error, "W" - warning, "N" - notice, "I" - information; place error code in quotes
Message (msg)	A text message within quotes; for example: "One file copied"
Message ID (msgid)	An integer between 0 and 65535
Encoding Format	UTF-8, ASCII, or UCS-2 in the form: "-encoding format"
Parameters	Parameters (up to six), each within quotes

## VCSAG\_LOG\_MSG examples, Shell script entry points

- Calling a function without parameters or encoding format:

```
VCSAG_LOG_MSG "<sev>" "<msg>" <msgid>
VCSAG_LOG_MSG "C" "Two files found" 140
```

- Calling a function with one parameter, but without encoding format:

```
VCSAG_LOG_MSG "<sev>" "<msg>" <msgid> "<param1>"
VCSAG_LOG_MSG "C" "$count files found" 140 "$count"
```

- Calling a function with a parameter and encoding format:

```
VCSAG_LOG_MSG "<sev>" "<msg>" <msgid> "-encoding <format>"
"<param1>"
VCSAG_LOG_MSG "C" "$count files found" 140 "-encoding utf8"
"$count"
```

Note that if encoding format and parameters are passed to the functions, the encoding format must be passed before any parameters.

## VCSAG\_LOG\_MSG examples, Perl script entry points

- Calling a function without parameters or encoding format:

```
VCSAG_LOG_MSG ("<sev>", "<msg>", <msgid>);
VCSAG_LOG_MSG ("C", "Two files found", 140);
```

- Calling a function with one parameter, but without encoding format:

```
VCSAG_LOG_MSG ("<sev>", "<msg>", <msgid>, "<param1>";
VCSAG_LOG_MSG ("C", "$count files found", 140, "$count");
```

- Calling a function with one parameter and encoding format:

```
VCSAG_LOG_MSG ("<sev>", "<msg>", <msgid>, "-encoding
<format>", "<param1>");
VCSAG_LOG_MSG ("C", "$count files found", 140, "-encoding
utf8", "$count");
```

Note that if encoding format and parameters are passed to the functions, the encoding format must be passed before any parameters.

## VCSAG\_LOGDBG\_MSG

This function can be used to pass debug messages to the `halog` utility for logging into the engine log. At a minimum, the severity must be indicated along with a message. Optionally, the encoding format and parameters may be specified.

Severity (dbg)      An integer indicating a severity level, 1 to 21.

See the *Symantec Cluster Server Administrator's Guide* for more information.

Message (msg)	A text message in quotes; for example: "One file copied"
Encoding Format	UTF-8, ASCII, or UCS-2 in the form: "-encoding format"
Parameters	Parameters (up to six), each within quotes

## VCSAG\_LOGDBG\_MSG examples, Shell script entry points

- Calling a function without encoding or parameters:

```
VCSAG_LOGDBG_MSG <dbg> "<msg>"
VCSAG_LOGDBG_MSG 1 "This is string number 1"
```

- Calling a function with a parameter, but without encoding format:

```
VCSAG_LOGDBG_MSG <dbg> "<msg>" "<param1>"
VCSAG_LOGDBG_MSG 2 "This is string number $count" "$count"
```

- Calling a function with a parameter and encoding format:

```
VCSAG_LOGDBG_MSG <dbg> "<msg>" "-encoding <format>" "$count"
VCSAG_LOGDBG_MSG 2 "This is string number $count" "$count"
```

## VCSAG\_LOGDBG\_MSG examples, Perl script entry points

- Calling a function:

```
VCSAG_LOGDBG_MSG (<dbg>, "<msg>");
VCSAG_LOGDBG_MSG (1 "This is string number 1");
```

- Calling a function with a parameter, but without encoding format:

```
VCSAG_LOGDBG_MSG (<dbg>, "<msg>", "<param1>");
VCSAG_LOGDBG_MSG (2, "This is string number $count",
"$count");
```

- Calling a function with a parameter and encoding format:

```
VCSAG_LOGDBG_MSG <dbg> "<msg>" "-encoding <format>"
```

```
"<param1>"  
    VCSAG_LOGDBG_MSG (2, "This is string number $count",  
"-encoding  
    utf8", "$count");
```

## Example of logging functions used in a script agent

The following example shows the use of VCSAG\_SET\_ENVS and VCSAG\_LOG\_MSG functions in a shell script for the online entry point.

```
#!/bin/ksh  
  
ResName=$1  
  
# Parse other input arguments  
:  
:  
VCS_HOME="${VCS_HOME:-/opt/VRTSvcs}"  
  
. $VCS_HOME/bin/ag_i18n_inc.sh  
  
# Assume the category id assigned by Symantec for this custom  
agent #is 10061  
VCSAG_SET_ENVS $ResName 10061  
  
# Online entry point processing  
:  
:  
# Successful completion of the online entry point  
VCSAG_LOG_MSG "N" "online succeeded for resource $ResName" 1  
"$ResName"  
  
exit 0
```

# Building a custom agent

This chapter includes the following topics:

- [Files for use in agent development](#)
- [Creating the type definition file for a custom agent](#)
- [Building a custom agent on UNIX](#)
- [Installing the custom agent](#)
- [Defining resources for the custom resource type](#)
- [Agent framework versions details](#)

## Files for use in agent development

The VCS installation program provides the Script agents and C++ agents to aid agent development

### Script based agent binaries

These are ready to use agent binaries which has in-built VCSAgStartup function implemented. These binaries are located in the directory `$VCS_HOME/bin`.

Following is the list of all script based agent binaries that user can use to build agent

- ScriptAgent with agent framework version V40
- Script50Agent with agent framework version V50
- Script51Agent with agent framework version V51
- Script60Agent with agent framework version V60

For details on the features added in each these agent frame work version please refer:



See [“Agent framework versions details”](#) on page 152.

VCS does not support agents that lower then agent version V40. Please refer to *Guidelines for using pre-VCS 4.0 Agents* chapter for using ScriptAgent to work with older agent's entry point.

See [“Guidelines for using pre-VCS 4.0 Agents”](#) on page 230.

## C++ based agent binaries

The VCS installation program provides the following C++ files to aid agent development:

**Table 6-1** C++ Agents

Description	Pathname
Directory containing a sample C++ agent and Makefile.	UNIX: \$VCS_HOME/src/agent/Sample
Sample Makefile for building a C++ agent.	UNIX: \$VCS_HOME/src/agent/Sample/Makefile
Entry point templates for C++ agents.	UNIX: \$VCS_HOME/src/agent/Sample/agent.C

## Creating the type definition file for a custom agent

The agent you create requires a resource type definition file. This file performs the function of providing a general type definition of the resource and its unique attributes.

### Naming convention for the type definition file

For example, for the resource type XYZ on Solaris, the file would be `XYZTypes.sun.cf`.

Name the resource type definition file following the convention `resource_typeTypes.cf`. For example, for the resource type XYZ, the file would be `XYZTypes.cf`.

## Example: FileOnOffTypes.cf

An example types configuration file for the FileOnOff resource:

```
// Define the resource type called FileOnOff (in
FileOnOffTypes.cf).
type FileOnOff (
  str PathName;
  static str ArgList[] = { PathName };
)
```

## Example: Type definition for a custom agent that supports intentional offline

```
type MyCustomApp (
  static int IntentionalOffline = 1
  static str ArgList[] = { PathName, Arguments }
  str PathName
  str Arguments
)
```

## Requirements for creating the agentTypes.cf file

As you examine the previous example, note the following aspects:

- The name of the agent
- The `ArgList` attribute, its name, type, dimension, and its values, which consist of the other attributes of the resource
- The remaining attributes (in this example case there is only the `PathName` attribute), their names, types, dimensions, and descriptions.

## Adding the custom type definition to the configuration

You can add the custom type definition to the configuration.

### To add the custom type definition to the configuration

- 1 Once you create the file, place it in the directory:  
UNIX: `$VCS_CONF/conf/config`
- 2 Add "include FileOnOffTypes.cf" in the main.cf file.
- 3 Restart VCS.

# Building a custom agent on UNIX

The following sections describe different ways to build an agent, using the "FileOnOff" resource as an example. For test purposes, instructions for installing the agent on a single system are also provided.

The examples assume:

- VCS is installed under `/opt/VRTSvcs` by default. If your installation directory is different, change `VCS_HOME` accordingly.
- You have created a FileOnOff type definition file.  
See ["Creating the type definition file for a custom agent"](#) on page 137.

Note the following about the FileOnOff agent entry points. A FileOnOff resource represents a regular file.

- The FileOnOff `online` entry point creates the file if it does not already exist.
- The FileOnOff `offline` entry point deletes the file.
- The FileOnOff `monitor` entry point returns online and confidence level 100 if the file exists; otherwise, it returns offline.

## Implementing entry points using scripts

If entry points are implemented using scripts, the script file must be placed in the directory `$VCS_HOME/bin/resource_type`. It must be named correctly.

See ["About creating entry points in scripts"](#) on page 92.

If all entry points are scripts, all scripts should be in the directory `$VCS_HOME/bin/resource_type`.

Copy the script based agent binary into the agent directory as `$VCS_HOME/bin/resource_type/resource_typeAgent`.

See ["Script based agent binaries"](#) on page 136.

For example, if the online entry point for Oracle is implemented using Perl, the online script must be: `$VCS_HOME/bin/Oracle/online`.

We also recommend naming the agent binary `resource_typeAgent`. Place the agent in the directory `$VCS_HOME/bin/resource_type`.

The agent binary for Oracle would be `$VCS_HOME/bin/Oracle/OracleAgent`, for example.

If the agent file is different, for example `/foo/ora_agent`, the `types.cf` file must contain the following entry:

```

...
    Type Oracle (
        ...
        static str AgentFile = "/foo/ora_agent"
        ...
    )

```

## Example: Using script entry points on UNIX

The following example shows how to build the FileOnOff agent using scripts. For the below example, we are using Script51Agent script based agent binary. This example implements the `online`, `offline`, and `monitor` entry points only.

See [“Script based agent binaries”](#) on page 136.

### Example: implementing entry points using scripts

- 1 Create the directory `/opt/VRTSvcs/bin/FileOnOff`:

```
mkdir /opt/VRTSvcs/bin/FileOnOff
```

- 2 Use the VCS agent `/opt/VRTSvcs/bin/Script51Agent` as the FileOnOff agent. Copy this file to the following path:

```
/opt/VRTSvcs/bin/FileOnOff/FileOnOffAgent
```

or create a link.

To copy the agent binary:

```
cp /opt/VRTSvcs/bin/Script51Agent
/opt/VRTSvcs/bin/FileOnOff/FileOnOffAgent
```

To create a link to the agent binary:

```
ln -s /opt/VRTSvcs/bin/Script51Agent
/opt/VRTSvcs/bin/FileOnOff/FileOnOffAgent
```

- 3 Implement the `online`, `offline`, and `monitor` entry points using scripts. Use any editor.

- Create the file `/opt/VRTSvcs/bin/FileOnOff/online` with the contents:

```

# !/bin/sh
# Create the file specified by the PathName
# attribute.

```

```
touch $4
exit 0
```

- Create the file `/opt/VRTSvcs/bin/FileOnOff/offline` with the contents:

```
# !/bin/sh
# Remove the file specified by the PathName
# attribute.
rm $4
exit 0
```

- Create the file `/opt/VRTSvcs/bin/FileOnOff/monitor` with the contents:

```
# !/bin/sh
# Verify file specified by the PathName attribute
# exists.
if test -f $4
then
    exit 110;
else
    exit 100;
fi
```

- 4 Additionally, you can implement the `info` and `action` entry points. For the `action` entry point, create a subdirectory named "actions" under the agent directory, and create scripts with the same names as the `action_tokens` within the subdirectory.

## Example: Using `VCSAgStartup()` and script entry points on UNIX

The following example shows how to build the `FileOnOff` agent using your own `VCSAgStartup` function. This example implements the `VCSAgStartup`, `online`, `offline`, and `monitor` entry points only.

**To implement the agent using VCSAgStartup function and script entry points**

- 1 Create the following directory:

```
mkdir /opt/VRTSvcs/src/agent/FileOnOff
```

- 2 Copy the contents from the sample agent directory to the directory you created in the previous step:

```
cp -r /opt/VRTSvcs/src/agent/Sample/*  
    /opt/VRTSvcs/src/agent/FileOnOff
```

- 3 Change to the new directory:

```
cd /opt/VRTSvcs/src/agent/FileOnOff
```

- 4 Edit the file `agent.C` and modify the `VCSAgStartup()` function (the last several lines) to match the following example:

```
void VCSAgStartup() {  
    VCSAgInitEntryPointStruct(V51);  
  
    // Do not configure any entry points because  
    // this example does not implement any of them  
    // using C++.  
  
    VCSAgSetLogCategory(10041);  
}
```

- 5 Compile `agent.C` and build the agent by invoking `make`. (Makefile is provided.)

```
make
```

- 6 Create a directory for the agent:

```
mkdir /opt/VRTSvcs/bin/FileOnOff
```

- 7 Install the FileOnOff agent.

```
make install AGENT=FileOnOff
```

- 8 Implement the `online`, `offline`, and `monitor` entry points.

See [Example: Using script entry points on UNIX](#).

## Implementing entry points using C++

You can implement entry points by using C++.

### To implement entry points by using C++

- 1 Edit `agent.C` to customize the implementation; `agent.C` is located in the directory `$VCS_HOME/src/agent/Sample`.
- 2 After completing the changes to `agent.C`, invoke the `make` command to build the agent. The command is invoked from `$VCS_HOME/src/agent/Sample`, where the `Makefile` is located.
- 3 Name the agent binary: `resource_typeAgent`.
- 4 Place the agent in the directory `$VCS_HOME/bin/resource_type`.

For example, the agent binary for Oracle would be  
`$VCS_HOME/bin/Oracle/OracleAgent`.

## Example: Using C++ entry points on UNIX

The example in this section shows how to build the `FileOnOff` agent using your own `VCSAgStartup` function and the C++ version of `online`, `offline`, and `monitor` entry points. This example implements the `VCSAgStartup`, `online`, `offline`, and `monitor` entry points only.

## To use VCSAgStartup and C++ entry points

- 1 Edit the file `agent.C` and modify the `VCSAgStartup()` function (the last several lines) to match the following example:

```
// Description: This functions registers the entry points //
void VCSAgStartup()
{
    VCSAG_LOG_INIT("VCSAgStartup");

    VCSAgSetLogCategory(10051);
    VCSAgInitEntryPointStruct(V51);

    VCSAgValidateAndSetEntryPoint(VCSAgEPMonitor, res_monitor);
    VCSAgValidateAndSetEntryPoint(VCSAgEPOnline, res_online);
    VCSAgValidateAndSetEntryPoint(VCSAgEPOffline, res_offline);
}
```



## 2 Modify `res_online()`:

```
// This is a C++ implementation of the online entry
// point for the FileOnOff resource type. This function
// brings online a FileOnOff resource by creating the
// corresponding file. It is assumed that the complete
// pathname of the file will be passed as the first
// ArgList attribute.

unsigned int res_online(const char *res_name, void **attr_val) {

    int fd = -1;
    int ret = 0;
    char *pathname = NULL;

    VCSAG_LOG_INIT("res_online");

    /*
     * Get PathName attribute form attr_val parameter, passed to
     res_online function and store
     * it under pathname variable.
     *
     */

    if (NULL == pathname) {
        return 0;
    }

    VCSAG_LOGDBG_MSG(VCS_DBG2, VCS_DEFAULT_FLAGS,
        "Creating file %s", pathname);

    if ((fd = open(pathname, S_IRUSR|S_IWUSR)) < 0) {
        VCSAG_LOG_MSG(VCS_ERROR, 2003, VCS_DEFAULT_FLAGS,
            "Attempt to create the file failed with errno=%d",
            errno);
        VCSAG_CONSOLE_LOG_MSG(VCS_ERROR, 2003, VCS_DEFAULT_FLAGS,
            "Attempt to create the file failed with errno=%d",
            errno);
    } else {
        close(fd);
    }
}
```

```

    return 0;
}

```

### 3 Modify `res_offline()`:

```

// Function:    res_offline
// Description: This function deletes the file //

unsigned int res_offline(const char *res_name, void **attr_val)
{
    char *pathname = NULL;

    VCSAG_LOG_INIT("res_offline");

    /*
     * Get PathName attribute form attr_val parameter, passed to
    res_offline function and store
     * under pathname variable.
     *
     */

    if (NULL == pathname) {
        return 0; /* success: nothing to remove */
    }

    VCSAG_LOGDBG_MSG(VCS_DBG2, VCS_DEFAULT_FLAGS,
        "Removing file %s", pathname);

    if ((0 != remove(pathname)) && (ENOENT != errno)) {
        VCSAG_LOG_MSG(VCS_ERROR, 2002, VCS_DEFAULT_FLAGS,
            "Attempt to remove the file failed with errno=%d",
        errno);
        VCSAG_CONSOLE_LOG_MSG(VCS_ERROR, 2002, VCS_DEFAULT_FLAGS,
            "Attempt to remove the file failed with errno=%d",
        errno);

        return 1; /* failure: attempt to remove failed */
    }

    return 0; /* success: file removed */
}

```

- 4 Modify the `res_monitor()`, function.

See [Example: Using C++ and script entry points on UNIX](#).

- 5 Compile `agent.C` and build the agent by invoking `make`. (`Makefile` is provided.)

```
make
```

- 6 Create the directory for the agent binaries:

```
mkdir /opt/VRTSvcs/bin/FileOnOff
```

- 7 Install the `FileOnOff` agent.

```
make install AGENT=FileOnOff
```

## Example: Using C++ and script entry points on UNIX

The following example shows how to build the `FileOnOff` agent using your own `VCSAgStartup` function, the C++ version of the `monitor` entry point, and script versions of `online` and `offline` entry points. This example implements the `VCSAgStartup`, `online`, `offline`, and `monitor` entry points only.

**To implement the agent using `VCSAgStartup`, C++, and script entry points**

- 1 Create a directory for the agent:

```
mkdir /opt/VRTSvcs/src/agent/FileOnOff
```

- 2 Copy the contents from the sample agent to the directory you created in the previous step:

```
cp -r /opt/VRTSvcs/src/agent/Sample/*  
/opt/VRTSvcs/src/agent/FileOnOff
```

- 3 Change to the new directory:

```
cd /opt/VRTSvcs/src/agent/FileOnOff
```

- 4 Edit the file `agent.c` and modify the `VCSAgStartup()` function (the last several lines) to match the following example:

```
// Description: This functions registers the entry points //
void VCSAgStartup()
{
    VCSAG_LOG_INIT("VCSAgStartup");

    VCSAgSetLogCategory(10051);
    VCSAgInitEntryPointStruct(V51);

    VCSAgValidateAndSetEntryPoint(VCSAgEPMonitor, res_monitor);
}
```

## 5 Modify the `res_monitor()` function:

```
// Function:    res_monitor
// Description: Determine if the given file is online (file exists)
//              or offline (file does not exist).

VCSAgResState res_monitor(const char *res_name, void
                          **attr_val, int *conf_level)
{
    int ret = 0;
    char *pathname = NULL;
    struct stat64 stat_buf;
    VCSAgResState state = VCSAgResUnknown;

    VCSAG_LOG_INIT("res_monitor");

    /*
     * Get PathName attribute form attr_val parameter, passed to
res_offline function and store
     * under pathname variable.
     */
    if (NULL == pathname) {
        return VCSAgResUnknown;
    }

    VCSAG_LOGDBG_MSG(VCS_DBG2, VCS_DEFAULT_FLAGS,
                    "Checking if file %s exists or not", pathname);

    if (0 == stat64(pathname, &stat_buf)) {
        /*
         * If the pathname is a directory, return status as unknown
         */
        if (S_ISDIR(stat_buf.st_mode) != 0) {
            VCSAG_LOG_MSG(VCS_ERROR, 2004, VCS_DEFAULT_FLAGS,
                          "%s is a directory", pathname);
            VCSAG_CONSOLE_LOG_MSG(VCS_ERROR, 2004,
VCS_DEFAULT_FLAGS,
                                "%s is a directory", pathname);

            *conf_level = 0;
            return VCSAgResUnknown;
        }
    }
}
```

```

    }
    *conf_level = 100;
    return VCSAgResOnline;
}

*conf_level = 0;
return VCSAgResOffline;
}

```

- 6 Compile `agent.C` and build the agent by invoking `make`. (Makefile is provided.)

```
make
```

- 7 Build the script entry points for the agent.

See [Example: Using script entry points on UNIX](#)

- 8 Create a directory for the agent:

```
mkdir /opt/VRTSvcs/bin/FileOnOff
```

- 9 Install the `FileOnOff` agent.

## Installing the custom agent

You can install the custom agent in one of the following directories.

On UNIX:

- `/opt/VRTSvcs/bin/custom_type/`
- `/opt/VRTSagents/ha/bin/custom_type/`
- A user-defined directory. For example `/myagents/custom_type/`. Note that you must configure the `AgentDirectory` attribute for this option.

Make sure you create the `custom_type` directory at only one of these locations.

Add the agent binary and the script entry points to the `custom_type` directory.

---

**Note:** To package the agent, see the documentation for the operating system. When setting up the Solaris `pkginfo` file for the installation of agents that are to run in zones, set the following variable: `SUNW_PKG_ALLZONES=true`.

---

## Defining resources for the custom resource type

When you have created a type definition for the resource and created an agent for it, you can begin to use the agent to control specific resources by adding the resources of the custom type and assigning values to resource attributes.

You can add resources and configure attribute values in the `main.cf` file.

See the *Symantec Cluster Server User's Guide* for more information.

### Sample resource definition

In the VCS configuration file, `main.cf`, a specific resource of the `FileOnOff` resource type may resemble

```
include types.cf
.
.
.

FileOnOff temp_file1 (
    PathName = "/tmp/test"
)
```

The type `FileOnOff` is defined in the file `types.cf`. The file `types.cf` is included in `main.cf` using the `include` directive. The resource defined in the `main.cf` file specifies:

- The resource type: `FileOnOff`
- The name of the resource, `temp_file1`
- The name of the attribute, `PathName`
- The value for the `PathName` attribute:

```
On UNIX: "/tmp/test"
```

When the resource `temp_file1` is brought online on a system by VCS, the `FileOnOff` agent creates a file "test" in the specified directory on that system.

### How the `FileOnOff` agent uses configuration information

The information in the VCS configuration is passed by the engine to the `FileOnOff` agent when the agent starts up on a node in the cluster. The information passed to the agent includes: the names of the resources of the type `FileOnOff` configured

on the system, the corresponding resource attributes, and the values of the attributes for all of the resources of that type. It also sends all the attribute and their repective value details to the agent.

Thereafter, to bring the resource online, for example,VCS can provide the agent with the name of the entry point (`online`) and the name of the resource (`temp_file01`). The agent then calls the entry point and provides the resource name and values for the attributes in the `ArgList` to the entry point. The entry point performs its tasks.

## Agent framework versions details

The following table describes the various agent binaries and its functions.

Agent binary	Description
Agent version V40	<p>The support for action and info entry point is available for agents with agent version V40 or later.</p> <p>See <a href="#">“About the info entry point”</a> on page 34.</p> <p>See <a href="#">“About the action entry point”</a> on page 33.</p>
Agent version V50	<p>The AEPTimeout attribute feature is available for agents registered with version V50 or later.</p> <p>See <a href="#">“AEPTimeout”</a> on page 182.</p> <p>Support for positional independent ArgListValues is available in agent framework version V50 and later.</p> <p>See <a href="#">“About the ArgList and ArgListValues attributes”</a> on page 47.</p> <p>The container support on AIX and Solaris is available in agent framework version V50 or later for containers solaris zones, solaris project and aix wpars.</p> <p>See <a href="#">“ContainerOpts”</a> on page 186.</p>



## Agent binary

Agent version V51

## Description

Intentional offline and IMF features are available for agents framework version V51 or later.

See [“IntentionalOffline”](#) on page 190.

See [“About intelligent monitoring framework \(IMF\)”](#) on page 18.

There are three new entry points for this feature

- imf\_init
- imf\_register
- imf\_getnotificaiton

See [“About building a script based IMF-aware custom agent”](#) on page 154.

Agent version V60

Migration feature is available in the agent framework version V60. Entry points migrate is added with this feature.

See [“About the migrate entry point”](#) on page 39.

**Note:** Symantec recommends using the latest agent version.

# Building a script based IMF-aware custom agent

This chapter includes the following topics:

- [About building a script based IMF-aware custom agent](#)
- [Linking AMF plugins with script agent](#)
- [Creating XML file required for AMF plugins to do resource registration for online and offline state monitoring](#)
- [Adding IMF and IMFRegList attributes in configuration](#)
- [Monitor without IMF integration](#)
- [Monitor without IMF but with LevelTwo monitor frequency](#)
- [Monitor with IMF integration](#)
- [Monitor with IMF but with LevelTwo monitor frequency](#)
- [Installing the IMF-aware script-based custom agent](#)

## About building a script based IMF-aware custom agent

This chapter explains how you can build a script-based IMF-aware custom agent. VCS supports only process and script-based IMF-aware custom agents from VCS 6.0.1 and later release. The process to build a custom agent (without IMF) is similar to what is described in the previous chapter.

The following IMF entry points have been introduced in VCS 5.1SP1 to enable IMF for intelligent monitoring:

- `imf_init`

- `imf_register`
- `imf_getnotification`

You must use the above-stated IMF entry points along with the other entry points if you want the IMF feature enabled for your custom agent. Symantec supports only the AMF plugins while implementing these entry points.

See [“About agent entry points”](#) on page 28.

See [“Syntax for the `imf\_init` script ”](#) on page 97.

See [“Syntax for the `imf\_register` script ”](#) on page 97.

See [“Syntax for the `imf\_getnotification` script ”](#) on page 98.

Building a script based IMF-aware agent involves the following steps:

1. Linking AMF plugins with the script agent.
2. Creating XML file (`amfregister.xml`) required for AMF plugins to do resource registration for online and offline state monitoring.
3. Adding IMF and IMFRegList attributes in configuration files  
See [“Adding IMF and IMFRegList attributes in configuration”](#) on page 163.
4. Installing the custom script based agent to enable IMF. See [“Installing the IMF-aware script-based custom agent”](#) on page 168.

## Linking AMF plugins with script agent

Change the current working directory to agent specific directory, and in the agent specific directory, create symbolic links (soft links) to the AMF plugins using the following commands:

```
ln -s /opt/VRTSamf/imf/imf_init imf_init
ln -s /opt/VRTSamf/imf/imf_register imf_register
ln -s /opt/VRTSamf/imf/imf_getnotification imf_getnotification
```

## Creating XML file required for AMF plugins to do resource registration for online and offline state monitoring

Create the `amfregister.xml` file that is used by `imf_register` entry point to do registration of process-based resource for online and offline monitoring with AMF. Since `imf_register` entry point is a generic script used by different agents to register

resources for online and offline monitoring, you must specify what needs to be registered for a resource of a particular type with the help of amfregister.xml. You can refer the following table description to know about the tags used in amfregister.xml.

Table 7-1 Common tags for the amfregister.xml file

Tag name	Description
RegType	<p>This tag is used to specify the type of registration. This tag is common between PRON and PROFF - specific tags.</p> <p>Set it to PROFF to do resource registration with AMF for process offline monitoring.</p> <p>Set it to PRON to do resource registration with AMF for process online monitoring.</p>
ReaperName	<p>It contains the reaper name (type name) for the agent. Agent will be registered with this name in the IMF notification module.</p>

Table 7-2 PRON-specific tags

Tag name	Description
ProcPattern	<p>Indicates how the process-based resource shows up in the process table. The specified ProcPattern is searched in the process table and the corresponding pid is registered with AMF for online monitoring.</p>
PronOptions	<p>Specifies additional options for ProcPattern matching. If it is set to IGNORE_ARGS, the value specified in ProcPattern is considered as the process path. While matching against the process table entries, only the process path is matched against the ProcPattern. The pid of the matching process is registered with AMF.</p> <p>If PronOptions is set to IGNORE_PATH, the value mentioned in the ProcPattern is considered as the process name followed by the process args. While matching against the process table entries, only the base name of the process path and the process args are matched against ProcPattern. The pid of the matching process is registered with AMF.</p> <p>If the PronOptions is set to IGNORE_ARGS IGNORE_PATH, the value mentioned in the ProcPattern is considered as just the process name. While matching against the process table entries, only the base name of the process path is matched against the process name mentioned in the ProcPattern. The arguments of the process are not considered. The pid of the matching process is registered with AMF.</p>

**Table 7-3** PROFF-specific tags

Tag name	Description
Owner	It is the user who executes this process. The UID and GID of this user are used to register the PROFF event with AMF.
Path	Complete path of the binary.
arg0	Name with which the binary is executed. If it is executed with the complete path, you need not provide this.
arg0flag	<p>This is used to further refine the matching behavior of arg0. The string specified in arg0 (for example: string A) is searched inside the arg0 of the process that is being matched against (for example: string PA). This can have the following values:</p> <ul style="list-style-type: none"> <li>■ FREE: Look for string A in string PA using a free substring match operation.</li> <li>■ BOUNDELEFT: Look for string A in string PA using a left-bounded substring match operation.</li> <li>■ BOUNDRIGHT: Look for string A in string PA using a right-bounded substring match operation.</li> <li>■ EXACT: String A must exactly match string PA.</li> </ul> <p>If arg0flag is not provided, the default value for arg0flag is considered as EXACT.</p> <p><b>Note:</b> BOUNDELEFT and BOUNDRIGHT can be specified together, separated by a space. BOUNDELEFT and BOUNDRIGHT specified together is not the same as EXACT.</p>
args	Arguments with which the binary is executed. This is used for matching while finding the process in the process table. Here it looks for exact match.
ArgsSubString	<p>Apart from the default exact match of the arguments, you can specify a list of substrings that must appear in the argument list of the process that is being matched against.</p> <p>Using the ArgsSubString tag, you can specify one substring. You can specify up to 8 such substrings.</p> <p><b>Note:</b> If ArgsSubString is provided, you must not provide args.</p>
ArgsSubStringFlag	<p>For each substring specified, you can specify additional flags to control the matching behavior. Each substring specified (for example: string SS) is searched inside args of the process that is being matched against (for example: string PA).</p> <ul style="list-style-type: none"> <li>■ FREE: Look for string SS in string PA using a free substring match operation.</li> <li>■ BOUNDELEFT: Look for string SS in string PA using a left-bounded substring match operation.</li> <li>■ BOUNDRIGHT: Look for string SS in string PA using a right-bounded substring match operation.</li> </ul> <p>Every ArgsSubString shall have a corresponding ArgsSubStringFlag. If no ArgsSubStringFlag is provided, the default flag is FREE.</p>

**Table 7-3** PROFF-specific tags (*continued*)

Tag name	Description
ArgsFlag	<p>This tag is used to control the behavior of overall substring matching.</p> <p>It can have the following values:</p> <ul style="list-style-type: none"> <li>■ MATCH_ALL: Match all substrings specified.</li> <li>■ MATCH_ANY: Match any of the substrings specified.</li> <li>■ IGNORE_ARGS: Ignore the args completely. You must not provide this if ArgsSubString or args tags are provided.</li> </ul> <p>A set of zero or more ArgsSubString and ArgsSubStringFlag tags can be followed by an optional tag ArgsFlag. If no ArgsFlag is provided, MATCH_ALL is considered as the default value for ArgsFlag.</p>

## Example of amfregister.xml for registration of process-based resource with AMF for online monitoring

Assuming the process in the `ps` output is displayed as follows, you can use the subsequent steps to register a process-based resource for online monitoring:

```
"/usr/sbin/rpc.statd -d 0 -t 50"
```

1. If you are sure about the path and arguments, you must specify your process in the following format in the `amfregister.xml` file:

```
<xml>
  <Register>
    <RegType>PRON</RegType>
    <ProcPattern>/usr/sbin/rpc.statd -d 0 -t 50</ProcPattern>
  </Register>
</xml>
```

2. If you are not sure about the arguments but are sure about the path, you must specify your process in the following format in the `amfregister.xml` file:

```
<xml>
  <Register>
    <RegType>PRON</RegType>
    <PronOptions>IGNORE_ARGS</PronOptions>
    <ProcPattern>/usr/sbin/rpc.statd</ProcPattern>
  </Register>
</xml>
```

---

**Note:** If there are more than one processes or instances with different arguments, all get registered.

---

For example:

```
"/usr/sbin/rpc.statd -d 0 -t 50"
"/usr/sbin/rpc.statd -xyz"
```

Both the above processes get registered with AMF.

3. If you are not sure about the path but are sure about the arguments, you must use the following format of the amfregister.xml:

```
<xml>
  <Register>
    <RegType>PRON</RegType>
    <PronOptions>IGNORE_PATH</PronOptions>
    <ProcPattern>rpc.statd -d 0 -t 50</ProcPattern>
  </Register>
</xml>
```

---

**Note:** If there are more than one processes/instances with different paths, all get registered.

---

For example:

```
"/usr/sbin/rpc.statd -d 0 -t 50"
"/home/<testuser>/rpc.statd -d 0 -t 50"
```

4. If you are not sure about the path or the arguments, you must use the following format of the amfregister.xml:

```
<xml>
  <Register>
    <RegType>PRON</RegType>
    <PronOptions>IGNORE_ARGS IGNORE_PATH</PronOptions>
    <ProcPattern>rpc.statd</ProcPattern>
  </Register>
</xml>
```

---

**Note:** If there are more than one processes with the same base name, all get registered irrespective of the path and arguments.

---

For example:

```
"/usr/sbin/rpc.statd -d 0"
"/home/<testuser>/rpc.statd -d 0 -t 50"
```

## Example of amfregister.xml for registration of process-based resource with AMF for offline monitoring

- Example 1:
  - Process name: xyz
  - Complete path of the process: /MyHome/symantec/veritas/xyz
  - Arguments: -p abc -t qwe -m40
  - Process owner : vcsuser

```
<xml>
  <Register>
    <RegType>PROFF</RegType>
    <Owner>vcsuser</Owner>
    <Path>/MyHome/symantec/veritas/xyz</Path>
    <arg0>xyz</arg0>
    <args>-p abc -t qwe -m40</args>
  </Register>
</xml>
```

- Example 2: To register a process-based resource with AMF for offline monitoring assuming OwnerName and HomeDir as VCS attributes the amfregister.xml has the following format:

```
<xml>
  <Register>
    <RegType>PROFF</RegType>
    <Owner>${OwnerName}</Owner>
    <Path>${HomeDir}/symantec/veritas/xyz</Path>
    <arg0>xyz</arg0>
    <args>-p abc -t qwe -m40</args>
```



```

        </Register>
    </xml>

```

- Example 3: To register a process-based resource with AMF for offline monitoring using substring matching for the arguments:
  - Process: xyz
  - Complete path of the process: /MyHome/symantec/veritas/xyz
  - Arguments substrings:
    - -t qwe with left bounded substring matching
    - -m 40 with right bounded substring matching
  - Argument flags: Match any of the substring

```

<xml>
  <Register>
    <RegType>PROFF</RegType>
    <Path>/MyHome/symantec/veritas/xyz</Path>
    <arg0>xyz</arg0>
    <arg0flag>EXACT</arg0flag>
    <ArgsSubString>-t qwe</ArgsSubString>
    <ArgsSubStringFlag>BOUNDLEFT</ArgsSubStringFlag>
    <ArgsSubString>-m 40</ArgsSubString>
    <ArgsSubStringFlag>BOUNDRIGHT</ArgsSubStringFlag>
    <ArgsFlag>MATCH_ANY</ArgsFlag>
  </Register>
</xml>

```

## Example of amfregister.xml for online and offline IMF monitoring for a given process

To register a process-based resource with AMF for online and offline monitoring with:

- Path: /opt/VRTSamf/bin/amfstat
- argv0: amfstat
- args: -s 5

```

<xml>
  <Register>

```

```

        <RegType>PRON</RegType>
        <ProcPattern>/opt/VRTSamf/bin/amfstat -s 5</ProcPattern>
    </Register>
    <Register>
        <RegType>PROFF</RegType>
        <Path>/opt/VRTSamf/bin/amfstat</Path>
        <arg0>amfstat</arg0>
        <args>-s 5</args>
    </Register>
</xml>

```

## Examples for adding ReaperName tag in amfregister.xml

The ReaperName tag can be added both manually and automatically in the amfregister.xml.

- Adding ReaperName tag automatically  
The tag is created automatically when imf\_init for the agent is called for the first time if not already present.  
For example, if the type name is CFSSMount, the amfregister.xml will have following lines:

```

<xml>
    <!--ReaperName tag has been added by imf_init entry point-->

    <ReaperName>CFSSMount</ReaperName>

    <Register>

        <RegType>PRON</RegType>

        <ProcPattern>/usr/sbin/rpc.statd -d 0 -t 50</ProcPattern>
    </Register>
</xml>

```

- Adding ReaperName tag manually  
Agent Developer may also choose to add this tag manually. In this case, imf\_init will not update amfregister.xml.  
For example, if the reaper name (type of the resource) is Process, the xml file will look as follows:

```

<xml>
    <ReaperName>Process</ReaperName>

```

```

<Register>

    <RegType>PRON</RegType>

    <ProcPattern>/usr/sbin/rpc.statd -d 0 -t 50</ProcPattern>

</Register>
</xml>

```

## Adding IMF and IMFRegList attributes in configuration

You need to add IMF and IMFRegList attribute in configuration files. Adding IMFRegList is optional.

See “IMF” on page 189.

See “IMFRegList” on page 189.

To add these attributes, you can either modify the configuration file if VCS is not running or modify the running configuration by `ha - command` if VCS is running. Refer to the following examples for this purpose.

Example of type definition for a custom agent to supports IMF when VCS is not running:

```

type MyCustomIMFApp (
    static int IMF{} = { Mode=3, MonitorFreq=1, RegisterRetryLimit=3 }
    static str IMFRegList[] = { PathName, Arguments }
    static str ArgList[] = { PathName, Arguments, HomeDir }
    str PathName
    str Arguments
    str HomeDir
)

```

Example of modify configuration for a custom agent to supports IMF when VCS is running:

Command to add IMF attribute:

```

haattr -add -static IMF MyCustomIMFApp -integer -assoc Mode 3
MonitorFreq 1 RegisterRetryLimit 3

```

Command to add IMFRegList attribute:

```

haattr -add -static Zone IMFRegList -string -vector PathName,
Arguments

```

See [“IMFRegList”](#) on page 189.

You can modify these IMF attribute values at the Agent Type or Resource level to suite your requirement. The following example describes how you can modify the values for Mode attribute.

**In case of Online only Monitoring (PRON), Mode value can be set to 2. Run the following commands at the respective levels to modify the Mode value:**

**1 At the type level:**

```
# hatype -display <resource-type> -attribute IMF
#Type          Attribute Value
CustomProcess IMF Mode 3 MonitorFreq 1 RegisterRetryLimit 3

# hatype -modify <resource-type> IMF -update Mode 2

# hatype -display <resource-type> -attribute IMF
#Type          Attribute Value
CustomProcess IMF Mode 2 MonitorFreq 1 RegisterRetryLimit 3
```

**2 At the Resource level, first check that whether static attribute IMF is overridden or not.**

```
# hares -display <resource-name> -attribute IMF
VCS WARNING V-16-1-10554 No resource exists with attribute IMF
```

**In case not overridden , you can now override static attribute IMF at resource level using following command:**

```
# hares -override <resource-name> IMF
# hares -display <resource-name> -attribute IMF
#Resource Attribute System Value
pres1      IMF global Mode 3 MonitorFreq 1 RegisterRetryLimit 3

# hares -modify pres1 IMF -update Mode 2

# hares -display pres1 -attribute IMF
#Resource Attribute System Value
pres1      IMF global Mode 2 MonitorFreq 1 RegisterRetryLimit 3
```

## Monitor without IMF integration

Monitor without IMF integration and having basic (Level-1) monitoring:

```
#!/bin/sh
# CustomAgent Monitor script
. $VCS_HOME/bin/ag_i18n_inc.sh
RESNAME=$1
VCSAG_SET_ENVS $RESNAME

# Logic for custom agent resource monitoring.
# Based on logic set STATE to "OFFLINE" or "ONLINE"
if resource is found in either OFFLINE or ONLINE state.

if [ ${STATE} = "OFFLINE" ]
then
    exit ${STATE}
fi
```

## Monitor without IMF but with LevelTwo monitor frequency

If the custom agent monitor does the basic as well as detail monitoring, then detail monitoring code must be conditional. This avoids scheduling of detail monitoring if not required. VCSAG\_GET\_MONITOR\_LEVEL API can be used to check if detail monitoring needs to be scheduled.

VCSAG\_GET\_MONITOR\_LEVEL API fetches and sets the values of the LevelTwoMonitorFreq attribute.

```
#!/bin/sh
# CustomAgent Monitor script
. $VCS_HOME/bin/ag_i18n_inc.sh
RESNAME=$1
VCSAG_SET_ENVS $RESNAME

STATE=${VCS_RES_ONLINE};

# Fetch the value of detail (Level-2) monitoring.
# VCSAG_GET_MONITOR_LEVEL will store this values in
# VCSAG_MONITOR_LEVEL_TWO environment.
VCSAG_GET_MONITOR_LEVEL();

# Logic for custom agent basic monitoring.
# Based on logic set STATE to OFFLINE or ONLINE
```

```

# if basic monitoring of the resource state that resource is ONLINE,
# check if detail monitoring (Level-2) need to be performed.
if [ ${STATE} -eq ${VCS_RES_ONLINE} ]; then

    if [ ${VCSAG_MONITOR_LEVEL_TWO} -ne 0 ]; then
        # Logic for custom agent detail monitoring.
        # Based on logic return OFFLINE or ONLINE

        # If resource is found as OFFLINE
        STATE = ${VCS_RES_OFFLINE};

        # If resource is found as ONLINE
        STATE = ${VCS_RES_ONLINE};
    fi
fi

exit ${STATE};

```

## Monitor with IMF integration

If the custom agent monitor does only basic monitoring, then you need not make any changes in the existing monitor entry point.

```

#!/bin/sh
# CustomAgent Monitor script
. ${VCS_HOME}/bin/ag_i18n_inc.sh
RESNAME=$1
VCSAG_SET_ENVS $RESNAME

# Logic for custom agent resource monitoring.
# Based on logic set STATE to "OFFLINE" or "ONLINE"
if resource is found in either OFFLINE or ONLINE state.

if [ ${STATE} = "OFFLINE" ]
then
    exit ${STATE}
fi

if [ ${STATE} = "ONLINE" ]
then
    exit ${STATE}

```

```
fi
```

## Monitor with IMF but with LevelTwo monitor frequency

If the custom agent monitor does the basic as well as detail monitoring, then the basic monitoring code must be conditional. This avoids scheduling of basic monitoring if only detail monitoring is required to be scheduled.

VCSAG\_GET\_MONITOR\_LEVEL api can be used to check if basic, detail or both monitoring is required to be scheduled.

Using api VCSAG\_GET\_MONITOR\_LEVEL monitor entry point can decide whether to perform basic and detail monitoring based on the values of MonitorFreq and LevelTwoMonitorFreq attributes respectively.

```
#!/bin/sh
# CustomAgent Monitor script
. $VCS_HOME/bin/ag_il8n_inc.sh
RESNAME=$1
VCSAG_SET_ENVS $RESNAME

STATE=${VCS_RES_ONLINE};

# Fetch the value of basic (Level-1) and detail (Level-2) monitoring.
# VCSAG_GET_MONITOR_LEVEL will store these values in
# VCSAG_MONITOR_LEVEL_ONE and CSAG_MONITOR_LEVEL_TWO environment.
VCSAG_GET_MONITOR_LEVEL();

# Check if basic monitoring (Level-1) need to be performed.
if [ ${VCSAG_MONITOR_LEVEL_ONE} -ne 0 ]; then

# Logic for custom agent basic monitoring.
# Based on logic set STATE to OFFLINE or ONLINE

# If resource is found as OFFLINE
STATE = ${VCS_RES_OFFLINE};

# If resource is found as ONLINE
STATE = ${VCS_RES_ONLINE};
fi

# if basic monitoring of the resource state that resource is ONLINE,
```

```
# check if detail monitoring (Level-2) need to be performed.
if [ ${STATE} -eq ${VCS_RES_ONLINE} ]; then

    if [ ${VCSAG_MONITOR_LEVEL_TWO} -ne 0 ]; then
        # Logic for custom agent detail monitoring.
        # Based on logic return OFFLINE or ONLINE

        # If resource is found as OFFLINE
        STATE = ${VCS_RES_OFFLINE};

        # If resource is found as ONLINE
        STATE = ${VCS_RES_ONLINE};
    fi
fi

exit ${STATE};
```

## Installing the IMF-aware script-based custom agent

The procedure to install the custom script based-agent is similar to installing the custom agent. See [“Installing the custom agent”](#) on page 150 for more information.



# Testing agents

This chapter includes the following topics:

- [About testing agents](#)
- [Using debug messages](#)
- [Debugging using AdvDbg attribute](#)
- [Using the engine process to test agents](#)
- [Using the AgentServer utility to test agents](#)

## About testing agents

Before testing an agent, make sure you have built the agent and have installed and configured the agent.

## Using debug messages

You can activate agent framework debug messages by setting the value of the LogDbg attribute. This directs the framework to print messages logged with the specified severity.

See [“LogDbg”](#) on page 191.

## Debugging agent functions (entry points).

The LogDbg attribute indicates the debug severities enabled for the agent function or agent framework. Debug severities used by agent functions are in the range of DBG\_1-DBG\_21.

To enable debug logging, use the LogDbg attribute at the type-level.

To set debug severities for a particular resource-type:

```
hatype -modify <resource-type> LogDbg -add <Debug-Severity>
[<Debug-Severity> ...]
```

To remove debug severities for a particular resource-type:

```
hatype -modify <resource-type> LogDbg -delete <Debug-Severity>
[<Debug-Severity> ...]
```

To remove all debug severities:

```
hatype -modify <resource-type> LogDbg -delete -keys
```

Note that you cannot set debug severities for an individual resource.

To debug a specific agent's entry point, see the documentation for that agent. So for bundled agents, see the *Bundled Agent's Reference Guide*.

For example, if you want to log debug messages for the FileOnOff resource type with severity levels DBG\_3 and DBG\_4, use the hatype commands:

```
# hatype -modify FileOnOff LogDbg -add DBG_3 DBG_4
# hatype -display FileOnOff -attribute LogDbg
TYPE          ATTRIBUTE          VALUE
FileOnOff     LogDbg             DBG_3 DBG_4
```

The debug messages from the FileOnOff agent with debug severities DBG\_3 and DBG\_4 get printed to the log files. Debug messages from C++ entry points get printed to the agent log file (UNIX: \$VCS\_LOG/log/<resource\_type>\_A.log) and from script entry points will get printed to the HAD log file. An example line from the agent log file:

```
.
.
2003/06/06 11:02:35 VCS DBG_3 V-16-50-0
FileOnOff:fl:monitor:This is a debug message
FileOnOff.C:res_monitor[28]
```

## Debugging the agent framework

The LogDbg attribute indicates the debug severities enabled for the resource type or agent framework. The debug messages from the agent framework are logged with the following severities:

- **DBG\_AGDEBUG:** Enables most debug logs, which include: debugging commands received from the engine, service thread execution code path, that is when a service thread picks up a resource for running an entry point or for modification of an attribute, printing of environment variables that the agent uses, timer-related processing like sending IAmAlive messages to engine, and so on.
- **DBG\_AGINFO:** Enables debugging messages related to specific entry-point execution, including entry point exit codes, transitioning of resources between various internal-states, printing of ArgListValues before entry point invocation, values of entry-point execution related attributes like RunInContainer and PassCInfo, and so on.
- **DBG\_AGTRACE:** Enables verbose debug logging, the bulk of it being Begin and End messages for almost every function that gets called within the agent-framework, like function-tracing.

## Debugging using AdvDbg attribute

You can activate advanced debugging by setting the value of AdvDbg attribute. If configured, this directs the agent framework to invoke the following predefined actions on entry point time out:

- **pstack:** Used to generate the process tree or process stack or both.
- **core:** Used to generate the core of the agent process.

A process can be the agent process or any command executed from the agent entry point. All information is captured under `$VCS_LOG/diag/agents/<Agent Name>` directory.

## Working of AdvDbg attribute

To understand how data is captured, you need to understand the variety of agents. Agents are divided into three varieties:

1. Agents with all entry points written in script.
2. Agents with all entry points implemented using C/C++. The implementation of these entry points is such that:

- Some commands get invoked from the entry points
  - Only system calls (but no commands) get executed from the entry points.
3. Hybrid agents where some entry points are written using scripts and remaining using C/C++.

## Working of pstack action

When configured with this action, the agent framework captures the process stack or process stack with the process tree on entry point timeout. The agent framework takes a decision internally to capture the process tree along with the process stack. In the following cases, agent framework also captures the process tree along with the process stack for the process:

- If the timed out entry point is implemented using script, the agent framework captures the process tree as well as the process stack.
- If the timed out entry point is implemented in C/C++ and waits for some command to complete, the agent framework captures the process tree along with the process stack.

In all the other cases, the agent framework captures the process stack of the agent process. All the information related to process stack and process tree is captured in the `FFDC_AGFWEPP<ep_name>_A.log` file. This file contains the information of all the resources of the same type for which `<ep_name>` entry point has timed out. When file `FFDC_AGFWEPP<ep_name>_A.log` is full, the current data is moved to `FFDC_AGFWEPP<ep_name>_B.log` for backup.

## Working of core action

When configured with this action, the agent framework captures the process core on the entry point timeout. In this release, agent framework only supports capturing of agent core. The core file is named as `core.<AgentPID>.<res_name>.<ep_name>`. This means that core is generated when entry point `<ep_name>` of the `<res_name>` resource is timed out. The core of the agent process gets generated in the last timeout of the entry point. For a given agent, if the same entry point time-outs multiple times for a same resource then this core will be obtained at the time of last timeout.

## Impact of AdvDbg attribute on existing functionality of the entry point

You must clearly understand and consider the following impact while configuring the AdvDbg attribute:

- Processing of other resources may get delayed as one thread is occupied in capturing the debug information.

- System resources are consumed by extra activities like core generation, process stack and process tree generation.
- Agent may stop responding due to low system resources.

Considering the above impact, the default action can be set for rarely occurring or one-time occurring events like open, close, offline, online, or clean. For other entry points, like monitor, if you face timeout issues, AdvDbg must be configured dynamically by overriding this attribute to the resource level for that resource which faces entry point timeout. As soon as the data is captured, AdvDbg attribute must be cleared for these entry points. If multiple resources of the same entry point are timing out, then choose only one resource to configure the AdvDbg attribute.

See [“Recommended steps for configuring AdvDbg attribute for monitor entry points”](#) on page 182.

## Using the engine process to test agents

When the VCS HAD process becomes active on a system, it automatically starts the appropriate agent processes based on the contents of the configuration files.

A single agent process monitors all resources of the same type on a system.

After the VCS HAD process is active, type the following command at the system prompt to verify that the agent has been started and is running:

```
haagent -display <resource_type>
```

For example, to test the Oracle agent, type:

```
haagent -display Oracle
```

If the Oracle agent is running, the output resembles:

#Agent	Attribute	Value
Oracle	AgentFile	
Oracle	Faults	0
Oracle	Running	Yes
Oracle	Started	Yes

## Test commands

The following examples show how to use commands to test the agent:

- To activate agent debug messages for C++ agents, type:

```
hatype -modify <resource_type> LogDbg -add DBG_AGINFO
```

- To check the status of a resource, type:

```
hares -display <resource_name>
```

- To bring a resource online, type:

```
hares -online <resource_name> -sys system
```

This causes the online entry point of the corresponding agent to be called.

- To take a resource offline, type:

```
hares -offline <resource_name> -sys system
```

This causes the offline entry point of the corresponding agent to be called.

- To deactivate agent debug messages for C++ agents, type:

```
hatype -modify <resource_type> LogDbg -delete DBG_AGINFO
```

## Using the AgentServer utility to test agents

The `AgentServer` utility enables you to test agents without running the HAD process. The utility is part of the product package and is installed in the directory

UNIX: `$VCS_HOME/bin`.

Run the AgentServer utility on any node when the engine process is not running.

**To start the AgentServer and access help (UNIX)**

- 1 Type the following command to start AgentServer:

```
$VCS_HOME/bin/AgentServer
```

The AgentServer utility monitors a TCP port for messages from the agents. Configure this port by setting the following string in the /etc/services file to the port number.

```
vcstest <port number>/tcp
```

If you do not specify this value, AgentServer uses the default value 14142.

- 2 When AgentServer is started, a message prompts you to enter a command/ For a complete list of the AgentServer commands, type:

```
> help
```

Output resembles:

```
The following commands are supported. (Use help for more
information on using any command.)
```

```
addattr
addres
addstaticattr
addtype
debughash
debugmemory
debugtime
delete
deleteres
modifyres
modifytype
offlineres
onlineres
print
proberes
startagent
stopagent
quit
```

- 3 For help on a specific command, type `help command_name` at the AgentServer prompt (>). For example, for information on how to bring a resource online, type:

```
> help onlineres
```

The output resembles:

```
Sends a message to an agent to online a resource.
Usage: onlineres <agentid> <resname>
where <agentid> is id for the agent - usually same as
the resource type name.
where <resname> is the name of the resource.
```

### To test the FileOnOff agent (UNIX)

- 1 Start the agent for the resource type:

```
>startagent FileOnOff /opt/VRTSvcs/bin/FileOnOff/FileOnOffAgent
```

You receive the following messages:

```
Agent (FileOnOff) has connected.
Agent (FileOnOff) is ready to accept commands.
```

- 2 The following are examples of `types.cf` and `main.cf` configuration files that can be referred to when testing the FileOnOff agent:
  - Example `types.cf` definition for the FileOnOff agent:

```
type FileOnOff (
    str PathName
    static str ArgList[] = { PathName }
)
```

- Example `main.cf` definition for a FileOnOff resource:

```
...
group ga (
    ...
)
    FileOnOff file1 (
        Enabled = 1
```



```
        PathName = "/tmp/VRTSvcfile001"  
    )
```

The sample configuration is set up using AgentServer commands.

- 3 Refer to the types.xml and main.xml configuration files when testing the FileOnOff agent. In step 4, the sample configuration is set up using AgentServer commands.

- 4 Complete the following steps to pass this sample configuration to the agent.

- Add a type:

```
>addtype FileOnOff FileOnOff
```

- Add attributes of the type:

```
>addattr FileOnOff FileOnOff PathName str ""  
>addattr FileOnOff FileOnOff Enabled int 0
```

- Add the static attributes to the FileOnOff resource type:

```
>addstaticattr FileOnOff FileOnOff ArgList vector PathName
```

- Add the LogLevel attribute to see the debug messages from the agent:

```
>addstaticattr FileOnOff FileOnOff LogLevel str info
```

- Add a resource:

```
>addres FileOnOff file1 FileOnOff
```

- Set the resource attributes:

```
>modifyres FileOnOff file1 PathName str /tmp/VRTSvcfile001  
>modifyres FileOnOff file1 Enabled int 1
```

- 5 After adding and modifying resources, type the following command to obtain the status of a resource:

```
>proberes FileOnOff file1
```

This calls the `monitor` entry point of the FileOnOff agent.

You will receive the following messages indicating the resource status:

```
Resource(file1) is OFFLINE  
Resource(file1) confidence level is 0
```

- To bring a resource online:

```
>onlineres FileOnOff file1
```

This calls the `online` entry point of the FileOnOff agent. The following message is displayed when `file1` is brought online:

```
Resource(file1) is ONLINE  
Resource(file1) confidence level is 100
```

- To take a resource offline:

```
>offlineres FileOnOff file1
```

This calls the `offline` entry point of the FileOnOff agent.

## 6 View the list of agents started by the AgentServer process:

```
>print
```

Output resembles:

```
Following Agents are started:  
FileOnOff
```

## 7 Stop the agent:

```
>stopagent FileOnOff
```

## 8 Exit from the AgentServer:

```
>quit
```

# Static type attributes

This chapter includes the following topics:

- [About static attributes](#)
- [Static type attribute definitions](#)

## About static attributes

Predefined static resource type attributes apply to all resource types.

See “[Static type attribute definitions](#)” on page 180.

When developers create agents and define the resource type definitions for them, the static type attributes become part of the type definition.

## Overriding static type attributes

Typically, the value of a static attribute of a resource type applies to all resources of the type. You can override the value of a static attribute for a specific resource without affecting the value of that attribute for other resources of that type. In this chapter, the description of each agent attribute indicates whether the attribute's values can be overridden.

Users can override the values of static attributes in two ways:

- By explicitly defining the attribute in a resource definition in configuration file (`main.cf`) when VCS is not running.
- By using the `hares` command from the command line with the `-override` option when VCS is running.

The values of the overridden attributes may be displayed using the `hares -display` command. You can remove the overridden values of static attributes by using the `hares -undo_override` option from the command line.

See the *Symantec Cluster Server Administrator's Guide* for additional information about overriding the values of static attributes.

## Static type attribute definitions

The following sections describe the static attributes for agents.

### ActionTimeout

After the `hares -action` command has instructed the agent to perform a specified action, the agent waits for the number of seconds as specified in the ActionTimeout attribute (scalar-integer) to let the action entry point finish and after the time limit has been reached the agent terminates the running action entry as it might hung at any point. The value of ActionTimeout may be set for individual resources, if overridden.

The default is 30 seconds. The value of the ActionTimeout attribute is internally capped at  $\text{MonitorInterval} / 2$ .

If the ActionTimeout attribute is set to a value greater than  $\text{MonitorInterval} / 2$ , then  $\text{MonitorInterval} / 2$  is used instead of ActionTimeout. If ActionTimeout value is less than  $\text{MonitorInterval} / 2$ , then the ActionTimeout value is honored.

---

**Note:** You can extend this value by using the `VCSAgSetResEPTimeout` (for C/C++ entry point) `/VCSAG_SET_RES_EP_TIMEOUT` (for script entry point). Use this API cautiously as setting a value higher than  $\text{MonitorInterval} / 2$  might result in delay of next periodic monitor which is used to check the state of the resource.

---

See [“VCSAgSetResEPTimeout”](#) on page 83.

See [“VCSAG\\_SET\\_RES\\_EP\\_TIMEOUT”](#) on page 100.

### AdvDbg

AdvDbg attribute helps VCS agents to capture advance information like process stack, process tree, and core on unexpected events. This is helpful in RCA and saves time in troubleshooting the unexpected event. The present scope of unexpected event is entry point timeout.

This is a KeyList attribute where each key defines an action that gets executed when an entry point times out.

See [“Debugging using AdvDbg attribute”](#) on page 171.

## Configuring AdvDbg attribute and formatting the individual key

AdvDbg attribute is a keylist attribute and the format of the individual key is:

```
<ep_name>:<event>:<action[,action...]>
```

In the above syntax:

**<ep\_name>**: Name of the resource level entry point. For example monitor, offline, online, clean, and so on.

**<event>**: This should always be specified as **timeout** and is reserved for future use.

**<action>**: Specifies what information to capture on entry point timeout. Its value can be either **pstack** or **core** or both.

For example:

- `monitor:timeout:pstack` instructs the agent framework to generate pstack information on monitor entry point timeout.
- `offline:timeout:pstack` instructs the agent framework to generate pstack information on offline entry point timeout.
- `clean:timeout:pstack,core` instructs the agent framework to generate pstack information as well as core on clean entry point timeout.

---

**Caution:** The present scope of AdvDbg attribute is limited to resource level entry points. This includes all entry points except `imf_init`, `imf_getnotification`, and shutdown entry points. This could degrade the system performance based on how this attribute is configured and how many resources experience timeout.

---

## Recommended steps for configuring AdvDbg attribute for monitor entry points

Set the AdvDbg attribute for the monitor entry points using the following steps:

- 1 Identify the resource for which the monitor entry point is timing out and analyze which information is useful.

This helps in choosing the action (`pstack` or `core` or both)

- 2 Run the following commands:

```
# hares -override <res_name> AdvDbg
# hares -modify <res_name> AdvDbg -add monitor:timeout:pstack
```

- 3 After the data is captured, clear action by:

```
# hares -modify <res_name> AdvDbg -delete monitor:timeout:pstack
# hares -undo_override <res_name> AdvDbg
```

## AEPTimeout

The AEPTimeout (Append Entry Point Timeout) attribute is a Boolean attribute. Set this attribute to true to append the entry point timeout value for a particular entry point to the list of arguments passed to the entry point.

If any entry point needs to fetch the value of entry point timeout attribute from the running entry point (for example, MonitorTimeout and ActionTimeout for monitor entry point and action entry point respectively) then instead of executing `hatype/hares` command, the attribute AEPTimeout should be set to 1 and agent entry point will get the value of respective entry point timeout attribute in the AEPTimeout argument. The advantage of using AEPTimeout over `hatype/hares` command is, if the attribute is overridden at resource level, the AEPTimeout will automatically fetch the overridden value.

This feature does not apply to pre-V50 agents. The AEPTimeout attribute value cannot be overridden.

See [“About the entry point timeouts”](#) on page 50.

## AgentClass

Indicates the scheduling class for agent process.

The default setting is TS. The AgentClass attribute value cannot be overridden.

## AgentDirectory

Complete path of the directory in which the agent binary and scripts are located. Agents look for binaries and scripts in the following directories:

- The directory specified by the AgentDirectory attribute
- /opt/VRTSvcs/bin/type/
- /opt/VRTSagents/ha/bin/type/

If none of the above directories exist, the agent does not start. Use this attribute in conjunction with the AgentFile attribute to specify a different location or a different binary for the agent.

## AgentFailedOn

A keylist attribute indicating the systems on which the agent has failed. This is not a user-defined attribute.

Default is an empty keylist. The AgentFailedOn attribute value cannot be overridden.

## AgentFile

The complete name and path of the binary for an agent. If you do not specify a value for this attribute, VCS uses the agent binary at the path defined by the AgentDirectory attribute.

## AgentPriority

Indicates the priority in which the agent process runs.

Default is 0. The AgentPriority attribute value cannot be overridden.

## AgentReplyTimeout

The HAD process restarts an agent if it has not received any messages from the agent for the number of seconds specified by AgentReplyTimeout.

The default value of 130 seconds works well for most configurations. Increase this value if the HAD is restarting the agent too often during steady state of the cluster. This may occur when the system is heavily loaded or if the number of resources exceeds four hundred. Refer to the description of the command `haagent -display` to view the current status of the agent. Note that the HAD process will also restart a crashed agent.

The AgentReplyTimeout attribute value cannot be overridden.

## AgentStartTimeout

The value of AgentStartTimeout specifies how long the HAD waits for the initial agent "handshake" after starting the agent, and before attempting to restart it.

Default is 60 seconds. The AgentStartTimeout attribute value cannot be overridden.

## AlertOnMonitorTimeouts

Indicates the number of consecutive monitor failures after which VCS sends an SNMP notification to the user. A monitor attempt is considered a failure if it does not complete within the time specified by the MonitorTimeout attribute.

When a monitor fails as many times as the value or a multiple of the value specified by the AlertOnMonitorTimeouts attribute, then VCS sends an SNMP notification to the user. If this attribute is set to a value, say N, then after sending the notification at the first monitor timeout, VCS also sends an SNMP notification at each N-consecutive monitor timeout including the first monitor timeout for the second-time notification.

In case of monitor timeouts, the AlertOnMonitorTimeouts attribute can be used in conjunction with the FaultOnMonitorTimeouts attribute to control the behavior of resources of a group configured under VCS. When FaultOnMonitorTimeouts is set to 0 and AlertOnMonitorTimeouts is set to some value for all resources of a service group, then VCS will not perform any action on monitor timeouts for resources configured under that service group, but will only send notifications at the frequency set in the AlertOnMonitorTimeouts attribute.

---

**Note:** This attribute applies only to online resources. If a resource is offline, no special action is taken during monitor failures.

---

When AlertOnMonitorTimeouts is set to 0, VCS sends an SNMP notification to the user only for the first monitor timeout; VCS does not send further notifications to the user for subsequent monitor timeouts until the monitor returns a success.

Default is 0. The AlertOnMonitorTimeouts attribute value can be overridden.

## ArgList

An ordered list of attributes whose values are passed to the open, close, online, offline, monitor, info, action, clean, imf\_register and migrate entry points.

The default is an empty list. The ArgList attribute value cannot be overridden.



## ArgList reference attributes

Reference attributes refer to attributes of a different resource. If the value of a resource's attribute is the name of another resource, the ArgList of the first resource can refer to an attribute of the second resource using the `:` operator.

For example, say, there is a type T1 whose ArgList is of the form:

```
{ Attr1, Attr2, Attr3:Attr_A }
```

where Attr1, Attr2 and Attr3 are attributes of type T1, and say for a resource res1T1 of type T1, Attr3's value is the name of another resource, res1T2. Then the entry points for res1T1 are passed the values of attributes Attr1 and Attr2 of res1T1 and the value of attribute Attr\_A of resource res1T2.

Note that one has to first add the attribute Attr3 to type T1 before adding Attr3:Attr\_A to T1's ArgList. Only then should one modify Attr3 for a resource (res1T1) to reference another resource (res1T2). Also, the value of Attr3 can either be another resource of the same type (res2T1) or a resource of a different type (res1T2).

## AttrChangedTimeout

Maximum time (in seconds) within which the `attr_changed` entry point must complete or else be terminated. Default is 60 seconds. The AttrChangedTimeout attribute value can be overridden.

## CleanRetryLimit

Defines the number of times clean operation can be retried before it succeeds. This parameter is meaningful only if the clean operation is implemented and the ManageFaults attribute is set to ALL. If CleanRetryLimit is set to 0, there will be no limit. Default = 0.

If this attribute is set to a non-zero value and the clean fails after the specified times then the resource enters into the ADMIN\_WAIT state. The CleanRetryLimit attribute value can be overridden.

## CleanTimeout

Maximum time (in seconds) within which the `clean` entry point must complete or else be terminated.

Default is 60 seconds. The CleanTimeout attribute value can be overridden.

## CloseTimeout

Maximum time (in seconds) within which the `close` entry point must complete or else be terminated.

Default is 60 seconds. The CloseTimeout attribute value can be overridden.

## ContainerOpts

---

**Note:** This attribute is applicable only to AIX and Solaris.

---

This attribute helps you to control execution of agent entry point and allows you to control the container information passed to the agent entry point. For each application or resource type that you want to include as part of the zone, wpar, and project, you need to assign the following values to the ContainerOpts attribute:

- **RunInContainer (RIC)**  
RunInContainer defines whether the agent framework should run all the script-based entry points for the agent inside the container. If the attribute is set to 1, all script-based entry points are forked off inside the local container that is configured for the corresponding resource. If the attribute is set to 0, even if a resource's service group has ContainerInfo set, the entry point scripts for that resource will still be run in the global container.
- **PassCInfo (PCI)**  
PassCInfo specifies if you want to pass the container information, defined in the service group's ContainerInfo attribute, to the entry points of the agent. Specify a value of 1, if you want to pass the container information to the entry points. Specify a value of 0, if you do not want to pass the container information to the entry points.

---

**Note:** Container support is available only from V50 or later agent versions.

---

## ConflInterval

Specifies an interval in seconds. When a resource has remained online for the designated interval (all `monitor` invocations during the interval reported ONLINE), any earlier faults or restart attempts of that resource are ignored. This attribute is used with ToleranceLimit to allow the `monitor` entry point to report OFFLINE several times before the resource is declared FAULTED. If `monitor` reports OFFLINE more often than the number set in ToleranceLimit, the resource is declared FAULTED. However, if the resource remains online for the interval designated in ConflInterval, any earlier reports of OFFLINE are not counted against ToleranceLimit.

The agent framework uses the values of `MonitorInterval` (MI), `MonitorTimeout` (MT), and `ToleranceLimit` (TL) to determine how low to set the value of `ConflInterval`. The agent framework ensures that `ConflInterval` (CI) cannot be less than that expressed by the following relationship:

$$(MI + MT) * TL + MI + 10$$

Lesser specified values of `ConflInterval` are ignored. For example, assume that the values are 60 for MI, 60 for MT, and 0 for TL. If you specify any value lower than 70 for CI, the agent framework ignores the specified value and sets the value to 70. However, you can successfully specify and set CI to any value over 70.

`ConflInterval` is also used with `RestartLimit` to prevent agent from restarting the resource indefinitely. The agent process attempts to restart the resource on the same system according to the number set in `RestartLimit` within `ConflInterval` before giving up and failing over. However, if the resource remains online for the interval designated in `ConflInterval`, earlier attempts to restart are not counted against `RestartLimit`. Default is 600 seconds.

The `ConflInterval` attribute value can be overridden.

## EPClass

Indicates the scheduling class at which the entry points need to run. All entry points except `Online` are affected by this attribute.

Default = -1, which indicates that this attribute is not being used. Setting this attribute to a non-default value overrides the older `AgentScript-Class` attributes. The `EPClass` attribute value cannot be overridden.

## EPPriority

Indicates the scheduling priority at which the entry points need to run. All entry points except `Online` are affected by this attribute.

Default = -1, which indicates that this attribute is not being used. Setting this attribute to a non-default value overrides the older `AgentPriority` attributes. The `EPPriority` attribute value cannot be overridden.

## ExternalStateChange

Specifies what actions must be taken on the group when a resource of this type is detected online or offline outside of VCS control. If `OnlineGroup` is specified and the resource is detected as online, the group will be brought online. If `OfflineGroup` is specified and the resource is detected as intentionally offline, the group will be taken offline after due consideration of the group dependency. Default is no action.

## FaultOnMonitorTimeouts

Indicates the number of consecutive monitor failures to be treated as a resource fault. A monitor attempt is considered a failure if it does not complete within the time specified by the MonitorTimeout attribute.

When a monitor fails as many times as the value specified by this attribute, the corresponding resource is brought down by calling the `clean` entry point. The resource is then marked faulted, or it is restarted, depending on the value set in the Restart Limit attribute.

---

**Note:** This attribute applies only to online resources. If a resource is offline, no special action is taken during monitor failures.

---

When FaultOnMonitorTimeouts is set to 0, monitor failures are not considered indicative of a resource fault.

Default is 4. The FaultOnMonitorTimeouts attribute value can be overridden.

## FaultPropagation

Specifies if VCS should propagate the fault up to parent resources and take the entire service group offline when a resource faults, or if VCS should not take the group offline, but fail over the group only when the system faults.

This attribute value can be set to 0 or 1. Default = 0.

If FaultPropagation is set to 1, then if a resource in the service group faults, the group is failed over if the group's AutoFailover attribute is set to 1. If FaultPropagation is set to 0, then if a resource in the service group faults, no other resources are taken offline nor the parent group regardless of the value set for the attribute Critical of a resource. VCS gives priority to the same attribute at a group level.

The FaultPropagation attribute value can be overridden

## FireDrill

A "fire drill" refers to the process of bringing up a database or application on a secondary or standby system for the purpose of doing some processing on the secondary data, or to verify that the application is capable of being brought online on the secondary in case of a primary fault. The FireDrill attribute specifies whether a resource type has fire drill enabled or not. A value of 1 for the FireDrill attribute indicates a fire drill is enabled. A value of 0 indicates a fire drill is not enabled.

The default is 0. The FireDrill attribute cannot be overridden.

Refer to the *Administrator's Guide* for details of how to set up and implement a fire drill.

## IMF

Determines whether the IMF-aware agent must perform intelligent resource monitoring. It is an association attribute with three keys—Mode, MonitorFreq, and RegisterRetryLimit.

- Mode defines for which state of the entry point, IMF monitoring must be performed. Mode can take values 0, 1, 2, or 3.

Mode value	Description
0	No IMF monitoring
1	Offline IMF monitoring
2	Online IMF monitoring
3	Offline and online IMF monitoring

- MonitorFreq specifies the frequency at which the agent invokes the monitor agent function.
- RegisterRetryLimit defines the maximum number of times the agent attempts to register a resource.

The IMF attribute value can be overridden.

---

**Note:** To make a custom agent IMF-aware, you must add IMF attribute in your configuration.

---

See [“Adding IMF and IMFRegList attributes in configuration”](#) on page 163.

## IMFRegList

It is an ordered list of attributes. If IMFRegList attribute or any attribute defined in IMFRegList is changed then the registered resource gets unregistered from IMF.

If IMFRegList is not defined and if ArgList attribute or any attribute defined in ArgList gets changed, then the resource gets unregistered from IMF.

---

**Note:** If IMF support for custom agent is added by a user then it is recommended to define value of IMFRegList attribute, if the number of attributes used for resource registration with IMF is less than ArgList. Thus avoiding unregistration of resources from IMF when any of the attributes gets changed that are not present in IMFResList.

---

## InfoInterval

Specifies the interval, in seconds, between successive invocations of the info entry point for a given resource. The default value of the InfoInterval attribute is 0, which specifies that the agent framework is not to schedule the `info` entry point periodically; the info entry point can also be invoked by the user from the command line using the `hares -refreshinfo` command.

For example,

```
hares -refreshinfo <res> [-sys <system>] [-clus <cluster> | -localclus]
```

The InfoInterval attribute value can be overridden.

See [“About the info entry point”](#) on page 34.

## InfoTimeout

Maximum time (in seconds) within which the info entry point must complete or be terminated.

The default is 30 seconds. The value of the InfoTimeout attribute is internally capped at  $\text{MonitorInterval} / 2$ . The InfoTimeout attribute value can be overridden.

You can extend this value by using the `VCSAgSetResEPTimeout` (for C/C++ entry point) `/VCSAG_SET_RES_EP_TIMEOUT` (for script entry point).

---

**Note:** You can extend this value by using the `VCSAgSetResEPTimeout` (for C/C++ entry point) `/VCSAG_SET_RES_EP_TIMEOUT` (for script entry point). Use this API cautiously as setting a value higher than  $\text{MonitorInterval} / 2$  might result in delay of next periodic monitor which is used to check the state of the resource.

---

See [“VCSAgSetResEPTimeout”](#) on page 83.

See [“VCSAG\\_SET\\_RES\\_EP\\_TIMEOUT”](#) on page 100.

## IntentionalOffline

Defines how VCS reacts to a configured application being intentionally stopped outside of VCS control.

Add this attribute for agents that support detection of an intentional offline outside of VCS control.

Note that the intentional offline feature is available for agents registered as V51 or later. User can use any script agent registered as V51 or later

The value 0 instructs the agent to register a fault and initiate the failover of a service group when the supported resource is taken offline outside of VCS control. The default value for this attribute is 0.

The value 1 instructs VCS to take the resource offline instead of faulting, when the corresponding application is stopped outside of VCS control. This attribute does not affect VCS behavior on application failure. VCS continues to fault resources if managed corresponding applications fail.

See [“About on-off, on-only, and persistent resources”](#) on page 19.

## LevelTwoMonitorFreq

The number of monitor cycles at which the agent framework initiates detailed monitoring. For example, if you set this attribute to 5, the agent framework initiates detailed monitoring every five monitor cycles.

The LevelTwoMonitorFreq attribute can be overridden at a resource level.

The monitor entry point can check if detail monitoring needs to be done through VCSAgGetMonitorLevel (for C/C++ based entry point) or VCSAG\_GET\_MONITOR\_LEVEL (for script-based entry point).

See [“VCSAG\\_GET\\_MONITOR\\_LEVEL”](#) on page 98.

See [“VCSAgGetMonitorLevel”](#) on page 70.

## LogDbg

The LogDbg attribute indicates the debug severities enabled for the resource type or agent framework.

Debug severities used by agent functions are in the range of DBG\_1–DBG\_21. By default, LogDbg is an empty list, meaning that no debug messages are logged for a resource type. Users can modify this attribute for a given resource type, to specify the debug severities that they want to enable, which would cause those debug messages to be printed to the log files. For more information on agent debug levels, see the *Symantec Cluster Server Bundled Agents Reference Guide*.

The LogDbg attribute can be overridden at a resource level.

The debug messages from the agent framework are logged with the following severities:

- `DBG_AGDEBUG`: Enables most debug logs.
- `DBG_AGINFO`: Enables debugging messages related to specific entry-point execution.
- `DBG_AGTRACE`: Enables verbose debug logging that prints function tracing.

See [“Using debug messages”](#) on page 169.

More information is available about APIs that are available to log debug messages from agent entry points.

See [“About logging agent messages”](#) on page 118.

These APIs expect a debug severity as a parameter, along with the message to be logged. You can choose different debug severities for messages to provide different logging levels for the agent. When you enable a particular severity in the `LogDbg` attribute, agent entry points log corresponding messages.

## LogFileSize

Sets the size of an agent log file. Value must be specified in bytes. Minimum is 65536 bytes (64KB). Maximum is 134217728 bytes (128MB). Default is 33554432 bytes (32MB). For example,

```
hatype -modify FileOnOff LogFileSize 2097152
```

Values specified less than the minimum acceptable value will be changed 65536 bytes. Values specified greater than the maximum acceptable value will be changed to 134217728 bytes. Therefore, out-of-range values displayed for the command:

```
hatype -display restype -attribute LogFileSize
```

will be those entered with the `-modify` option, not the actual values. The `LogFileSize` attribute value cannot be overridden.

## ManageFaults

A service group level attribute. `ManageFaults` specifies if VCS manages resource failures within the service group by calling `clean` entry point for the resources. This attribute value can be set to `ALL` or `NONE`. Default = `ALL`.

If set to `NONE`, VCS does not call `clean` entry point for any resource in the group. User intervention is required to handle resource faults/failures. When `ManageFaults` is set to `NONE` and one of the following events occur, the resource enters the `ADMIN_WAIT` state:



1. The `offline` entry point was ineffective. Resource state is `ONLINE|ADMIN_WAIT`.
2. The `offline` entry point did not complete within the expected time. Resource state is `ONLINE|ADMIN_WAIT`.
3. The `online` entry point did not complete within the expected time. Resource state is `OFFLINE|ADMIN_WAIT`.
4. The `online` entry point was ineffective. Resource state is `OFFLINE|ADMIN_WAIT`.
5. The resource was taken offline unexpectedly. Resource state is `OFFLINE|ADMIN_WAIT`.
6. For the online resource the monitor entry point consistently failed to complete within the expected time. Resource state is `ONLINE| MONITOR_ TIMEDOUT|ADMIN_WAIT`. The value configured in `FaultOnMonitorTimeouts` attribute indicates number of consecutive monitor failures after which the resource must move into `ONLINE| MONITOR_ TIMEDOUT|ADMIN_WAIT` state.

## MonitorInterval

Duration (in seconds) between two consecutive monitor calls for an `ONLINE` resource or a resource in transition.

Default is 60 seconds. The `MonitorInterval` attribute value can be overridden.

## MonitorStatsParam

`MonitorStatsParam` is a type-level attribute, which stores the required parameter values for calculating monitor time statistics. For example:

```
static str MonitorStatsParam = { Frequency = 10, ExpectedValue =  
    3000, ValueThreshold = 100, AvgThreshold = 40 }
```

- **Frequency:** Defines the number of monitor cycles after which the average monitor cycle time should be computed and sent to HAD. The value of this key can be from 1 to 30. A value of 0 (zero) indicates that the average monitor time need not be computed. This is the default value for this key.
- **ExpectedValue:** The expected monitor time in milliseconds for all resources of this type. Default=100.

- ValueThreshold: The acceptable percentage difference between the expected monitor cycle time (ExpectedValue) and the actual monitor cycle time. Default=100.
- AvgThreshold: The acceptable percentage difference between the benchmark average and the moving average of monitor cycle times. Default=40.

The MonitorStatsParam attribute values can be overridden.

For more information:

Refer to the *Administrator's Guide*.

## MonitorTimeout

Maximum time (in seconds) within which the `monitor` entry point must complete or else be terminated. Default is 60 seconds. The MonitorTimeout attribute value can be overridden.

The determination of a suitable value for the MonitorTimeout attribute can be assisted by the use of the MonitorStatsParam attribute.

## MigrateTimeout

Maximum time (in seconds) within which the migrate procedure must complete or else the procedure is terminated.

Default value is 600 secs. The MigrateTimeout attribute can be overridden.

## MigrateWaitLimit

Number of monitor intervals to wait for resource to migrate after completing the migrate procedure. MigrateWaitLimit will be applicable for source as well as for target node; as the migrate operation brings the resource offline on the source node and online on the target node. We can also define MigrateWaitLimit as the number of monitor intervals required to wait for resource to go offline on source after completing the migrate procedure, and the number of monitor intervals to wait for resource to come online on target after the resource goes offline on source.

Default value is 2. The MigrateWaitLimit attribute can be overridden.

Probes fired manually are counted when MigrateWaitLimit is set and the resource is waiting to migrate. For example, if the MigrateWaitLimit of a resource is set to 5 and the MonitorInterval is set to 60 (seconds), the resource waits for a maximum of five monitor intervals (that is, 5 x 60), and if all five monitors within MigrateWaitLimit report the resource as online on source node, it sets the ADMIN\_WAIT flag. If you run another probe, the resource waits for four monitor intervals (that is, 4 x 60), and if the fourth monitor does not report the state as offline

on source , it sets the ADMIN\_WAIT flag. This process is repeated for remaining monitor intervals (3x60, 2x60 and 1x60). Similarly if the resource does not moved to online state within the MigrateWaitLimit then it sets the ADMIN\_WAIT flag.

## NumThreads

NumThreads specifies the maximum number of service threads that an agent is allowed to create. Service threads are the threads in the agent that service resource commands. NumThreads does not control the number of threads used for other internal purposes.

Agents dynamically create service threads depending on the number of resources that the agent has to manage. Until the number of resources is less than the NumThreads value, the addition of a new resource will make the agent create an additional service thread. Also, if the number of resources falls below the NumThreads value as a result of deletion of resources, the agent will correspondingly delete service threads. Since an agent for a type will be started by VCS HAD process only if there is at least one resource for that type in the configuration, an agent will always have at least 1 service thread. Setting NumThreads to 1 will thus prevent any additional service threads from being created even if more resources are added.

If the entry points have a locking mechanism within them for synchronization, then set the NumThreads attribute to a relatively low value, for example, 2—5.

The maximum value that can be set for NumThreads is 100. If NumThreads need to be increased beyond 30, please contact Symantec support.

Default is 10. The NumThreads attribute cannot be overridden.

## OfflineMonitorInterval

The duration (in seconds) between two consecutive monitor calls for an OFFLINE resource. If set to 0, OFFLINE resources are not monitored.

Default is 300 seconds. The OfflineMonitorInterval attribute value can be overridden.

## OfflineTimeout

Maximum time (in seconds) within which the `offline` entry point must complete or else be terminated.

Default is 300 seconds. The OfflineTimeout attribute value can be overridden.

## OfflineWaitLimit

Number of monitor intervals to wait after completing the offline procedure and before the resource goes offline.

Probes fired manually are counted when `OfflineWaitLimit` is set and the resource is waiting to go offline. For example, say the `OfflineWaitLimit` of a resource is set to 5 and the `MonitorInterval` is set to 60. The resource waits for a maximum of five monitor intervals (five times 60), and if all five monitors within `OfflineWaitLimit` report the resource as offline, it calls the clean agent function. If the user fires a probe, the resource waits for four monitor intervals (four times 60), and if the fourth monitor does not report the state as offline, it calls the clean agent function. If the user fires another probe, one more monitor cycle is consumed and the resource waits for three monitor intervals (three times 60), and if the third monitor does not report the state as offline, it calls the clean agent function.

Default = 0.

## OnlineClass

Indicates the scheduling class at which the Online entry point needs to run. Only the Online entry point gets affected by this attribute.

Default = -1, which indicates that this attribute is not being used. Setting this attribute to a non-default value overrides the older `AgentClass` attributes. The `OnlineClass` attribute value cannot be overridden.

## OnlinePriority

Indicates the scheduling priority at which the Online entry point needs to run. Only the Online entry point gets affected by this attribute.

Default = -1, which indicates that this attribute is not being used. Setting this attribute to a non-default value overrides the older `AgentPriority` attributes. The `OnlinePriority` attribute value cannot be overridden.

## OnlineRetryLimit

Number of times to retry `online` if the attempt to bring a resource online is unsuccessful. This attribute is meaningful only if `clean` is implemented.

Default is 0. The `OnlineRetryLimit` attribute value can be overridden.

## OnlineTimeout

Maximum time (in seconds) within which the `online` entry point must complete or else be terminated.

Default is 300 seconds. The OnlineTimeout attribute value can be overridden.

## OnlineWaitLimit

Number of monitor intervals to wait after completing the online procedure, and before declaring the online attempt as ineffective.

This attribute is meaningful only if the `clean` entry point is implemented.

If `clean` is implemented, when the agent reaches the maximum number of monitor intervals it assumes that the online procedure was ineffective and runs `clean`. The agent then notifies HAD that the online attempt failed, or retries the procedure, depending on whether or not the OnlineRetryLimit is reached.

If `clean` is not implemented, the agent continues to periodically run `monitor` until the resource is brought online.

Each probe command fired from the user is considered as one monitor interval. For example, say the OnlineWaitLimit of a resource is set to 5. This means that the resource will be moved to a faulted state after five monitor intervals. If the user fires a probe, then the resource will be faulted after four monitor cycles, if the fourth monitor does not report the state as ONLINE. If the user again fires a probe, then one more monitor cycle is consumed and the resource will be faulted if the third monitor does not report the state as ONLINE.

Default is 2. The OnlineWaitLimit attribute value can be overridden.

## OpenTimeout

Maximum time (in seconds) within which the `open` entry point must complete or else be terminated. The OpenTimeout attribute value can be overridden.

## Operations

Indicates the valid operations for the resources of the type. The values are OnOff (can be brought online and taken offline), OnOnly (can be online only), and None (cannot be brought online or taken offline but can be monitored).

Default is OnOff. The Operations attribute value cannot be overridden.

## RegList

RegList is a type level keylist attribute that can be used to store, or register, a list of certain resource level attributes. The agent calls the `attr_changed` entry point for a resource when the value of an attribute listed in RegList is modified. The RegList attribute is useful where a change in the values of important attributes require specific actions that can be executed from the `attr_changed` entry point.

By default, the attribute RegList is not included in a resource's type definition, but it can be added using either of the two methods shown below.

Assume the RegList attribute is added to the FileOnOff resource type definition and its value is defined as `PathName`. Thereafter, when the value of the `PathName` attribute for a FileOnOff resource is modified, the `attr_changed` entry point is called.

- Method one is to modify the types definition file (`types.cf` for example) to include the RegList attribute when VCS is not running. Add a line in the definition of a resource type that resembles:

```
static keylist RegList = { attribute1_name,  
attribute2_name,...}
```

For example, if the type definition is for the FileOnOff resource and the name of the attribute to register is `PathName`, the modified type definition would resemble:

```
.  
.   
.   
type FileOnOff (  
    str PathName  
    static keylist RegList = { PathName }  
    static str ArgList[] = { PathName }  
)  
.   
. 
```

- Method two is to use the `haattr` command to add the RegList attribute to a resource type definition and then modify the value of the type's RegList attribute using the `hatype` command when VCS is running; the commands are:

```
haattr -add -static resource_type RegList -keylist
```

- To set value

```
# hatype -modify resource_type RegList attribute_name1  
attribute_name2
```

- To add a new key

```
# hatype -modify resource_type RegList -add attribute_name3
```

For example:

- # haattr -add -static FileOnOff RegList -keylist
- # hatype -modify FileOnOff RegList PathName
- # hatype -modify FileOnOff RegList -add PathName

The RegList attribute cannot be overridden.

## RestartLimit

Affects how the agent responds to a resource fault.

A non-zero value for RestartLimit causes the invocation of the `online` entry point instead of the failover of the service group to another system. The agent process attempts to restart the resource according to the number set in RestartLimit before it gives up and attempts failover. However, if the resource remains online for the interval designated in ConfInterval, earlier attempts to restart are not counted against RestartLimit

---

**Note:** The agent will not restart a faulted resource if the `clean` entry point is not implemented. Therefore, the value of the RestartLimit attribute applies only if `clean` is implemented.

---

Default is 0. The RestartLimit attribute value can be overridden.

See “[ToleranceLimit](#)” on page 201.

## ScriptClass

Indicates the scheduling class of the script processes (for example, online) created by the agent. This attribute is not an overrideable static attribute.

The default setting is TS.

## ScriptPriority

Indicates the priority of the script processes created by the agent. This attribute is not an overrideable static attribute.

Default is 0.

## SourceFile

The file from which the configuration was read. This attribute is not an overrideable static attribute.

## SupportedActions

The SupportedActions (string-keylist) attribute lists all possible actions defined for an agent, including those defined by the agent developer. The HAD process validates the `action_token` value specified in the `hares -action resource action_token` command against the SupportedActions attribute. For example, if `action_token` is not present in SupportedActions, HAD will not allow the command to go through. It is the responsibility of the agent developer to initialize the SupportedActions attribute in the resource type definition and update the definition for each new action added to the `action` entry point code or script. This attribute serves as a reference for users of the command line or the graphical user interface.

See [“About the action entry point”](#) on page 33.

An example definition of a resource type in a VCS `ResourceTypeTypes.cf` file may resemble:

```
Type DBResource (
    static str ArgList[] = { Sid, Owner, Home, User, Pword,
        StartOpt, ShutOpt }
    static keylist SupportedActions = { VRTS_GetRunningServices,
        DBRestrict, DBUndoRestrict, DBSuspend, DBResume }
    str Sid
    str Owner
    str Home
    str User
    str Pword
    str StartOpt
    str ShutOpt
)
```



In the SupportedActions attribute definition, `VRTS_GetRunningServices` is a Veritas predefined action, and the actions following it are defined by the developer. The SupportedActions attribute value cannot be overridden.

## SupportedOperations

Indicates the operations that can be performed by the agent. Since only migration is supported, the value is set to "migrate". The attribute value must be set only by those agents that support migration.

This attribute is not an overrideable static attribute.

## ToleranceLimit

A non-zero ToleranceLimit allows the `monitor` entry point to return OFFLINE several times before the ONLINE resource is declared FAULTED. If the monitor entry point reports OFFLINE more times than the number set in ToleranceLimit, the resource is declared FAULTED. However, if the resource remains online for the interval designated in `ConflInterval`, any earlier reports of OFFLINE are not counted against ToleranceLimit. Default is 0. The ToleranceLimit attribute value can be overridden.

Each probe command fired from the user is considered as one monitor. For example, when Tolerance limit of a resource is set to 5, the resource will be moved to a faulted state after five monitor intervals. If the user fires another probe and the resource is not reported as ONLINE, then the resource will be faulted after four monitor cycles. This process will be repeated for five monitoring cycles.

# State transition diagram

This chapter includes the following topics:

- [State transitions](#)
- [State transitions with respect to ManageFaults attribute](#)

## State transitions

This section describes state transitions for:

- Opening a resource
- Resource in a steady state
- Bringing a resource online
- Taking a resource offline
- Resource fault (without automatic restart)
- Resource fault (with automatic restart)
- Monitoring of persistent resources
- Closing a resource
- Migrating a resource


In addition, state transitions are shown for the handling of resources with respect to the `ManageFaults` service group attribute.

See [“State transitions with respect to ManageFaults attribute”](#) on page 216.

The states shown in these diagrams are associated with each resource by the agent framework. These states are used only within the agent framework and are independent of the `IState` resource attribute values indicated by the engine.


The agent writes resource state transition information into the agent log file when the `LogDbg` parameter, a static resource type attribute, is set to the value `DBG_AGINFO`. Agent developers can make use of this information when debugging agents.

**Figure 10-1** Opening a resource

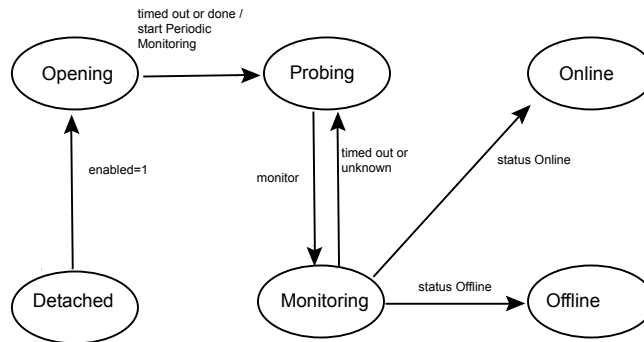


When the agent starts up, each resource starts with the initial state of Detached. In the Detached state (Enabled=0), the agent rejects all commands to bring a resource online or take it offline.

**Figure 10-2** Resource in a steady state

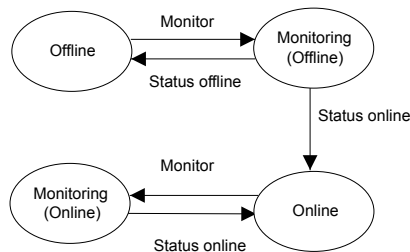

When resources are in a steady state of Online or Offline, they are monitored at regular intervals. The intervals are specified by the `MonitorInterval` attribute in the Online state and by the `OfflineMonitorInterval` attribute in the Offline state. An Online resource that is unexpectedly detected as Offline is considered to be faulted. Refer to diagrams describing faulted resources.

**Figure 10-3** Bringing a resource online: ManageFaults=ALL

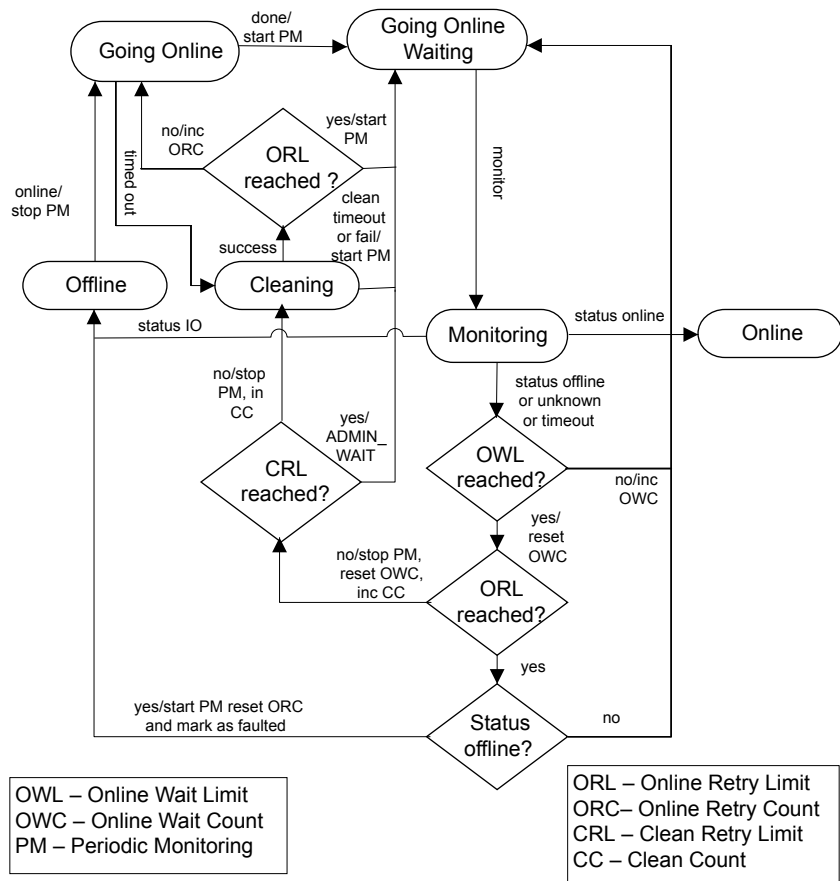

When the agent receives a request from the engine to bring the resource online, the resource enters the Going Online state, where the online entry point is invoked.

If online entry point completes, the resource enters the Going Online Waiting state where it waits for the next monitor cycle.

If online entry point timesout, the agent call *clean*.


If monitor of GoingOnlineWaiting state returns a status as *online*, the resource moves to the Online state.

If monitor of GoingOnlineWaiting state returns a status as *Intentional Offline*, the resource moves to the Offline state.

If, however, the *monitor* times out, or returns a status of "not Online" (that is, unknown or offline), the following actions are considered:

- If OnlineWaitLimit is not reached then resource returns to GoingOnlineWaiting and waits for next monitor.
- If OnlineWaitLimit and OnlineRetryLimit are reached and the status remains unknow then resource returns to GoingOnlineWaiting and waits for next monitor.
- If OnlineWaitLimit and OnlineRetryLimit are reached then the status remains *offline* then resource return to Offline state and marks the resource as faulted.
- If OnlineWaitLimit is reached and OnlineRetryLimit is not reached then run *clean*, if CleanRetryLimit is not reached.
- If OnlineWaitLimit and CleanRetryLimit are reached and OnlineRetryLimit is not reached then move the resource to GoingOnlineWaiting and mark it as *ADMIN\_WAIT*.
- If CleanRetryLimit is not reached and agent calls *clean* then following things can happen:
  - If clean times out or fails, the resource again returns to the Going Online Waiting state and waits for the next monitor cycle.
  - If clean succeeds with the OnlineRetryLimit reached, and the subsequent monitor reports the status as offline, the resource transitions to the offline state and it is marked as FAULTED.

**Figure 10-4** Taking a resource offline and ManageFault = ALL

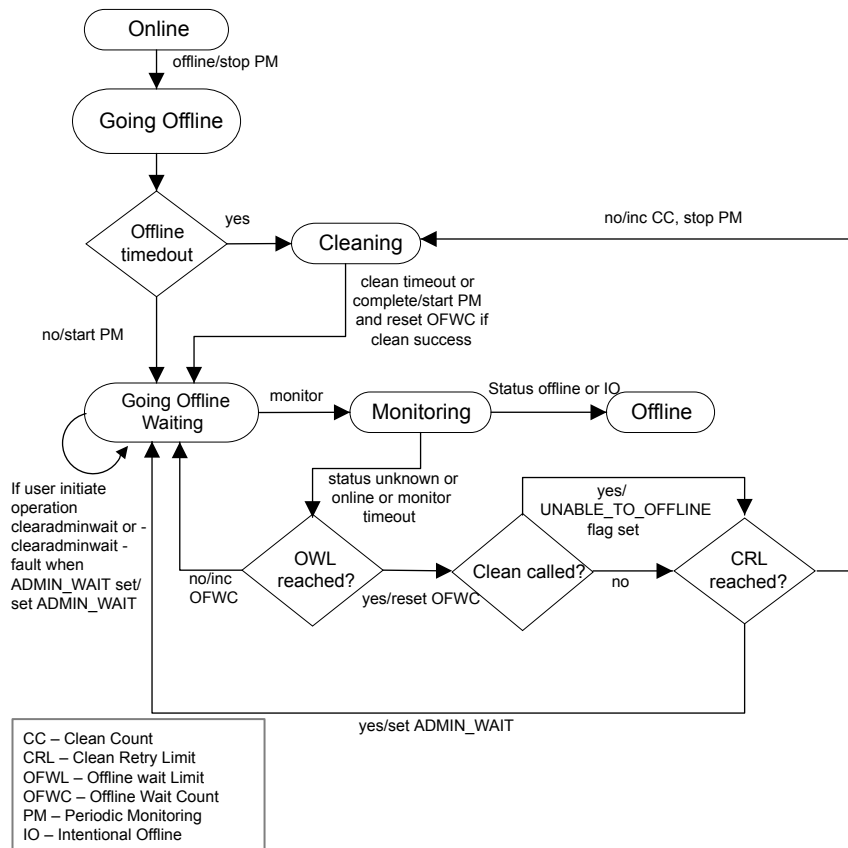

Upon receiving a request from the engine to take a resource *offline*, the agent places the resource in a *GoingOffline* state and invokes the offline entry point and stop periodic monitoring.


If *offline* completes, the resource enters the *GoingOffline Waiting* state, agent starts periodic monitoring of resource and also insert a monitor command for the resource. If *offline* times out, the clean entry point is called for the resource. If *clean* times out or complete then start periodic monitoring and reset Offline Wait Count if clean was success and move resource to *Going Offline Waiting* state

If monitor of *Going Offline Waiting* state returns offline or intentional offline then resource moves to *offline* state

If monitor of the GoingOffline Waiting state returns unknown or online, or if the monitor times out then,

- If OfflineWait Limit is not reached then the resource is moved to GoingOffline Waiting state.
- If Offline Wait Limit is reached then the resource which is cleaned earlier is called, then mark the resource as `UNABLE_TO_OFFLINE`
- If *CleantRetryLimit* is not reached then call clean.
- If *CleantRetryLimit* is reached then mark resource as `ADMIN_WAIT` state and move the resource to GoingOffline Waiting state.
- If the user initiates operation “-clearadminwait” then reset the `ADMIN_WAIT` flag. If user initiates operation “-clearaminwait -fault” then agent resets the `ADMIN_WAIT` flag

**Figure 10-5** Resource fault when RestartLimit reached and ManageFault = ALL

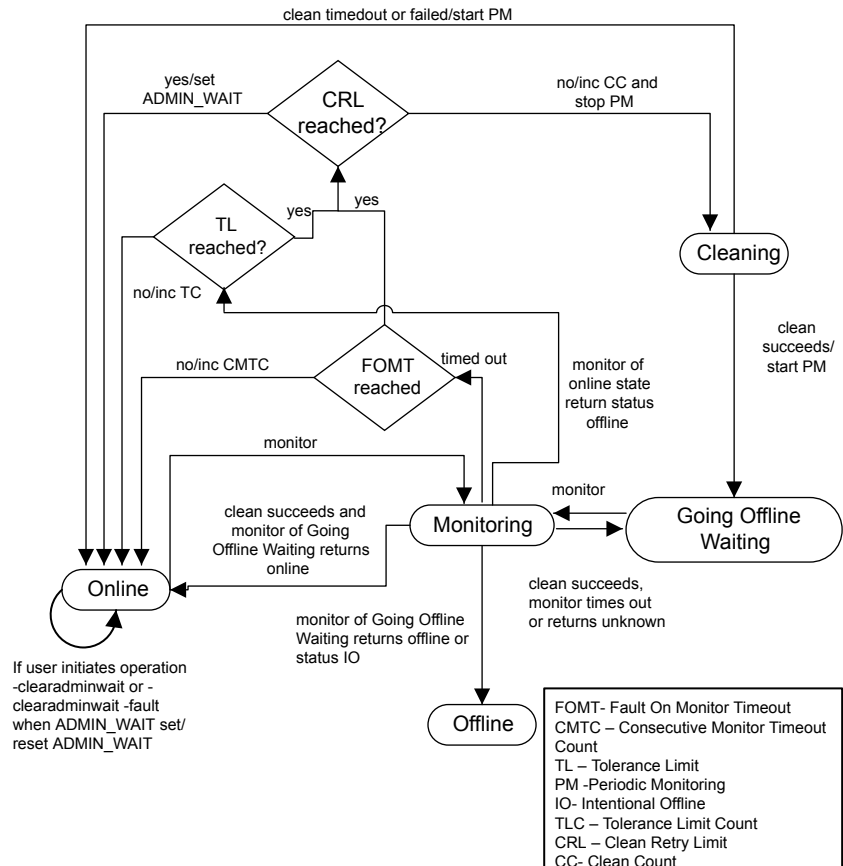

This diagram describes the activity that occurs when a resource faults and the `RestartLimit` is reached. When the monitor entry point times out successively and `FaultOnMonitorTimeout` is reached, or monitor returns offline and the `ToleranceLimit` is reached.

If `clean` retry limit is reached then set `ADMIN_WAIT` flag for resource and move resource to `online` state if not reached the agent invokes the `clean` entry point.

If `clean` fails, or if it times out, the agent places the resource in the `online` state as if no fault has occurred and starts periodic monitoring. If `clean` succeeds, the resource is placed in the `Going Offline Waiting` state and start periodic monitoring, where the agent waits for the next monitor.



If *clean* succeeds, the resource is placed in the GoingOffline Waiting state, where the agent waits for the next monitor.


- If *monitor* reports *online*, the resource is placed back online as if no fault occurred. If *monitor* reports *offline*, the resource is placed in an offline state and marked as `FAULTED`. If monitor reports IO, the resource is placed in an *offline* state
- If *monitor* reports unknown or times out, the agent places the resource back into the Going Offline Waiting state, and sets the `UNABLE_TO_OFFLINE` flag.

---

**Note:** If *clean* succeeds, the agent move resource to `GoingOfflineWait` and the resource is marked faulted. If monitoring of `GoingOfflineWaiting` returns *online* then the resource is moved to online state as engine does not expects the resource to go in offline state the as `GoingOfflineWaiting` state was set by the agent as a result of *clean* success.

---

**Figure 10-6** Resource fault when RestartLimit not reached and ManageFault = ALL

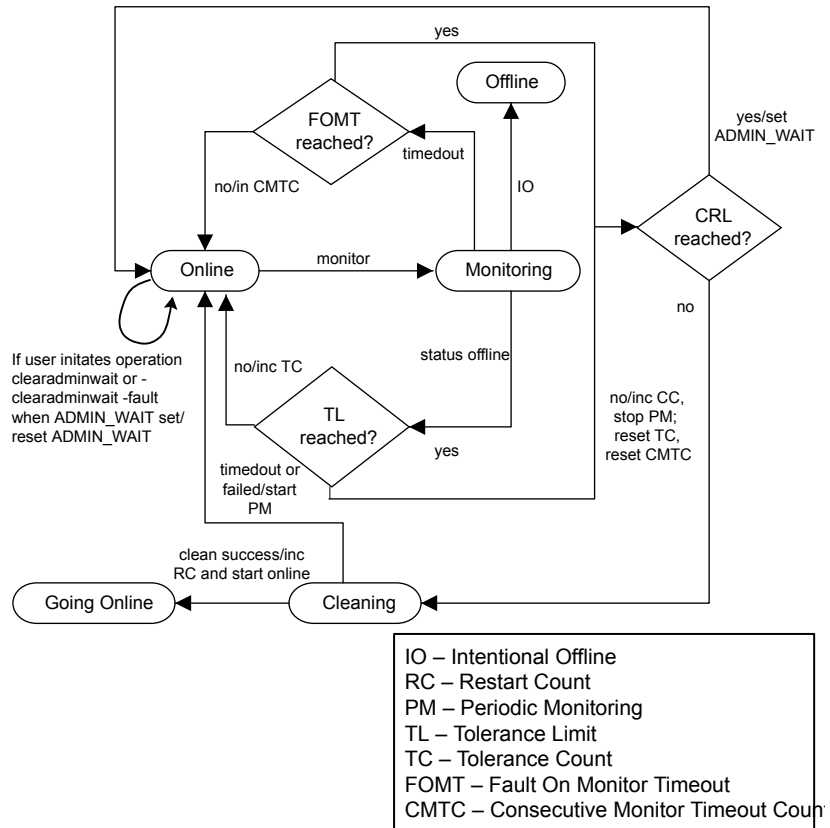

This diagram describes the activity that occurs when a resource faults and the `RestartLimit` is not reached. When the `monitor` entry point times out successively and `FaultOnMonitorTimeout` is reached, or `monitor` returns offline and the `ToleranceLimit` is reached then agent checks the clean counter to check if the clean entry point can be invoked.


If `CleanRetryLimit` is reached then set `ADMIN_WAIT` flag for the resource and move the resource to online state. If clean retry limit fails to reach, the agent invokes the clean entry point.

- If `clean` succeeds, the resource is placed in the Going Online state and the `online` entry point is invoked to restart the resource; refer to the diagram, "Bringing a resource online."

- If *clean* fails or times out, the agent places the resource in the Online state as if no fault occurred.


Refer to the diagram "Resource fault without automatic restart," for a discussion of activity when a resource faults and the `RestartLimit` is reached.

**Figure 10-7** Monitoring of persistent resources

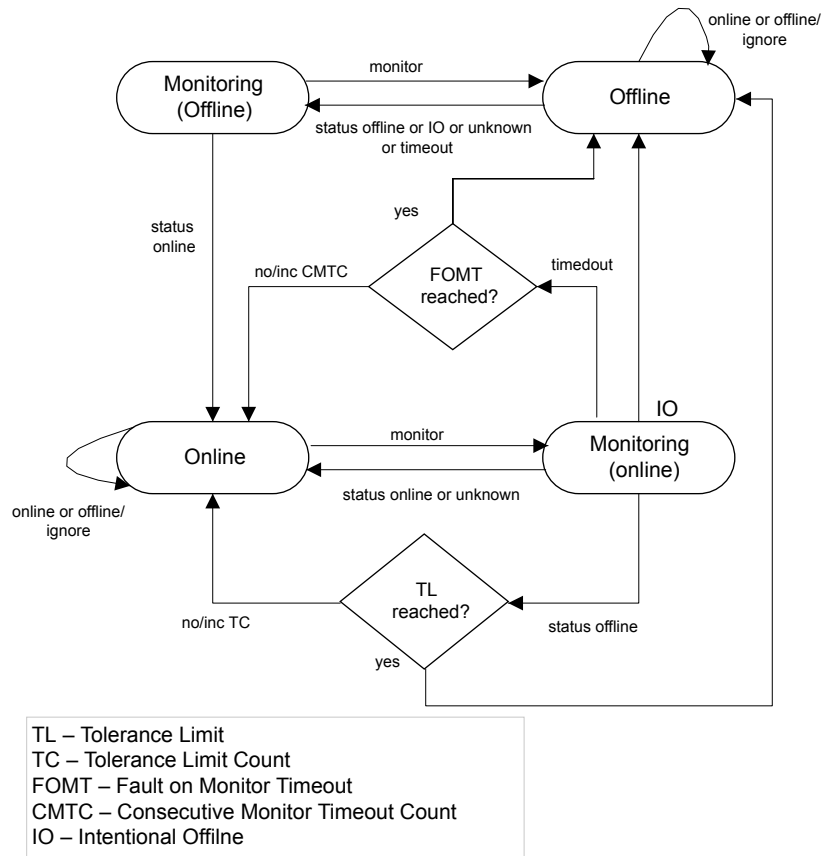

If *monitor* returns *offline* and the `ToleranceLimit` is reached, the resource is placed in an *Offline* state and noted as `FAULTED`. If monitor timeout and `FaultOnMonitorTimeouts` is reached, the resource is placed in an *Offline* state and noted as `FAULTED`.


**Figure 10-8** Closing a resource

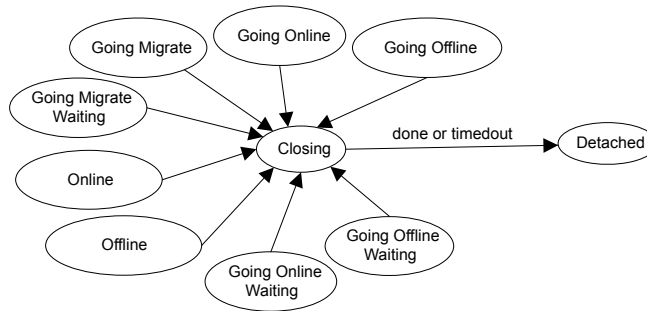

The state diagram explains all the states from where a resource can move to *Closing* state. The following tables describes the actions performed in different state by which a resource can move to *Closing* state,

State	Action
Online to Closing	hastop –local –force or hares -delete or Enabled = 0 only if resource is persistent resource
Offline to Closing	Enabled = 0 or hastop –local or hastop –local –force or hares -delete
GoingOnlineWaiting	hastop –local –force or hares -delete
GoingOfflineWaiting	hastop –local –force or hares -delete
GoingMigrateWaiting	hastop –local –force or hares -delete
GoingOnline	hastop –local –force
GoingOffline	hastop –local –force
GoingMigrate	hastop –local –force
Probing	Enabled = 0 or hastop –local or hastop –local –force or hares –delete

**Figure 10-9** Migrating a resource

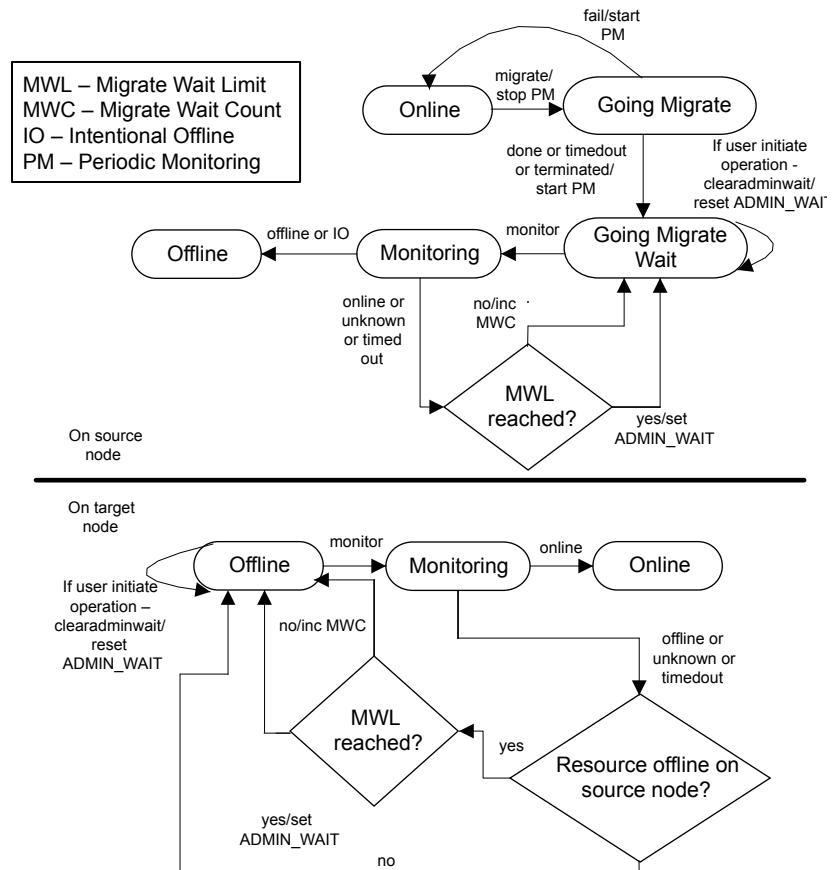

The migration process is initiated from the source system, where virtual machine (VM) is online and the VM is migrated to the target system where it was offline. When the agent on the source system receives a migration request from the engine to migrate the resource, the resource goes to Going Migrate state, where migrate entry point is invoked. If the migrate entry point fails with return code 255, the resource is transitioned back to the online state and failure of migrate operation is communicated to the engine. This indicates that the migration operation cannot be performed.

Agent framework ignores any value returned between 101 to 254 range and will return to online state. If the migrate entry point completes successfully or times out is reached, the resource enters the Going Migrate Waiting state where it waits for the next monitor cycle and the monitor calls with the frequency as configured in

MonitorInterval. If monitor returns an offline status, the resource moves to the offline state and the migration on the source system is considered complete.

Even after moving to offline state the agent keeps on monitoring the resource with same monitor frequency as configured in MonitorInterval. This is to detect if VM fails back at source node early. However, if monitor entry point times out or reports the state as online or unknown, the resource waits for the MigrateWaitLimit resource cycle to complete.

If any of the monitor within MigrateWaitLimit reports the state as offline, the resource transitions to offline state and the same is reported to the engine. If the monitor entry point times out or reports the state as online or unknown even after MigrateWaitLimit has reached, the ADMIN\_WAIT flag is set.


If resource migration operation is successful on source node then on target node the agent change the monitoring frequency from OfflineMonitorInterval to MonitorInterval to detect success full migration early. But if resource is not detected as online on target node even after MigrateWaitLimit is reached then resource is moved to ADMIN\_WAIT state and agent fail back to monitor frequency as configured in OfflineMonitorInterval

---


**Note:** : The agent does not call clean if the migrate entry point times out or if monitor after migrate entry point times out or reports the state as online or unknown even after MigrateWaitLimit has reached. You need to manually clear the ADMIN\_WAIT flag after resolving the issue.

---

**Figure 10-10** Resource fault: ManageFaults attribute = ALL

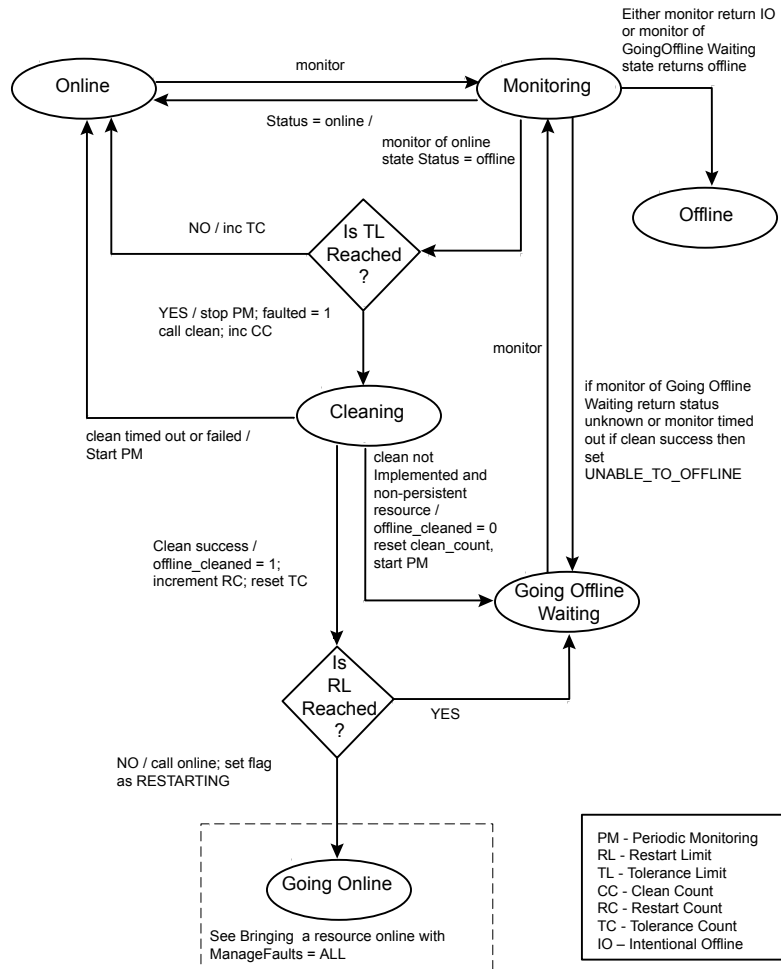

**Figure 10-11** Resource fault (monitor hung): ManageFaults attribute = ALL

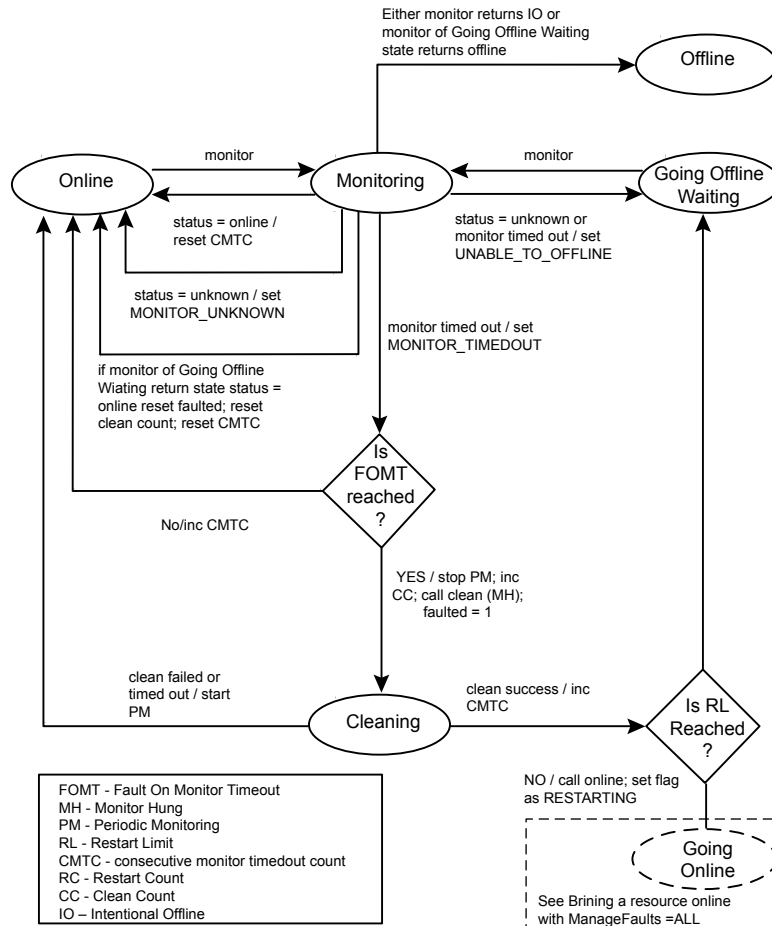

## State transitions with respect to ManageFaults attribute

This section shows state transition diagrams with respect to the `ManageFault` attribute.

By default, `ManageFaults` is set to `ALL`, in which case the clean entry point is called by VCS.


See “[ManageFaults](#)” on page 192.




The diagrams cover the following conditions:

- Bringing a resource online when the `ManageFaults` attribute is set to `NONE`
- Taking a resource offline when the `ManageFaults` attribute is set to `NONE`
- Resource fault when `ManageFaults` attribute is set to `ALL`
- Resource fault (unexpected offline) when `ManageFaults` attribute is set to `NONE`
- Resource fault (monitor is hung) when `ManageFaults` attribute is set to `ALL`
- Resource fault (monitor is hung) when `ManageFaults` attribute is set to `NONE`


**Figure 10-12** Bringing a resource online: `ManageFaults` attribute = `NONE`

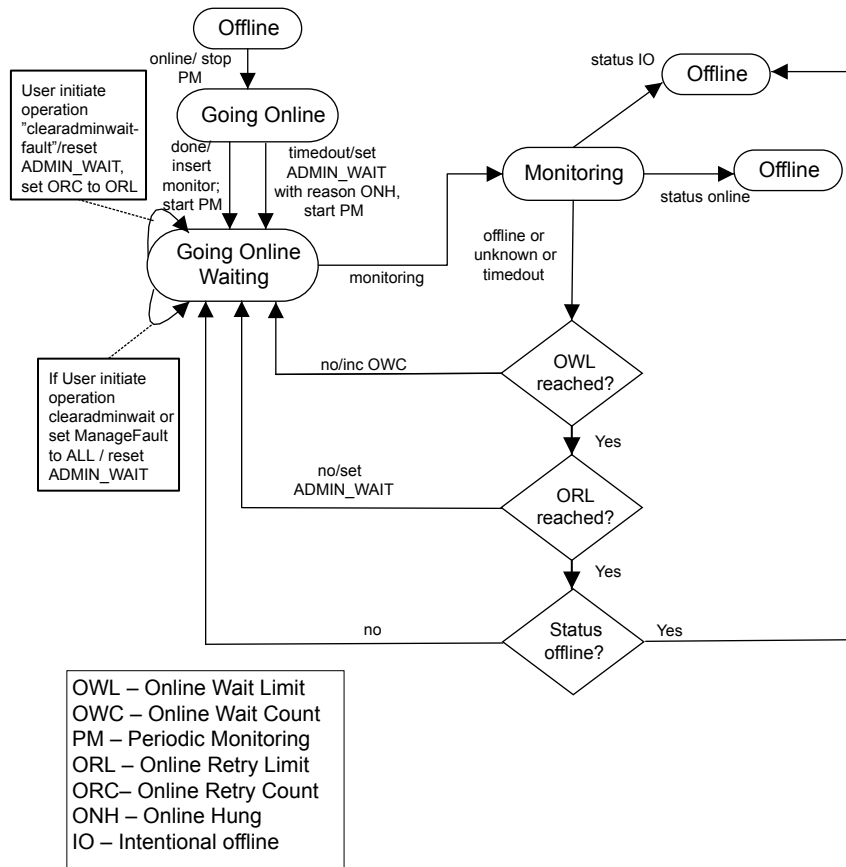


**Figure 10-13** Taking a resource offline; ManageFaults = None

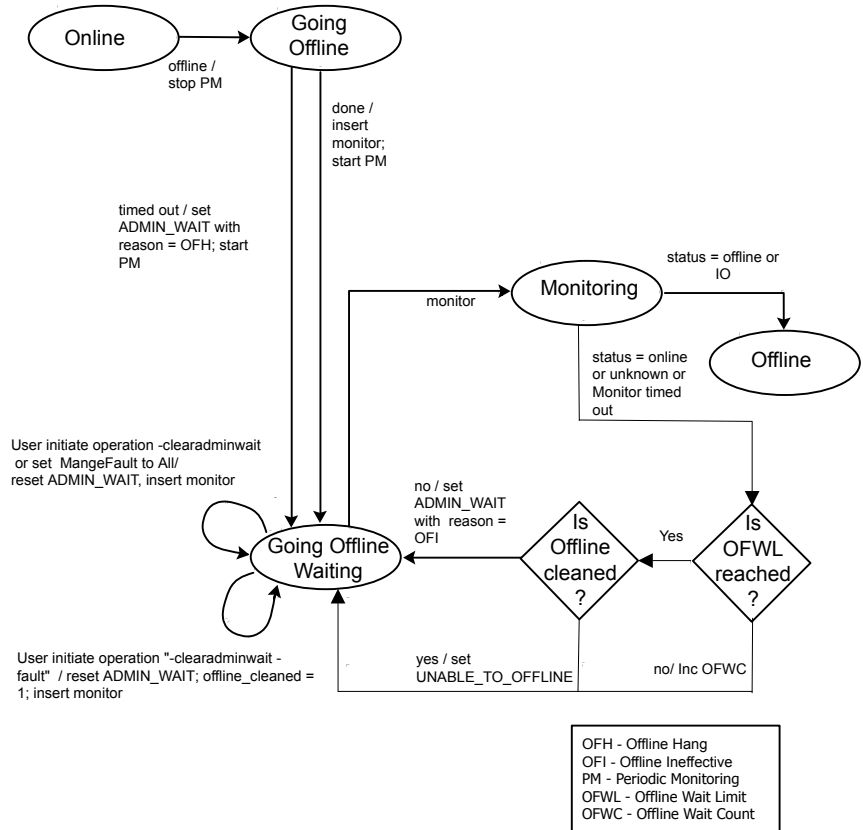

**Figure 10-14** Resource fault (unexpected offline): ManageFaults attribute = NONE

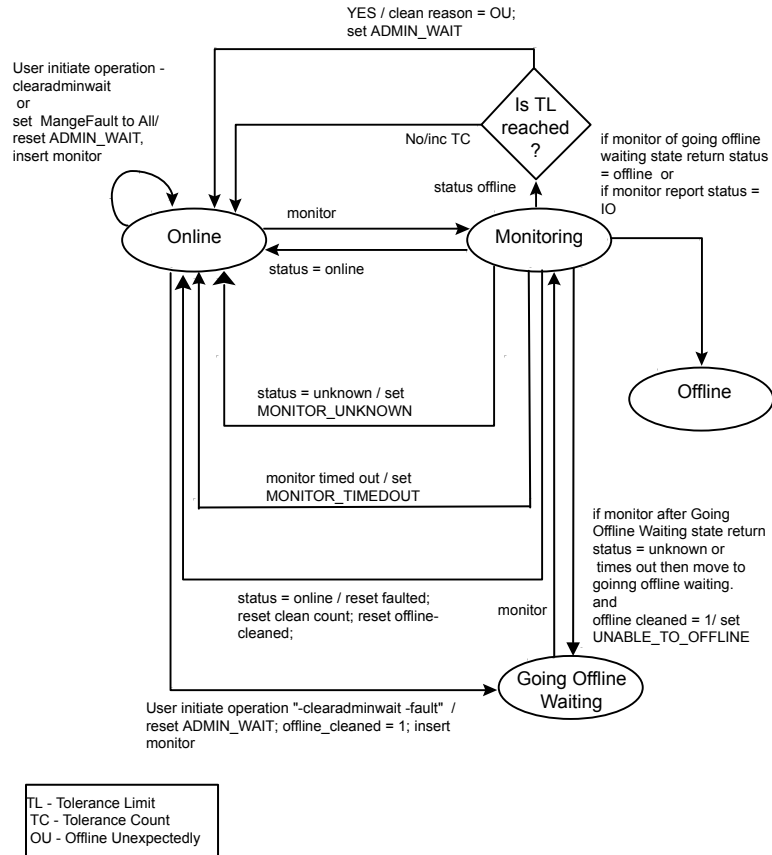

**Figure 10-15** Resource fault (monitor hung): ManageFaults attribute = NONE

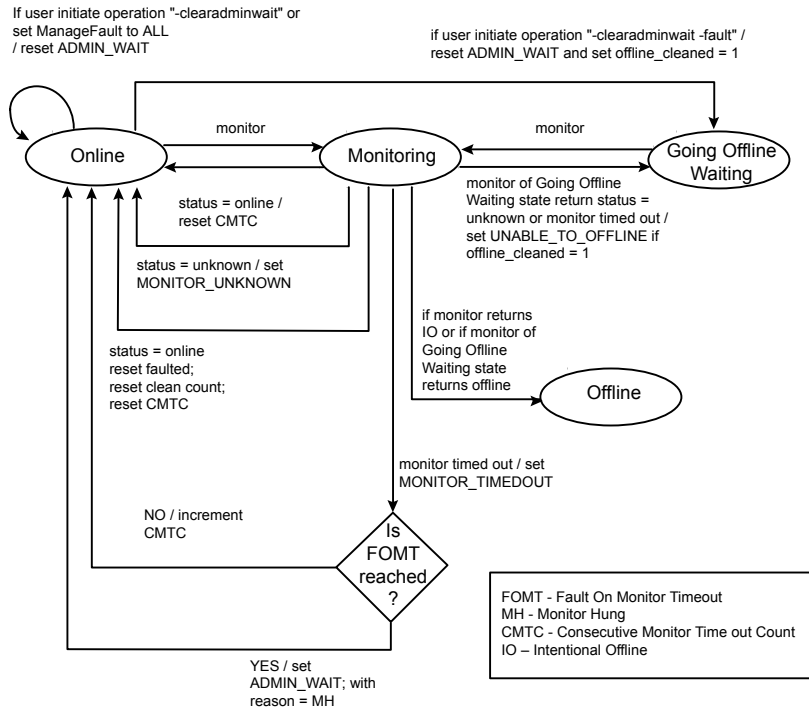

# Internationalized messages

This chapter includes the following topics:

- [About internationalized messages](#)
- [Creating SMC files](#)
- [Converting SMC files to BMC files](#)
- [Using BMC Map Files](#)
- [Updating BMC Files](#)

## About internationalized messages

VCS handles internationalized messages in *binary message catalogs* (BMCs) generated from *source message catalogs* (SMCs).

- A source message catalog (SMC) is a plain text catalog file encoded in ASCII or in UCS-2, a two-byte encoding of Unicode. Developers can create messages using a prescribed format and store them in an SMC.
- A binary message catalog(BMC) is a catalog file in a form that VCS can use. BMCs are generated from SMCs through the use of the `bmcgen` utility.

Each module requires a BMC. For example, the VCS engine (HAD), GAB, and LLT require distinct BMCs, as do each enterprise agent and each custom agent. For agents, a BMC is required for each operating system platform.

Once generated, BMCs must be placed in specific directories that correspond to the module and the language of the message. You can run the `bmcmap` utility within the specific directory to create a BMC map file, an ASCII text file that links BMC files with their corresponding module, language, and range of message IDs. The map file enables VCS to manage the BMC files.

You can change an existing SMC file to generate an updated BMC file.

# Creating SMC files

Since Source Message Catalog files are used to generate the Binary Message Catalog files, they must be created in a consistent format.

## SMC format

Writer: introductory text is required here.

```
#!language = language_ID
#!module = module_name
#!version = version
#!category = category_ID

# comment
message_ID1 {%s:msg}
message_ID2 {%s:msg}
message_ID3 {%s:msg}

# comment
message_ID4 {%s:msg}
message_ID5 {%s:msg}
...
```

## Example SMC file

Examine an example SMC file:

VRTSvcsSunAgent.smc

The sample file is based on the SMC format:

```
#!language = en
#!module = HAD
#!version = 4.0
#!category = 203

# common library

100 {%s:Invalid message for agent"}
101 {%s:Process %s restarted"}
102 {%s:Error opening /proc directory"}
103 {%s:online:No start program defined"}
```

```
104 {"%s:Executed %s"}  
105 {"%s:Executed %s"}
```

## Formatting SMC files

- SMC files must be encoded in UCS-2, ASCII, or UTF-8.  
A discussion of file naming conventions is available.  
See [“Naming SMC files, BMC files”](#) on page 223.
- All messages should begin with "%s:" that represents the three-part header "Agent:Resource:EntryPoint" generated by the agent framework.
- The HAD module must be specified in the header for custom agents.  
See [“Example SMC file”](#) on page 222.
- The minor number of the version (for example, 2.x) can be modified each time a BMC is to be updated. The major number is only to be changed by VCS. The version number indicates to processes handling the messages which catalog is to be used.  
See [“Updating BMC Files”](#) on page 227.
- In the SMC header, no space is permitted between the "#" and the "!" characters. Spaces can follow the "#" character and regular comments in the file. See the example above.
- SMC filenames must use the extension: `.smc`.
- A message should contain no more than six string format specifiers.
- Message IDs must contain only numeric characters, not alphabetic characters. For example, 2001003A is invalid. Message IDs can range from 1 to 65535.
- Message IDs within an SMC file must be in ascending order.
- A message formatted to span across multiple lines must use the "\n" characters to break the line, not a hard carriage return. Line wrapping is permitted. See the examples that follow.

## Naming SMC files, BMC files

BMC files, which follow a naming convention, are generated from SMC files. The name of an SMC file determines the name of the generated BMC file. The naming convention for BMC files has the following pattern:

`VRTSvc{Sun|AIX|Lnx}{Agent_name}.bmc`

where the *platform* and *agent\_name* are included.

For example:

```
VRTSvcsLnxOracle.bmc
```

## Message examples

- An illegal message, with hard carriage returns embedded with the message:

```
201 {"%s:To be or not to be!
    That is the question"}
```

- A valid message using "\n":

```
10010 {"%s:To be or not to be!\n
    That is the question"}
```

- A valid message with text wrapping to the next line:

```
10012 {"%s:To be or not to be!\n
    That is the question.\n Whether tis nobler in the mind to
    suffer\n the slings and arrows of outrageous fortune\n or to
    take arms against a sea of troubles"}
```

## Using format specifiers

Using the "%s" specifier is appropriate for all message arguments unless the arguments must be reordered. Since the word order in messages may vary by language, a format specifier, %*#\$*s, enables the reordering of arguments in a message; the "#" character is a number from 1 to 99.

In an English SMC file, the entry might resemble:

```
301 {"%s:Setting cookie for proc=%s, PID = %s"}
```

In a language where the position of message arguments need to switch, the same entry in the SMC file for that language might resemble:

```
301 {"%s:Setting cookie for process with PID = %3$s, name =
    %2$s"}
```

## Converting SMC files to BMC files

Use the `bmcgen` utility to convert SMC files to BMC files. For example:

```
bmcgen VRTSvcsLnxAgent.smc
```



The file `VRTSvcslnxAgent.bmc` is created in the directory where the SMC file exists. A BMC file must have an extension: `.bmc`.

By default, the `bmcgen` utility assumes the SMC file is a Unicode (UCS-2) file. For ASCII or UTF-8 encoded files, use the `-ascii` option. For example:

```
bmcgen -ascii VRTSvcslnxAgent.smc
```

## Storing BMC files

By default, BMC files must be installed in `/opt/VRTS/messages/language`, where *language* is a directory containing the BMCs of a given supported language. For example, the path to the BMC for a Japanese agent on a Solaris system resembles:

```
/opt/VRTS/messages/ja/VRTSvcslnxAgent.bmc.
```

## VCS languages

The languages supported by VCS are listed as subdirectories, such as `/ja` (Japanese) and `/en` (English), in the directory `/opt/VRTS/messages`.

## Displaying the contents of BMC files

The `bmcread` command enables you to display the contents of the binary message catalog file. For example, the following command displays the contents of the specified BMC file:

```
bmcread VRTSvcslnxAgent.bmc  
bmcread VRTSvcslnxAgent.bmc
```

## Using BMC Map Files

VCS uses a BMC map file to manage the various BMC files of a given module for a given language. HAD is the module for the VCS engine, bundled agents, enterprise agents, and custom agents. A BMC map file is an ASCII text file that associates BMC files with their category and unique message ID range.

## Location of BMC Map Files

Map files, by default, are created in the same directories as their corresponding BMC files: `/opt/VRTS/messages/language`.

## Creating BMC Map Files

Developers can add BMCs to the BMC map file. After generating a BMC file:

- 1 Copy the BMC file to the corresponding directory. For example:

```
cp VRTSvcsSunLnxOracle.bmc /opt/VRTS/messages/en
```

- 2 Change to the directory containing the BMC file and run the `bmcmap` utility. For example:

```
cd /opt/VRTS/messages/en
bmcmap -create en HAD
cd %VCS_HOME%\messages\en
bmcmap -create en HAD
```

The `bmcmap` utility scans the contents of the directory and dynamically generates the BMC map. In this case, HAD.bmc map is created.

## Example BMC Map File

An example of a BMC Map file named HAD.bmcmap on a Solaris system.

```
# This is a program generated file, please do not edit.
```

```
Language=en
```

```
HAD=VRTSvcsHad VRTSvcsAgfw VRTSvcsWac \
VRTSvcsHbfbw VRTSvcsAlerts VRTSvcsTriggers \
VRTSvcsApi gcoconfig fdsetup \
hazonesetup hagetcf uuidconfig \
hazoneverify VRTSvcsSunAgent VRTSvcsCommonAgent \
VRTSvcsOracle VRTSvcsDb2udb VRTSvcsCVMcluster \
VRTSvcsCVMVolDg VRTSvcsSunVVR VRTSvcsCFSMount \
VRTSvcsSybase VRTSvcsCVMVxconfigd VRTSvcsCFSfsckd \
VRTSvcsCommon
```

```
VRTSvcsHad.version=5.1
VRTSvcsHad.category=1
VRTSvcsHad.IDstart=0
VRTSvcsHad.IDend=53502
```

```
VRTSvcsAgfw.version=5.1
VRTSvcsAgfw.category=2
VRTSvcsAgfw.IDstart=0
```

```
VRTSvcsAgfw.IDend=60019

VRTSvcsWac.version=5.1
VRTSvcsWac.category=3
VRTSvcsWac.IDstart=0
VRTSvcsWac.IDend=53006

VRTSvcsHbfw.version=5.1
VRTSvcsHbfw.category=4
VRTSvcsHbfw.IDstart=0
VRTSvcsHbfw.IDend=13301

VRTSvcsAlerts.version=5.1
VRTSvcsAlerts.category=5
VRTSvcsAlerts.IDstart=10018
VRTSvcsAlerts.IDend=52026
```

## Updating BMC Files

You can update an existing BMC file. This may be necessary, for example, to add new messages or to change a message.

This can be done in the following way:

- If the original SMC file for a given BMC file exists, you can edit it using a text editor. Otherwise, create a new SMC file.
  - Make your changes, such as adding, deleting, or changing messages.
  - Change the minor number of the version number in the header. For example, change the version from 2.0 to 2.1.
  - Save the file.
- Generate the new BMC file using the `bmcgen` command; place the new BMC file in the corresponding language directory.
- In the directory containing the BMC file, run the `bmcmap` command to create a new BMC map file.

# Using pre-5.0 VCS agents

This appendix includes the following topics:

- [Using pre-5.0 VCS agents and registering them with V50 or later](#)
- [Guidelines for using pre-VCS 4.0 Agents](#)
- [Log messages in pre-VCS 4.0 agents](#)
- [Pre-VCS 4.0 Message APIs](#)

## Using pre-5.0 VCS agents and registering them with V50 or later

With VCS 5.0 release, the agent framework has been enhanced. For using this enhanced agent framework for your agent, you need to register the agent with the agent framework version V50 or later. The following sections describe how to use pre-5.0 agents with the VCS 5.0 agent framework.

When you use pre-5.0 agents with VCS, you may register them as V50 or later agents after making necessary modifications. Making this conversion affords you advantages, which include:

- You can use different versions of an agent on different systems in VCS.
- You can make changes to the resource type definition used on some systems without affecting how older versions of the agents function

## Outline of steps to change V40 agents to V50 or later

- Modifications to PATH variables and links to the agent binary registered with agent version V50 or later may be necessary.

- Change the way attributes and their values are passed to the entry points from the V40 format to V50 or later name-value tuple format.
- Include /opt/VRTSvcs/lib in path for Perl and shell to source them.
- Set necessary environment variables.

See [“About the ArgList and ArgListValues attributes”](#) on page 47.

## Example script in V40 and V50 or later

Note the following comparison.

### V40

```
ResName=$1
Attr1=$2
Attr2=$3
VCSHOME="$ {VCS_HOME:-/opt/VRTSvcs}"
. $VCSHOME/bin/ag_i18n_inc.sh;
VCSAG_SET_ENVS $ResName;
```

### V50 or later

```
ResName=$1; shift;
.."../ag_i18n_inc.sh";
VCSAG_SET_ENVS $ResName;

VCSAG_GET_ATTR_VALUE "Attr1" -1 1 "$@";
attr1_value=${VCSAG_ATTR_VALUE};
VCSAG_GET_ATTR_VALUE "Attr2" -1 1 "$@";
attr2_value=${VCSAG_ATTR_VALUE};
```

## Sourcing ag\_i18n\_inc modules in script entry points

In entry points, you need to source the ag\_i18n\_inc modules. The following examples assume that the agent is installed in the directory /opt/VRTSvcs/bin/type.

For entry points in Perl:

```
...
$ResName = shift;
use ag_i18n_inc;
VCSAG_SET_ENVS ($ResName);
...
```

For entry points in Shell:

```
...  
ResName = $1; shift;  
. "../ag_i18n_inc.sh";  
VCSAG_SET_ENVS $ ResName;
```

## Guidelines for using pre-VCS 4.0 Agents

The agent framework supports all VCS agents by enabling them to communicate with the engine about the definitions of resource types, the values configured for the resource attributes, and entry points they use.

Changes made to the agent framework with VCS 4.0 and VCS 5.0 releases affect how agents developed using the pre-VCS 4.0 agent framework can be used. While not necessary, all pre-VCS 4.0 agents may be modified to work with the VCS 4.0 and later agent framework so that the new entry points can be used.

Note the following guidelines:

- If the pre-VCS 4.0 agent is implemented strictly in scripts, then the VCS 4.0 and later ScriptAgent can be used on UNIX. If desired, the VCS 4.0 and later `action` and `info` entry points can be used directly.
- If the pre-VCS 4.0 agent is implemented using any C++ entry points, the agent can be used if developers do not care to implement the `action` or `info` entry points. The VCS 4.0 and later agent framework assumes all pre-VCS 4.0 agents are version 3.5.
- If the pre-VCS 4.0 agent is implemented using any C++ entry points, and you want to implement the `action` or the `info` entry point:
  - Add the `action` or `info` entry point, C++ or script-based, to the agent.
  - Use the API `VCSAgInitEntryPointStruct` with the parameter `V40` to register the agent as a VCS 4.0 agent. Use the `VCSAgValidateAndSetEntryPoint` API to register your C++ entry points.
  - Recompile the agent.

---

**Note:** Agents developed on the 4.0 and later agent framework are not compatible with the 2.0 or the 3.5 pre-4.0 frameworks.

---

## Log messages in pre-VCS 4.0 agents

The log messages in pre-VCS 4.0 agents are automatically converted to the VCS 4.0 and later message format.

See *Logging agent messages* for more information.

## Mapping of log tags (pre-VCS 4.0) to log severities (VCS 4.0)

For agents, the severity levels of entry point messages for VCS 4.0 and later correspond to the pre-VCS 4.0 entry point message tags as shown in this table:

Log Tag (Pre-VCS 4.0)	Log Severity (VCS 4.0 and later)
-----------------------	----------------------------------

TAG_A	VCS_CRITICAL
TAG_B	VCS_ERROR
TAG_C	VCS_WARNING
TAG_D	VCS_NOTE
TAG_E	VCS_INFORMATION
TAG_F through TAG_Z	VCS_DBG1 through VCS_DBG21

## How Pre-VCS 4.0 Messages are Displayed by VCS 4.0 and Later

In the following examples, a message written in a VCS 3.5 agent is shown as it would appear in VCS 3.5 and as it appears in VCS 4.0 and later. Note that when messages from pre-VCS 4.0 agents are displayed by VCS 4.0 or later, a category ID of 10000 is included in the unique message identifier portion of the message. The category ID was introduced with VCS 4.0.

- Pre-VCS 4.0 message output:

```
TAG_B 2003/12/08 15:42:30
VCS:141549:Mount:nj_batches:monitor:Mount resource will not go
online because FsckOpt is incomplete
```

- Pre-VCS 4.0 message displayed by VCS 4.0 and later

```
2003/12/15 12:39:32 VCS ERROR V-16-10000-141549
Mount:nj_batches:monitor:Mount resource will not go online
because FsckOpt is incomplete
```

## Comparing Pre-VCS 4.0 APIs and VCS 4.0 Logging Macros

This guide describes the logging macros for C++ agents and script-based agents.

See *Logging agent messages* for more information.

For the purpose of comparison, the examples that follow show a pair of messages in C++ that are formatted using the pre-VCS 4.0 API and the VCS 4.0 macros.

- Pre-VCS 4.0 APIs:

```
sprintf(msg,
"VCS:140003:FileOnOff:%s:online:The value for PathName attribute
is not specified", res_name);
VCSAgLogI18NMsg(TAG_C, msg, 140003,
res_name, NULL, NULL, NULL, LOG_DEFAULT);
VCSAgLogI18NConsoleMsg(TAG_C, msg, 140003, res_name,
NULL,NULL,NULL,LOG_DEFAULT);
```

- VCS 4.0 macros:

```
VCSAG_LOG_MSG(VCS_WARNING, 14003, VCS_DEFAULT_FLAGS,
"The value for PathName attribute is not specified");
VCSAG_CONSOLE_LOG_MSG(VCS_WARNING, 14003, VCS_DEFAULT_FLAGS,
"The value for PathName attribute is not specified");
```

## Pre-VCS 4.0 Message APIs

The message APIs described in this section of the document are maintained to allow VCS 4.0 and later to work with the agents developed on the 2.0 and 3.5 agent framework.

### VCSAgLogConsoleMsg

```
void
VCSAgLogConsoleMsg(int tag, const char *message, int flags);
```

This primitive requests that the VCS agent framework write `message` to the agent log file

UNIX: `$VCS_LOG/log/resource_type_A.log`.

The `message` must not exceed 4096 bytes. A message greater than 4096 bytes is truncated.

`tag` can be any value from `TAG_A` to `TAG_Z`. Tags A through E are enabled by default. To enable other tags, use the `halog` command. `flags` can be zero or more of `LOG_NONE`, `LOG_TIMESTAMP` (prints date and time), `LOG_NEWLINE` (prints a new line), and `LOG_TAG` (prints tag). This primitive can be called from any entry point.



For example:

```
#include "VCSAgApi.h"
...

VCSAgLogConsoleMsg(TAG_A, "Getting low on disk space",
                    LOG_TAG|LOG_TIMESTAMP);
...
```

## VCSAgLogI18NMsg

```
void
VCSAgLogI18NMsg(int tag, const char *msg,
                int msg_id, const char *arg1_string, const char
                *arg2_string,
                const char *arg3_string, const char *arg4_string, int
                flags);
```

This primitive requests that the VCS agent framework write an internationalized message with a message ID and four string arguments to the agent log file

UNIX: \$VCS\_LOG/log/resource\_type\_A.log

The `message` must not exceed 4096 bytes. A message greater than 4096 bytes is truncated. The size of all argument strings combined must not exceed 4096 bytes. If the argument string total exceeds 4096 bytes, then each argument is allowed an equal portion of 4096 bytes and truncated if it exceeds the allowed portion.

`tag` can be any value from TAG\_A to TAG\_Z. Tags A through H are enabled by default. To enable other tags, modify the LogTags attribute of the corresponding resource type. `flags` can be zero or more of LOG\_NONE, LOG\_TIMESTAMP (prints date and time), LOG\_NEWLINE (prints a new line), and LOG\_TAG (prints tag). This primitive can be called from any entry point.

For example:

```
#include "VCSAgApi.h"
...
char buffer[256];
sprintf(buffer, "VCS:2015001:IP:%s:monitor:Device %s address
            %s", res_name, device, address);

VCSAgLogI18NConsoleMsg(TAG_B, buffer, 2015001, res_name, device,
                        address, NULL, LOG_TAG|LOG_TIMESTAMP|LOG_NEWLINE);
```

## VCSAgLogI18NMsgEx

```
void
VCSAgLogI18NMsgEx(int tag, const char *msg,
    int msg_id, const char *arg1_string, const char
    *arg2_string,
    const char *arg3_string, const char *arg4_string,
    const char *arg5_string, const char *arg6_string, int
    flags);
```

This primitive requests that the VCS agent framework write an internationalized message with a message ID and six string arguments to the agent log file

UNIX: \$VCS\_LOG/log/resource\_type\_A.log

The `message` must not exceed 4096 bytes. A message greater than 4096 bytes is truncated. The size of all argument strings combined must not exceed 4096 bytes. If the argument string total exceeds 4096 bytes, then each argument is allowed an equal portion of 4096 bytes and truncated if it exceeds the allowed portion.

`tag` can be any value from `TAG_A` to `TAG_Z`. Tags A through H are enabled by default. To enable other tags, modify the `LogTags` attribute of the corresponding resource type. `flags` can be zero or more of `LOG_NONE`, `LOG_TIMESTAMP` (prints date and time), `LOG_NEWLINE` (prints a new line), and `LOG_TAG` (prints tag). This primitive can be called from any entry point.

For example:

```
#include "VCSAgApi.h"
...
char buffer[256];
sprintf(buffer, "VCS:2015004:Oracle:%s:%s:During scan for
    process %s ioctl failed with return code %s, errno = %s",
    res_name, ep_name, proc_name, ret_buf, err_buf);

VCSAgLogI18NConsoleMsgEx(TAG_A, buffer, 2015004, res_name,
    ep_name, proc_name, ret_buf, err_buf, NULL, flags);
```

## VCSAgLogI18NConsoleMsg

```
void
VCSAgLogI18NConsoleMsg(int tag,
    const char *msg, int msg_id, const char *arg1_string,
    const char *arg2_string, const char *arg3_string,
    const char *arg4_string, int flags);
```

This primitive requests that the VCS agent framework write an internationalized message with a message ID and four string arguments to the agent log file

UNIX: \$VCS\_LOG/log/resource\_type\_A.log

The `message` must not exceed 4096 bytes. A message greater than 4096 bytes is truncated. The size of all argument strings combined must not exceed 4096 bytes. If the argument string total exceeds 4096 bytes, then each argument is allowed an equal portion of 4096 bytes and truncated if it exceeds the allowed portion.

`tag` can be any value from TAG\_A to TAG\_Z. Tags A through E are enabled by default. To enable other tags, use the `halog` command. `flags` can be zero or more of LOG\_NONE, LOG\_TIMESTAMP (prints date and time), LOG\_NEWLINE (prints a new line), and LOG\_TAG (prints tag). This primitive can be called from any entry point.

For example:

```
#include "VCSAgApi.h"
...

char buffer[256];
sprintf(buffer, "VCS:2015002:IP:%s:monitor:Device %s address
            %s", res_name, device, address);

VCSAgLogI18NConsoleMsg(TAG_B, buffer, 2015002, res_name, device,
                        address, NULL, LOG_TAG|LOG_TIMESTAMP|LOG_NEWLINE);
```

## VCSAgLogI18NConsoleMsgEx

```
void
VCSAgLogI18NConsoleMsgEx(int tag,
                          const char *msg, int msg_id, const char *arg1_string,
                          const char *arg2_string, const char *arg3_string,
                          const char *arg4_string, const char *arg5_string,
                          const char *arg6_string, int flags);
```

This primitive requests that the VCS agent framework write an internationalized message with a message ID and six string arguments to the agent log file

UNIX: \$VCS\_LOG/log/resource\_type\_A.log

The `message` must not exceed 4096 bytes. A message greater than 4096 bytes is truncated. The size of all argument strings combined must not exceed 4096 bytes. If the argument string total exceeds 4096 bytes, then each argument is allowed an equal portion of 4096 bytes and truncated if it exceeds the allowed portion.

tag can be any value from TAG\_A to TAG\_Z. Tags A through E are enabled by default. To enable other tags, use the `halog` command. `flags` can be zero or more of `LOG_NONE`, `LOG_TIMESTAMP` (prints date and time), `LOG_NEWLINE` (prints a new line), and `LOG_TAG` (prints tag). This primitive can be called from any entry point.

For example:

```
#include "VCSAgApi.h"
...
...
char buffer[256];
sprintf(buffer, "VCS:2015003:Oracle:%s:%s:During scan for
    process %s ioctl failed with return code %s, errno = %s",
res_name, ep_name, proc_name, ret_buf, err_buf);

VCSAgLogI18NConsoleMsgEx(TAG_A, buffer, 2015003, res_name,
ep_name, proc_name, ret_buf, err_buf, NULL, flags);
```

# Index

## A

- action entry point
  - script entry point 96
  - supported actions 200
- add IMF attribute 163
- add IMFRegList attribute 163
- AdvDbg attribute 180
- agent framework
  - described 18
  - library, C++ 41
  - logging APIs 121
  - multithreaded 52
  - working with pre-4.0 agents 230
- agent messages
  - formatting 119
  - normal in VCSAG\_LOG\_MSG 132
- AgentClass parameter 182
- AgentPriority parameter 183
- AgentReplyTimeout parameter 183
- AlertOnMonitorTimeouts parameter 184
- ArgList parameter 184
- ArgList reference attributes 185
- association attribute dimension 22
- attr\_changed entry point 36
  - C++ syntax 66
  - script syntax 96
- AttrChangedTimeout parameter 185
- attribute dimensions
  - association 22
  - keylist 22
  - scalar 22
  - vector 22
- attribute types
  - boolean 21
  - integer 21
  - string 21
- attributes
  - local and global 23

## B

- binary message catalog (BMC) files
  - converting from SMC files 224
  - displaying contents 225
  - updating 227
- bmcgen utility 224
- bmcread utility 225
- boolean attribute type 21

## C

- category ID for messages 129
- clean entry point 32
  - C++ syntax 63
  - enum types 32
  - script syntax 95
- CleanTimeout parameter 185
- close entry point 37
  - C++ syntax 68
  - script syntax 97
- CloseTimeout parameter 186
- configuration language
  - local and global attributes 23
- ConflInterval parameter 186
- container primitives
  - VCSAgExecInContainer2 86
  - VCSAgExecInContainerWithTimeout 87
  - VCSAgGetContainerBasePath 89
  - VCSAgGetContainerEnabled 90
  - VCSAgGetContainerID2 88
  - VCSAgGetContainerName2 89
  - VCSAgGetContainerTypeEnum 86
  - VCSAgGetUID 87
  - VCSAgIsContainerCapable 87
  - VCSAgIsContainerUp 86
  - VCSAgIsPidInContainer 88
  - VCSAgIsProcInContainer 88

## D

- debug message severity level 122

debug messages  
   C++ entry points 122  
   Perl script entry points 133  
   Shell script entry points 133

## E

entry points  
   attr\_changed 36  
   clean 32  
   close 37  
   definition 19  
   imf\_getnotification 38  
   imf\_init 38  
   imf\_register 38  
   info 34  
   migrate 39  
   monitor 30  
   offline 31  
   online 31  
   open 30  
   sample structure 42  
   shutdown 37  
 enum types for clean  
   VCSAgCleanMonitorHung 32  
   VCSAgCleanOfflineHung 32  
   VCSAgCleanOfflineIneffective 32  
   VCSAgCleanOnlineHung 32  
   VCSAgCleanOnlineIneffective 32  
   VCSAgCleanUnexpectedOffline 32

## F

FaultOnMonitorTimeouts parameter 188  
 FireDrill parameter 188  
 formatting agent messages 119

## G

global attributes 23

## I

IMF 189  
   benefits 18  
   described 18  
 imf\_getnotification 38  
   script syntax 98  
 imf\_init 38  
   script syntax 97  
 imf\_register 38  
   script syntax 97

IMFRegList 189  
 info entry point 34  
   C++ syntax 57  
   script example 96  
 InfoTimeout parameter 190  
 initializing functions with VCSAG\_LOG\_INIT 124  
 integer attribute type 21  
 intentional offline 19

## K

keylist attribute dimension 22

## L

local attributes 23  
 log category 124  
 LogDbg parameter 191  
 LogFileSize parameter 192  
 logging APIs  
   C++ 121  
   script entry points 129

## M

ManageFaults parameter 192  
 message text format 119–120  
 migrate  
   script syntax 98  
 migrate entry point 39  
   C++ syntax 69  
 MigrateTimeout parameter 194  
 MigrateWaitLimit parameter 194  
 mnemonic message field 119  
 monitor entry point 30  
   C++ syntax 56–57  
   script syntax 94  
 MonitorLevel parameter 193  
 MonitorStatsParam parameter 193  
 MonitorTimeout parameter 194

## O

offline entry point 31  
   C++ syntax 62  
   script syntax 95  
 OfflineMonitorInterval parameter 195  
 OfflineTimeout parameter 195  
 online entry point 31  
   C++ syntax 61  
   script syntax 95  
 OnlineRetryLimit parameter 196

OnlineTimeout parameter 197  
 OnlineWaitLimit parameter 197  
 OnOff resource type 19  
 OnOnly resource type 19  
 open entry point 30  
   C++ syntax 67  
   script syntax 96  
 OpenTimeout parameter 197  
 Operations parameter 197

## P

### parameters

AgentClass 182  
 AgentPriority 183  
 AgentReplyTimeout 183  
 AlertOnMonitorTimeouts 184  
 ArgList 184  
 AttrChangedTimeout 185  
 CleanTimeout 185  
 CloseTimeout 186  
 ConflInterval 186  
 FaultOnMonitorTimeouts 188  
 FireDrill 188  
 IMF 189  
 IMFRegList 189  
 InfoTimeout 190  
 LogDbg 191  
 LogFileSize 192  
 ManageFaults 192  
 MigrateTimeout 194  
 MigrateWaitLimit 194  
 MonitorLevel 193  
 MonitorStatsParam 193  
 MonitorTimeout 194  
 OfflineMonitorInterval 195  
 OfflineTimeout 195  
 OnlineRetryLimit 196  
 OnlineTimeout 197  
 OnlineWaitLimit 197  
 OpenTimeout 197  
 Operations 197  
 RegList 198  
 RestartLimit 199  
 ScriptClass 199  
 ScriptPriority 200  
 ToleranceLimit 201  
 persistent resource type 19  
 primitives  
   definition 70

### primitives *(continued)*

VCSAgGetCookie 75  
 VCSAgLogI18NMsg 233–235  
 VCSAgLogI18NMsgEx 234  
 VCSAgLogMsg 232  
 VCSAgRegister 73  
 VCSAgRegisterEPStruct 72  
 VCSAgSetCookie2 72  
 VCSAgSnprintf 76  
 VCSAgStrlcat 76  
 VCSAgUnregister 74

## R

RegList parameter 198

### resource

closing (state transition diagram) 202  
 fault (state transition diagram) 202  
 migrating a resource(state transition diagram) 202  
 monitoring (state transition diagram) 202  
 offlining (state transition diagram) 202  
 onlining (state transition diagram) 202  
 OnOff type 19  
 OnOnly type 19  
 opening (state transition diagram) 202  
 persistent type 19  
 steady state (state transition diagram) 202

RestartLimit parameter 199

## S

scalar attribute dimension 22

### script primitives

VCSAG\_BLD\_PSCOMM 106  
 VCSAG\_EXEC\_IN\_CONTAINER 111  
 VCSAG\_GET\_AFW\_VERSION 100  
 VCSAG\_GET\_ATTR\_VALUE 101  
 VCSAG\_GET\_CONTAINER\_BASE\_PATH 108  
 VCSAG\_GET\_CONTAINER\_INFO 109  
 VCSAG\_GET\_MONITOR\_LEVEL 98  
 VCSAG\_GET\_REG\_VERSION 100  
 VCSAG\_IS\_PROC\_IN\_CONTAINER 110  
 VCSAG\_LOG\_MSG 107  
 VCSAG\_LOGDBG\_MSG 107  
 VCSAG\_MONITOR\_EXIT 103  
 VCSAG\_PHANTOM\_STATE 106  
 VCSAG\_RETURN\_IMF\_EVENT 106  
 VCSAG\_RETURN\_IMF\_RESID 106  
 VCSAG\_SET\_ENVS 107

- script primitives (*continued*)
  - VCSAG\_SET\_RES\_EP\_TIMEOUT 100
  - VCSAG\_SET\_RESINFO 103
  - VCSAG\_SQUEEZE\_SPACES 107
  - VCSAG\_SU 105
  - VCSAG\_SYSTEM 105
- script-based logging functions 129
- ScriptAgent 139, 230
- ScriptClass parameter 199
- ScriptPriority parameter 200
- severity macros 123
- severity message field 119
- shutdown entry point 37
  - C++ syntax 69
  - script syntax 97
- source message catalog (SMC) files
  - converting to BMC files 222
  - creating 222
- state transition diagram
  - closing a resource 202
  - migrating 202
  - monitoring persistent resources 202
  - offlining a resource 202
  - onlining a resource 202
  - opening a resource 202
  - resource fault with auto restart 202
  - resource fault, no auto restart 202
  - resource in steady state 202
- string attribute type 21

## T

- timestamp message field 119
- ToleranceLimit parameter 201

## U

- UMI (unique message identifier) 120

## V

- VCSAG\_CONSOLE\_LOG\_MSG 84
- VCSAG\_CONSOLE\_LOG\_MSG logging macro 121
- VCSAG\_LOG\_INIT initializing function 124
- VCSAG\_LOG\_MSG 85
- VCSAG\_LOG\_MSG logging macro 121
- VCSAG\_LOGDBG\_MSG 85
- VCSAG\_LOGDBG\_MSG logging macro 121
- VCSAG\_LOGDBG\_MSG script logging function 129
- VCSAG\_RES\_LOG\_MSG 85
- VCSAG\_RES\_LOG\_MSG logging macro 121

- VCSAgCloseFile primitive 77
- VCSAgDelString primitive 77
- VCSAgExec primitive 77
- VCSAgExecWithTimeout primitive 79
- VCSAgGenSnmpTrap primitive 80
- VCSAgGetConfDir 83
- VCSAgGetCookie primitive 75
- VCSAgGetFwVersion 71
- VCSAgGetHomeDir 84
- VCSAgGetLogDir 84
- VCSAgGetMonitorLevel 70
- VCSAgGetProductName 82
- VCSAgGetRegVersion 71
- VCSAgGetSystemName 84
- VCSAgInitEntryPointStruct primitive 80
- VCSAgLockFile primitive 80
- VCSAgLogI18NMsg primitive 233–235
- VCSAgLogI18NMsgEx primitive 234
- VCSAgLogMsg primitive 232
- VCSAgRegister primitive 73
- VCSAgRegisterEPStruct primitive 72
- VCSAgSendTrap primitive 80
- VCSAgSetCookie2 primitive 72
- VCSAgSetLogCategory 82
- VCSAgSetResEPTimeout 83
- VCSAgSetStackSize primitive 81
- VCSAgSprintf primitive 76
- VCSAgStartup function, C++ syntax 55
- VCSAgStrlcat primitive 76
- VCSAgStrlcpy primitive 76
- VCSAgUnlockFile primitive 81
- VCSAgUnregister primitive 74
- VCSAgValidateAndSetEntryPoint 82
- vector attribute dimension 22