

Cluster Server Agent for SAP Web Application Server Installation and Configuration Guide

Windows Server 2008 (x64), Windows
Server 2012 (x64)

6.1

Cluster Server Agent for SAP Web Application Server Installation and Configuration Guide

The software described in this book is furnished under a license agreement and may be used only in accordance with the terms of the agreement.

Agent Version: 6.1

Document version: 6.1 Rev 1

Legal Notice

Copyright © 2015 Symantec Corporation. All rights reserved.

Symantec, the Symantec Logo, the Checkmark Logo, Veritas, the Veritas Logo, InfoScale, CommandCentral, NetBackup, Enterprise Vault, and LiveUpdate are trademarks or registered trademarks of Symantec Corporation or its affiliates in the U.S. and other countries. Other names may be trademarks of their respective owners.

The product described in this document is distributed under licenses restricting its use, copying, distribution, and decompilation/reverse engineering. No part of this document may be reproduced in any form by any means without prior written authorization of Symantec Corporation and its licensors, if any.

THE DOCUMENTATION IS PROVIDED "AS IS" AND ALL EXPRESS OR IMPLIED CONDITIONS, REPRESENTATIONS AND WARRANTIES, INCLUDING ANY IMPLIED WARRANTY OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT, ARE DISCLAIMED, EXCEPT TO THE EXTENT THAT SUCH DISCLAIMERS ARE HELD TO BE LEGALLY INVALID. SYMANTEC CORPORATION SHALL NOT BE LIABLE FOR INCIDENTAL OR CONSEQUENTIAL DAMAGES IN CONNECTION WITH THE FURNISHING, PERFORMANCE, OR USE OF THIS DOCUMENTATION. THE INFORMATION CONTAINED IN THIS DOCUMENTATION IS SUBJECT TO CHANGE WITHOUT NOTICE.

The Licensed Software and Documentation are deemed to be commercial computer software as defined in FAR 12.212 and subject to restricted rights as defined in FAR Section 52.227-19 "Commercial Computer Software - Restricted Rights" and DFARS 227.7202, "Rights in Commercial Computer Software or Commercial Computer Software Documentation", as applicable, and any successor regulations. Any use, modification, reproduction release, performance, display or disclosure of the Licensed Software and Documentation by the U.S. Government shall be solely in accordance with the terms of this Agreement.

Symantec Corporation
350 Ellis Street
Mountain View, CA 94043

<http://www.symantec.com>

Technical Support

Symantec Technical Support maintains support centers globally. Technical Support's primary role is to respond to specific queries about product features and functionality. The Technical Support group also creates content for our online Knowledge Base. The Technical Support group works collaboratively with the other functional areas within Symantec to answer your questions in a timely fashion. For example, the Technical Support group works with Product Engineering and Symantec Security Response to provide alerting services and virus definition updates.

Symantec's support offerings include the following:

- A range of support options that give you the flexibility to select the right amount of service for any size organization
- Telephone and/or Web-based support that provides rapid response and up-to-the-minute information
- Upgrade assurance that delivers software upgrades
- Global support purchased on a regional business hours or 24 hours a day, 7 days a week basis
- Premium service offerings that include Account Management Services

For information about Symantec's support offerings, you can visit our website at the following URL:

www.symantec.com/business/support/index.jsp

All support services will be delivered in accordance with your support agreement and the then-current enterprise technical support policy.

Contacting Technical Support

Customers with a current support agreement may access Technical Support information at the following URL:

www.symantec.com/business/support/contact_techsupp_static.jsp

Before contacting Technical Support, make sure you have satisfied the system requirements that are listed in your product documentation. Also, you should be at the computer on which the problem occurred, in case it is necessary to replicate the problem.

When you contact Technical Support, please have the following information available:

- Product release level
- Hardware information

- Available memory, disk space, and NIC information
- Operating system
- Version and patch level
- Network topology
- Router, gateway, and IP address information
- Problem description:
 - Error messages and log files
 - Troubleshooting that was performed before contacting Symantec
 - Recent software configuration changes and network changes

Licensing and registration

If your Symantec product requires registration or a license key, access our technical support Web page at the following URL:

www.symantec.com/business/support/

Customer service

Customer service information is available at the following URL:

www.symantec.com/business/support/

Customer Service is available to assist with non-technical questions, such as the following types of issues:

- Questions regarding product licensing or serialization
- Product registration updates, such as address or name changes
- General product information (features, language availability, local dealers)
- Latest information about product updates and upgrades
- Information about upgrade assurance and support contracts
- Information about the Symantec Buying Programs
- Advice about Symantec's technical support options
- Nontechnical presales questions
- Issues that are related to CD-ROMs or manuals

Support agreement resources

If you want to contact us regarding an existing support agreement, please contact the support agreement administration team for your region as follows:

Asia-Pacific and Japan customercare_apj@symantec.com

Europe, Middle-East, and Africa semea@symantec.com

North America and Latin America supportsolutions@symantec.com

Documentation

Product guides are available on the media in PDF format. Make sure that you are using the current version of the documentation. The document version appears on page 2 of each guide. The latest product documentation is available on the Symantec website.

<https://sort.symantec.com/documents>

Your feedback on product documentation is important to us. Send suggestions for improvements and reports on errors or omissions. Include the title and document version (located on the second page), and chapter and section titles of the text on which you are reporting. Send feedback to:

doc_feedback@symantec.com

For information regarding the latest HOWTO articles, documentation updates, or to ask a question regarding product documentation, visit the Storage and Clustering Documentation forum on Symantec Connect.

<https://www-secure.symantec.com/connect/storage-management/forums/storage-and-clustering-documentation>

About Symantec Connect

Symantec Connect is the peer-to-peer technical community site for Symantec's enterprise customers. Participants can connect and share information with other product users, including creating forum posts, articles, videos, downloads, blogs and suggesting ideas, as well as interact with Symantec product teams and Technical Support. Content is rated by the community, and members receive reward points for their contributions.

<http://www.symantec.com/connect/storage-management>

Contents

Technical Support	3	
Chapter 1	Introducing the agent for SAP Web Application Server	10
	About the Cluster Server agent for SAP Web Application Server	10
	What's new in this release	11
	Supported software	11
	How the agent makes SAP Web Application Server highly available	11
	Agent functions	12
	Online	12
	Offline	12
	Monitor	13
	Clean	13
	Typical SAP Web Application Server configuration in a VCS cluster	14
	Setting up SAP Web Application Server in a VCS cluster	15
Chapter 2	Installing and configuring the SAP Web Application Server for high availability	17
	About SAP Web Application Server	17
	SAP system components	18
	SAP architecture	18
	Single Point of Failures (SPOF)	21
	Uniquely identifying SAP Web Application Server server instances	21
	Monitoring an SAP instance	22
	About installing SAP Web Application Server for high availability	24
	About configuring SAP Web Application Server for high availability	24
	Setting up SAP systems for clustering	24
	Installing SAP system using Virtual Hostname	25
	Configuring the agent for message server restart	26
	Configuring the Enqueue Replication Server	26
	Configuring the Enqueue Replication Server manually	26

	Configuring the Enqueue Replication Server using SAPInst	29
	Clustering an SAP instance	30
	Configuring the first node in the cluster	30
	Configuring all other nodes in the cluster	30
	Creating and adding domain groups and users	35
	Creating and adding local groups and users	39
	Creating sapmnt and saploc share directories	39
	Configuring the SAP systems on Windows Server 2008/2012	40
Chapter 3	Installing, upgrading, and removing the agent for SAP Web Application Server	42
	Before you install the agent for SAP Web Application Server	42
	Installing the agent for SAP Web Application Server	43
	Removing the agent for SAP Web Application Server	44
	Upgrading the agent for SAP Web Application Server	44
Chapter 4	Configuring the agent for SAP Web Application Server	47
	About configuring the agent for SAP Web Application Server	47
	Agent attributes for SAP Web Application Server	48
	Setting the SAPMonHome attribute	54
	Configuring the execution period for agent functions	55
	Executing a custom monitor program	55
	Preventing early faulting of Java and Add-In instances	56
Chapter 5	Configuring the service groups for SAP Web Application Server	57
	About configuring service groups for SAP Web Application Server	57
	Before configuring the service groups for SAP Web Application Server	58
	Configuring service groups with the SAP Web Application Server agent	58
	Configuring the SAPWebAS preonline script	60
Chapter 6	Troubleshooting the agent for SAP Web Application Server	64
	Using correct software and operating system versions	64
	Meeting prerequisites	65
	Configuring SAP Web Application Server resources	65

Starting the SAP Web Application Server outside a cluster 65

Troubleshooting common problems 66

 Unable to install the Cluster Server agent for SAP Web Application
 Server 66

 Unable to see an entry in the SAP MMC for an SAP
 instance 66

 The agent for SAP Web Application Server fails to bring online an
 SAP instance resource through VCS 67

 SAP instance does not come online, and the startsap.exe
 command exits with exit code -1 67

 In case of an Enqueue server failure, the Enqueue server instance
 fails to take over the lock table from the Enqueue Replication
 server instance 67

 The ensmon.exe command returns exit code 4 for a Enqueue
 server instance 68

 The return code of the ensmon.exe command is 8 for an Enqueue
 Replication server instance 68

 The Enqueue server instance does not fail over to the correct
 Enqueue Replication server instance 68

 In case of a resource fault, the Service Group does not fail
 over 68

Reviewing SAP Web Application Server agent log files 69

 Using SAP instance log files 69

 Using SAP log files 69

Reviewing error log files 69

 Using SAP NetWeaver instance files 69

 Reviewing cluster log files 69

 Using trace level logging 70

Checks for an SAP Add-In Usage Types 70

Appendix A Sample Configurations 72

About the sample configuration for the agent for SAP Web Application
Server 72

Sample agent type definition for SAP WebAS 72

Sample SAP resource configuration in a physical environment 73

 Sample SAP primary application server instance 73

 Sample SAP additional application server instance 74

 Sample SAP Central Services instance 74

 Sample SAP Enqueue Replication server instance 75

Sample service group configuration for ABAP and Java Usage
types 75

Sample service group configurations for SAP systems on Windows	
Server 2008/2012	78
Sample configuration for SAP Central Services Instances service group for Add-In installation Usage Type	78
Sample resource dependency for SAP Central Services Instances service group for Add-In installation usage type	83
Sample configuration for SAP Enqueue Replication Server Instances service group for Add-In installation Usage Type	84
Sample resource dependency for SAP Enqueue Replication Server Instances service group for Add-In installation Usage Type	87
Sample service group dependency for SAP Web Application Server	88
Index	90

Introducing the agent for SAP Web Application Server

This chapter includes the following topics:

- [About the Cluster Server agent for SAP Web Application Server](#)
- [What's new in this release](#)
- [Supported software](#)
- [How the agent makes SAP Web Application Server highly available](#)
- [Agent functions](#)
- [Typical SAP Web Application Server configuration in a VCS cluster](#)
- [Setting up SAP Web Application Server in a VCS cluster](#)

About the Cluster Server agent for SAP Web Application Server

The Cluster Server agents monitor specific resources within an enterprise application, determine the status of these resources, and start or stop them according to external events.

The Cluster Server agent for SAP Web Application Server provides high availability for SAP NetWeaver 7.1, 7.3, and 7.4 in a cluster. The agent is designed to support a wide range of SAP NetWeaver environments which include SAP NetWeaver 7.1,

7.3, and 7.4; SAP NetWeaver CE 7.1 and 7.3; SAP NetWeaver Mobile 7.1 and 7.3; and SAP NetWeaver PI 7.1 and 7.3.

The Cluster Server agent for SAP Web Application Server brings SAP instances online, monitors the instances, and takes the instances offline. The agent monitors the system processes and server states, and can shut down the server in case of a failover.

The agent supports the following SAP instance types:

- Central Services Instance
- Application Server Instance
- Enqueue Replication Server Instance

The agent supports the following SAP Web Application Server Usage Types:

- ABAP
- Java
- Add-In (ABAP + Java)

What's new in this release

The enhancement in this release of the agent for SAP Web Application Server is as follows:

- Added support for SAP NetWeaver 7.4

Supported software

For information on the software versions that the Cluster Server agent for SAP Web Application Server supports, see the Symantec Operations Readiness Tools (SORT) site: <https://sort.veritas.com/agents>.

How the agent makes SAP Web Application Server highly available

The Cluster Server agent for SAP Web Application Server continuously monitors the SAP instance processes to verify that they function properly.

The agent provides the following levels of application monitoring:

- Primary or Basic monitoring

This mode has Process check and Health check monitoring options. With the default Process check option, the agent verifies that the SAP instance processes are present in the process table. Process check cannot detect whether processes are in the hung or stopped states.

- Secondary or Detail monitoring
In this mode, the agent runs a utility to verify the status of the SAP instance. The agent detects application failure if the monitoring routine reports an improper function of the SAP instance processes. When this application failure occurs, the SAP instance service group fails over to another node in the cluster. Thus, the agent ensures high availability for SAP instances.

Agent functions

Online

The online function performs the following tasks:

- Validates the values of the agent attributes required to bring the SAP instance online.
- Performs a preliminary check to ensure that the SAP instance is not running already on the specified node in the cluster.
- Starts the SAP Windows service *SAPSAPSID_InstID*, where *InstID* is the last two characters of the *InstName* attribute.
- Starts the SAP instance using the *startsap.exe* utility.
- Ensures that the instance is initialized successfully.

Offline

The offline function performs the following tasks:

- Validates the values of the agent attributes required to bring the SAP instance offline.
- Performs a preliminary check to ensure that the SAP instance is not already offline.
- Stops the SAP instance using the *stopsap.exe* utility.
- Stops the SAP Windows service. *SAPSAPSID_InstID*, where *InstID* is the last two characters of the *InstName* attribute.
- Kills any remaining SAP instance processes to ensure that the instance processes are removed completely.

Monitor

The monitor function performs the following tasks:

- Validates the values of the agent attributes required to monitor the SAP instance.
- Performs a first-level monitor check as follows:
 - The function verifies that the SAP Windows service `SAPSAPSID_InstID` is running, where `InstID` is the last two characters of the `InstName` attribute.
 - Verifies that all processes that the `ProcMon` attribute lists are running.
- If the value of `SecondLevelMonitor` attribute is greater than 0, the monitor function performs a more thorough check of the SAP instance as follows:
 - For `APPSEVR` instances, the function uses the following utilities to perform this check:

Server type	SAP utility used
SAPWeb Application Server as ABAP	sapcontrol.exe
SAPWeb Application Server as Java	sapcontrol.exe
SAPWeb Application Server as Add-In	sapcontrol.exe

- For an `Enqueue` or `Enqueue Replication` server instance, the function uses the `ensmon.exe` utility.
- If the `MonitorProgram` attribute specifies a custom monitor program, the monitor function executes the specified program.
 See [“Executing a custom monitor program”](#) on page 55.

Clean

- Uses SAP’s `sapsrvkill.exe` utility to stop all processes of the particular SAP instance.
- Stops `SAPSAPSID_InstID`, the SAP Windows service for the instance.
- The `clean` function identifies and kills any remaining SAP instance processes using the unique combination of the `SAPSID` attribute and `InstID`, that is the last two characters of the `InstName` attribute. All these processes must also belong to the `SAPServiceSAPSID` or `sapsidadm` user.

Typical SAP Web Application Server configuration in a VCS cluster

A typical SAP Web Application Server configuration in a VCS cluster has the following characteristics:

- VCS is installed and configured in a two-node cluster.
- The SAP Web Application Server instance binaries are installed locally on both nodes or on shared disks.
- The Cluster Server agent for SAP Web Application Server is installed on the both nodes.
- The `drive:\usr\sap` directory is shared with name `sapmnt` and `saploc`.

Figure 1-1 depicts a configuration where SAP Web Application Server instance binaries and SYS are installed completely on shared disks.


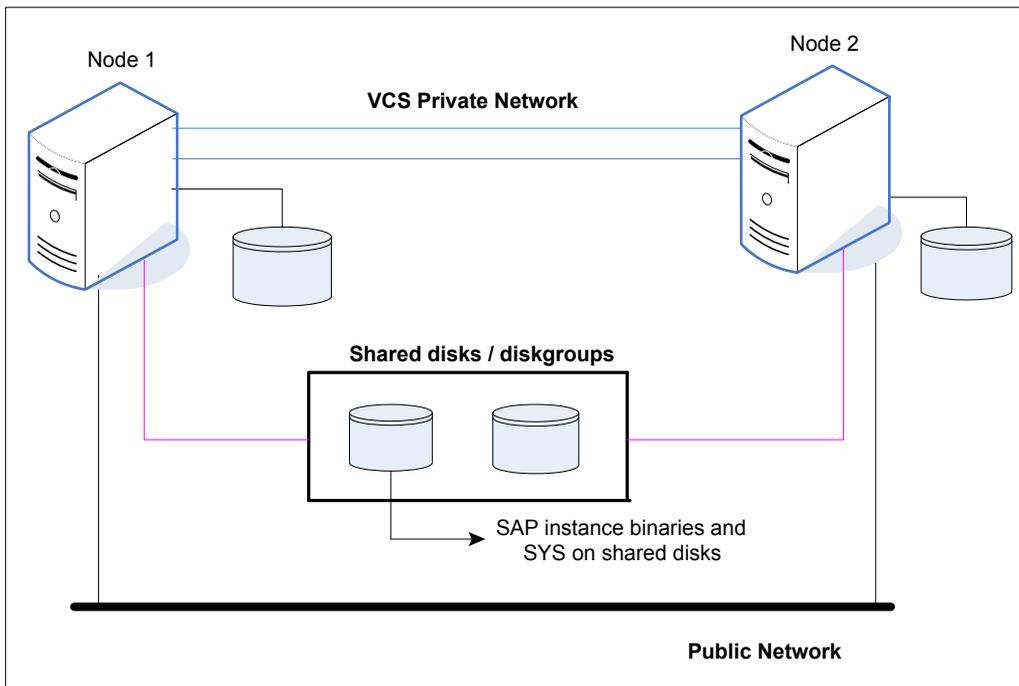


Figure 1-2 depicts a configuration where SAP Web Application Server instance binaries are installed locally on each node and SYS is installed on shared disks.

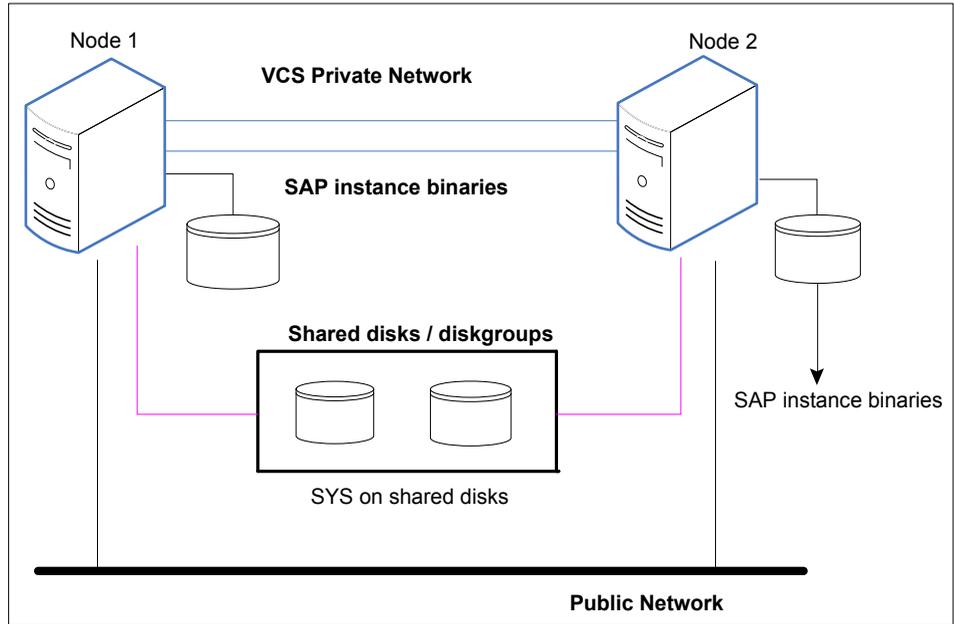

Setting up SAP Web Application Server in a VCS cluster

Follow the steps below to set up SAP Web Application Server in a cluster:

- Set up a VCS cluster.
 For more information on installing and configuring Cluster Server, refer to the Cluster Server installation and configuration guides.
 Refer to the *Storage Foundation and High Availability Solutions Configuration and Upgrade Guide* for more information on installing and configuring Cluster Server.
- Install and configure SAP Web Application Server for High Availability.
- Install the Cluster Server agent for SAP Web Application Server.

Note: The Cluster Server agent for SAP Web Application Server is automatically installed during the installation of the VCS server components.

- Configure the service groups for SAP Web Application Server.
See [“About configuring service groups for SAP Web Application Server”](#)
on page 57.

Installing and configuring the SAP Web Application Server for high availability

This chapter includes the following topics:

- [About SAP Web Application Server](#)
- [Uniquely identifying SAP Web Application Server server instances](#)
- [Monitoring an SAP instance](#)
- [About installing SAP Web Application Server for high availability](#)
- [About configuring SAP Web Application Server for high availability](#)
- [Setting up SAP systems for clustering](#)
- [Installing SAP system using Virtual Hostname](#)
- [Configuring the agent for message server restart](#)
- [Configuring the Enqueue Replication Server](#)
- [Clustering an SAP instance](#)
- [Configuring the SAP systems on Windows Server 2008/2012](#)

About SAP Web Application Server

All SAP NetWeaver components (example, PI, CE) run on top of the SAP Web Application Server.

The following three usage types are possible with SAP Web Application Server:

- SAP WebAS ABAP (ABAP only)
- SAP WebAS Java (Java only)
- SAP WebAS Add-In (ABAP and Java)

Depending on the SAP NetWeaver component to be installed, the Web Application Server installation type is determined. For example, SAP NetWeaver PI requires SAP WebAS Add-In (ABAP + Java) usage type.

SAP system components

An SAP application instance has multiple services or components which are typically deployed across multiple servers.

SAP identifies the following services as critical to the application environment, representing potential single points of failure:

- Database Instance
- Central Services Instance (SCSxx or ASCSxx)
- Enqueue Replication Server (ERSxx)
- Network File System (NFS) or Common Internet File System (CIFS) services
- Solution Manager Diagnostics Agent (SMDAxx)

Where xx takes the value of an SAP Instance number ranging from 00 to 99.

SAP architecture

[Table 2-1](#) lists the different SAP architectures and its components.

Table 2-1 SAP architecture

Architecture	Component	Service	Functions
SAP WebAS ABAP	Application Server	ABAP Dispatcher	<ul style="list-style-type: none"> ■ Controls program that manages the resources of the R/3 applications. ■ Balances assignment of the transaction load to the work processes. ■ Manages buffers in main memory. ■ Manages connections with the presentation level. ■ Organizes the communication processes.

Table 2-1 SAP architecture (*continued*)

Architecture	Component	Service	Functions
		ABAP Work processes	<ul style="list-style-type: none"> ■ Acts as a service offered by a server and requested by a client ■ Acts as a special program in charge of some specific tasks.
	Central Services Instance	ABAP Enqueue Service	<ul style="list-style-type: none"> ■ Manages logical locks. ■ Ensures server synchronization.
		ABAP Message Service	<ul style="list-style-type: none"> ■ Central service for cluster internal communication, such as event notifications, broadcasts, exchange of cache content, and so on. ■ Provides cluster state information to SAP Web Dispatcher. ■ Keeps a list of application servers that can be reached within the system.
	Enqueue Replication Instance	ABAP Enqueue Replication Service	Enables the lock table to be replicated on a second server, the replication server.
SAP WebAS Java	Application Server	Java Server Processes	Processes the requests and holds the session data.
	Central Services Instance	Java Enqueue Service	<ul style="list-style-type: none"> ■ Manages logical locks. ■ Ensures server synchronization.
		Java Message Service	<ul style="list-style-type: none"> ■ Acts as a central service for cluster internal communication, such as event notifications, broadcasts, exchange of cache content, and so on. ■ Provides cluster state information to SAP Web Dispatcher. ■ Keeps a list of application servers that can be reached within the system.
	Enqueue Replication Instance	Java Enqueue Replication Service	Enables the lock table to be replicated on a second server, the replication server.

Table 2-1 SAP architecture (*continued*)

Architecture	Component	Service	Functions
SAP WebAS Add-In	Application Server	ABAP Dispatcher	<ul style="list-style-type: none"> ■ Controls program that manages the resources of R/3 applications. ■ Balances the assignments of the transaction load to the work processes. ■ Manages buffer in main memory. ■ Connects to the presentation level. ■ Organizes the communication processes.
		ABAP Work processes	<ul style="list-style-type: none"> ■ Acts as a service offered by a server and requested by a client. ■ Manages the programs that handle specific tasks.
		Java Server Processes	<ul style="list-style-type: none"> ■ Handles the client-server processes and maintains the session data.
	Central Services Instance ABAP	ABAP Enqueue Service	<ul style="list-style-type: none"> ■ Manages logical locks ■ Ensures server synchronization
		ABAP Message Service	<ul style="list-style-type: none"> ■ Acts as a central service for cluster internal communication, such as event notifications, broadcasts, exchange of cache content, and so on. ■ Provides cluster state information to SAP Web Dispatcher ■ Keeps a list of application servers that can be reached within the system.
	Central Services Instance Java	Java Enqueue Service	<ul style="list-style-type: none"> ■ Manages logical locks. ■ Ensures server synchronization.
		Java Message Service	<ul style="list-style-type: none"> ■ Acts as a central service for cluster internal communication, such as event notifications, broadcasts, exchange of cache content, and so on. ■ Provides cluster state information to SAP Web Dispatcher ■ Keeps a list of application servers that can be reached within the system.
	Enqueue Replication Instance ABAP	ABAP Enqueue Replication Service	Enables the lock table to be replicated on a second server, the replication server.

Table 2-1 SAP architecture (*continued*)

Architecture	Component	Service	Functions
	Enqueue Replication Instance Java	Java Enqueue Replication Service	Enables the lock table to be replicated on a second server, the replication server.
SMDA	SMDA Instance	SMDA Service	Remote component of end-to-end root cause analysis.

Single Point of Failures (SPOF)

In a distributed SAP environment, the following components are critical for application availability. Hence, these components need to be protected.

- Database Instance
- Central Services Instance
- Enqueue Replication Server

[Table 2-2](#) lists the possibilities to eliminate the single point of failures.

Table 2-2 Possibilities to secure the single point of failures

Single Point of Failure	Technical Possibilities to eliminate the SPOF
Central Database	Switch-over solutions
Central Services	Set up an Enqueue Replication Server controlled by a switch-over solution
Enqueue Replication Server	Switch-over solutions
SAP Central File System	Switch-over solutions
Solution Manager Diagnostics Agent (SMDA)	Switch-over solutions

Uniquely identifying SAP Web Application Server server instances

You can virtualize an SAP instance using a cluster. Using shared disk and virtual IP addresses, you can manage a large set of SAP Web Application Server instances in a single cluster.

For multiple instances running concurrently on a single node, the agent must be able to uniquely identify each SAP Web Application Server instance on that system.

Each instance has a unique instance name. The instance names may follow the conventional form. For example, additional application server instances begin with 'D', and Primary application server instances are typically named DVEBMGS.

Instance names often include an instance ID suffix which is an integer between 00-99. For example, an application server instance with an instance ID = 00 may have an instance name of DVEBMGS00.

The SAPSID and InstName form a unique identifier that can identify the processes running for a particular instance.

Some examples of SAP instances are given as follows:

InstName	InstType
DVEBMGS00	SAP Application Server - ABAP (Primary)
D01	SAP Application Server - ABAP (Additional)
ASCS02	SAP Central Services - ABAP
J03	SAP Application Server - Java
SCS04	SAP Central Services - Java
ERS05	SAP Enqueue Replication Server
SMDA97	Solution Manager Diagnostics Agent

Differentiating SAP instances is important to identify each instance uniquely. When the agent kills the processes of a non-responsive or failed instance in absence of unique names for each server, the agent may kill processes for more than one SAP instance during a clean operation.

Monitoring an SAP instance

The monitor operation performs process level check to ensure the proper functioning of an SAP instance.

The ProcMon attribute specifies the processes that must be running successfully for a particular SAP instance type. The monitor operation uses this list of processes to scan the process table, and verify that the processes are running successfully.

[Table 2-3](#) lists valid values of the ProcMon attribute

Table 2-3 Values of ProcMon attribute

SAP usage type	SAP instance type	Value of ProcMon attribute
ABAP	ENQREP	enrepserver.exe
Java	APPSERV	jstart.exe igswd.exe and icman.exe are optional
Java	ENQUEUE	enserver.exe msg_server.exe gwrdr.exe is optional
Java	ENQREP	enrepserver.exe
Add-In (ABAP + Java)	APPSERV	disp+work.exe jstart.exe igswd.exe, icman.exe and gwrdr.exe are optional
Add-In (ABAP +Java)	ENQUEUE (ABAP)	enserver.exe msg_server.exe
Add-In (ABAP +Java)	ENQREP (ABAP)	enrepserver.exe
Add-In (ABAP +Java)	ENQUEUE (Java)	enserver.exe msg_server.exe gwrdr.exe is optional
Add-In (ABAP +Java)	ENQREP (Java)	enrepserver.exe
Java	SMDA	jstart.exe
Add-In (ABAP +Java)	SMDA	jstart.exe

The monitor operation takes a snapshot of the running processes table. The operation compares the processes that the ProcMon attribute specifies, to the set of running processes. If any process is missing, the operation declares the SAP instance as offline, and bypasses further monitor operations.

About installing SAP Web Application Server for high availability

In a VCS environment, you can install SAP NetWeaver in the following ways:

SAP instance on shared disk	Install the SAP instance binaries and SYS directory on shared disks
SAP instance on shared disk	Install the SAP instance binaries on local disk and SYS directory on shared disks

When installing SAP NetWeaver, ensure that the `login_name`, `group_name` for the `sidadm` and `SAPServiceSID` is the same on all the nodes.

For more details refer to SAP documentation.

About configuring SAP Web Application Server for high availability

The guidelines for configuring SAP NetWeaver for high availability are as follows:

- In a service group, keep the single point of failure as minimal as possible and watch the application startup time.
- Assign a virtual hostname to the component within the switchover environment. Since the physical hostname changes with the switchover, this is a must have requirement.
- Based on the expected failover time configure the reconnection parameters for all software components and enable its automatic reconnection.
- Configure `sapcpe` to copy the instance specific executables and binaries from a central file system to the instance executable directory, during the instance startup.

Setting up SAP systems for clustering

This topic describes the procedure to install and configure SAP NetWeaver on a Windows system, so that you can cluster the system in a Cluster Server (VCS) environment.

Veritas recommends installing and clustering a database server for SAP to minimize SAP system downtime. An SAP system downtime may happen due to database unavailability.

In this installation, it is assumed that you are setting up the system on two or more nodes, and clustering these nodes in a VCS environment.

Note: Veritas strongly recommends that a trained SAP consultant be involved in performing the installation procedure.

Installing SAP system using Virtual Hostname

An SAP system can be installed directly using virtual hostnames. To install SAP system using virtual hostname, perform the following steps:

Note: Before installing SAP system refer to SAP Installation documentation.

To install SAP instances using Virtual Hostname

- 1 Log in as a user that has domain administrator rights.
- 2 Create a VCS Service Group with IP and Lanman resources for SAP instance.
For details about creating VCS Service Groups, refer to the VCS user documentation.
- 3 Before beginning to install the SAP instance, bring the Service Group online.
- 4 On the node that has the Service Group online, start the SAP instance installation.

Note: Do not double-click the sapinst.exe file to launch the SAP installation GUI. Use the SAPINST_USE_HOSTNAME parameter to launch the SAP installation GUI in a virtual environment.

- 5 Navigate to the directory where sapinst.exe tool is present in the Master DVD.
At the command prompt, run the following command:

```
path\sapinst.exe SAPINST_USE_HOSTNAME=Virtual Host Name
```

where,

Virtual Host Name is the virtual Lanman name that you created in step 2.

- 6 From the installation GUI, select the usage type of system you are planning to install and follow the instructions to complete the installation.

Configuring the agent for message server restart

In case the message server process fails, the Cluster Server agent for SAP Web Application Server supports the message server restart through SAP service (SAPSID_InstID) process sapstartsrv.exe

In case of unexpected termination, to avail the advantage of this restart technology without failing over the entire (A)SCS instance, the SAP administrator must modify the Instance profile for (A)SCS instance and set the new profile parameters.

Note: The Cluster Server agent for SAP Web Application Server does not support restart of the 'enserver.exe' Enqueue server process.

To restart the message server, use the following syntax in the start profile:

```
Restart_Program_xx = local program name program arguments
```

For example, the modified syntax for the message server is as follows:

```
Restart_Program_02 = local $(_MS) pf=$(_PF)
```

By default sapstartsrv.exe restarts the message server without any delay.

For more information on how to restart the process of a program through sapstartsrv.exe, refer to SAP Note 729945 and related notes.

Note: Veritas recommends that you carefully study the SAP note before you modify the profile files for (A)SCS instance.

Configuring the Enqueue Replication Server

Configuration of the Enqueue Replication Server for SAP Web Application Server can either be done manually, or by using SAPIInst.

Configuring the Enqueue Replication Server manually

To manually configure the Enqueue Replication Server for SAP Web Application Server

- 1 Enable replication in the (A)SCS instance by adding the following parameter to the instance profile of (A)SCS instance:

```
(SAPSID_InstName_VirtualHostname).
```

```
enqueue/server/replication = true
```

Restart the (A)SCS instance to make the change effective.

Let us assume a two-node software failover cluster, running on the physical hosts—host A and host B, and a clustered (A) SCS instance with the following parameters.

- SCS SAPSID = PLL
- SCS INSTNO = 01
- SCS HOST = sapscshost (virtual host name)

This instance (that is, the Enqueue Server's lock table) must be protected with an ERS instance as follows:

- ERS SAPSID = PLL
- ERS INSTNO = 11 (a free instance number)
- ERS HOST = sapershost (virtual hostname)

- 2** On one of the physical hosts (host A or host B) perform the following steps as user *sidadm* or domain administrator:

Create the directory structure as follows:

drive:\usr\sap\PLL\ERS11\exe

drive:\usr\sap\PLL\ERS11\log

drive:\usr\sap\PLL\ERS11\data

drive:\usr\sap\PLL\ERS11\work

- 3** Copy all the binaries from (A)SCS instance exe directory into the ERS instance exe directory.

4 Create a new ERS instance profile in *drive:\usr\sap\PLL\SYS\profile*.

```

SAPSYSTEMNAME = PLL
SAPSYSTEM = 11
INSTANCE_NAME = ERS11

DIR_CT_RUN = $(DIR_EXE_ROOT)\$(OS_UNICODE)\NTAMD64
DIR_INSTANCE = <drive>:\usr\sap\$(SAPSYSTEMNAME)\$(INSTANCE_NAME)
DIR_EXECUTABLE = $(DIR_INSTANCE)\exe
DIR_PROFILE = $(DIR_INSTALL)/profile
_PF = $(DIR_PROFILE)\PLL_ERS11_sapershost

SAPGLOBALHOST = sapscshost
SAPLOCALHOST = sapershost

#-----
# Copy SAP Executables
#-----
_CPARG0 = list:$(DIR_CT_RUN)/scs.lst
Start_Program_01 = immediate $(DIR_CT_RUN)\sapcpe$(FT_EXE) pf=$(PF)
$(CPARG0)
#-----
# Settings for enqueue monitoring tools (enqt, ensmon)
#-----
enqueue/process_location = REMOTESA
rdisp/enqname = $(rdisp/myname)

#-----
# standalone enqueue details from (A)SCS instance
#-----
SCSID = 01
SCSHOST = sapscshost
enqueue/serverinst = $(SCSID)
enqueue/serverhost = $(SCSHOST)
enqueue/serverport = 32$(SCSID)

enqueue/enrep/poll_interval = 0
enqueue/enrep/poll_timeout = 120
enqueue/enrep/inactive_action = sleep

#-----
# Start enqueue replication server
#-----

```

```
_ER = $(DIR_EXECUTABLE)\enrepserver$(FT_EXE)  
Start_Program_02 = local $_ER pf=$_PFL NR=$(SCSID)
```

For DIR_CT_RUN in this ERS profile, take the value DIR_CT_RUN from the (A)SCS instance profile. If the (A)SCS instance has not configured DIR_CT_RUN in its profiles, take the value specified for DIR_EXECUTABLE from the (A)SCS instance profile.

It is essential that the binaries from (A)SCS and ERS instance are from the same binary set.

- 5 Use the `sapstartsrv.exe` command to create an SAP Windows Service for the Enqueue Replication Server instance.
- 6 Start the SAP instance for the Enqueue Replication Server. Ensure that the instance starts successfully.

The SAP instance is now ready for clustering and to control the life time of Enqueue Replication Server using VCS.

Configuring the Enqueue Replication Server using SAPIInst

To configure the Enqueue Replication Server for SAP NetWeaver using SAPIInst

- 1 Install Enqueue Replication Server using SAPIInst with virtual hostname.

```
# sapinst SAPIINST_USE_HOSTNAME=VirtualHostName
```

- 2 Modify the Enqueue Replication Instance profile

```
drive:\usr\sap\SAPSID\SYS\profile\SAPSID_InstName_VHostName
```

- 3 Add the following lines under the section "standalone enqueue details from (A)SCS instance" in the profile file.

```
enqueue/poll_interval = 0
```

```
enqueue/poll_timeout = 120
```

```
enqueue/enrep/inactive_action = sleep
```

```
enqueue/table_size = 4096
```

- 4 Delete the following lines from the profile file.

```
Autostart = 1
```

```
enqueue/enrep/hafunc_implementation
```

- 5 Change the Restart_Program_00 to Start_Program_00 Under "Start enqueue replication server" section.

```
Start_Program_00 = local $_ER pf=$_PFL NR=$(SCSID)
```

- 6 Control the life time of Enqueue Replication Server using the switchover solution.

Clustering an SAP instance

This section describes the procedure for clustering an SAP instance.

To cluster an SAP instance, you must first configure the node that hosts the SAP Central Service Instance ([A]SCS) and then configure all other nodes that you want to cluster.

Configuring the first node in the cluster

Perform the following tasks on the node on which you installed SAP, the first time.

- Set the SAP Service to manual.
- Create the cluster service group for SAP instance.

To configure the first node in the cluster

- 1 Stop the SAP Central Services Instance.
- 2 Stop the SAP instance Windows service

```
SAPSAPSID_No
```

- 3 In the instance profile, set the AUTOSTART equal to 0.
- 4 Configure the SAPSAPSID_No service as follows:
 - Open services.msc. Click **Start > Run** and enter service.msc.
 - On the Services panel, right-click the SAPSAPSID_No service, and select **Properties**.
 - On the General tab, select **Manual** from the Startup type drop-down list.
 - Click **OK**.
 - Close and exit the Services panel.

Configuring all other nodes in the cluster

Perform the following tasks on the other remaining cluster nodes:

- Create the required SAP users and groups.

- Set the system and user environment for the SAP system.
- Enter the required port numbers in the Windows services files.
- Install Host Agent using sapinst.exe.
- Create the Windows service for the SAP instance.

To configure all other nodes in the cluster

- 1 Log in as a domain administrator.
- 2 Create the following local groups.
 - SAP_SAPSID_LocalAdmin
 - SAP_SAP_LocalAdmin
 - SAP_LocalAdmin
- 3 Add the SAP_SAPSID_GlobalAdmin domain group to the SAP_SAPSID_LocalAdmin and SAP_LocalAdmin group.
- 4 Add the SAP_SAP_GlobalAdmin domain group to the SAP_SAP_LocalAdmin and SAP_LocalAdmin
- 5 Add the SAP_SAPSID_GlobalAdmin and SAP_SAP_GlobalAdmin domain group to the local Administrators group.

For details on creating and adding a new local group and users:

See [“Creating and adding local groups and users”](#) on page 39.

- 6 Click **Start > Programs > Administrative Tools > Local Security Policy > Local Policies > User Right Assignment**.
- 7 Add the following privileges for the *sapsidadm* user.
 - Act as a part of the Operating System (SeTcbPrivilege)
 - Replace a process-level token (SeAssignPrimaryTokenPrivilege)
 - Adjust memory quotas for a process (SeIncreaseQuotaPrivilege)
- 8 Add the following privileges for the SAPServiceSAPSID user.
 - Log on as a Service (SeServiceLogonRight).
 - Adjust memory quotas for a process (SeIncreaseQuotaPrivilege)
 - Access this computer from the network (SeNetworkLogonRight)
 - Deny Log on Locally and Deny Log on through Terminal Services (SeDenyInteractiveLogOnRight)
- 9 Change the *sapsidadm* user environment as follows:

- At the command prompt enter,


```
runas /profile /user:domain\sapsidadm regedit
```
- On the Registry Editor panel, click **HKEY_CURRENT_USER > Environment**.
- Modify the user environment based on your Database, SAP Usage Type and SAPSID.

For example, the following table depicts the registry environment with Oracle database (PI1) and Add-In installation with SAPSID PI1.

Name	Type	Data
Default	REG_SZ	value not set
DBMS_TYPE	REG_SZ	ora
dbms_ora_schema	REG_SZ	SAPSR3
dbms_ora_tnsname	REG_SZ	PI1
JAVA_HOME	REG_SZ	C:\j2sdk1.4.2_19-x64
NLS_LANG	REG_SZ	AMERICAN_AMERICA.UTF8
ORACLE_HOME	REG_EXPAND_SZ	E:\oracle\PI1\102
ORACLE_SID	REG_EXPAND_SZ	PI1
PATH	REG_EXPAND_SZ	E:\usr\sap\PI1\SYSTEM\exe\uc\NTAMD64;\sapi1scs\sapmnt\PI1\SYSTEM\exe\uc\NTAMD64;E:\oracle\PI1\102\BIN
SAPDATA_HOME	REG_EXPAND_SZ	E:\oracle\PI1
SAPEXE	REG_SZ	\\sapi1scs\sapmnt\PI1\SYSTEM\exe\uc\NTAMD64
SAPLOCALHOST	REG_SZ	sapi1aas
SAPSYSTEMNAME	REG_SZ	PI1
TEMP	REG_EXPAND_SZ	E:\usr\sap\PI1\tmp
TMP	REG_EXPAND_SZ	E:\usr\sap\PI1\tmp
TNS_ADMIN	REG_EXPAND_SZ	\\sapi1scs\sapmnt\PI1\SYSTEM\profile\oracle

- 10** From the first node in the cluster, copy the following service entries for the SAP instance, from the services file in the `%windir%\system32\drivers\etc` directory to the corresponding services file on all other nodes in the cluster.

```

sapdp<No.>      32<No.>/tcp    # SAP System Dispatcher Port
sapdp<No.>s     47<No.>/tcp    # SAP System Dispatcher Security Port
sapgw<No.>      33<No.>/tcp    # SAP System Gateway Port
sapgw<No.>s     48<No.>/tcp    # SAP System Gateway Security Port
sapms<SAPSID>  36<No.>/tcp    # SAP System Message Port Number

```

where,

The value for `<No.>` is the value of an Instance ID.

- 11** Move the Service Group from the first node to the node that you are currently configuring and ensure that the `drive:\usr\sap` directory is shared with the names, `sapmnt` and `saploc`.

See [“Creating sapmnt and saploc share directories”](#) on page 39.

- 12** Install SAP Host Agent with SAPInst. Follow the steps below to install the SAP Host agent.

- In the Master DVD, navigate to the directory containing the `sapinst.exe` tool.
- Double-click the `sapinst.exe` file to launch the SAP installation GUI.
- Select **High Availability System > Based on [AS ABAP/AS Java/AS ABAP and AS Java] > Host Agent** based on the usage type of system you installed.
- Follow the instructions to complete the installation.

- 13** Create the `SAPSAPSID_No` service as follows:

- At the command prompt, navigate to the `drive:\usr\sap\SAPSID\InstName\exe` directory.
- Run the `sapstartsrv.exe` command.
- In the SAP Service Install/Uninstall dialog box, enter the following values:

SID	<i>SAPSID</i>
NR	<i>InstanceNumber</i>

Profile If, SAPLOCALHOST=SAPGLOBALHOST, then enter the value as:

```
drive:\usr\sap\SAPSID
\SYS\profile\SAPSID_InstName
_VirtualHostName
```

If, SAPLOCALHOST is not equal to SAPGLOBALHOST, then enter the value as:

```
\\SAPGLOBALHOST\sapmnt\SAPSID
\SYS\profile\SAPSID_InstName
_VirtualHostName
```

User *domain\SAPServiceSAPSID*

Password *SAPServiceSAPSID password*

Startup type manual

Use *domain\sapsidadm*

Environment of
User

14 Click **OK**.

15 Re-register the type library as follows:

- At the command prompt, navigate to the *Drive:\Path\SAP\hostctrl\exe* directory.
- Run the `sapstartsrv.exe` command.
- In the SAP Service Install/Uninstall dialog box, select **Register COM Typelibrary Only** in the Operation field
- Click **OK**.

16 Create registry entries for the SAPSAPSID_No service.

For example,

Name	Type	Data
Default	REG_SZ	value not set
EventMessageFile	REG_SZ	\\sappl1scs\sapmnt\PI1\SYS\exe\uc\NTAMD64\sapevents.dll
TypesSupported	REG_DWORD	0x00000007(7)

17 If an SAP Microsoft Management Console (MMC) is not configured on the node, register the SAP MMC using the following steps:

- Access the file sapmmcX64u.msi or sapmmclA64u.msi from Kernel Install DVD depending on the OS architecture.
- Install SAP MMC by executing the msi package.

Note: Veritas recommends that you cluster the SAP Central Services instances for both ABAP and Java in an Add-In Usage Type in the same service group.

Also, cluster the Enqueue Replication servers for both ABAP and Java in an Add-In Usage Type in a single Service Group.

Creating and adding domain groups and users

If you do not have domain administrator rights, you can perform the SAP instance installation and configuration as a domain user who is a member of the local administrator group.

User accounts

The SAPInst tool creates the following accounts for the SAP system administrator:

<i>sapsidadm</i>	This user account is the SAP system administrator account. This account enables interactive administration of the system.
<i>SAPServiceSID</i>	This user account is required to start the SAP system. This account has the local user right to log on as a service. This account does not allow interactive logon. You need not set an expiry date for the password. However, you must change the password at the next logon option.

Groups

The SAPInst tool creates the following groups during domain installation:

- SAP_SAPSID_GlobalAdmin** This global group is a domain level SAP administration group for organizing SAP system administrators. This global group, groups together the users at the domain level so that they can be placed in appropriate local groups.
- SAP_SAPSID_LocalAdmin** These are local groups created and maintained on an application server. A local group has rights only to the system on which the group is located.
- The system on which the local group is located is part of a particular domain. The local group can contain users and global groups from this domain.
- SAP_LocalAdmin** Though this group is created on all hosts, creating this group on the transport host is necessary. Members of this group have full control over the transport directory, *drive:\usr\sap\trans*. This directory allows transports to take place between systems.
- The SAP_SAPSID_GlobalAdmin groups of all the SAP systems that are part of the transport infrastructure are added to the SAP_LocalAdmin group. Therefore, the *sapsidadm* and *SAPServiceSAPSID* users of all systems in the transport infrastructure are members of the SAP_LocalAdmin group. These users have the rights necessary to initiate and execute transports.

Adding new domain groups and users

This section describes the procedure to add new domain groups and users. You can perform this procedure as a domain administrator only.

To create the SAP_SAPSID_GlobalAdmin Global group

- 1 Log in as a domain administrator on to Domain Controller.
- 2 Click **Start > Programs > Administrative Tools > Active Directory Users and Computers**.

Alternatively,

- Click **Start > Run**.
- In the Open field, enter *mmc*.
- In the Console window, click **File > Add/Remove Snap-in**.
- In the Add/Remove Snap-in dialog box, click **Add**.

- In the Add Standalone Snap-in dialog box, select **Active Directory Users and Computers**.
 - Click **Add**.
 - Click **OK**.
- 3** In the Active Directory Users and Computers dialog box, right-click **Users**, and select **New > Group**.
- 4** In the New Object - Group dialog box, enter the following values:

Group Name	SAP_SAPSID_GlobalAdmin
	Specify this value using the exact and correct uppercase and lowercase.
Group scope	Global
Group type	Security

- 5** Click **OK**.

Creating SAP system users, *sapsidadm* and **SAPServiceSAPSID**

Follow the steps below to create the SAP system users:

To create the SAP system users

- 1** In the Active Directory Users and Computers dialog box, right-click **Users**, and select **New > User**.
- 2** In the New Object - User dialog box, enter the following values for *sapsidadm*

First name	NA
Initials	NA
Last name	NA
Full name	<i>sapsidadm</i>
User logon name	<i>sapsidadm</i>

- 3** Click **Next**.
- 4** Enter the password and confirm the password.

- 5 Select **Password never expires**.
Ensure that no other option is selected.
- 6 Click **Next**.
- 7 Click **Finish**.

Adding the *sapsidadm* user to the SAP_SAPSID_GlobalAdmin Group

To add the *sapsidadm* user to the SAP_SAPSID_GlobalAdmin Group

- 1 In the Active Directory Users and Computers dialog box, double-click *sapsidadm* under Users.
- 2 In the *sapsidadm* Properties dialog box, click **Member > Add**.
- 3 In the Select Groups dialog box, select SAP_SAPSID_GlobalAdmin
- 4 Click **Add**.

Note: By default, this user is also a member of the Domain Users group.

- 5 Click **OK**.

To add the SAPServiceSAPSID user to the SAP_SAPSID_GlobalAdmin Group

To add the SAPSID service user to the SAP_SAPSID_GlobalAdmin Group

- 1 In the Active Directory Users and Computers dialog box, double-click SAPServiceSAPSID under Users.
- 2 In the SAPServiceSAPSID dialog box, click **Member > Add**.
- 3 In the Select Groups dialog box, select SAP_SAPSID_GlobalAdmin.
- 4 Click **Add**.
- 5 Remove the user from the Domain users group.
 - From the Member of list, select SAP_SAPSID_GlobalAdmin
 - Select Set Primary Group
 - Select Domain Users
 - Click **Remove** to delete the Domain Users group from the Member of list
 - Click **OK**
 - Exit the Active Directory Users and Computers dialog box.

Creating and adding local groups and users

This section describes the procedure to add new local groups and users.

Note: This procedure may vary for Windows Server 2008.

To create a local group

- 1 Click **Start > ControlPanel > Administrative tools > Computer Management**.
- 2 In the Computer Management dialog box, select **Local Users and Groups**.
- 3 Right-click **Group**, and select **New Group**.
- 4 In the New Group dialog box, enter `SAP_SAPSID_LocalAdmin` in the **Group name** field.
- 5 Click **Add**.
- 6 In the Select Users, Computers or Groups dialog box, enter `domain\SAP_SAPSID_GlobalAdmin` in the Object names field.
- 7 Click **OK** on the Select Users, Computers, or Groups dialog box.
- 8 Click **OK** on the New Group dialog box

To add a domain group to a local group

- 1 Click **Start > ControlPanel > Administrative tools > Computer Management**.
- 2 In the Computer Management Console, select **Local Users and Groups >Groups**.
- 3 In the right panel, double-click **Administrators**.
- 4 In the Administrators Properties dialog box, click **Add**.
- 5 In the Select Users, Computers, or Groups dialog box, enter `domain\SAP_SAPSID_GlobalAdmin` in the Object names field.
- 6 Click **OK** in the Select Users, Computers, or Groups dialog box.
- 7 Click **OK** in the Administrators Properties dialog box.

Creating sapmnt and saploc share directories

Ensure that the sapmnt and saploc directories are shared, and are accessible by the SAP system Administrator.

To create the sapmnt and saploc share directories on Windows Server 2008/2012

- 1** Right-click the *drive:\usr\sap* directory, and select properties.
- 2** On the Properties dialog box, click the **Sharing** tab.
- 3** Click **Advanced Sharing**.
- 4** Select **Share this folder** option.
- 5** Enter *sapmnt* in the Share name field.
- 6** Click **Permissions**.
- 7** In the Permissions for sapmnt dialog box, ensure that the Administrators and SAP_LocalAdmin user groups have full control for the sapmnt directory.
- 8** Click **OK** in the Permissions for sapmnt dialog box.
- 9** In the Properties dialog box, click Advanced Sharing.
- 10** On the Advanced Sharing dialog box, click **Adv**.
- 11** On the New Share dialog box, enter *saploc* in the Share name field.
- 12** Click **OK** in the New Share dialog box.
- 13** Click **Permissions**.
- 14** In the Permissions for saploc dialog box, ensure that the Administrators and SAP_LocalAdmin user groups have full control for the saploc directory.
- 15** Click **OK** in the Permissions for saploc dialog box.
- 16** Click **OK** in the New Share dialog box.
- 17** Click **OK** in the Advanced Sharing dialog box.
- 18** Click **Close** in the Properties dialog box.


Configuring the SAP systems on Windows Server 2008/2012

On Windows Server 2008/2012, you can only access file shares pointing to local disks with the physical computer name. To be able to define file shares pointing to shared disks, a “client access point” (one IP address associated with one network name cluster resource) must already exist in the failover cluster service group to which the shared disk belongs. Since you can only access file shares pointing to shared disks with the network name that belongs to the same failover cluster service group, you can create multiple file shares with the same file share name (for

example, sapmnt) in a failover cluster environment, assuming the file shares belong to different cluster service groups.

Figure 2-1 shows a typical SAP system installation on a Windows Server 2008/2012 system under VCS environment.

Figure 2-1 Typical SAP system installation (using multiple sapmnt file shares) on a Windows Server 2008/2012 system under VCS environment

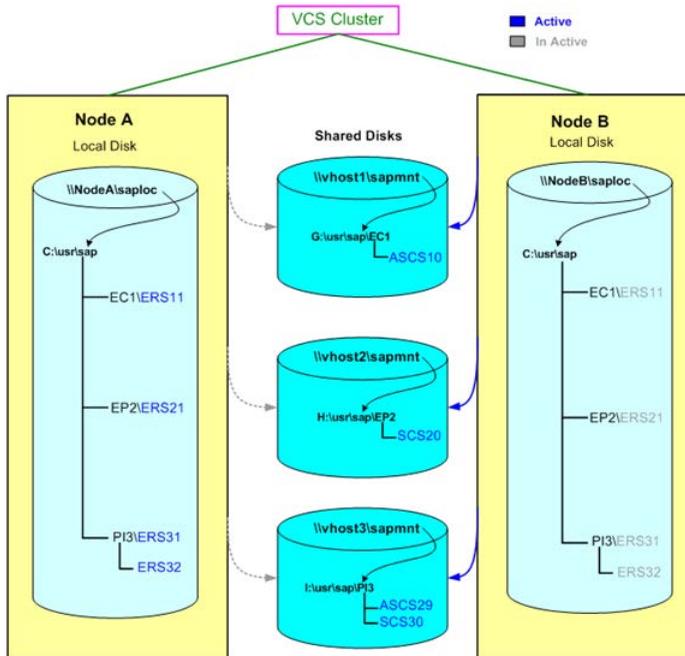

For sample service group configurations on Windows Server 2008/2012,

See “Sample service group configurations for SAP systems on Windows Server 2008/2012” on page 78.

Installing, upgrading, and removing the agent for SAP Web Application Server

This chapter includes the following topics:

- [Before you install the agent for SAP Web Application Server](#)
- [Installing the agent for SAP Web Application Server](#)
- [Removing the agent for SAP Web Application Server](#)
- [Upgrading the agent for SAP Web Application Server](#)

Before you install the agent for SAP Web Application Server

Before you install the Cluster Server agent for SAP Web Application Server, ensure that you install and configure the VCS on all nodes in the cluster.

Installing the agent for SAP Web Application Server

Note: By default, the SAP Web Application Server agent is installed along with VCS 6.1. You can upgrade the SAP Web Application Server agent to the latest Agent Pack release that is available.

The agents for both SAP NetWeaver and SAP Web Application Server are combined in a single package. Thus, if you install either of the agents, the other agent gets installed by default.

To install the VCS agent for SAP Web Application Server

- 1 Log on to any node in the cluster.
Ensure that the logged on user has the domain administrative privileges.
- 2 Download the Agent Pack from the Symantec Operations Readiness Tools (SORT) site: <https://sort.veritas.com/agents>.
You can download the complete Agent Pack tar file or the individual agent tar file.
- 3 Uncompress the file to a temporary location.
- 4 If you downloaded the complete Agent Pack tar file, navigate to the directory containing the package for the platform running in your environment.

```
Windows 2008 (x64) cd1\windows\w2k8x64\wcs\application\sapwebas_agent\  
vcs_version\version_agent\Pkgs
```

```
Windows 2012 (x64) cd1\windows\w2k12x64\wcs\application\sapwebas_agent\  
vcs_version\version_agent\Pkgs
```

- 5 Double-click **vrtsvcssap.msi**.
- 6 Follow the instructions that the install program provides, to complete the installation of the Cluster Server agent for SAP Web Application Server.

Removing the agent for SAP Web Application Server

Perform the following procedure to uninstall the agent for SAP Web Application Server from a cluster. Perform these steps while the cluster is active.

Note: The agent for SAP NetWeaver and SAP WebAS are combined in a single package. Thus, removing one agent package will remove the other by default.

Note: If you remove the SAP WebAS agent, the default agent installed with VCS 6.1 is also removed.

To uninstall the VCS agent for SAP Web Application Server

- 1 Ensure that all clustered SAP resources are offline.
- 2 From the cluster, remove all the resources that use the agents for SAP Web Application Server.
- 3 Perform the following steps on each node from which you want to uninstall the agent. Ensure that you have a user with administrative privileges.
 - Click **Start > Settings > Control Panel**.
 - On Windows 2008: Navigate to **Programs and Features**
 - On Windows 2008R2/2012: Navigate to **Programs>Programs and Features**
 - From the list of programs, select **vrtsvcssap.msi**.
- 4 Click **Change/Remove**.
- 5 Follow the instructions that the uninstall program provides, to complete the uninstallation of the agents for SAP Web Application Server.

Upgrading the agent for SAP Web Application Server

Perform the following steps to upgrade the agent with minimal disruption, in a VCS environment.

To upgrade the agent in a VCS environment

- 1 Login as domain administrator.
- 2 Verify that your path is *drive:\Program Files\Veritas\Cluster Server\bin*
- 3 Persistently freeze all the service groups that host the application:

```
C:\> hagrpf -freeze GroupName -persistent
```

- 4 Stop the SAP WebAS agent forcibly:

```
C:\> haagent -stop SAPWebAS -force -sys SystemName
```

- 5 Ensure that the agent operations are stopped on all the nodes.
- 6 Take a back up of the main.cf and types.cf files:

```
C:\> copy drive:\> Program Files\Veritas\Cluster Server\conf\config\main.cf drive:\>backup\main.cf
```

```
C:\> copy drive:\> Program Files\Veritas\Cluster Server\conf\config\types.cf drive:\>backup\types.cf
```

- 7 Install the new agent on all the nodes.
- 8 Ensure that the logged on user has the domain administrative privileges.
- 9 Download the Agent Pack from the Symantec Operations Readiness Tools (SORT) site:<https://sort.veritas.com/agents>.

You can download the complete Agent Pack tar file or the individual agent tar file.

- 10 Uncompress the file to a temporary location.
- 11 If you downloaded the complete Agent Pack tar file, navigate to the directory containing the package for the platform running in your environment:

```
Windows 2008 (x64)      cd1\windows\w2k8x64\vcs\
                        application\sapwebas_agent\vcs_version\
                        version_agent\Pkgs
```

```
Windows 2012 (x64)     cd1\windows\w2k12x64\vcs\
                        applicationsapwebas_agent\ vcs_version\
                        version_agent\Pkgs
```

- 12 Double-click **vrtsvcssap.msi**.
- 13 Select **Modify** and follow the instructions that the install program provides to upgrade the Veritas agent for SAP Web Application Server.

- 14 Navigate to *drive:\> Program Files\Veritas\Cluster Server\conf\config\types.cf* file and verify if any duplicate type definitions exists for SAP Web Application Server on all the nodes.

If duplicate type definitions exist, remove old type definition from types.cf file and save the file.

Note: To identify the old type definition, compare the new type definition file with the old (backed up) types.cf file.

- 15 Check for the changes in the resource values required, if any, due to the new agent types definition.

Note: To note the list of changed attributes, compare the new type definition file with the old type definition file.

- 16 Start the agent on all nodes:

```
C:\> haagent -start SAPWebAS -sys SystemName
```

- 17 Unfreeze the service groups once all the resources come to an online steady state:

```
C:\> hagrps -unfreeze GroupName -persistent
```

Configuring the agent for SAP Web Application Server

This chapter includes the following topics:

- [About configuring the agent for SAP Web Application Server](#)
- [Agent attributes for SAP Web Application Server](#)
- [Setting the SAPMonHome attribute](#)
- [Configuring the execution period for agent functions](#)
- [Executing a custom monitor program](#)
- [Preventing early faulting of Java and Add-In instances](#)

About configuring the agent for SAP Web Application Server

To provide high availability for SAP NetWeaver components in the VCS environment, you must first configure the VCS resources of type SAPWebAS.

After installing the Agents for SAP NetWeaver, you can create and configure the SAP resources. Before you configure a resource, review the attributes table that describes the SAPWebAS resource type and its attribute definitions.

See [“Agent attributes for SAP Web Application Server”](#) on page 48.

Agent attributes for SAP Web Application Server

In a virtual environment, the Symantec High Availability Configuration Wizard discovers the required attributes. You can use CLI commands to configure any of the optional attributes.

[Table 4-1](#) shows the required attributes for configuring a SAP Web Application Server instance.

Table 4-1 Required attributes

Required attributes	Description
ResLogLevel	<p>The logging detail performed by the agent for the resource. The valid values are:</p> <p>INFO: Logs error messages</p> <p>TRACE: Logs error and trace messages. TRACE is very verbose and should only be used during initial configuration or for troubleshooting and diagnostic operations.</p> <p>Type and dimension: string-scalar</p> <p>Default: INFO</p> <p>Example: TRACE</p>
SAPAdmin	<p>Windows user name used to start the SAP instance. This user must be dedicated to all the SAP instances within an SAP system. The format is <i>sapsidadm</i>.</p> <p>Type and dimension: string-scalar</p> <p>Default: No default value</p> <p>Example: piladm</p>
SAPAdminDomain	<p>Windows domain name to which the SAPAdmin user belongs.</p> <p>Note: If SAPAdmin does not belong to a Windows domain, use the cluster localization settings to specify the local computer name for each system.</p> <p>Type and dimension: string-scalar</p> <p>Default: No default value</p> <p>Example: SYMCORP</p>

Table 4-1 Required attributes (*continued*)

Required attributes	Description
SAPAdminPassword	<p>Password for the SAPAdmin user.</p> <p>Use the <code>vcsencrypt -agent</code> command to encrypt the password. If you are using the VCS GUI, the GUI automatically encrypts the password.</p> <p>Type and dimension: string-scalar</p> <p>Default: No default value</p> <p>Example: vxfgh28skbsj</p>
SAPHost	<p>Virtual IP host name (LANMAN name) for the SAP instance. If the instance is installed with location hostname, use the local system name as this attribute value.</p> <p>Type and dimension: string-scalar</p> <p>Default: No default value</p> <p>Example: sappi1scs</p>
SAPHome	<p>The absolute path to the SAP base directory. This attribute is used to locate programs that the agent uses for start, stop, and clean functions.</p> <p>Example 1: C:\usr\sap\PI1\DVEBMSG00\exe</p> <p>Example 2: C:\usr\sap\PI1\ASCS01\exe</p> <p>Default: No default value</p>
SAPServiceUser	<p>Windows user name used to start the SAP Windows service for an SAPSID. This user must be dedicated to all the SAP services under one SAP system, and must not be used by any other SAP service or instance under a different SAP system, even in the same cluster.</p> <p>Note: Do not include the domain name in the value for this attribute. Use the SAPAdminDomain attribute to specify domain information.</p> <p>Type and dimension: string-scalar</p> <p>Default: No default value</p> <p>Example: SAPServicePI1</p>

Table 4-1 Required attributes (*continued*)

Required attributes	Description
SAPSID	<p>SAP system name. This attribute starts with an alphabetic character and is exactly 3 characters in length. Ensure that the alphabetic characters used in this attribute are in uppercase only. SAPSID is defined during the SAP installation.</p> <p>Type and dimension: string-scalar</p> <p>Default: No default value</p> <p>Example: PI1</p>
InstType	<p>String identifier that classifies and describes the SAP server instance type. The InstType values are not case sensitive.</p> <p>The valid values are:</p> <p>APPSEV: SAP Application Server</p> <p>ENQUEUE: SAP Central Services</p> <p>ENQREP: SAP Enqueue Replication Server</p> <p>SMDA: Solution Manager Diagnostics Agent</p> <p>Type and dimension: string-scalar</p> <p>Default: APPSERV</p> <p>Example: ENQUEUE</p>
InstName	<p>Uniquely identifies an SAP server instance, along with the SAPSID attribute. The last two characters of this attribute specify the value of the InstID attribute. The InstID and SAPSID attributes together uniquely identify an SAP instance.</p> <p>Some examples include the following:</p> <ul style="list-style-type: none"> ■ ASCS03: SAP Central Services (ABAP) ■ SCS07: SAP Central Services (Java) ■ DVEBMGS00: SAP Primary Application Server (ABAP) ■ D05: SAP Additional Application Server (ABAP) ■ J06: SAP (Primary/Additional) Application Server (Java) ■ ERS04: SAP Enqueue Replication server ■ SMDA97: Solution Manager Diagnostics Agent <p>Type and dimension: string-scalar</p> <p>Default: ""</p> <p>Example: DVEBMGS00</p>

Table 4-1 Required attributes (*continued*)

Required attributes	Description
InstProfile	<p>Specifies the full path and file name of the SAP Instance Profile. Typically the InstProfile is found in C:\usr\sap\SAPSID\SYS\profile and has a name of SAPSID_InstName_hostname.</p> <p>Type and dimension: string-scalar</p> <p>Default: No default value</p> <p>Example: C:\usr\sap\PI1\SYS\profile\PI1_DVEBMGS00_sappi1pas</p>
ProcMon	<p>The list of SAP processes that the monitor function must monitor during a first-level check of an SAP instance. The entries in this list are separated by a space and can be specified in any order. The valid values are:</p> <p>APPSERV: disp+work.exe igswd.exe jstart.exe gwrp.exe icman.exe</p> <p>ENQUEUE: msg_server.exe ensrver.exe gwrp.exe</p> <p>ENQREP: enrepsrver.exe</p> <p>SMDA: jstart.exe</p> <p>Type and dimension: vector-scalar</p> <p>Default: No default value</p> <p>Example: disp+work.exe</p>
SAPMonHome	<p>The directory that defines the location of the sapcontrol.exe or ensmon.exe commands. The agent for SAP WebAS uses these commands for second-level monitoring.</p> <p>This functionality is not a part of the base SAP installation. Hence, the value of this attribute may be different from the SAPHome attribute.</p> <p>Type and dimension: string-scalar</p> <p>Default: No default value</p> <p>Example: C:\usr\sap\AAV\SYS\exe\luc\NTAMD64</p>

Table 4-1 Required attributes (*continued*)

Required attributes	Description
EnqSrvResName	<p>Specifies the SAP Central Services instance resource name in VCS. This attribute is set only for Enqueue Replication Server (ERS) and will be used by both Enqueue and Enqueue Replication Servers to query others status during startup and failover.</p> <p>Type and dimension: string-scalar</p> <p>Default: No default value</p> <p>Example: SAPPI1SCS_scs</p>

[Table 4-2](#) shows the optional attributes for configuring an SAP Web Application Server instance.

Table 4-2 Optional attributes

Attribute	Description
SecondLevelMonitor	<p>Used to enable second-level monitoring and specify the interval for the same. Second-level monitoring is a deeper, more thorough state check of the configured SAP instance. The numeric value specifies how often the second-level monitoring routines are run. 0 means never run the second-level monitoring routines, 1 means run routines every monitor interval, 2 means run routines every second monitor interval, and so on.</p> <p>Note: Exercise caution while setting SecondLevelMonitor to large numbers. For example, if the MonitorInterval is set to 60 seconds and the SecondLevelMonitor is set to 100, then sapcontrol is executed every 100 minutes, which may not be as often as intended. For maximum flexibility, no upper limit is defined for SecondLevelMonitor.</p> <p>For Java and Add-In systems, if SecondLevelMonitor is enabled and if resources are going to unknown state, change ResLogLevel to TRACE. After you change ResLogLevel to TRACE, you might encounter the following error message:</p> <pre>J2EEGetProcessList FAIL: HTTP error, HTTP/1.1 401 Unauthorized.</pre> <p>If you encounter the above-mentioned error message, edit the instance profile, add the following parameter, and restart the instance service:</p> <pre>service/protectedwebmethods =</pre> <p>Type and dimension: integer-scalar</p> <p>Default: 0</p> <p>Example: 1</p>

Table 4-2 Optional attributes (*continued*)

Attribute	Description
MonitorProgram	<p>Full path and file name of an external, user-supplied monitor program. If specified, the monitor function executes this file to perform an additional server state check. There are no restrictions for what actions the external monitor program performs, to determine the state of a SAP instance server. The only constraint is that the external monitor program must return one of the following integer values:</p> <ul style="list-style-type: none"> ■ 0 (server is online) ■ 110 (server is online) ■ 100 (server is offline) ■ 1 (server is offline) ■ 99 or anything else (server state is unknown) <p>Note: Veritas recommends storing the external monitor program in the shared disk directory to ensure the file is always available on the online system. Arguments are supported.</p> <p>Type and dimension: string-scalar</p> <p>Default: No default value</p> <p>Example 1: C:\usr\sap\PI1\DVEBMGS00\work\mymonitor.bat</p> <p>Example 2: C:\usr\sap\PI1\DVEBMGS00\work\mymonitor.exe arg1 arg2</p>

Setting the SAPMonHome attribute

The SAPMonHome attribute contains the absolute path to the directory that contains the binary used for second level monitoring process.

The binaries that are used during second-level monitoring for different SAP usage types and SAP instances are as follows:

- For ABAP application Server: sapcontrol.exe
- For Add-In (ABAP + Java) application server: sapcontrol.exe
- For Enqueue and Enqueue Replication Server: ensmon.exe

Note: For Java application server and java component of Add-In application server the agent uses the sapcontrol.exe utility present in SAPHome.

Configuring the execution period for agent functions

An agent function is allocated an execution period using the respective time-out attributes: `OnlineTimeout`, `OfflineTimeout`, `MonitorTimeout`, and `CleanTimeout`. By default these values are set to 300, 300, 60 and 60 respectively.

If an agent function executes a program, for example `sapcontrol.exe`, the program must execute within the allocated execution period. If the program is unable to execute within the allocated period, the agent function cancels and terminates the execution of the program. You must set these timeout attributes to appropriate values depending on the time required for SAP applications. You can modify these values with the following command.

```
hatype -modify TypeName attribute_name attribute_value
```

Example: C:\> hatype -modify SAPWebAS OnlineTimeout 600

Executing a custom monitor program

The monitor function executes a custom monitor program to perform a user-defined SAP WebAS state check.

The monitor function executes the `MonitorProgram` if the following conditions are true:

- The specified utility is a valid executable file.
- The first level process check indicates that the SAP Web AS instance is online.
- The `SecondLevelMonitor` attribute is either set to 0 or 1, and the second level check indicates that the SAP Web AS instance is online.
- The `SecondLevelMonitor` attribute is set to greater than 1, but the second level check is deferred for this monitoring cycle

The monitor operation interprets the program exit code as follows:

110 or 0	SAP server instance is ONLINE
100 or 1	SAP server instance is OFFLINE
99	SAP server instance is UNKNOWN
Any other value	SAP server instance is UNKNOWN

To ensure that the custom monitor program is always available to the agent application, Veritas recommends storing the file in a shared directory that is available on an online node.

Preventing early faulting of Java and Add-In instances

When you start a SAP Java or a SAP Add-In Application Server Instance, SAP automatically starts processes such as `jstart.exe`. Depending upon the available resources, starting these processes takes some finite time.

The agent for SAP WebAS allows enough time for SAP to start these processes successfully. The agent checks the status of these processes in definite intervals. While checking the status of these processes, if the processes are missing, the agent pauses for a time period that is equal to one-tenth of the value of the `MonitorTimeout` attribute before re-checking the status of the processes.

Veritas strongly recommends that the administrator set the `MonitorTimeout` attribute, such that the agent gives enough time for these processes to restart if a failure occurs.

For example, if an add-in server instance takes 9 seconds to restart a failed `jstart` process, you must set the value of the `MonitorTimeout` attribute to at least 90 seconds.

Configuring the service groups for SAP Web Application Server

This chapter includes the following topics:

- [About configuring service groups for SAP Web Application Server](#)
- [Before configuring the service groups for SAP Web Application Server](#)
- [Configuring service groups with the SAP Web Application Server agent](#)
- [Configuring the SAPWebAS preonline script](#)

About configuring service groups for SAP Web Application Server

Configuring the SAP Web Application Server service group involves creating the SAP service group, its resources, and defining attribute values for the configured resources. You must have administrator privileges to create and configure a service group.

You can configure the service groups using one of the following:

- The Cluster Manager (Java console)
- Veritas Infoscale Operations Manager
- The command line

Before configuring the service groups for SAP Web Application Server

Before you configure the SAP Web Application Server service group, you must perform the following:

- Verify that VCS is installed and configured on all nodes in the cluster where you will configure the service group.
Refer to the product installation guide for more information on installing and configuring VCS.
- Verify that SAP NetWeaver is installed and configured identically on all nodes in the cluster.
See [“About installing SAP Web Application Server for high availability”](#) on page 24.
See [“About configuring SAP Web Application Server for high availability”](#) on page 24.
- Verify that the Cluster Server agent for SAP Web Application Server is installed on all nodes in the cluster.

Configuring service groups with the SAP Web Application Server agent

While setting up a cluster, you must always ensure that the cluster has some spare capacity to handle the SAP NetWeaver failover scenarios. For example, in case of a back-end database failure, the cluster must be able to run another database instance in conjunction with other running applications. Review the information about data protection.

The cluster should thus be able to provide application failover by encapsulating the resources required for an application into a service group. A service group is a virtualized application that can switch between the cluster nodes. It contains a set of dependent resources, such as disk groups, disk volumes, file systems, IP addresses, NIC cards, and dependent application processes. It also includes logic about the dependencies between the application components.

These service groups should thus be configured such that the cluster can start, stop, monitor, and switch the service groups between the nodes, depending upon the server or resource faults. An administrator should also be pro-actively able to move a service group between cluster nodes to perform preventative maintenance or apply patches.

To configure the service groups

- 1 Change the cluster configuration to read/write mode.

```
C:\> haconf -makerw
```

- 2 Create a service group for SAP NetWeaver

```
C:\> hagrps -add SAP710-PI1SCS
```

- 3 Modify the SystemList attribute for the group, to add systems.

```
C:\> hagrps -modify SAP710-PI1SCS SystemList vcswin74 0 vcswin75  
1
```

- 4 Create resources for NIC, IP, Lanman, VMDg, and MountV in the service group.

```
C:\> hares -add SAP710-PI1SCS_nic NIC SAP710-PI1SCS
```

```
C:\> hares -add SAP710-PI1SCS_ip IP SAP710-PI1SCS
```

```
C:\> hares -add SAP710-PI1SCS_lanman Lanman SAP710-PI1SCS
```

```
C:\> hares -add SAP710-PI1SCS_mnt MountV SAP710-PI1SCS
```

```
C:\> hares -add SAP710-PI1SCS_vmdg VMDg SAP710-PI1SCS
```

For more details on creating and modifying resource attributes for NIC, IP, Lanman, VMDg and MountV refer to *Cluster Server Bundled Agents Reference Guide*.

- 5 Create links between the resources.

```
C:\> hares -link SAP710-PI1SCS_ip SAP710-PI1SCS_nic
```

```
C:\> hares -link SAP710-PI1SCS_lanman SAP710-PI1SCS_ip
```

```
C:\> hares -link SAP710-PI1SCS_mnt SAP710-PI1SCS_vmdg
```

- 6 Create SAPWebAS resource for applications based on SAP NetWeaver

```
C:\> hares -add SAP710-PI1SCS_scs SAPWebAS SAP710-PI1SCS
```

Based on the SAP instance you are clustering, modify the resource attributes.

See [“Agent attributes for SAP Web Application Server”](#) on page 48.

- 7 Create resource dependencies for SAPWebAS resource.

The SAPWebAS resource depends on the Lanman and MountV resources.

```
C:\> hares -link SAP710-PI1SCS_scs SAP710-PI1SCS_lanman
```

```
C:\> hares -link SAP710-PI1SCS_scs SAP710-PI1SCS_mnt
```

8 Verify the final resource dependencies for SAP server group.

Group	Parent	Child
SAP710-PI1SCS	SAP710-PI1SCS_scs	SAP710-PI1SCS_lanman
SAP710-PI1SCS	SAP710-PI1SCS_scs	SAP710-PI1SCS_mnt
SAP710-PI1SCS	SAP710-PI1SCS_ip	SAP710-PI1SCS_nic
SAP710-PI1SCS	SAP710-PI1SCS_lanman	SAP710-PI1SCS_ip
SAP710-PI1SCS	SAP710-PI1SCS_mnt	SAP710-PI1SCS_vmdg

9 Save the cluster configuration.

```
C:\> haconf -dump -makero
```

Configuring the SAPWebAS preonline script

In a clustered environment, the SAP administrator installs and configures SAP Enqueue and SAP Enqueue Replication Server. SAP Enqueue and Enqueue Replication Server have the following requisites:

- If an Enqueue server instance fails, the server must fail over to the node on which the Enqueue Replication Server instance is running.
- If the Enqueue Replication Server instance fails, the instance must fail over to a node on which Enqueue Server is NOT running.

The SAPWebAS preonline script facilitates proper Enqueue server failover behavior. The existing VCS preonline script calls the SAPWebAS preonline script.

The SAPWebAS preonline script performs the following tasks:

- If the service group for which the script is running does not have an Enqueue server or an Enqueue Replication Server resource, the script returns the control to the VCS preonline script.
- If the service group has an Enqueue server or Enqueue Replication Server resource, the script determines the node on which the online operation can be performed. The script also ensures that the online operation does not execute the VCS preonline script again.

To accomplish this failover behavior, you must configure the VCS preonline script.

The VCS preonline trigger calls an external preonline trigger utility—sapwebaspreonline.exe. The initiated preonline trigger performs the steps necessary for correct failover behavior of the Enqueue servers. The sapwebaspreonline.exe utility is located in the %VCS_HOME%\bin\SAPWebAS directory.

To configure SAPWebAS preonline script

- 1** Go to the `%VCS_HOME%\bin\Trigger` directory.
- 2** Skip this step if the preonline file exists in this directory.

If the preonline file does not exist, copy the sample preonline trigger file from the `%VCS_HOME%\bin\Sample_Triggers` directory to the `%VCS_HOME%\bin\Triggers` directory, rename the file to preonline, and then use this file.

3 Add the following lines to the preonline file:

```

#-----
# Start sapwebas preonline trigger.
#-----
# Perl preonline.pl <system> <group> <whyonlining>
<systemwhereregroupfaulted>
my $system = $ARGV[0];
my $group = $ARGV[1];
my $whyonlining = $ARGV[2];
my $systemwhereregroupfaulted = undef;
my $sArgs = join(' ', @ARGV);
VCSAG_LOG_MSG("I", "Arguments [$sArgs]", 15041);
if(defined $ARGV[3]) {
    $systemwhereregroupfaulted = $ARGV[3];
}
my $SAPWebASPreOnlineTrigger = sprintf("%s\\bin\\SAPWebAS\\
sapwebaspreonline.exe", $vcs_home);
VCSAG_LOG_MSG("I",
"The trigger command is [$SAPPreOnlineTrigger]", 15041);
if(defined $systemwhereregroupfaulted)
{
    VCSAG_LOG_MSG("I", "The group is faulted on syetem =
[$systemwhereregroupfaulted]", 15042);
    $CMD = sprintf("%s\\%s %s %s", $SAPWebASPreOnlineTrigger,
    $system, $group, $whyonlining, $systemwhereregroupfaulted);
}
else {
    $CMD = sprintf("%s\\%s %s %s", $SAPWebASPreOnlineTrigger,
    $system, $group, $whyonlining);
}
system($CMD);
my $exit_value = $? >> 8;
VCSAG_LOG_MSG("I", "The exit code from the trigger: [$exit_value].",
    15046, $exit_value);
if($exit_value == 0) {
    VCSAG_LOG_MSG("I", "The PreOnline Trigger for SAP executed
successfully.", 15046);
    exit;
}
elseif($exit_value == 1) {
    VCSAG_LOG_MSG("I", "The PreOnline Trigger for SAP FAILED.", 15047);
    exit;
}

```

```
}  
else {  
  VCSAG_LOG_MSG("I", "Unknown PreOnline trigger.", 15048);  
}  
#-----  
# End sapwebas preonline trigger.  
#-----  
.  
.  
# give control back to HAD.  
if (defined $ARGV[3]) {  
  \"$vcs_home\\bin\\hagrp\" -online -nopre $ARGV[1] -sys $ARGV[0]  
-checkpartial $ARGV[3]`;   
  exit;  
}  
  
 \"$vcs_home\\bin\\hagrp\" -online -nopre $ARGV[1] -sys $ARGV[0]`;   
exit;
```

- 4 Use the following command to set the preonline trigger attribute to true for the Service Groups to which the Enqueue and Enqueue Replication server instances belongs:

```
C:\> hagrp -modify service_group PreOnline 1 -sys system
```

The preonline script is now configured to facilitate Enqueue and Enqueue Replication server behavior. You can view the logs in the VCS engine log, engine_A.log.

Note: Once the preonline trigger is configured, you may see unexpected behavior while manually switching or performing online operations on the Enqueue Replication service group. This behavior is a result of the control logic within the preonline trigger that protects the Enqueue lock table. For system maintenance, if you prefer to perform manual operations on the service groups, you can do so by disabling the preonline trigger.

To disable the preonline trigger, use the following command:

```
C:\> hagrp -modify service_group PreOnline 0 -sys system
```

Troubleshooting the agent for SAP Web Application Server

This chapter includes the following topics:

- [Using correct software and operating system versions](#)
- [Meeting prerequisites](#)
- [Configuring SAP Web Application Server resources](#)
- [Starting the SAP Web Application Server outside a cluster](#)
- [Troubleshooting common problems](#)
- [Reviewing SAP Web Application Server agent log files](#)
- [Reviewing error log files](#)
- [Checks for an SAP Add-In Usage Types](#)

Using correct software and operating system versions

Ensure that no issues arise due to incorrect software and operating system versions. For the correct versions of operating system and software to be installed on the resource systems, refer to SORT site: <https://sort.veritas.com/agents>

Meeting prerequisites

Before installing the Cluster Server agent for SAP Web Application Server, double check that you meet the prerequisite requirements. For a list of prerequisites:

See [“Before you install the agent for SAP Web Application Server”](#) on page 42.

Configuring SAP Web Application Server resources

Before using an SAP Web Application Server resource, ensure that you configure the agent attributes correctly. For more information,

See [“Agent attributes for SAP Web Application Server”](#) on page 48.

Starting the SAP Web Application Server outside a cluster

If you face problems while working with a resource, you must disable the resource within the cluster framework. A disabled resource is not under the control of the cluster framework, and so you can test the SAP Web Application Server independent of the cluster framework. Refer to the cluster documentation for information about disabling a resource. You can then restart the SAP Web Application Server outside the cluster framework.

Note: Use the same parameters that the resource attributes define within the cluster framework while restarting the resource outside the framework.

A sample procedure to start a SAP Web Application Server outside the cluster framework, is illustrated as follows:

To start a SAP instance outside the cluster framework, using SAP MMC

- 1 Log in to the system as a *sapsidadm* user.
- 2 Use the SAP Microsoft Management Console (MMC) to start the SAP instance.
 Ensure that the SAP instance starts successfully. If the instance starts successfully outside the cluster, you can attempt to start it inside the cluster framework.

To start a SAP instance outside the cluster framework, using the command prompt

- 1 Log in to the system as a *sapsidadm* user.
- 2 Start the SAP Windows service *SAPSAPSID_xx* for SAP instance, using the following command:.

```
drive\> net start SAPSAPSID_xx
```

- 3 Use the *startsap.exe* utility to start the SAP instance. Enter,

```
drive\>usr\sap\SAPSID\InstName\exe\startsap.exe name=SAPSID
nr=InstID sapdiahost=virtual_hostname
```

Ensure that the SAP instance starts successfully. If the instance starts successfully outside the cluster, you can attempt to start it inside the cluster framework.

Troubleshooting common problems

This section describes some problems that you may face while working with the Cluster Server agent for SAP Web Application Server in a VCS environment.

Unable to install the Cluster Server agent for SAP Web Application Server

If you are not able to install the Cluster Server agent for SAP Web Application Server, check to see if previous versions of the agent are present in the system. If present, remove the older agents and attempt to install the agent again.

Also, ensure that you go through the prerequisites before installing SAP NetWeaver.

See [“Before you install the agent for SAP Web Application Server”](#) on page 42.

Unable to see an entry in the SAP MMC for an SAP instance

If you cannot see any entry for an SAP instance in the SAP MMC, you must re-register the SAP services as COM Typelibrary Only.

To re-register the SAP services

- 1 At the command prompt, navigate to *drive*\Program Files\SAP\hostcntl\exe directory.
- 2 Run the `sapstartsrv.exe` command.
- 3 In the SAP Service Install/Uninstall dialog box, select **Register COM Typelibrary Only** in the Operation field.

You must re-register the SAP services as described here whenever a change in the SAP service registration occurs.

The agent for SAP Web Application Server fails to bring online an SAP instance resource through VCS

Attempt to start the SAP resource outside the VCS environment to ensure that the resource is working properly.

See [“Starting the SAP Web Application Server outside a cluster”](#) on page 65.

You can also view the log files to further diagnose the problem.

See [“Reviewing SAP Web Application Server agent log files”](#) on page 69.

SAP instance does not come online, and the `startsap.exe` command exits with exit code -1

Check the SAP MMC to ensure that the entry for this SAP instance is present. If the entry is not present, add the SAP instance in the SAP MMC.

See [“Unable to see an entry in the SAP MMC for an SAP instance”](#) on page 66.

Then attempt to bring the SAP instance online.

In case of an Enqueue server failure, the Enqueue server instance fails to take over the lock table from the Enqueue Replication server instance

If the Enqueue Replication server instance does not recognize the correct Enqueue server instance, this problem may occur. Ensure that the value of `InstID` passed to the Enqueue Replication server process, `enrepserver.exe` in the start profile, belongs to the correct Enqueue server instance.

The ensmon.exe command returns exit code 4 for a Enqueue server instance

If the Enqueue Replication server is not configured or is not online, this problem occurs. Ensure that if the Enqueue Replication server is configured, the instance is online.

If the Enqueue Replication server instance is not configured, disable the replication parameter in the Instance profile of the Enqueue server instance:

```
enqueue/server/replication = false
```

The return code of the ensmon.exe command is 8 for an Enqueue Replication server instance

The return code indicates that the Enqueue server instance is down. When the Enqueue server instance fails, the ensmon.exe command returns this code when the instance is switching over to the Enqueue Replication server instance to take over the instate lock table.

Check the state of the Enqueue server instance.

The Enqueue server instance does not fail over to the correct Enqueue Replication server instance

This problem occurs if the preonline script is not configured properly. To configure the preonline script:

See [“Configuring the SAPWebAS preonline script”](#) on page 60.

This problem also occurs if the InstType attribute is not set properly. Also make sure that you configured EnqSrvResName attribute for Enqueue Replication Server (ERS) Instance resource.

In case of a resource fault, the Service Group does not fail over

If the resource is not set to critical, the Service Group may not fail over. To resolve the issue, set the resource to critical.

Reviewing SAP Web Application Server agent log files

If you are facing problems while using the VCS agent for SAP Web Application Server or an SAP server instance, refer to the following sections to access the relevant files for information about the issue.

Using SAP instance log files

In case of problems while using the VCS agent for SAP Web Application Server, you can access the SAP instance log files for more information. These log files are located in the *drive:\usr\sap\SAPSID\InstName\work* directory.

Using SAP log files

If an SAP server is facing problems, you can access the agent log files to further diagnose the problem. The log file is *drive:\Program Files\Veritas\Cluster Server\log\SAPWebAS_A.txt*.

Reviewing error log files

If you face problems while using SAP NetWeaver instance or the agent for SAP WebAS, use the log files described in this section to investigate the problems.

Using SAP NetWeaver instance files

If a SAP server is facing problems, you can access the server log files to further diagnose the problem. The SAP log files are located in the *drive\usr\sap\SAPSID\InstName\work* directory.

Reviewing cluster log files

In case of problems while using the agent for SAP Web Application Server, you can access the engine log file for more information about a particular resource. The engine log file is located at *drive:\Program Files\Veritas\Cluster Server\log\engine_A.txt*.

Additionally, you can also refer to the latest SAP Web Application Server agent log files located at *drive:\Program Files\Veritas\Cluster Server\log\SAPWebAS_A.txt*.

Note: Include both these log files while addressing the problem to Veritas support team.

Using trace level logging

The ResLogLevel attribute controls the level of logging that is written in a cluster log file for each SAP Web AS resource. You can set this attribute to TRACE, which enables very detailed and verbose logging.

If you set ResLogLevel to TRACE, a very high volume of messages are produced. Veritas recommends that you localize the ResLogLevel attribute for a particular resource.

Warning: You may consider to temporarily increase the timeout values for SAPWebAS for debugging purposes. After the debugging process is complete, you can revert back to the original timeout values.

To localize ResLogLevel attribute for a resource

- 1 Identify the resource for which you want to enable detailed logging.
- 2 Localize the ResLogLevel attribute for the identified resource:


```
hares -local Resource_Name ResLogLevel
```
- 3 Set the ResLogLevel attribute to TRACE for the identified resource:


```
hares -modify Resource_Name ResLogLevel TRACE -sys SysA
```
- 4 Note the time before you begin to operate the identified resource.
- 5 Test the identified resource. The function reproduces the problem that you are attempting to diagnose.
- 6 Note the time when the problem is reproduced.
- 7 Set the ResLogLevel attribute back to INFO for the identified resource:


```
hares -modify Resource_Name ResLogLevel INFO -sys SysA
```
- 8 Review the contents of the log file. Use the time noted in Step 4 and Step 6 to diagnose the problem.

You can also contact Veritas support for more help.

Checks for an SAP Add-In Usage Types

For an SAP Add-In system, you must perform the following checks before further investigations:

- The SAP resources running the ABAP and Java Central Services instances are in the same Service Group.
- The SAP resources running the ABAP and Java Enqueue Replication server instances, are in the same Service Group.

Note: Veritas recommends to configure the Central Services and Enqueue Replication server instances for an Add-In usage type in different service groups to minimize the SPOFs in a service group.

- Ensure the following:
 - The EnqSrvResName attribute of the Java Enqueue Replication server instance is set to the VCS resource that is running the corresponding Java Central Services instance (SCS).
 - The EnqSrvResName attribute of the ABAP Enqueue Replication server instance is set to the VCS resource that is running the corresponding ABAP Central Services instance (ASCS).

Sample Configurations

This appendix includes the following topics:

- [About the sample configuration for the agent for SAP Web Application Server](#)
- [Sample agent type definition for SAP WebAS](#)
- [Sample SAP resource configuration in a physical environment](#)
- [Sample service group configuration for ABAP and Java Usage types](#)
- [Sample service group configurations for SAP systems on Windows Server 2008/2012](#)
- [Sample service group dependency for SAP Web Application Server](#)

About the sample configuration for the agent for SAP Web Application Server

The sample configuration depicts the resource types, resources, and resource dependencies within the service group. Review these dependencies carefully before configuring the agent for SAP Web Application Server. For more information about these resource types, refer to the *Cluster Server Bundled Agents Reference Guide*.

Sample agent type definition for SAP WebAS

This section provides the sample agent type definition for SAP WebAS.

```
type SAPWebAS (  
    static i18nstr ArgList[] = { ResLogLevel, SAPAdmin,  
        SAPAdminDomain, SAPAdminPassword, SAPHome, SAPHost,  
        SAPMonHome, SAPServiceUser, SAPSID, InstName,  
        InstProfile, InstType, ProcMon, EnqSrvResName,
```

```
    MonitorProgram, SecondLevelMonitor}  
str ResLogLevel = INFO  
str SAPAdmin  
str SAPAdminDomain  
str SAPAdminPassword  
str SAPHome  
str SAPHost  
str SAPMonHome  
str SAPServiceUser  
str SAPSID  
str InstName  
str InstProfile  
str InstType = APPSERV  
str ProcMon[]  
str EnqSrvResName  
str MonitorProgram  
int SecondLevelMonitor = 0  
)
```

Sample SAP resource configuration in a physical environment

Given the number of possible SAP resource configurations, this section provides sample working examples that configure a specific SAP instance for Add-In installations.

Sample SAP primary application server instance

An excerpt of the main.cf file for a SAP primary application server instance is as follows.

```
SAPWebAS SAP710-PI1PAS_sap (  
  SAPAdmin = piladm  
  SAPAdminDomain = SAP-DOMAIN  
  SAPAdminPassword = HVNtKVkRWnINjNKnL  
  SAPHome = "E:\\usr\\sap\\PI1\\DVEBMGS22\\exe"  
  SAPHost = sappilpas  
  SAPMonHome = "E:\\usr\\sap\\rfcsdk\\bin"  
  SAPServiceUser = SAPServicePI1  
  SAPSID = PI1  
  InstName = DVEBMGS22  
  InstType = APPSERV
```

```
InstProfile = "\\sappilscs\sapmnt\PI1\SYS\profile\  
PI1_DVEBMGS22_sappilpas"  
ProcMon = { "disp+work.exe", "jstart.exe" }  
)
```

Sample SAP additional application server instance

An excerpt of the main.cf file for a SAP additional application server instance is as follows:

```
SAPWebAS SAP710-PI1PAS_sap (  
  SAPAdmin = piladm  
  SAPAdminDomain = SAP-DOMAIN  
  SAPAdminPassword = HVNtKVkRWnINjNKnL  
  SAPHome = "E:\usr\sap\PI1\D23\exe"  
  SAPHost = sappilaas  
  SAPMonHome = "E:\usr\sap\rfcsdk\bin"  
  SAPServiceUser = SAPServicePI1  
  SAPSID = PI1  
  InstName = D23  
  InstType = APPSERV  
  InstProfile = "\\sappilscs\sapmnt\PI1\  
SYS\profile\PI1_D23_sappilaas"  
  ProcMon = { "disp+work.exe", "jstart.exe" }  
)
```

Sample SAP Central Services instance

An excerpt of the main.cf file for an SAP Central Services instance is as follows.

```
SAPWebAS SAP710-PI1SCS_scs (  
  Critical = 0  
  SAPAdmin = piladm  
  SAPAdminDomain = SAP-DOMAIN  
  SAPAdminPassword = HVNtKVkRWnINjNKnL  
  SAPHome = "E:\usr\sap\PI1\ASCS20\exe"  
  SAPHost = sappilscs  
  SAPMonHome = "E:\usr\sap\PI1\ASCS20\exe"  
  SAPServiceUser = SAPServicePI1  
  SAPSID = PI1  
  InstName = ASCS20  
  InstProfile = "\\sappilscs\sapmnt\PI1\SYS\profile\  
PI1_ASCS20_sappilscs"  
  InstType = ENQUEUE
```

```
ProcMon = { "msg_server.exe", "enserver.exe" }  
SecondLevelMonitor = 1  
)
```

Sample SAP Enqueue Replication server instance

An excerpt of the main.cf file for a SAP Enqueue Replication server instance is as follows.

```
SAPWebAS SAP710-PI1ERS_ers (  
  Critical = 0  
  SAPAdmin = piladm  
  SAPAdminDomain = SAP-DOMAIN  
  SAPAdminPassword = HVNtKVkRWnINjNKnL  
  SAPHome = "E:\\usr\\sap\\PI1\\ERS24\\exe"  
  SAPHost = sappilers  
  SAPMonHome = "E:\\usr\\sap\\PI1\\ERS24\\exe"  
  SAPServiceUser = SAPServicePI1  
  SAPSID = PI1  
  InstName = ERS24  
  InstProfile = "\\\\sappilscs\\sapmnt\\PI1\\SYS\\profile\\  
PI1_ERS24_sappilers"  
  InstType = ENQREP  
  ProcMon = { "enrepsrv.exe" }  
  EnqSrvResName = SAP710-PI1SCS_scs  
  SecondLevelMonitor = 1  
)
```

Sample service group configuration for ABAP and Java Usage types

The service group configuration in a cluster depends on some common characteristics that must be part of the configuration design.

These characteristics include the following:

- The SAP application server must be dependent on the database server
- Each SAP instance (Application Server, Enqueue, and Enqueue Replication) should have a separate virtual IP address assigned to facilitate network transparency.
- Each SAP instance (Application Server, Enqueue and Enqueue Replication) should be placed on shared disk to facilitate cluster node transparency.

- Common file systems to include the profile, global and transaction file systems should be managed from one or more shared disk objects. These systems must be available to the SAP application via UNC path with SAPGLOBALHOST.

Figure A-1 shows the service group configuration for Application Server

Figure A-1 Service group configuration for Application Server

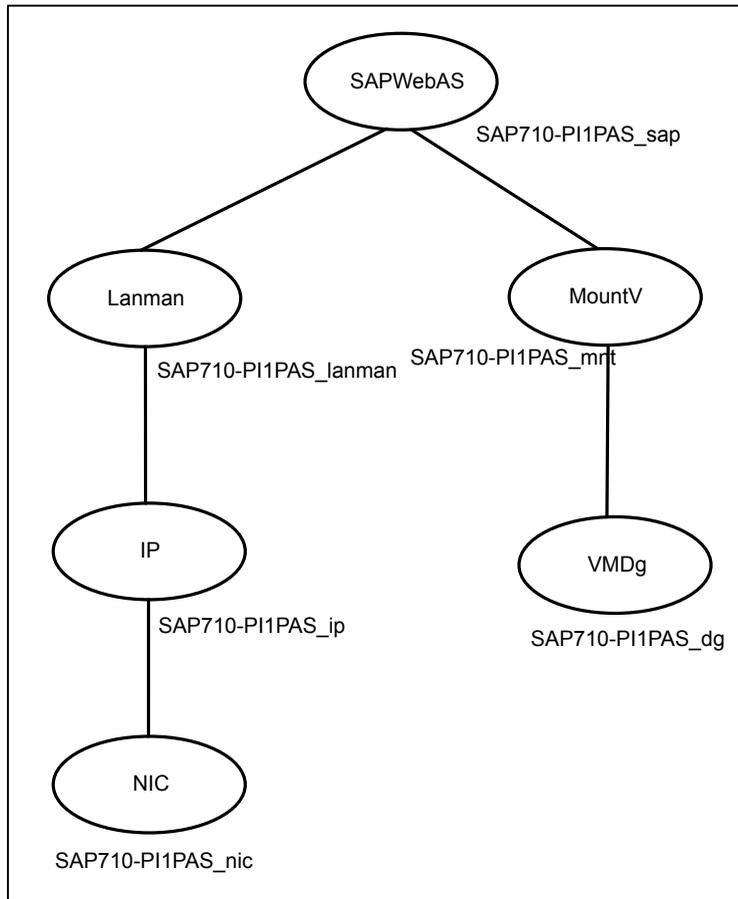


Figure A-2 shows the service group configuration for SAP Central services instance

Figure A-2 Service group configuration for SAP Central services instance


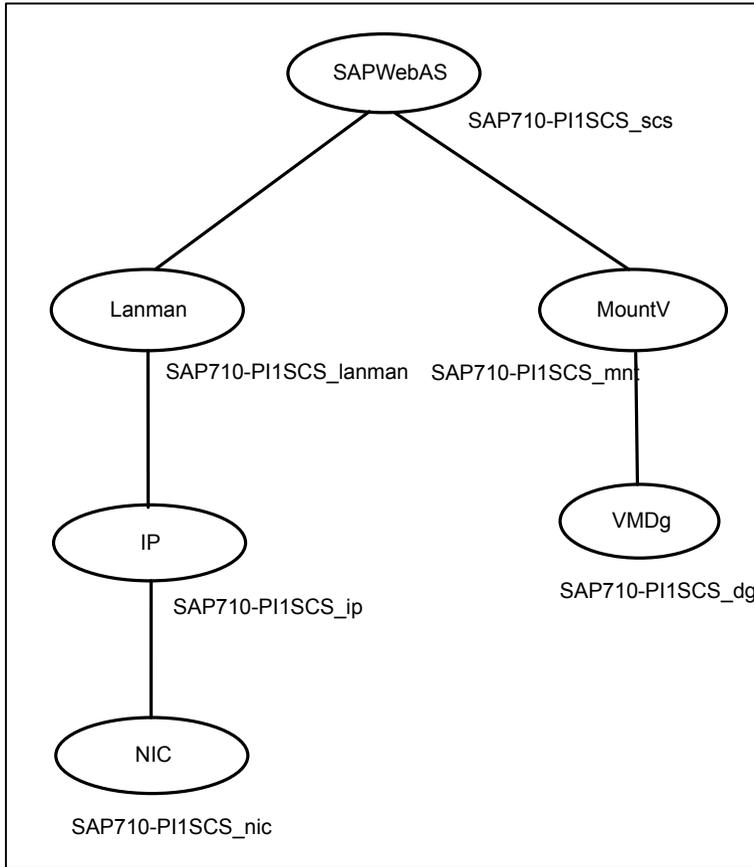


Figure A-3 shows the service group configuration for Enqueue Replication Server instance

Figure A-3 Service group configuration for Enqueue Replication Server instance

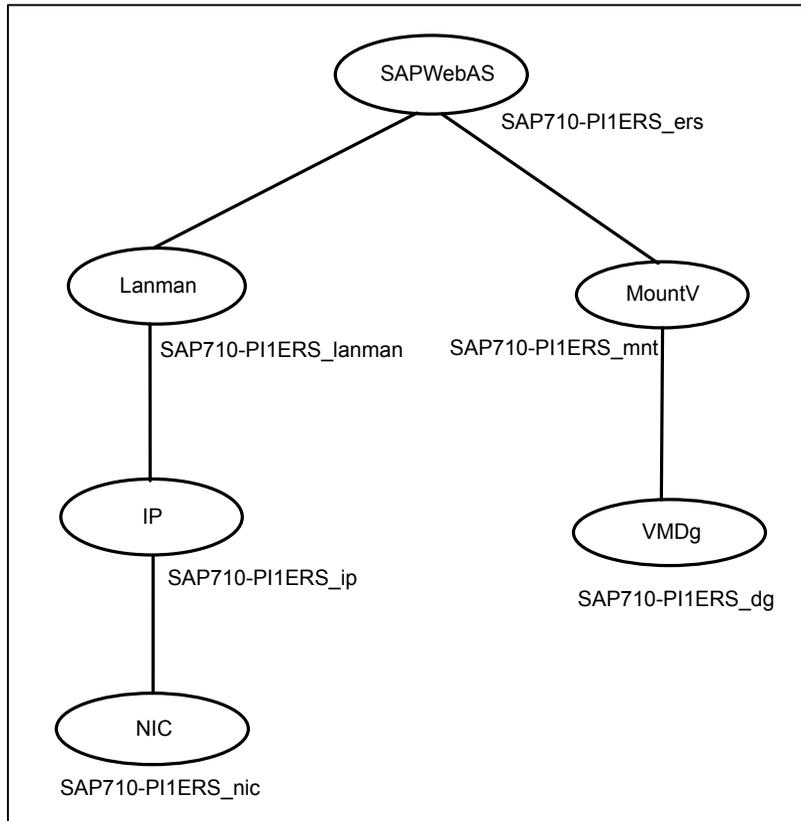

Sample service group configurations for SAP systems on Windows Server 2008/2012

This section provides the sample service group configurations and resource dependency diagrams for SAP systems on Windows Server 2008/2012.

Sample configuration for SAP Central Services Instances service group for Add-In installation Usage Type

This section provides the VCS main.cf for SAP Central Services Instances service group for Add-In installation Usage Type.

Sample service group configurations for SAP systems on Windows Server 2008/2012

```

group SAP-PI3SCS (
  SystemList = { SysA = 0, SysB = 1 }
)
FileShare SAP-PI3SCS_sapmnt_FS (
  PathName = "\\usr\sap"
  ShareName = sapmnt
  LanmanResName = SAP-PI3SCS_Lanman
  MountResName = SAP-PI3SCS_H_MountV
  UserPermissions = { "'SAP_LocalAdmin'" = FULL_CONTROL,
    "'Administrators'" = FULL_CONTROL,
    "'SYMCORP\SAP_PI3_GlobalAdmin'" = FULL_CONTROL,
    "'SAP_PI3_LocalAdmin'" = FULL_CONTROL }
)
IP SAP-PI3SCS_IP (
  Address = "10.xxx.xx.30"
SubNetMask = "255.255.252.0"
  MACAddress = "00-15-17-63-45-92"
)
Lanman SAP-PI3SCS_Lanman (
  VirtualName = sappi3scs
  IPResName = SAP-PI3SCS_IP
)
MountV SAP-PI3ASCS_MountV (
  MountPath = "I:\usr\sap\PI3\ASCS29"
  VolumeName = PI3ASCS_vol
  VMDGResName = SAP-PI3ASCS_VMDg
)
MountV SAP-PI3SCS_MountV (
  MountPath = "I:\usr\sap\PI3\SCS30"
  VolumeName = PI3SCS_vol
  VMDGResName = SAP-PI3SCS_VMDg
)
MountV SAP-PI3SCS_I_MountV (
  MountPath = "I:"
  VolumeName = PI3SCS_I_vol
  VMDGResName = SAP-PI3SCS_I_VMDg
)
MountV SAP-PI3SYS_MountV (
  MountPath = "I:\usr\sap\PI3\SYS"
  VolumeName = PI3SYS_vol
  VMDGResName = SAP-PI3SYS_VMDg
)
NIC SAP-PI3SCS_NIC (

```

Sample service group configurations for SAP systems on Windows Server 2008/2012

```

    MACAddress = "00-15-17-63-45-92"
  )
SAPWebAS SAP-PI3ASCS_SAPWebAS (
  SAPSID = PI3
  SAPHome = "I:\\usr\\sap\\PI3\\ASCS29\\exe"
  SAPMonHome = "I:\\usr\\sap\\PI3\\ASCS29\\exe"
  SAPHost = sappi3scs
  ProcMon = { "msg_server.exe", "enserver.exe" }
  SAPServiceUser = SAPServicePI3
  SAPAdminDomain = SYMCORP
  SAPAdmin = pi3adm
  SAPAdminPassword = AFkl41nmqdaou
  InstType = ENQUEUE
  InstName = ASCS29
  InstProfile = "I:\\usr\\sap\\PI3\\SYS\\profile\\PI3_ASCS29_sappi3scs"
)
SAPWebAS SAP-PI3SCS_SAPWebAS (
  SAPSID = PI3
  SAPHome = "I:\\usr\\sap\\PI3\\SCS30\\exe"
  SAPMonHome = "I:\\usr\\sap\\PI3\\SCS30\\exe"
SAPHost = sappi3scs
  ProcMon = { "msg_server.exe", "enserver.exe" }
  SAPServiceUser = SAPServicePI3
  SAPAdminDomain = SYMCORP
  SAPAdmin = pi3adm
  SAPAdminPassword = AFkl41nmqdaou
  InstType = ENQUEUE
  InstName = SCS30
  InstProfile = "I:\\usr\\sap\\PI3\\SYS\\profile\\PI3_SCS30_sappi3scs"
)
VMDg SAP-PI3SCS_I_VMDg (
  DiskGroupName = PI3SCS_I_dg
)
VMDg SAP-PI3ASCS_VMDg (
  DiskGroupName = PI3ASCS_dg
)
VMDg SAP-PI3SCS_VMDg (
  DiskGroupName = PI3SCS_dg
)
VMDg SAP-PI3SYS_VMDg (
  DiskGroupName = PI3SYS_dg
)
SAP-PI3SCS_sapmnt_FS requires SAP-PI3SCS_Lanman

```

Sample service group configurations for SAP systems on Windows Server 2008/2012

```

SAP-PI3SCS_sapmnt_FS requires SAP-PI3SCS_I_MountV
SAP-PI3SCS_IP requires SAP-PI3SCS_NIC
SAP-PI3SCS_Lanman requires SAP-PI3SCS_IP
SAP-PI3ASCS_MountV requires SAP-PI3SCS_I_MountV
SAP-PI3ASCS_MountV requires SAP-PI3ASCS_VMDg
SAP-PI3SCS_MountV requires SAP-PI3SCS_I_MountV
SAP-PI3SCS_MountV requires SAP-PI3SCS_VMDg
SAP-PI3SCS_I_MountV requires SAP-PI3SCS_I_VMDg
SAP-PI3SYS_MountV requires SAP-PI3SCS_I_MountV
SAP-PI3SYS_MountV requires SAP-PI3SYS_VMDg
SAP-PI3ASCS_SAPWebAS requires SAP-PI3SCS_sapmnt_FS
SAP-PI3ASCS_SAPWebAS requires SAP-PI3ASCS_MountV
SAP-PI3ASCS_SAPWebAS requires SAP-PI3SYS_MountV
SAP-PI3SCS_SAPWebAS requires SAP-PI3SCS_sapmnt_FS
SAP-PI3SCS_SAPWebAS requires SAP-PI3SCS_MountV
SAP-PI3SCS_SAPWebAS requires SAP-PI3SYS_MountV

// resource dependency tree
//
// group SAP-PI3SCS
// {
//   SAPWebAS SAP-PI3ASCS_SAPWebAS
//   {
//     FileShare SAP-PI3SCS_sapmnt_FS
//     {
//       Lanman SAP-PI3SCS_Lanman
//       {
//         IP SAP-PI3SCS_IP
//         {
//           NIC SAP-PI3SCS_NIC
//         }
//       }
//     }
//     MountV SAP-PI3SCS_I_MountV
//     {
//       VMDg SAP-PI3SCS_I_VMDg
//     }
//   }
//   MountV SAP-PI3ASCS_MountV
//   {
//     MountV SAP-PI3SCS_I_MountV
//     {
//       VMDg SAP-PI3SCS_I_VMDg
//     }
//   }
// }

```

Sample service group configurations for SAP systems on Windows Server 2008/2012

```

//          VMDg SAP-PI3ASCS_VMDg
//          }
//      MountV SAP-PI3SYS_MountV
//          {
//          MountV SAP-PI3SCS_I_MountV
//              {
//                  VMDg SAP-PI3SCS_I_VMDg
//              }
//          VMDg SAP-PI3SYS_VMDg
//          }
//      }
//  SAPWebAS SAP-PI3SCS_SAPWebAS
//      {
//      FileShare SAP-PI3SCS_sapmnt_FS
//          {
//          Lanman SAP-PI3SCS_Lanman
//              {
//                  IP SAP-PI3SCS_IP
//                      {
//                          NIC SAP-PI3SCS_NIC
//                      }
//                  }
//          MountV SAP-PI3SCS_I_MountV
//              {
//                  VMDg SAP-PI3SCS_I_VMDg
//              }
//          }
//      MountV SAP-PI3SCS_MountV
//          {
//          MountV SAP-PI3SCS_I_MountV
//              {
//                  VMDg SAP-PI3SCS_I_VMDg
//              }
//          VMDg SAP-PI3SCS_VMDg
//          }
//      MountV SAP-PI3SYS_MountV
//          {
//          MountV SAP-PI3SCS_I_MountV
//              {
//                  VMDg SAP-PI3SCS_I_VMDg
//              }
//          VMDg SAP-PI3SYS_VMDg
//          }
//      }


```

```
//      }  
// }
```

Sample resource dependency for SAP Central Services Instances service group for Add-In installation usage type

[Figure A-4](#) shows the sample resource dependency diagram for SAP Central Services Instances service group for Add-In installation Usage Type on a Windows 2008/2012 Server.

Figure A-4 Sample resource dependency diagram for SAP Central Services Instances service group for Add-In installation Usage Type on a Windows 2008/2012 Server

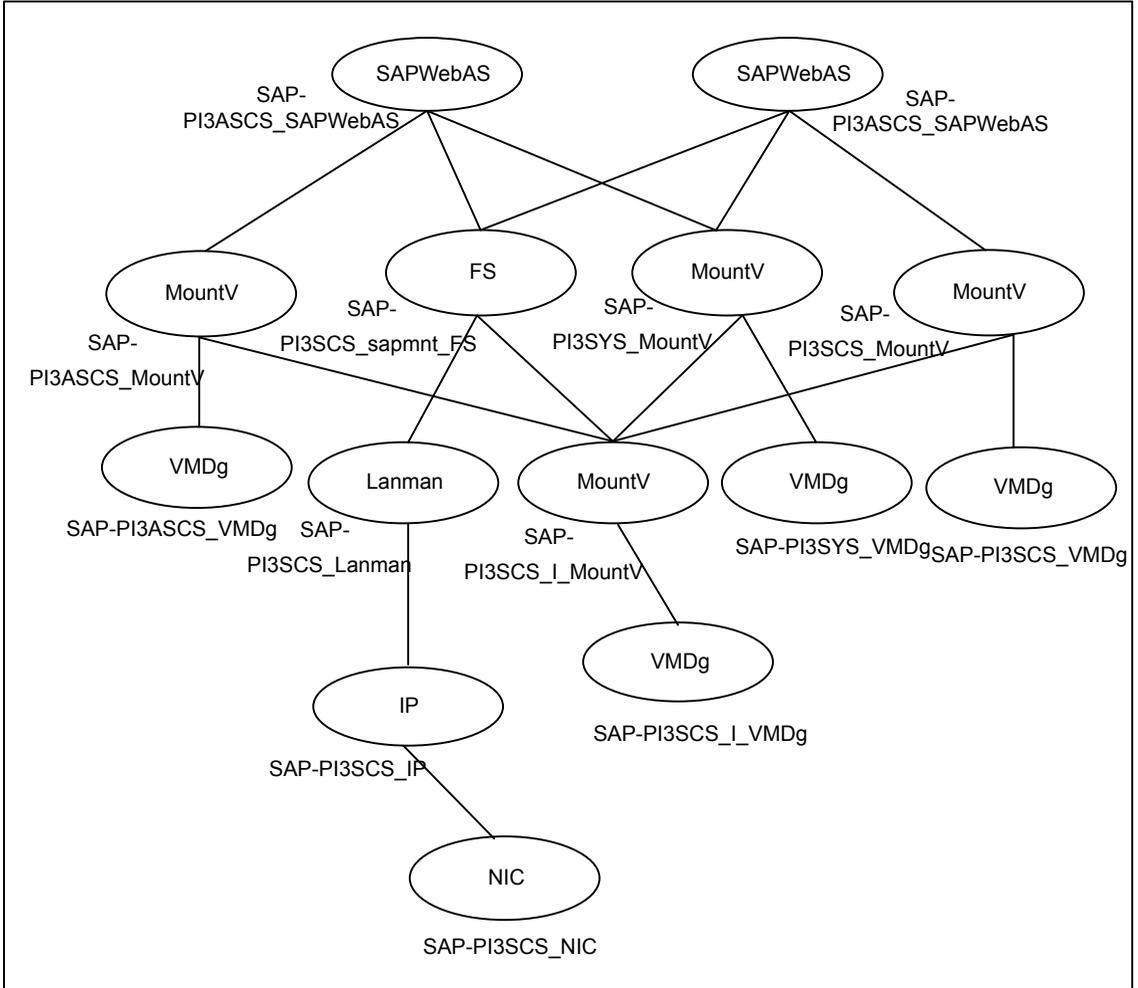

Sample configuration for SAP Enqueue Replication Server Instances service group for Add-In installation Usage Type

```

group SAP-PI3ERS (
  SystemList = { SysA = 0, SysB = 1 }
)
IP SAP-PI3ERS_IP (

```

Sample service group configurations for SAP systems on Windows Server 2008/2012

```

Address = "10.xxx.xx.30"
SubNetMask = "255.255.252.0"
MACAddress = "00-15-17-63-45-92"
)
Lanman SAP-PI3ERS_Lanman (
  VirtualName = sappi3ers
IPResName = SAP-PI3ERS_IP
)
MountV SAP-PI3AERS_MountV (
  MountPath = "C:\\usr\\sap\\PI3\\ERS31"
  VolumeName = PI3AERS_vol
  VMDGResName = SAP-PI3AERS_VMDg
)
MountV SAP-PI3ERS_MountV (
  MountPath = "C:\\usr\\sap\\PI3\\ERS32"
  VolumeName = PI3ERS_vol
  VMDGResName = SAP-PI3ERS_VMDg
)
NIC SAP-PI3ERS_NIC (
  MACAddress = "00-15-17-63-45-92"
)
SAPWebAS SAP-PI3AERS_SAPWebAS (
  SAPSID = PI3
  SAPHome = "C:\\usr\\sap\\PI3\\ERS31\\exe"
  SAPMonHome = "C:\\usr\\sap\\PI3\\ERS31\\exe"
  SAPHost = sappi3ers
  ProcMon = { "enrepserver.exe" }
  SAPServiceUser = SAPServicePI3
  SAPAdminDomain = SYMCORP
  SAPAdmin = pi3adm
  SAPAdminPassword = AFkl41nmqdaou
  InstType = ENQREP
  InstName = ERS31
  InstProfile = "\\sppi3scs\\sapmnt\\
PI3\\SYS\\profile\\PI3_ERS31_sappi3ers"
  EnqSrvResName = SAP-PI3ASCS_SAPWebAS
)
SAPWebAS SAP-PI3ERS_SAPWebAS (
  SAPSID = PI3
  SAPHome = "C:\\usr\\sap\\PI3\\ERS32\\exe"
  SAPMonHome = "C:\\usr\\sap\\PI3\\ERS32\\exe"
  SAPHost = sappi3ers
  ProcMon = { "enrepserver.exe" }

```

Sample service group configurations for SAP systems on Windows Server 2008/2012

```

SAPServiceUser = SAPServicePI3
SAPAdminDomain = SYMCORP
SAPAdmin = pi3adm
SAPAdminPassword = AFkl41nmqdaou
InstType = ENQREP
InstName = ERS32
InstProfile = "\\sappi3scs\sapmnt\
PI3\sys\profile\PI3_ERS32_sappi3ers"
EngSrvResName = SAP-PI3SCS_SAPWebAS
)
VMDg SAP-PI3AERS_VMDg (
  DiskGroupName = PI3AERS_dg
)
VMDg SAP-PI3ERS_VMDg (
  DiskGroupName = PI3ERS_dg
)
SAP-PI3ERS_IP requires SAP-PI3ERS_NIC
SAP-PI3ERS_Lanman requires SAP-PI3ERS_IP
SAP-PI3AERS_MountV requires SAP-PI3AERS_VMDg
SAP-PI3ERS_MountV requires SAP-PI3ERS_VMDg
SAP-PI3AERS_SAPWebAS requires SAP-PI3AERS_MountV
SAP-PI3AERS_SAPWebAS requires SAP-PI3ERS_Lanman
SAP-PI3ERS_SAPWebAS requires SAP-PI3ERS_MountV
SAP-PI3ERS_SAPWebAS requires SAP-PI3ERS_Lanman

// resource dependency tree
//
// group SAP-PI3ERS
// {
//   SAPWebAS SAP-PI3AERS_SAPWebAS
//   {
//     MountV SAP-PI3AERS_MountV
//     {
//       VMDg SAP-PI3AERS_VMDg
//     }
//     Lanman SAP-PI3ERS_Lanman
//     {
//       IP SAP-PI3ERS_IP
//       {
//         NIC SAP-PI3ERS_NIC
//       }
//     }
//   }
// }

```


Sample service group configurations for SAP systems on Windows Server 2008/2012

```
// SAPWebAS SAP-PI3ERS_SAPWebAS
// {
//   MountV SAP-PI3ERS_MountV
//     {
//       VMDg SAP-PI3ERS_VMDg
//     }
//   Lanman SAP-PI3ERS_Lanman
//     {
//       IP SAP-PI3ERS_IP
//         {
//           NIC SAP-PI3ERS_NIC
//         }
//     }
//   }
// }
```

Sample resource dependency for SAP Enqueue Replication Server Instances service group for Add-In installation Usage Type

[Figure A-5](#) shows the sample resource group dependency for SAP Enqueue Replication Server Instances service group for Add-In installation Usage Type

Figure A-5 Sample resource group dependency for SAP Enqueue Replication Server Instances service group for Add-In installation Usage Type

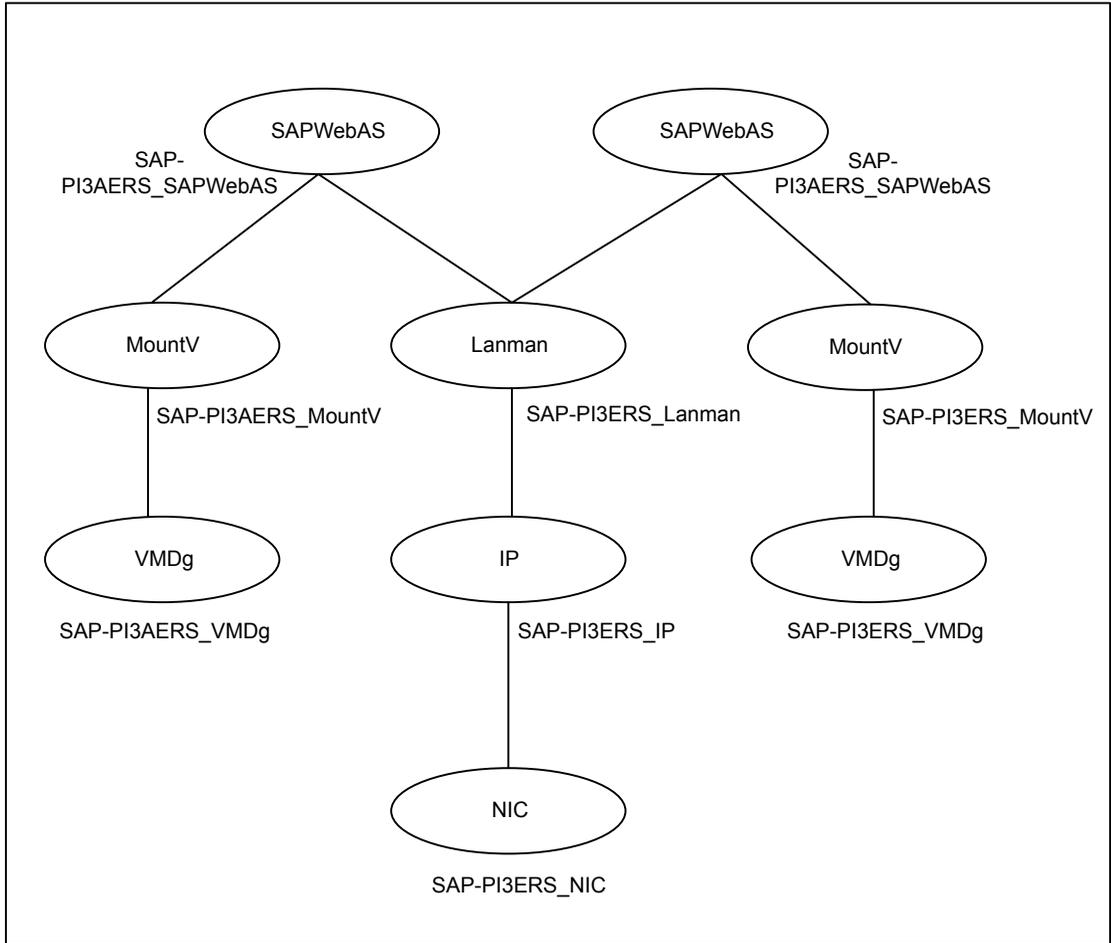

Sample service group dependency for SAP Web Application Server

This section includes service groups that show the group dependency for SAP Web Application Server.

[Figure A-6](#) shows the sample service group dependency.

Figure A-6 Sample service group dependency



Index

A

- About
 - configuring SAP Web Application Server for high availability 24
- about
 - configuring service groups 57
 - installing SAP Web Application Server for high availability 24
- Add
 - new domain groups and users 36
 - SAPSID service user to the SAP_SAPSID_GlobalAdmin Group 38
 - sapsidadm user to the SAP_SAPSID_GLOBALAdmin Group 38
- agent
 - installing in VCS environment 43
 - removing in VCS environment;uninstalling in VCS environment 44
 - upgrading 44
- agent attributes 48
 - EnqSrvResName 52
 - InstName 50
 - InstProfile 51
 - InstType 50
 - MonitorProgram 54
 - optional 54
 - ProcMon 51
 - required 52
 - ResLogLevel 48
 - SAPAdmin 48
 - SAPAdminDomain 48
 - SAPAdminPassword 49
 - SAPHome 49
 - SAPHost 49
 - SAPMonHome 51
 - SAPServiceUser 49
 - SAPSID 50
 - SecondLevelMonitor 53
- agent function 12
 - clean 13
 - monitor 13

- agent function *(continued)*
 - offline 12
 - online 12
- application overview 17

B

- before configuring the service groups 58

C

- Cluster
 - SAP instance 30
- cluster SAP instance
 - configure all other nodes 30
 - configure first node 30
- configure
 - SAP systems on Windows Server 2008/2012 40
- Configuring
 - agent for message server restart 26
 - Enqueue Replication Server 26
 - Enqueue Replication Server using SAPInst 29
 - execution period for agent functions 55
 - preonline script 60
- Configuring service groups 58
- Create
 - SAP system users 37
 - sapmnt and saploc share directories 39
- Create and add
 - local groups and users 39
- create sapmnt and saploc share directories on Windows Server 2008/2012 40

D

- Domain groups and users
 - create and add 35

I

- install
 - SAP system using Virtual Hostname 25

M

Monitoring an SAP instance 22

P

Preventing early faulting of Java and Add-In instances 56

R

reviewing error log files 69

S

Sample

- service group configuration for ABAP and Java Usage types 75
- service group dependency 88

sample

- resource dependency
 - SAP Central Services Instances service group for Add-In installation usage type 83

- service group configurations
 - on Windows Server 2008/2012 78

sample agent type definition 72

sample configuration

- Windows Server 2008/2012
 - SAP central Services Instances service group for Add-In installation Usage Type 78

sample resource configuration 73

Setting

- SAPMonHome attribute 54

setting

- SAP Web Application Server in a cluster 15

T

typical configuration in a VCS cluster 14

U

uniquely identifying SAP server instances 21