

Veritas Storage Foundation™ for Oracle Administrator's Guide

Linux

5.0

Veritas Storage Foundation™ for Oracle Administrator's Guide

The software described in this book is furnished under a license agreement and may be used only in accordance with the terms of the agreement.

Documentation version 5.0

PN: N18489H

Legal Notice

Copyright © 2006 Symantec Corporation.

All rights reserved.

Federal acquisitions: Commercial Software - Government Users Subject to Standard License Terms and Conditions.

Symantec, the Symantec Logo, Veritas, and Veritas Storage Foundation are trademarks or registered trademarks of Symantec Corporation or its affiliates in the U.S. and other countries. Other names may be trademarks of their respective owners.

Third-party software may be recommended, distributed, embedded, or bundled with this Symantec product. Such third-party software is licensed separately by its copyright holder. All third-party copyrights associated with this product are listed in the accompanying release notes.

Oracle is a registered trademark of Oracle Corporation.

Linux is a registered trademark of Linus Torvalds.

Windows is a registered trademark of Microsoft Corporation.

Veritas Storage Foundation™ is a licensed product. See the Veritas Storage Foundation™ Installation Guide for license installation instructions.

The product described in this document is distributed under licenses restricting its use, copying, distribution, and decompilation/reverse engineering. No part of this document may be reproduced in any form by any means without prior written authorization of Symantec Corporation and its licensors, if any.

THE DOCUMENTATION IS PROVIDED "AS IS" AND ALL EXPRESS OR IMPLIED CONDITIONS, REPRESENTATIONS AND WARRANTIES, INCLUDING ANY IMPLIED WARRANTY OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT, ARE DISCLAIMED, EXCEPT TO THE EXTENT THAT SUCH DISCLAIMERS ARE HELD TO BE LEGALLY INVALID. SYMANTEC CORPORATION SHALL NOT BE LIABLE FOR INCIDENTAL OR CONSEQUENTIAL DAMAGES IN CONNECTION WITH THE FURNISHING PERFORMANCE, OR USE OF THIS DOCUMENTATION. THE INFORMATION CONTAINED IN THIS DOCUMENTATION IS SUBJECT TO CHANGE WITHOUT NOTICE.

The Licensed Software and Documentation are deemed to be "commercial computer software" and "commercial computer software documentation" as defined in FAR Sections 12.212 and DFARS Section 227.7202.

Symantec Corporation 20330 Stevens Creek Blvd. Cupertino, CA 95014 USA

<http://www.symantec.com>

Technical Support

For technical assistance, visit <http://support.veritas.com> and select phone or email support. Use the Knowledge Base search feature to access resources such as TechNotes, product alerts, software downloads, hardware compatibility lists, and our customer email notification service.

Contents

Chapter 1	Introducing Veritas Storage Foundation for Oracle	
	About Veritas Storage Foundation for Oracle	13
	Components of Veritas Storage Foundation for Oracle	14
	How Veritas Volume Manager works	16
	About volumes	18
	About disk groups	18
	About volume layouts	18
	About online relayout	21
	About volume resynchronization	21
	About dirty region logging	22
	About SmartSync recovery accelerator	22
	About volume sets	23
	About volume snapshots	23
	About Veritas FastResync	23
	About disk group split and join	24
	About hot-relocation	25
	About DMP-supported disk arrays	25
	About dynamic LUN expansion	26
	About Storage Expert	26
	About cluster functionality (optional)	26
	About Veritas Volume Replicator (optional)	26
	How Veritas File System works	27
	About Veritas Concurrent I/O	27
	About extent-based allocation	27
	About fast file system and database recovery	28
	About online system administration	28
	About cross-platform data sharing	29
	Support for multi-volume file systems	29
	About Quality of Storage Service (optional)	29
	Support for large file systems and large files (optional)	30
	About Storage Checkpoints and Storage Rollback	30
	About restoring file systems using Storage Checkpoints	31
	About quotas	31
	About cluster functionality (optional)	32
	How Veritas Storage Mapping works	32
	How Veritas Database FlashSnap works	33

How Veritas Extension for Oracle Disk Manager works 33

How Database Dynamic Storage Tiering works 34

About the vxdbd daemon 34

About Veritas Storage Foundation for Oracle graphical user
interface 36

About Veritas NetBackup (optional) 37

About Veritas Storage Foundation/High Availability for Oracle
(optional) 37

Chapter 2 Setting up databases

Tasks for setting up new databases 39

About setting up a disk group 41

 Disk group configuration guidelines 41

Creating a disk group 42

Adding disks to a disk group 43

About selecting a volume layout 44

 How to choose appropriate stripe unit sizes 44

 How to choose between mirroring and RAID-5 45

 Volume configuration guidelines 45

Creating a volume 46

Creating a volume set 47

Adding a volume to a volume set 48

File system creation guidelines 48

Creating a VxFS file system 49

 Large file system and large file support 50

 Multi-volume support 51

Mounting a file system 51

Unmounting a file system 53

About fragmentation 54

 How to control fragmentation 54

 Types of fragmentation 54

 How to monitor fragmentation 54

 Defragmenting a file system 55

Resizing a file system 57

 Resizing a file system and the underlying volume 58

Chapter 3 Managing the SFDB repository

About the SFDB repository 61

Runtime management tasks for SFDB 62

 Starting, stopping, and checking the SFDB repository with
 sfua_db_config 62

	Backing up and restoring the SFDB repository with sfua_rept_adm	62
	Monitoring free space for the SFDB repository	65
	Adding a new system to an HA configuration	66
	Accessing an off-host repository in a non-VCS environment	67
Chapter 4	Using Veritas Concurrent I/O	
	About Concurrent I/O	69
	How Concurrent I/O works	69
	Oracle's filesystemio_options parameter	70
	Enabling and disabling Concurrent I/O	70
	Enabling Concurrent I/O	70
	Disabling Concurrent I/O	71
Chapter 5	Using Veritas Extension for Oracle Disk Manager	
	About Oracle Disk Manager	73
	How Oracle Disk Manager improves database performance	74
	About Oracle Disk Manager and Oracle Managed Files	76
	How Oracle Disk Manager works with Oracle Managed Files	77
	Setting up Veritas extension for Oracle Disk Manager	79
	How to prepare existing database storage for Oracle Disk Manager	80
	Verifying that Oracle Disk Manager is configured	80
	Disabling the Oracle Disk Manager feature	82
Chapter 6	Using Storage Mapping	
	About Storage Mapping	83
	Verifying Veritas Storage Mapping setup	85
	Using vxstorage_stats	85
	Displaying Storage Mapping information	86
	Displaying I/O statistics information	88
	Using dbed_analyzer	89
	Obtaining Storage Mapping information for a list of tablespaces	91
	Oracle file mapping (ORAMAP)	95
	Mapping components	95
	Storage Mapping views	96
	Verifying Oracle file mapping setup	97
	Enabling Oracle file mapping	97
	Accessing dynamic performance views	98
	Using Oracle Enterprise Manager	99

About arrays for Storage Mapping and statistics 101

Chapter 7

Converting existing database configurations to VxFS

About converting LVM volume groups to VxVM disk groups 103
 Converting native file systems to VxFS for Oracle Disk Manager 104
 Upgrading from earlier VxFS version layouts 105
 Converting from raw devices 105

Chapter 8

Using Storage Checkpoints and Storage Rollback

About Storage Checkpoints and Storage Rollback 107
 How Storage Checkpoints and Storage Rollback work 108
 Space requirements for Storage Checkpoints 109
 Performance of Storage Checkpoints 111
 Storage Checkpoint allocation policies 111
 Using Storage Checkpoint allocation policies 113
 Backing up and recovering the database using Storage
 Checkpoints 122
 Verifying a Storage Checkpoint using the command line 122
 Backing up using a Storage Checkpoint 123
 Recovering a database using a Storage Checkpoint 124
 Cloning the Oracle instance using dbed_clonedb 125
 Guidelines for Oracle recovery 130
 Using the GUI to perform Storage Checkpoint-related operations 132

Chapter 9

Using Database Dynamic Storage Tiering

About Database Dynamic Storage Tiering 133
 Database Dynamic Storage Tiering building blocks 134
 Database Dynamic Storage Tiering in a High Availability (HA)
 environment 135
 Configuring Database Dynamic Storage Tiering 136
 Database Dynamic Storage Tiering command requirements 136
 Defining database parameters 137
 Setting up storage classes 139
 Converting a VxFS file system to a VxFS multi-volume file
 system 140
 Classifying volumes into a storage class 141
 Displaying free space on your storage classes 142
 Adding new volumes to a storage class 143
 Removing volumes from a storage class 143
 Dynamic Storage Tiering policy management 144
 Relocating files 144

Relocating tablespaces	145
Relocating table partitions	145
Using preset policies	146
How to use file statistics	147
Setting up statistic collection	147
Viewing file statistics	147
Running Database Dynamic Storage Tiering reports	149
Viewing modified allocation policies	149
Viewing audit reports	149
Load balancing in a database environment	149
Load balancing file system	150
Creating a Load Balancing File System	151
Adding volumes to a Load Balancing File System	152
Database Dynamic Storage Tiering use cases for Oracle	153
Migrating partitioned data and tablespaces	153
Scheduling the relocation of archive and Flashback logs	155

Chapter 10 Using Database FlashSnap for backup and off-host processing

About Veritas Database FlashSnap	160
Typical database problems solved with Database FlashSnap	161
About Database FlashSnap applications	161
Database FlashSnap	162
Database FlashSnap commands	163
Database FlashSnap options	164
How to plan for Database FlashSnap	165
Snapshot mode	165
One or two snapshot hosts	165
Hosts and storage for Database FlashSnap	165
Single-host configuration	166
Two-host or Oracle RAC configuration	166
Host and storage requirements	167
Creating a snapshot mirror of a volume or volume set used by the database	168
Upgrading existing volumes to use Veritas Volume Manager 5.0	179
Upgrading from Veritas Database Edition 3.5 for Oracle with Database FlashSnap	184
Summary of database snapshot steps	185
Creating a snapplan (dbed_vmchecksnap)	189
Creating multi-mirror snapshots	195
Validating a snapplan (dbed_vmchecksnap)	197

Displaying, copying, and removing a snapplan (dbed_vmchecksnap)	200
Creating a snapshot (dbed_vmsnap)	202
Backing up the database from snapshot volumes (dbed_vmclonedb)	205
Mounting the snapshot volumes and backing up	208
Restoring from backup	209
Cloning a database (dbed_vmclonedb)	209
Using Database FlashSnap to clone a database	210
Shutting down the clone database and unmounting file systems	214
Restarting a clone database	215
Recreating Oracle tempfiles	216
Resynchronizing your database to the snapshot	218
Resynchronizing the snapshot to your database	221
Removing a snapshot volume	222
Using Database FlashSnap in an HA environment	223

Chapter 11

Using Veritas NetBackup for database backup

About using Veritas NetBackup for backup and restore	225
About using Veritas NetBackup to backup and restore Oracle Disk Manager files	225

Chapter 12

Tuning for performance

Additional documentation	227
About tuning VxVM	227
About obtaining volume I/O statistics	228
About tuning VxFS	229
How monitoring free space works	229
How tuning VxFS I/O parameters works	230
About tunable VxFS I/O parameters	231
Obtaining file I/O statistics using Veritas extension for Oracle Disk Manager	235
About I/O statistics	236
About tuning Oracle databases	237
Asynchronous I/O	237
Setting Oracle block reads during sequential scans	237
Setting slave parameters	237
Configuring memory allocation	238

Appendix A	Veritas Storage Foundation for Oracle Command Line Interface	
	Overview of commands	239
	About the command line interface	241
	Updating the repository using dbed_update	242
	Checking the database configuration environment using dbed_checkconfig	243
	Saving the database configuration environment using dbed_saveconfig	247
	Creating Storage Checkpoints using dbed_ckptcreate	248
	Displaying Storage Checkpoints using dbed_ckptdisplay	252
	Mounting Storage Checkpoints using dbed_ckptmount	254
	Unmounting Storage Checkpoints using dbed_ckptumount	255
	Creating and working with Storage Checkpoint allocation policies using dbed_ckptpolicy	256
	Administering Storage Checkpoint quotas using dbed_ckptquota	259
	Performing Storage Rollback using dbed_ckptrollback	261
	Removing Storage Checkpoints using dbed_ckptremove	263
	Managing the Capacity Planning Utility using dbed_ckptplan	263
	Cloning the Oracle instance using dbed_clonedb	264
	Creating and working with snapplans using dbed_vmchecksnap	269
	Creating, resynchronizing, or reverse resynchronizing a snapshot database using dbed_vmsnap	279
	Creating or shutting down a clone database using dbed_vmclonedb	284
	Managing log files using edgetmsg2	292
	Displaying I/O mapping and statistics using vxstorage_stats	293
	Mapping tablespaces to disks using dbed_analyzer	295
Appendix B	Using third-party software to back up files	
	About backing up and restoring Oracle Disk Manager files using Oracle RMAN	299
	About using backup software other than VERITAS NetBackup to back up and restore ODM files	300
Appendix C	Veritas Database FlashSnap status information	
	Database FlashSnap snapshot status and database status	301
	Snapshot status details	301
	Database status details	304

Glossary

Index

Introducing Veritas Storage Foundation for Oracle

This chapter includes the following topics:

- [About Veritas Storage Foundation for Oracle](#)
- [How Veritas Volume Manager works](#)
- [How Veritas File System works](#)
- [How Veritas Storage Mapping works](#)
- [How Veritas Database FlashSnap works](#)
- [How Veritas Extension for Oracle Disk Manager works](#)
- [How Database Dynamic Storage Tiering works](#)
- [About the vxdbd daemon](#)
- [About Veritas Storage Foundation for Oracle graphical user interface](#)
- [About Veritas NetBackup \(optional\)](#)
- [About Veritas Storage Foundation/High Availability for Oracle \(optional\)](#)

About Veritas Storage Foundation for Oracle

There are two versions of this product:

- Veritas Storage Foundation for Oracle Standard Edition
- Veritas Storage Foundation for Oracle Enterprise Edition
The Enterprise Edition contains everything in the Standard Edition plus Storage Mapping, Database FlashSnap, Storage Checkpoints, and Storage Rollback.

Note: Veritas Storage Foundation/High Availability (HA) for Oracle is available only with the Enterprise Edition.

Unless otherwise noted, features pertain to both the Standard and Enterprise Edition products.

Components of Veritas Storage Foundation for Oracle

Veritas Storage Foundation for Oracle combines the strengths of the core technology products with database-specific enhancements to offer performance, availability, and manageability for Oracle database servers.

Veritas Storage Foundation for Oracle includes the following products:

- **Veritas Volume Manager (VxVM)**

A disk management subsystem that supports disk striping, disk mirroring, and simplified disk management for improved data availability and performance.

- **Veritas File System (VxFS)**

A high-performance, fast-recovery file system that is optimized for business-critical database applications and data-intensive workloads. VxFS offers online administration, letting you perform most frequently scheduled maintenance tasks (including online backup, resizing, and file system changes) without interrupting data or system availability. VxFS also provides support for large file systems (of more than 8 exabytes in a 64-bit environment) and large files (in the exabyte range in a 64-bit environment).

Veritas File System offers the following performance-enhancing features that are of particular interest in a database environment:

- **Veritas Concurrent I/O** improves the performance of regular files on a VxFS file system without the need for extending namespaces and presenting the files as devices. This simplifies administrative tasks and allows relational databases (such as Oracle), which do not have a sequential read/write requirement, to access files concurrently.

- A feature of the Enterprise Edition, **VxFS Storage Checkpoint** technology lets you create a point-in-time image of a file system. Storage Checkpoints are treated like any other VxFS file system and can be created, mounted, unmounted, and removed with VxFS and Veritas Storage Foundation administrative utilities.

- **Veritas Storage Mapping**

Storage Mapping, a feature of the Enterprise Edition, lets you take full advantage of Oracle storage mapping to map datafiles to physical devices and

display storage object I/O statistics. Oracle's file mapping (I/O topology) feature was introduced beginning with Oracle9 Release 2.

Both storage object I/O statistics and the storage structure can be displayed for a specific file using either the `vxstorage_stats` command or the Veritas Storage Foundation GUI. In addition, mapping information showing which tablespaces reside on which physical disks can be obtained for a specified database using the `dbed_analyzer` command.

- **Veritas Database FlashSnap**

Database FlashSnap, a feature of the Enterprise Edition and optionally available in the Standard Edition, lets you create, resynchronize, and reverse resynchronize an online point-in-time image of a database. You can use this image to perform backup, other maintenance tasks, or off-host processing while providing continuous data availability. Also, database administrators can perform these tasks without `root` privileges. Database FlashSnap tasks may be performed through the Veritas Storage Foundation GUI or the command line interface.

- **Veritas Extension for Oracle Disk Manager**

Veritas Extension for Oracle Disk Manager is a custom storage interface designed specifically for Oracle9i and 10g. Oracle Disk Manager allows Oracle9i and 10g to improve performance and manage system bandwidth through an improved Application Programming Interface (API) that contains advanced kernel support for file I/O.

Veritas Extension for Oracle Disk Manager supports Oracle Resilvering. With Oracle Resilvering, the storage layer receives information from the Oracle database as to which regions or blocks of a mirrored datafile to resync after a system crash. When using Oracle Resilvering, you can turn off VxVM Dirty Region Logging (DRL), which increases performance.

- **Database Dynamic Storage Tiering**

Database Dynamic Storage Tiering, a feature of the Enterprise Edition, enables you to manage your data so that less-frequently used data can be moved to slower, less expensive disks, allowing frequently-accessed data to be stored on the faster disks for quicker retrieval.

- **Veritas Enterprise Administrator**

Veritas Enterprise Administrator (VEA) is the infrastructure that allows you to access Veritas Storage Foundation for Oracle, Veritas Volume Manager, and Veritas File System information and features through the GUI.

An optional High Availability (HA) version of Veritas Storage Foundation for Oracle Enterprise Edition, which includes Veritas Cluster Server, is available for customers who have high system-availability requirements.

How Veritas Volume Manager works

Databases require their storage media to be robust and resilient to failure. It is vital to protect against hardware and disk failures and to maximize performance using all the available hardware resources. Using a volume manager provides this necessary resilience and eases the task of management. A volume manager can help you manage hundreds of disk devices and makes spanning, striping, and mirroring easy.

Veritas Volume Manager (VxVM) builds virtual devices called volumes on top of physical disks. Volumes are accessed by a file system, a database, or other applications in the same way physical disk partitions would be accessed. Using volumes, VxVM provides the following administrative benefits for databases:

Table 1-1 Veritas Volume Manager features

Feature	Benefit
Spanning of multiple disks	Eliminates media size limitations.
Striping	Increases throughput and bandwidth.
Mirroring or RAID-5	Increases data availability.
Online relayout	Allows volume layout changes without application or database downtime. Online relayout can be used to change performance or reliability characteristics of unerlying storage.
Volume resynchronization	Ensures that all mirrors contain exactly the same data and that the data and parity in RAID-5 volumes agree.
Dirty Region Logging (DRL)	Speeds the recovery of mirrored volumes after a system crash.
SmartSync Recovery Accelerator	Increases the availability of mirrored volumes by only resynchronizing changed data.
Volume snapshots	Allows backup of volumes based on disk mirroring. VxVM provides full-sized and space-optimized instant snapshots, which are online and off-host point-in-time copy solutions.
FastResync	Separately licensed, optional feature that performs quick and efficient resynchronization of stale mirrors. FastResync is included with the Enterprise Edition and is also included as part of the Veritas FlashSnap option with the Standard Edition.

Table 1-1 Veritas Volume Manager features (*continued*)

Feature	Benefit
Disk group split and join	<p>Separately licensed, optional feature that supports general disk group reorganization and allows you to move volume snapshots to another host for off-host backup.</p> <p>Disk group split and join is included with the Enterprise Edition and is also included as part of the Veritas FlashSnap option with the Standard Edition.</p>
Hot-relocation	Automatically restores data redundancy in mirrored and RAID-5 volumes when a disk fails.
Dynamic multipathing (DMP)	Allows for transparent failover, load sharing, and hot plugging of physical disks.
Volume sets	Allows several volumes to be represented by a single logical mount device.
Dynamic LUN Expansion	Allows you to resize a disk after it has been initialized while preserving the existing data on the disk.
Storage Expert	Helps diagnose configuration problems with VxVM.
Cluster Volume Manager (CVM)	Separately licensed, optional feature that allows you to use VxVM in a cluster environment.
Veritas FlashSnap Agent for Symmetrix	Separately licensed, optional feature that includes a set of commands that allows you to use EMC TimeFinder in conjunction with VxVM disk groups and volumes that have been created on Symmetrix standard devices.
Veritas Volume Replicator (VVR)	Separately licensed, optional feature that provides data replication for disaster recovery solutions.
Free space pool management	Simplifies administration and provides flexible use of available hardware.
Online administration	Allows configuration changes without system or database down time.

For a more detailed description of VxVM and its features, refer to the *Veritas Volume Manager Administrator's Guide*.

About volumes

A volume is a virtual disk device that appears to applications, databases, and file systems like a physical disk partition without the physical limitations of a disk partition. A volume consists of one or more plexes, each holding a copy of the selected data in the volume. Due to its virtual nature, a volume is not restricted to a particular disk or a specific area of a disk. For example, a volume can span multiple disks and can be used to create a large file system.

Volumes consist of other virtual objects that can be manipulated to change the volume's configuration. Volumes and their virtual components are referred to as Volume Manager objects. You can manipulate Veritas Volume Manager objects in a variety of ways to optimize performance, provide redundancy of data, and perform backups or other administrative tasks on one or more physical disks without interrupting applications. As a result, data availability and disk subsystem throughput are improved.

You can change the configuration of a volume without causing disruption to databases or file systems that are using the volume. For example, you can mirror a volume on separate disks or move the volume to use different disk storage.

About disk groups

A disk group is a collection of disks that share a common configuration (for example, configuration objects that belong to a single database). We recommend creating one disk group for each database.

You can move a disk group and its components as a unit from one host to another host. For example, you can move volumes and file systems that belong to the same database and are created within one disk group as a unit. You must configure a given volume from disks belonging to one disk group.

In releases before Veritas Storage Foundation 4.0 for Oracle, the default disk group was `rootdg`. For VxVM to function, the `rootdg` disk group had to exist and it had to contain at least one disk. This requirement no longer exists, and VxVM can work without any disk groups configured (although you must set up at least one disk group before you can create any volumes of other VxVM objects).

About volume layouts

A Redundant Array of Independent Disks (RAID) is a disk array in which a group of disks appears to the system as a single virtual disk or a single volume. VxVM supports several RAID implementations, as well as spanning.

The following volume layouts are available to satisfy different database configuration requirements:

- Spanning and concatenation
- Striping (RAID-0)
- Mirroring (RAID-1)
- Mirrored-Stripe Volumes (RAID-0+1)
- Striped-Mirror Volumes (RAID-1+0)
- RAID-5

Caution: Spanning or striping a volume across multiple disks increases the chance that a disk failure will result in failure of that volume. Use mirroring or RAID-5 to substantially reduce the chance of a single volume failure caused by a single disk failure.

How spanning and concatenation work

Concatenation maps data in a linear manner onto one or more subdisks in a plex. To access all of the data in a concatenated plex sequentially, data is first accessed in the first subdisk from beginning to end. Data is then accessed in the remaining subdisks sequentially from beginning to end, until the end of the last subdisk.

You can use concatenation with multiple subdisks when there is insufficient contiguous space for the plex on any one disk. This form of concatenation can be used for load balancing between disks, and for head movement optimization on a particular disk.

Concatenation using subdisks that reside on more than one VxVM disk is called spanning.

Warning: Spanning a plex across multiple disks increases the chance that a disk failure results in failure of the assigned volume. Use mirroring (RAID-1) or striping with parity (RAID-5) to reduce the risk that a single disk failure results in a volume failure.

Spanning is useful when you need to read or write data sequentially (for example, reading from or writing to database redo logs) and there is not sufficient contiguous space.

How striping (RAID-0) works

Striping is a technique of mapping data so that the data is interleaved among multiple physical disks. Data is allocated in equal-sized units (called stripe units)

that are interleaved between the disks. Each stripe unit is a set of contiguous blocks on a disk. A stripe consists of the set of stripe units at the same position across all columns. A column is a set of one or more subdisks within a striped plex.

Striping is useful if you need large amounts of data written to or read from physical disks, and performance is important. Striping is also helpful in balancing the I/O load from multi-user applications across multiple disks. By using parallel data transfer to and from multiple disks, striping significantly improves data-access performance.

When striping across multiple disks, failure of any one disk will make the entire volume unusable.

How mirroring (RAID-1) works

Mirroring is a technique of using multiple copies of the data, or mirrors, to duplicate the information contained in a volume. In the event of a physical disk failure, the mirror on the failed disk becomes unavailable, but the system continues to operate using the unaffected mirrors. For this reason, mirroring increases system reliability and availability. A volume requires at least two mirrors to provide redundancy of data. A volume can consist of up to 32 mirrors. Each of these mirrors must contain disk space from different disks for the redundancy to be effective.

How striping plus mirroring (mirrored-stripe or RAID-0+1) works

VxVM supports the combination of mirroring above striping. The combined layout is called a mirrored-stripe layout. A mirrored-stripe layout offers the dual benefits of striping to spread data across multiple disks, while mirroring provides redundancy of data. For mirroring above striping to be effective, the striped plex and its mirrors must be allocated from separate disks.

The layout type of the data plexes in a mirror can be concatenated or striped. Even if only one is striped, the volume is still termed a mirrored-stripe volume. If they are all concatenated, the volume is termed a mirrored-concatenated volume.

How mirroring plus striping (striped-mirror, RAID-1+0 or RAID-10) works

VxVM supports the combination of striping above mirroring. This combined layout is called a striped-mirror layout and mirrors each column of the stripe. If there are multiple subdisks per column, each subdisk can be mirrored individually instead of each column. A striped-mirror volume is an example of a layered volume.

Compared to a mirrored-stripe volume, a striped-mirror volume offers the dual benefits of striping to spread data across multiple disks, while mirroring provides redundancy of data. A striped-mirror volume enhances redundancy, which makes it more tolerant of disk failure, and reduces recovery time after disk failure.

For databases that support online transaction processing (OLTP) workloads, we recommend either mirrored-stripe or striped-mirror volumes to improve database performance and reliability. For highest availability, we recommend striped-mirror volumes (RAID 1+0).

How striping with parity (RAID-5) works

RAID-5 provides data redundancy through the use of parity (a calculated value that the system uses to reconstruct data after a failure). While data is written to a RAID-5 volume, parity is also calculated by performing an exclusive OR (XOR) procedure on data. The resulting parity is then written to another part of the volume. If a portion of a RAID-5 volume fails, the data that was on that portion of the failed volume can be recreated from the remaining data and the parity.

RAID-5 offers data redundancy similar to mirroring, while requiring less disk space. RAID-5 read performance is similar to that of striping but with relatively slow write performance. RAID-5 is useful if the database workload is read-intensive (as in many data warehousing applications). You can snapshot a RAID-5 volume and move a RAID-5 subdisk without losing redundancy.

About online relayout

As databases grow and usage patterns change, online relayout lets you change volumes to a different layout, with uninterrupted data access. Relayout is accomplished online and in place. Use online relayout to change the redundancy or performance characteristics of the storage, such as data organization (RAID levels), the number of columns for RAID-5 and striped volumes, and stripe unit size.

About volume resynchronization

When storing data redundantly, using mirrored or RAID-5 volumes, Veritas Volume Manager ensures that all copies of the data match exactly. However, if the system crashes, small amounts of the redundant data on a volume can become inconsistent or unsynchronized. For mirrored volumes, unsynchronized data can cause two reads from the same region of the volume to return different results if different mirrors are used to satisfy the read request. In the case of RAID-5 volumes, unsynchronized data can lead to parity corruption and incorrect data reconstruction.

In the event of a system crash, Veritas Volume Manager ensures that all mirrors contain exactly the same data and that the data and parity in RAID-5 volumes agree. This process is called volume resynchronization. Not all volumes require resynchronization after a system failure. VxVM notices when a volume is first written and marks it as dirty. Only volumes that are marked dirty when the system reboots require resynchronization.

The process of resynchronization can impact system and database performance. However, it does not affect the availability of the database after system reboot. You can immediately access the database after database recovery although the performance may suffer due to resynchronization. For very large volumes or for a very large number of volumes, the resynchronization process can take a long time. You can significantly reduce resynchronization time by using Dirty Region Logging (DRL) for mirrored volumes or by making sure that RAID-5 volumes have valid RAID-5 logs. However, using logs can slightly reduce the database write performance.

For most database configurations, we recommend using dirty region logs or the RAID-5 logs when mirrored or RAID-5 volumes are used. It is also advisable to evaluate the database performance requirements to determine the optimal volume configurations for the databases.

About dirty region logging

Dirty region logging (DRL), if enabled, speeds the recovery of mirrored volumes after a system crash. DRL keeps track of the regions that have changed due to I/O writes to a mirrored volume. DRL uses this information to recover only those portions of the volume that need to be recovered.

Note: If a version 20 data change object (DCO) volume is associated with a volume, a portion of the DCO volume can be used to store the DRL log. There is no need to create a separate DRL log for a volume that has a version 20 DCO volume.

For more information on DCOs and DCO volumes, see the *Veritas Volume Manager Administrator's Guide*.

About SmartSync recovery accelerator

SmartSync increases the availability of mirrored volumes by only resynchronizing changed data. SmartSync reduces the time required to restore consistency, freeing more I/O bandwidth for business-critical applications.

This feature is applicable only to databases that are configured on raw volumes. If supported by the database vendor, the SmartSync feature uses an extended interface between VxVM volumes and the database software to avoid unnecessary

work during mirror resynchronization. For example, Oracle automatically takes advantage of SmartSync to perform database resynchronization when it is available.

About volume sets

Volume sets are an enhancement to VxVM that allow several volumes to be represented by a single logical mount device. All I/O from and to the underlying volumes is directed via the I/O interfaces of the volume set. The volume set feature supports the multi-device enhancement to Veritas File System (VxFS). This feature allows file systems to make best use of the different performance and availability characteristics of the underlying volumes. For example, file system metadata could be stored on volumes with higher redundancy, and user data on volumes with better performance.

About volume snapshots

A volume snapshot is a point-in-time image of a volume. Veritas Volume Manager provides three volume snapshot features based on disk mirroring:

- Full-sized instant snapshots
- Space-optimized instant snapshots
- Emulation of third-mirror snapshots

About Veritas FastResync

Veritas FastResync (previously called Fast Mirror Resynchronization or FMR) is included with the Enterprise Edition. It is also included as part of the Veritas FlashSnap option with the Standard Edition.

Veritas FastResync performs quick and efficient resynchronization of stale mirrors (mirrors that are not synchronized). This increases the efficiency of the VxVM snapshot mechanism, and improves the performance of operations such as backup and decision support. Typically, these operations require that the volume is quiescent, and that they are not impeded by updates to the volume by other activities on the system. To achieve these goals, the snapshot mechanism in VxVM creates an exact copy of a primary volume at an instant in time. After a snapshot is taken, it can be accessed independently of the volume from which it was taken.

Veritas Storage Foundation for Oracle Enterprise Edition includes a feature called Database FlashSnap, which takes advantage of the FastResync and disk group split and join features. Database FlashSnap provides a quicker and easier way for database administrators to use volume snapshots.

See [“How Veritas Volume Manager works”](#) on page 16.

See [“How Veritas Database FlashSnap works”](#) on page 33.

How non-persistent FastResync works

Non-persistent FastResync allocates its change maps in memory. If non-persistent FastResync is enabled, a separate FastResync map is kept for the original volume and for each snapshot volume. Unlike a dirty region log (DRL), these maps do not reside on disk nor in persistent store. The advantage is that updates to the FastResync map have little impact on I/O performance, as no disk updates need to be performed. However, if a system is rebooted, the information in the map is lost, so a full resynchronization is required when performing a snapback operation. This limitation can be overcome for volumes in cluster-shareable disk groups, provided that at least one of the nodes in the cluster remains running to preserve the FastResync map in its memory.

How persistent FastResync works

Non-persistent FastResync has been augmented by the introduction of persistent FastResync. Unlike non-persistent FastResync, Persistent FastResync keeps the FastResync maps on disk so that they can survive system reboots and system crashes. When the disk groups are rejoined, this allows the snapshot plexes to be quickly resynchronized. This ability is not supported by non-persistent FastResync.

If persistent FastResync is enabled on a volume or on a snapshot volume, a DCO and a DCO log volume are associated with the volume.

The DCO object is used not only to manage FastResync maps, but also to manage DRL recovery maps and special maps called copy maps that allow instant snapshot operations to be resume following a system crash.

Persistent FastResync can also track the association between volumes and their snapshot volumes after they are moved into different disk groups. When the disk groups are rejoined, this allows the snapshot plexes to be quickly resynchronized. This ability is not supported by non-persistent FastResync.

About disk group split and join

Disk group split and join is included with the Enterprise Edition. It is also included as part of the Veritas FlashSnap option with the Standard Edition.

VxVM provides a disk group content reorganization feature that supports general disk group reorganization and allows you to move volume snapshots to another host for off-host backup. Additional options to the `vxdg` command enable you to take advantage of the ability to remove all VxVM objects from an imported disk

group and move them to a newly created target disk group (split), and to remove all VxVM objects from an imported disk group and move them to an imported target disk group (join). The move operation enables you to move a self-contained set of VxVM objects between the imported disk groups.

About hot-relocation

In addition to providing volume layouts that help improve database performance and availability, VxVM offers features that you can use to further improve system availability in the event of a disk failure. Hot-relocation is a feature that allows a system to react automatically to I/O failures on mirrored or RAID-5 volumes and restore redundancy and access to those volumes.

VxVM detects I/O failures on volumes and relocates the affected portions to disks designated as spare disks or free space within the disk group. VxVM then reconstructs the volumes that existed before the failure and makes them redundant and accessible again.

The hot-relocation feature is enabled by default and is recommended for most database configurations. After hot-relocation occurs, we recommend verifying the volume configuration for any possible performance impact. It is also a good idea to designate additional disks as spares to augment the spare pool.

While a disk is designated as a spare, you cannot use the space on that disk for the creation of VxVM objects within its disk group. VxVM also lets you free a spare disk for general use by removing it from the pool of hot-relocation disks.

About DMP-supported disk arrays

VxVM provides administrative utilities and driver support for disk arrays that can take advantage of its Dynamic Multipathing (DMP) feature. Some disk arrays provide multiple ports to access their disk devices. These ports, coupled with the host bus adaptor (HBA) controller and any data bus or I/O processor local to the array, make up multiple hardware paths to access the disk devices. Such disk arrays are called multipathed disk arrays. This type of disk array can be connected to host systems in many different configurations, (such as multiple ports connected to different controllers on a single host, chaining of the ports through a single controller on a host, or ports connected to different hosts simultaneously). DMP is available for multiported disk arrays from various vendors and provides improved reliability and performance by using path failover and load balancing.

See the *Veritas Volume Manager Administrator's Guide*.

See the *Veritas Volume Manager Hardware Notes*.

About dynamic LUN expansion

Dynamic LUN expansion allows you to resize a disk after it has been initialized while preserving the existing data on the disk.

See the *Veritas Volume Manager Administrator's Guide*.

About Storage Expert

Storage Expert consists of a set of simple commands that collect VxVM configuration data and compare it with “best practice.” Storage Expert then produces a summary report that shows which objects do not meet these criteria and makes recommendations for VxVM configuration improvements.

These user-configurable tools help you as an administrator to verify and validate systems and non-optimal configurations in both small and large VxVM installations.

Storage Expert components include a set of rule scripts and a rules engine. The rules engine runs the scripts and produces ASCII output, which is organized and archived by Storage Expert's report generator. This output contains information about areas of VxVM configuration that do not meet the set criteria. By default, output is sent to the screen, but you can redirect it to a file using standard UNIX redirection.

See the *Veritas Volume Manager Administrator's Guide*.

About cluster functionality (optional)

VxVM includes an optional, separately licensable clustering feature, known as Cluster Volume Manager, that enables VxVM to be used in a cluster environment. With the clustering option, VxVM supports up to 16 nodes per cluster.

See the *Veritas Volume Manager Administrator's Guide*.

About Veritas Volume Replicator (optional)

Veritas Volume Replicator (VVR) is an optional, separately licensable feature of VxVM. VVR is a data replication tool designed to maintain a consistent copy of application data at a remote site. It is built to contribute to an effective disaster recovery plan. If the data center is destroyed, the application data is immediately available at the remote site, and the application can be restarted at the remote site.

VVR works as a fully integrated component of VxVM. VVR benefits from the robustness, ease of use, and high performance of VxVM and, at the same time, adds replication capability to VxVM. VVR can use existing VxVM configurations

with some restrictions. Any application, even with existing data, can be configured to use VVR transparently.

See the Veritas Volume Replicator documentation.

How Veritas File System works

Veritas File System (referred to as VxFS) is an extent-based, intent logging file system intended for use in UNIX environments that deal with large volumes of data and that require high file system performance, availability, and manageability. VxFS also provides enhancements that make file systems more viable in database environments.

The following sections provide a brief overview of VxFS concepts and features that are relevant to database administration.

See the *Veritas File System Administrator's Guide*.

About Veritas Concurrent I/O

Veritas Concurrent I/O improves the performance of regular files on a VxFS file system without the need for extending namespaces and presenting the files as devices. This simplifies administrative tasks and allows databases, which do not have a sequential read/write requirement, to access files concurrently.

Veritas Concurrent I/O allows for concurrency between a single writer and multiple readers or between multiple writers. It minimizes serialization for extending writes and sends I/O requests directly to file systems.

See [“About Concurrent I/O”](#) on page 69.

About extent-based allocation

By allocating disk space to files in extents, disk I/O to and from a file can be done in units of multiple blocks. This type of I/O can occur if storage is allocated in units of consecutive blocks. For sequential I/O, multiple block operations are considerably faster than block-at-a-time operations. Almost all disk drives accept I/O operations of multiple blocks.

The VxFS file system allocates disk space to files in groups of one or more extents. VxFS also allows applications to control some aspects of the extent allocation for a given file. Extent attributes are the extent allocation policies associated with a file.

About fast file system and database recovery

Veritas File System begins recovery procedures within seconds after a system failure by using a tracking feature called intent logging. This feature records pending changes to the file system structure in a circular intent log. The intent log recovery feature is not readily apparent to users or a system administrator except during a system failure. During system failure recovery, the VxFS `fsck` utility performs an intent log replay, which scans the intent log and nullifies or completes file system operations that were active when the system failed. The file system can then be mounted without completing a full structural check of the entire file system. Replaying the intent log may not completely recover the damaged file system structure if there was a disk hardware failure; hardware problems may require a complete system check using the `fsck` utility provided with Veritas File System.

About online system administration

The VxFS file system provides online system administration utilities to help resolve certain problems that impact database performance. You can defragment and resize a VxFS file system while it remains online and accessible to users.

How the defragmentation utility works

Free resources are originally aligned in the most efficient order possible and are allocated to files in a way that is considered by the system to provide optimal performance. When a file system is active for extended periods of time, new files are created, old files are removed, and existing files grow and shrink. Over time, the original ordering of free resources is lost and the file system tends to spread across the disk, leaving unused gaps or fragments between areas that are in use. This process, known as fragmentation, leads to degraded performance because the file system has fewer choices when selecting an extent (a group of contiguous data blocks) to assign to a file. You should analyze the degree of fragmentation before creating new database files.

VxFS provides the online administration utility `fsadm` to resolve fragmentation problems. The utility can be run on demand and should be scheduled regularly as a `cron` job.

How the resizing utility works

Changes in database size can result in file systems that are too large or too small for the current database. Without special utilities, expanding or shrinking a file system becomes a matter of stopping applications, offloading the contents of

the file system, rebuilding the file system to a new size, and then restoring the data. Data is unavailable to users while these administrative tasks are performed.

The VxFS file system utility `fsadm` provides a mechanism to resize file systems without unmounting them or interrupting users' productivity. Because the VxFS file system can only be mounted on one device, expanding a file system means that the underlying device must also be expandable while the file system is mounted. Working with VxVM, VxFS provides online expansion capability.

About cross-platform data sharing

Veritas Cross-Platform Data Sharing allows data to be serially shared among heterogeneous systems where each system has direct access to the physical devices that hold the data. This feature can be used only in conjunction with Veritas Volume Manager. Shared or parallel access is possible for read-only data.

Cross-Platform Data Sharing provides the fastest way to use Oracle's Transportable Tablespace (TTS) feature for migrating databases to different platforms in Oracle 10g or for moving sets of tablespaces between databases on the same platform in Oracle9.

See the *Veritas Storage Foundation Cross-Platform Data Sharing Administrator's Guide*.

Support for multi-volume file systems

The multi-volume file system (MVS) feature allows several volumes to be represented by a single logical object. All I/O to and from an underlying logical volume is directed by way of volume sets. A volume set is a container for multiple different volumes. This feature can be used only in conjunction with Veritas Volume Manager.

About Quality of Storage Service (optional)

The Quality of Storage Service (QoSS) feature is included with the Enterprise Edition.

The QoSS option is built on the multi-volume support technology introduced in this release. Using QoSS, you can map more than one device to a single file system. You can then configure policies that automatically relocate files from one device to another, or relocate files by running file relocation commands. Having multiple devices lets you determine where files are located, which can improve performance for applications that access specific types of files and reduce storage-related costs.

Database Dynamic Storage Tiering is built on top of QoSS and automates the migration process for Oracle database objects.

Support for large file systems and large files (optional)

Support for large file systems is included with the Enterprise Edition.

In conjunction with VxVM, VxFS can support file systems up to 8 exabytes in size.

For large database configurations, this eliminates the need to use multiple file systems because of the size limitations of the underlying physical devices.

You can create or mount file systems with or without large files by specifying either the `largefiles` or `nolargefiles` option in `mkfs` or `mount` commands.

See [“Creating a VxFS file system”](#) on page 49.

About Storage Checkpoints and Storage Rollback

The Storage Checkpoint and Storage Rollback features are included with the Enterprise Edition. With the Standard Edition, they can be purchased as part of the Veritas FlashSnap option.

Veritas File System provides a Storage Checkpoint facility that allows you to create a persistent, point-in-time image of all user files in a file system—the Storage Checkpoint remains even after the file system is unmounted or the system is rebooted. Storage Checkpoints present a view of a file system at a point in time, and subsequently identifies and maintains copies of the original file system blocks. Instead of using a disk-based mirroring method, Storage Checkpoints save disk space and significantly reduce I/O overhead by using the free space pool available to a file system.

The time required to create a Storage Checkpoint is typically only a couple of seconds. After a Storage Checkpoint is created, a consistent database backup image is made and the database can then resume its normal operation.

The Storage Rollback facility can then be used for rolling back the file system image to the point in time when the Storage Checkpoints were taken. In addition, Storage Checkpoints also keep track of the block change information that enables incremental database backup at the block level.

Storage Checkpoints are writable, and can be created, mounted, and removed. Performance enhancements in maintaining Data Storage Checkpoints (Storage Checkpoints that are complete images of the file system) makes using the Storage Rollback feature easier and more efficient, therefore more viable for backing up large databases.

Multi-Volume File System (MVS) Storage Checkpoint creation allows database backups without having to shut down the database.

MVSs provide the ability to create and administer Storage Checkpoint allocation policies. Storage Checkpoint allocation policies specify a list of volumes and the

order in which Storage Checkpoint data is allocated to them. These allocation policies can be used to control where a Storage Checkpoint is created, allowing for separating Storage Checkpoint metadata and data onto different volumes. They can also be used to isolate data allocated to a Storage Checkpoint from the primary file system, which can help prevent the Storage Checkpoint from fragmenting space in the primary file system.

See [“About Storage Checkpoints and Storage Rollback”](#) on page 107.

About restoring file systems using Storage Checkpoints

Storage Checkpoints can be used by backup and restore applications to restore either individual files or an entire file system. Restoring from Storage Checkpoints can recover data from incorrectly modified files, but typically cannot be used to recover from hardware damage or other file system integrity problems. File restoration can be done using the `fsckpt_restore(1M)` command.

See the *Veritas File System Administrator's Guide*.

About quotas

VxFS supports quotas, which allocate per-user and per-group quotas and limit the use of two principal resources: files and data blocks. You can assign quotas for each of these resources.

Each quota consists of two limits for each resource:

- The hard limit represents an absolute limit on data blocks or files. A user can never exceed the hard limit under any circumstances.
- The soft limit is lower than the hard limit and can be exceeded for a limited amount of time. This allows users to temporarily exceed limits as long as they fall under those limits before the allotted time expires.

You can use quotas to limit the amount of file system space used by Storage Checkpoints.

With Veritas Storage Foundation for Oracle, you can enable, disable, set, and display quota values for a single file system, for multiple file systems, or for all file systems in a database using the `dbed_ckptquota` command.

See [“Administering Storage Checkpoint quotas using `dbed_ckptquota`”](#) on page 259.

See the *Veritas File System Administrator's Guide*.

About cluster functionality (optional)

File system clustering is an optional, separately licensed feature of VxFS, where one system is configured as a primary server for the file system, and the other members of a cluster are configured as secondaries. All servers access shared disks for file data operations. If the primary server fails, one of the secondary servers takes over the file system operations.

See the *Veritas File System Administrator's Guide*.

How Veritas Storage Mapping works

Veritas Storage Mapping is a feature included with Veritas Storage Foundation for Oracle Enterprise Edition.

Veritas has defined and implemented a library called Veritas Mapping Service (VxMS) that provides a mapping interface to VxFS file systems, VxVM volumes, and physical disks. With Veritas Storage Foundation for Oracle, you can take full advantage of this feature to map datafiles or containers, depending on your database, to physical devices and display storage object I/O statistics. With the `vxstorage_stats` command, you can view the complete I/O topology mapping of datafiles or containers through intermediate layers like logical volumes down to actual physical devices. You can also use `vxstorage_stats` to view statistics for VxFS file systems, VxVM volumes, and physical devices. This information can be used to determine the exact location of a data block on a disk and to help identify hot spots.

In addition to `vxstorage_stats`, you can use the `dbed_analyzer` command to obtain tablespace-to-physical disk mapping information for all the datafiles in a specified database. The command also provides information about the amount of disk space being used by a tablespace. Because the `dbed_analyzer` command output can be long, it is written to a file for easier viewing.

This command can help you avoid I/O contention. For example, you can use the information to avoid backing up two tablespaces that share the same physical disk.

Both storage object statistics and the storage structure are displayed in the Veritas Storage Foundation for Oracle GUI.

See “[About Storage Mapping](#)” on page 83.

How Veritas Database FlashSnap works

Veritas Database FlashSnap is a feature included with Veritas Storage Foundation Enterprise Edition. It is also a separately licensed option available with Veritas Storage Foundation Standard Edition.

Veritas Database FlashSnap offers a flexible and efficient means of managing business-critical data. Database FlashSnap lets you capture an online image of an actively changing database at a given instant, called a point-in-time copy. You can perform system backup, upgrade, or perform other maintenance tasks on point-in-time copies while providing continuous availability of your critical data. If required, you can offload processing of the point-in-time copies onto another host to avoid contention for system resources on your production server.

Database FlashSnap takes advantage of the Persistent FastResync and Disk Group Content Reorganization features of VxVM. Database FlashSnap also streamlines database operations. Once configured, the database administrator can create snapshots, resynchronize data, and reverse resynchronize data without involving the system administrator.

Veritas Storage Foundation for Oracle provides three commands that can be executed by the database administrator and do not require root privileges:

- `dbed_vmchecksnap`
- `dbed_vmsnap`
- `dbed_vmclonedb`

These commands let database administrators take advantage of the VxVM snapshot functionality without having to deal with storage operations in day-to-day database uses. To use Database FlashSnap, you must configure the volumes used by the database.

See [“Hosts and storage for Database FlashSnap”](#) on page 165.

How Veritas Extension for Oracle Disk Manager works

Veritas Extension for Oracle Disk Manager is a custom storage interface defined by Oracle Corporation first introduced in Oracle9. Oracle Disk Manager allows Oracle9 and above to exploit system bandwidth through an improved Application Programming Interface (API) that contains advanced kernel support for file I/O. Oracle Disk Manager reduces administration overhead by providing enhanced support for the Oracle Managed Files (OMF) infrastructure also introduced beginning with Oracle9. Combining Veritas Extension for Oracle Disk Manager with Oracle9 offers better database throughput for I/O intensive workloads due

to specialized I/O features that greatly improve the I/O system call profile for such key Oracle server processes as the Log Writer and Database Writers.

With Veritas Extension for Oracle Disk Manager, Oracle9 or Oracle 10 is able to use the same system calls for datafiles stored in the Veritas File System as they do with raw partitions. Oracle Disk Manager files look just like ordinary file system files and can be handled as such. Care is given within Oracle Disk Manager to ensure files are created with contiguous disk blocks automatically for improved sequential file access performance. Oracle Disk Manager files can be backed up and recovered through Veritas NetBackup, Oracle Recovery Manager (RMAN), or other backup software.

Veritas Extension for Oracle Disk Manager supports Oracle Resilvering. With Oracle Resilvering, the storage layer receives information from the Oracle database as to which regions or blocks of a mirrored datafile require resynchronization after a system crash. When using Oracle Resilvering, you can turn off VxVM Dirty Region Logging (DRL), which increases performance.

Oracle Resilvering is supported at the operating system and application levels.

How Database Dynamic Storage Tiering works

Today, more and more data needs to be retained. Eventually, some of the data is no longer needed as frequently, but it still takes up a large amount of disk space. Database Dynamic Storage Tiering matches data storage with the data's usage requirements so that data is relocated based on requirements determined by the database administrator (DBA). The feature enables you to manage your data so that less-frequently used data can be moved to slower, less expensive disks, allowing frequently-accessed data to be stored on the faster disks for quicker retrieval.

The DBA can create a file allocation policy based on filename extension before new files are created, which will create the datafiles on the appropriate tier during database creation.

The DBA can also create a file relocation policy for database files, which would relocate files based on how frequently a file is used.

See [“About Database Dynamic Storage Tiering”](#) on page 133.

About the vxdbd daemon

The vxdbd daemon handles communication to and from the Veritas Storage Foundation for Oracle software. By default, vxdbd communicates with Veritas Storage Foundation for Oracle over port number 3233. If there are conflicts with

this port or other port-related problems, you can change the port by changing the `VXDBD_SOCKET` setting located in the `/etc/vx/vxdbed/admin.properties` file.

Normally the `vxdbd` daemon starts automatically when the host boots up. However, if the daemon reports errors or if the daemon process dies, you may have to manually start or stop it. There is also a `status` command that reports the current state of the daemon to confirm that it is currently running.

Only the root user can stop `vxdbd`. Any user can start `vxdbd` or display its status.

Note: You must have a valid HOME directory for `vxdbd` to work correctly with several Veritas Storage Foundation for Oracle features. If you receive the following error message, but you confirm that `vxdbd` is running (using `ps -ef | grep vxdbd` rather than `vxdbdctl status`), you may not have a valid HOME directory or it may not be available to `vxdbd`:

```
VXDBA_PRODUCT exec_remote ERROR V-81-7700 Can not connect to the vxdbd.
```

To see the status of the vxdbd daemon

- ◆ Use the `vxdbdctl status` command:

```
/opt/VRTSdbcom/bin/vxdbdctl status
```

If the daemon is running you see the following output:

```
vxdbd is alive
```

To start the vxdbd daemon

- ◆ Use the `vxdbdctl start` command:

```
/opt/VRTSdbcom/bin/vxdbdctl start
```

To stop the vxdbd daemon

- ◆ As root, use the `vxdbdctl stop` command:

```
/opt/VRTSdbcom/bin/vxdbdctl stop
```

To change the communications port used by the vxdbd daemon

- 1 As the root user, stop the vxdbd daemon:

```
/opt/VRTSdbcom/bin/vxdbdctrl stop
```

- 2 In the `/etc/vx/vxdbed/admin.properties` file, change the value of the `VXDBD_SOCKET` variable to a new port number:

```
VXDBD_SOCKET=3233
```

- 3 Restart the vxdbd daemon:

```
/opt/VRTSdbcom/bin/vxdbdctrl start
```

- 4 If the system is part of a multi-host configuration, change the port on all hosts involved by repeating this procedure on each host.
- 5 Restart the DBED agent `vxpal`.

See the section "Starting the DBED agent" in the *Veritas Storage Foundation for Oracle Graphical User Interface Guide*.

About Veritas Storage Foundation for Oracle graphical user interface

An alternative to the command line interface, the Veritas Storage Foundation for Oracle GUI allows you to manage the storage used by databases.

In this release, Veritas Storage Foundation for Oracle offers both a Java-based GUI and a Web-based GUI. The Web-based GUI does not contain the Database Dynamic Storage Tiering functionality or the scheduler functionality.

You can use the GUI to:

- Display database, tablespace, datafile, and file system information and manage the database state.
- Manage volume and file movement with Database Dynamic Storage Tiering. With this feature, you can also get reports on file usage. (Java-based GUI only.)
- Create, display, mount, unmount, and remove Storage Checkpoints.
- Automate tasks, such as creating or cloning a database using a Storage Checkpoint, with the scheduler. (Java-based GUI only.)
- Roll back databases, tablespaces, or datafiles to Storage Checkpoints.
- Collect and display statistics on file system and Oracle space usage.

- Collect and display storage object I/O statistics and the storage structure.
- Monitor file system and Oracle datafile space usage and automatically grow the file system as needed.
- Examine volumes used by the file systems and overall system configuration.
- Start or stop instances or duplicate databases. You can duplicate a database using Storage Checkpoints or Database FlashSnap.
- Create or shut down a clone database.
- Create, modify, validate, or remove snapplans.
- Create, resynchronize, or reverse resynchronize a snapshot database.

For more information, see the appropriate online help and the *Veritas Storage Foundation for Oracle Graphic User Interface Guide*.

About Veritas NetBackup (optional)

Veritas NetBackup provides backup, archive, and restore capabilities for database files and directories contained on client systems in a client-server network. NetBackup server software resides on platforms that manage physical backup storage devices. The NetBackup server provides robotic control, media management, error handling, scheduling, and a repository of all client backup images.

Administrators can set up schedules for automatic, unattended full and incremental backups. These backups are managed entirely by the NetBackup server. The administrator can also manually back up clients. Client users can perform backups, archives, and restores from their client system, and once started, these operations also run under the control of the NetBackup server.

Veritas NetBackup, while not a shipped component of Veritas Storage Foundation for Oracle, can be purchased separately.

About Veritas Storage Foundation/High Availability for Oracle (optional)

Veritas Storage Foundation/High Availability (HA) (VCS) lets database administrators integrate multiple servers into high availability database configurations that can significantly reduce the down time of Oracle databases caused by a system hardware or software failure.

In addition to the Veritas products included in the base Veritas Storage Foundation for Oracle, Veritas Storage Foundation/HA for Oracle incorporates the following products:

- Veritas Cluster Server™ (VCS) for Oracle
- Veritas Cluster Server™ (VCS) Enterprise Agent for Oracle

Note: Veritas Storage Foundation/HA (VCS) for Oracle is available only for the Enterprise Edition.

Setting up databases

This chapter includes the following topics:

- [Tasks for setting up new databases](#)
- [About setting up a disk group](#)
- [Creating a disk group](#)
- [Adding disks to a disk group](#)
- [About selecting a volume layout](#)
- [Creating a volume](#)
- [Creating a volume set](#)
- [Adding a volume to a volume set](#)
- [File system creation guidelines](#)
- [Creating a VxFS file system](#)
- [Mounting a file system](#)
- [Unmounting a file system](#)
- [About fragmentation](#)
- [Resizing a file system](#)

Tasks for setting up new databases

If you are using Veritas Storage Foundation for Oracle to set up a new database, complete these tasks in the order listed below:

- Determine the number and sizes of file systems you need for the database you want to create. See the *Veritas File System Administrator's Guide*.
- Create volumes to meet your file system needs. You can use disk mirroring as a safeguard against disk failures and striping for better performance.
- If you plan to create volume snapshots for the database and use them on either the same host or a secondary one, ensure that your volume layout is consistent with Database FlashSnap requirements. See [“Hosts and storage for Database FlashSnap”](#) on page 165.
- Create the VxFS file systems you need on the volumes. See [“File system creation guidelines”](#) on page 48.
See [“Creating a VxFS file system”](#) on page 49.
- Install and configure your database. See [“About Oracle Disk Manager”](#) on page 73.
- For best OLTP performance, use Oracle Disk Manager (ODM).
- If you would like the ability to view detailed storage stack topology information to ensure your storage stack configuration is optimized for the database, configure and use Storage Mapping. See [“About Storage Mapping”](#) on page 83.
- If using ODM, link the ODM library. See [“Setting up Veritas extension for Oracle Disk Manager”](#) on page 79.
- If you are not currently running on VxVM and VxFS, make sure Veritas Storage Foundation for Oracle is installed and convert your existing database configuration. See the *Veritas Storage Foundation for Oracle Installation Guide*.
- For backup and recovery on the same host, you can use the Storage Checkpoint facility to create file system snapshots of the database. A Storage Checkpoint creates an exact image of a database instantly and provides a consistent image of the database from the point in time the Storage Checkpoint was created. See [“About Storage Checkpoints and Storage Rollback”](#) on page 107.

For off-host processing or backup, you can use the Database FlashSnap feature to create a volume snapshot for the database.

Database FlashSnap lets you capture an online image of an actively changing database at a given instant, known as a snapshot. You can perform backups and off-host processing tasks on snapshots while providing continuous availability of your critical data.

About setting up a disk group

Before creating file systems for a database, set up a disk group for each database.

A disk group lets you group disks, volumes, file systems, and files that are relevant to a single database into a logical collection for easy administration. Because you can move a disk group and its components as a unit from one machine to another, you can move an entire database when all the configuration objects of the database are in one disk group. This capability is useful in a failover situation.

Disk group configuration guidelines

Follow these guidelines when setting up disk groups:

- Only disks that are online and do not already belong to a disk group can be used to create a new disk group.
- Create one disk group for each database.
- The disk group name must be unique. Name each disk group using the Oracle database instance name specified by the environment variable `$ORACLE_SID` and a `dg` suffix. The `dg` suffix helps identify the object as a disk group. Also, each disk name must be unique within the disk group.
- Never create database files using file systems or volumes that are not in the same disk group.

In earlier releases of Veritas Volume Manager, a system installed with VxVM was configured with a default disk group, `rootdg`, that had to contain at least one disk. VxVM can now function without any disk group having been configured. Only when the first disk is placed under VxVM control must a disk group be configured.

Note: Most VxVM commands require superuser or equivalent privileges.

See [“About tuning VxVM ”](#) on page 227.

Creating a disk group

You can use the `vxdg` command to create a new disk group. A disk group must contain at least one disk at the time it is created. You also have the option to create a shared disk group for use in a cluster environment.

Disks must be placed in disk groups before they can be used by VxVM. You can create disk groups to organize your disks into logical sets of disks.

Before creating a disk group, make sure the following conditions have been met:

- | | |
|---------------|--|
| Prerequisites | <ul style="list-style-type: none"> ■ Only disks that are online and do not belong to a disk group can be used to create a disk group. ■ The disk group name must be unique in the host or cluster. ■ Creating a disk group requires at least one disk. |
| Usage notes | <ul style="list-style-type: none"> ■ Veritas Storage Foundation for Oracle only supports single disk groups. ■ Veritas Storage Foundation for Oracle RAC supports shared disk groups. If you are in an Oracle RAC environment: <ul style="list-style-type: none"> ■ Create disk groups on the shared disks from the master node. To determine if a node is a master or slave, run the following command: <pre style="margin-left: 40px;">vxdctl -c mode</pre> ■ RAID-5 volumes are not supported for sharing in a cluster. ■ New disks must be placed under VxVM control and then added to a dynamic disk group before they can be used for volumes. ■ When you place a disk under VxVM control, the disk is initialized. Initialization destroys any existing data on the disk. ■ For information on the <code>vxdg</code> command, see the <code>vxdg(1M)</code> manual page. |

To create a new disk group

- ◆ Use the `vxdg` command as follows:

```
# /opt/VRTS/bin/vxdg init disk_group [disk_name=disk_device]
```

The following is an example of creating a disk group using the `vxdg` command:

To create a disk group named `PRODDg` on a raw disk partition `sda`, where the disk name `PRODDg01` references the disk within the disk group:

```
# /opt/VRTS/bin/vxdg init PRODDg PRODDg01=sda
```

To create a new shared disk group in an Oracle RAC environment

- ◆ Use the `vxdg` command as follows:

```
# /opt/VRTS/bin/vxdg -s init disk_group [disk_name=disk_device]
```

Where the `-s` option allows the disk group to be shared.

Warning: Veritas Storage Foundation for Oracle RAC supports shared disk groups. Veritas Storage Foundation for Oracle Standard and Enterprise editions support single disk groups.

To create a disk group named `PRODDg` on a raw disk partition `sda`, where the disk name `PRODDg01` references the disk within the disk group:

```
# /opt/VRTS/bin/vxdg -s init PRODDg PRODDg01=sda
```

Adding disks to a disk group

When a disk group is first created, it can contain only a single disk. You may need to add more disks to the disk group. Before adding disks, make sure the following conditions have been met:

Usage notes

- When you place a disk under VxVM control, the disk is initialized. Initialization destroys any existing data on the disk.
- Disks must be under VxVM control and in a disk group before they can be used to create volumes.
- Disks must be online before they can be added to a disk group.
- Disks that already belong to a disk group cannot be added to another disk group.

To add disks to a disk group

- ◆ Use the `vxdg` command as follows:

```
# /opt/VRTS/bin/vxdg -g disk_group adddisk \  
[disk_name=disk_device]
```

The following is an example of adding disks to a disk group using the `vxdg` command:

To add disks named `PRODDg02`, `PRODDg03`, and `PRODDg04` to the disk group `PRODDg`:

```
# /opt/VRTS/bin/vxdg -g PRODDg adddisk PRODDg02=sda
# /opt/VRTS/bin/vxdg -g PRODDg adddisk PRODDg03=sdb
# /opt/VRTS/bin/vxdg -g PRODDg adddisk PRODDg04=sdc
```

About selecting a volume layout

Veritas Volume Manager offers a variety of layouts that allow you to configure your database to meet performance and availability requirements. The proper selection of volume layouts provides optimal performance for the database workload.

An important factor in database performance is the tablespace placement on the disks.

Disk I/O is one of the most important determining factors of your database's performance. Having a balanced I/O load usually means optimal performance. Designing a disk layout for the database objects to achieve balanced I/O is a crucial step in configuring a database.

When deciding where to place tablespaces, it is often difficult to anticipate future usage patterns. VxVM provides flexibility in configuring storage for the initial database set up and for continual database performance improvement as needs change. VxVM can split volumes across multiple drives to provide a finer level of granularity in data placement. By using striped volumes, I/O can be balanced across multiple disk drives. For most databases, ensuring that different containers or tablespaces, depending on which database you are using, are distributed across the available disks may be sufficient.

Striping also helps sequential table scan performance. When a table is striped across multiple devices, a high transfer bandwidth can be achieved by setting the Oracle parameter `DB_FILE_MULTIBLOCK_READ_COUNT` to a multiple of full stripe size divided by `DB_BLOCK_SIZE`.

See [“About tuning VxVM ”](#) on page 227.

How to choose appropriate stripe unit sizes

When creating a striped volume, you need to decide the number of columns to form a striped volume and the stripe unit size. You also need to decide how to stripe the volume. You may stripe a volume across multiple disk drives on the same controller or across multiple disks on multiple controllers. By striping across multiple controllers, disk I/O can be balanced across multiple I/O channels. The

decision is based on the disk and controller bandwidth and the database workload. In general, for most OLTP databases, use the default stripe unit size of 64 K or smaller for striped volumes and 16 K for RAID-5 volumes.

How to choose between mirroring and RAID-5

VxVM provides two volume configuration strategies for data redundancy: mirroring and RAID-5. Both strategies allow continuous access to data in the event of disk failure. For most database configurations, we recommend using mirrored, striped volumes. If hardware cost is a significant concern, but having higher data availability is still important, use RAID-5 volumes.

RAID-5 configurations have certain performance implications you must consider. Writes to RAID-5 volumes require parity-bit recalculation, which adds significant I/O and CPU overhead. This overhead can cause considerable performance penalties in online transaction processing (OLTP) workloads. If the database has a high read ratio, however, RAID-5 performance is similar to that of a striped volume.

Volume configuration guidelines

Follow these guidelines when selecting volume layouts:

- Put the database log files on a file system created on a striped and mirrored (RAID-0+1) volume separate from the index or data tablespaces. Stripe multiple devices to create larger volumes if needed. Use mirroring to improve reliability. Do not use VxVM RAID-5 for redo logs.
- When normal system availability is acceptable, put the tablespaces on file systems created on striped volumes for most OLTP workloads.
- Create striped volumes across at least four disks. Try to stripe across disk controllers. For sequential scans, do not stripe across too many disks or controllers. The single thread that processes sequential scans may not be able to keep up with the disk speed.
- For most workloads, use the default 64 K stripe-unit size for striped volumes and 16 K for RAID-5 volumes.
- When system availability is critical, use mirroring for most write-intensive OLTP workloads. Turn on Dirty Region Logging (DRL) to allow fast volume resynchronization in the event of a system crash.
- When system availability is critical, use RAID-5 for read-intensive OLTP workloads to improve database performance and availability. Use RAID-5 logs to allow fast volume resynchronization in the event of a system crash.

- For most decision support system (DSS) workloads, where sequential scans are common, experiment with different striping strategies and stripe-unit sizes. Put the most frequently accessed tables or tables that are accessed together on separate striped volumes to improve the bandwidth of data transfer.

See [“About tuning VxVM ”](#) on page 227.

Creating a volume

Veritas Volume Manager uses logical volumes to organize and manage disk space. A volume is made up of portions of one or more physical disks, so it does not have the limitations of a physical disk.

For databases where the data storage needs to be resilient and the data layout needs to be optimized for maximum performance, we recommend using VxVM. The striping and mirroring capabilities offered by a volume manager will help you achieve your manageability, availability, and performance goals.

After you decide on a volume layout, you can use the `vxassist` command to create the volume.

Before creating a volume, make sure the following conditions are met:

Usage notes

- Creating a volume requires a disk group name, volume name, volume size, and volume layout. You will also need to know subdisk names if you are creating a striped volume.
- Striped or mirrored volumes require at least two disks.
- Striped pro and concatenated pro volumes are mirrored by default, so a striped pro volume requires more disks than an unmirrored striped volume and a concatenated pro volume requires more disks than an unmirrored concatenated volume.
- You cannot use a striped pro or concatenated pro volume for a `root` or `swap` volume.
- A RAID-5 volume requires at least three disks. If RAID-5 logging is enabled, a RAID-5 volume requires at least four disks. RAID-5 mirroring is not supported.

To create a volume

- ◆ Use the `vxassist` command as follows:

```
# /opt/VRTS/bin/vxassist -g disk_group make volume_name \  
size disk_name
```

The following is an example of creating a volume using the `vxassist` command:

To create a 1 GB mirrored volume called `db01` on the `PRODDg` disk group:

```
# /opt/VRTS/bin/vxassist -g PRODDg make db01 1g PRODDg01
```

Creating a volume set

Volume Sets enable the use of the Multi-Volume Support feature with Veritas File System (VxFS). It is also possible to use the Veritas Enterprise Administrator (VEA) to create and administer volumes sets. For more information, see the VEA online help.

Before creating a volume set, make sure the following conditions are met:

- Usage notes
- Before creating a volume set, you must have at least one volume created.
See [“Creating a volume”](#) on page 46.
 - A maximum of 256 volumes may be configured in a volume set.
 - Only Veritas File System is supported on a volume set.
 - The first volume in a volume set must be larger than 20MB.
 - Raw I/O from and to a volume set is not supported.
 - Volume sets can be used instead of volumes with the following `vxsnap` operations on instant snapshots: `addmir`, `dis`, `make`, `prepare`, `reattach`, `refresh`, `restore`, `rmir`, `split`, `syncpause`, `syncresume`, `syncstart`, `syncstop`, `syncwait`, and `unprepare`. The third-mirror break-off usage model for full-sized instant snapshots is supported for volume sets provided that sufficient plexes exist for each volume in the volume set. See the *Veritas Volume Manager Administrator's Guide*.
 - Most VxVM commands require superuser or equivalent privileges.
 - For details regarding usage of the `vxvset` command, see the `vxvset (1M)` manual page.

To create a volume set for use by Veritas file system (VxFS)

- ◆ Use the following command:

```
# /opt/VRTS/bin/vxvset [-g diskgroup] -t vxfs make volset volume
```

where:

- `volset` is the name of the volume set
- `volume` is the name of the first volume in the volume set
- `-t` defines the content handler subdirectory for the application that is to be used with the volume. This subdirectory contains utilities that an application uses to operate on the volume set. The operation of these utilities is determined by the requirements of the application and not by VxVM.

For example, to create a volume set named `db01vset` that contains the volume `db01`, in the disk group `PRODDg`, you would use the following command:

```
# /opt/VRTS/bin/vxvset -g PRODDg -t vxfs make db01vset db01
```

Adding a volume to a volume set

After creating a volume set, you can add additional volumes.

To add a volume to a volume set

- ◆ Use the `vxvset` command as follows:

```
# /opt/VRTS/bin/vxvset [-g diskgroup] [-f] addvol volset \  
volume
```

Warning: The `-f` (force) option must be specified if the volume being added, or any volume in the volume set, is either a snapshot or the parent of a snapshot. Using this option can potentially cause inconsistencies in a snapshot hierarchy if any of the volumes involved in the operation is already in a snapshot chain.

See the *Veritas Volume Manager Administrator's Guide*.

For example, to add the volume `db02`, to the volume set `db01vset`, use the following command:

```
# /opt/VRTS/bin/vxvset -g PRODDg addvol db01vset db02
```

File system creation guidelines

Follow these guidelines when creating VxFS file systems:

- Specify the maximum log size when creating file systems for databases.
- Except for specifying the maximum log size and support for large files as required, use the VxFS defaults when creating file systems for databases.
- Never disable the intent logging feature of the file system.
- For redo logs, create a single file system using a simple (and mirrored, if necessary) volume. Put the other tablespaces and database files on separate file systems created on striped, striped and mirrored, or RAID-5 volumes.
- When using the command line, use the mount points to name the underlying volumes. For example, if a file system named `/db01` is to be created on a mirrored volume, name the volume `db01` and the mirrors `db01-01` and `db01-02` to relate to the configuration objects. If you are using the `vxassist` command or the GUI, this is transparent.

Choose a file system block size that matches or is a multiple of the block size of your Oracle database (`db_block_size`).

It is possible to have a file system block size that is smaller than the database block size because the database block-size limit can be bigger than the file system block size. It is fine if the file system block size is smaller than the database block size because VxFS will not perform multiple I/O operations for each database I/O operation. VxFS is capable of performing I/Os with multiple blocks. For example, if your database block size is 32K and your file system block size is 8k, VxFS can put four 8K blocks together to perform one 32K database I/O operation.

When creating the file system, set the number of file system blocks in the intent log so that the log size is 16MB. For example, if the file system block size is 8K (that is, 8192), it will take 2000 blocks to make a 16MB log ($2000 \times 8192 = \sim 16\text{MB}$). If the file system block size is 4K (that is, 4096), then twice as many blocks as in the 8K case would need to be allocated (4000 in this example).

Creating a VxFS file system

Before creating a file system, see the following notes:

- Usage notes
- See the `mkfs(1M)` and `mkfs_vxfs(1M)` manual pages for more information about the options and variables available for use with the `mkfs` command.
 - See the `mount(1M)` and `mount_vxfs(1M)` manual pages for more information about mount settings.

To create a VxFS file system on an existing volume

- ◆ Use the `mkfs` command as follows:

```
# /usr/sbin/mkfs -t vxfs [generic_options] \  
[-o specific_options] special [size]
```

where:

- `vxfs` is the file system type
- `generic_options` are the options common to most file systems
- `specific_options` are options specific to the VxFS file system
- `special` is the full path name of the raw character device or VxVM volume on which to create the file system (for example, `/dev/vx/rdisk/PRODDg/db01`)
- `size` is the size of the new file system (optional)

If you do not specify , the file system will be as large as the underlying volume.

For example, to create a VxFS file system that has an 8 KB block size and supports files larger than 2 GB on the newly created `db01` volume:

```
# /usr/sbin/mkfs -t vxfs -o largefiles,bsize=8192,\  
logsize=2000 /dev/vx/rdisk/PRODDg/db01
```

The `-o largefiles` specific option allows you to create files larger than 2 GB.

Note: Because `size` is not specified in this example, the size of the file system will be calculated automatically to be the same size as the volume on which the file system is created.

The `mkfs` command displays output similar to the following:

```
version 6 layout  
  
20480 sectors, 10240 blocks of size 1024, log size 1024 blocks
```

You can now mount the newly created file system.

See “[Mounting a file system](#)” on page 51.

Large file system and large file support

In conjunction with VxVM, VxFS can support file systems up to 8 exabytes in size. For large database configurations, this eliminates the need to use multiple file systems because of the size limitations of the underlying physical devices.

Changes implemented with the VxFS Version 6 disk layout have greatly expanded file system scalability, including support for large files. You can create or mount file systems with or without large files by specifying either the `largefiles` or `nolargefiles` option in `mkfs` or `mount` commands. If you specify the `nolargefiles` option, a file system cannot contain files 2 GB or larger.

Before creating a VxFS file system, make sure the following conditions are met:

- Usage notes
- See the `mount_vxfs (1M)` and `mkfs_vxfs (1M)` manual pages for detailed information on mounting and creating file systems.
 - See the `fsadm_vxfs (1M)` manual pages for detailed information about large files.

To enable large files on a file system that was created without the `largefiles` option

- ◆ Use the `fsadm` command as follows:

```
# /opt/VRTS/bin/fsadm -t vxfs -o largefiles \  
/mount_point
```

Note: Make sure the applications and tools you use can handle large files before enabling the large file capability. Applications and system administration utilities can experience problems if they are not large file aware.

Multi-volume support

The multi-volume support feature enabled by VxFS Version 6 disk layout allows several volumes to be represented by a single logical object, known as a volume set. The `vxvset` command can be used to create and administer volume sets in Veritas Volume Manager.

VxFS's multi-volume support feature can be used with volume sets. There are two VxFS commands associated with multi-volume support:

- `fsapadm` - VxFS allocation policy administration utility
- `fsvoladm` - VxFS device administration utility

See the *Veritas File System Administrator's Guide*.

Mounting a file system

After creating a VxFS file system, mount the file system using the `mount` command.

Before mounting a file system, make sure the following conditions are met:

- | | |
|---------------|---|
| Prerequisites | <ul style="list-style-type: none">■ A file system must exist in order to be mounted.■ DBAs must be logged in as <code>root</code> to mount a file system. |
| Usage notes | <ul style="list-style-type: none">■ The mount point must be an absolute path name (that is, it must begin with <code>/</code>).■ See the <code>mount_vxfs (1M)</code> manual page for more information about mount settings.■ See the <code>mount (1M)</code> manual page for more information about generic mount options. |

To mount a file system

- ◆ Use the `mount` command as follows:

```
# /usr/sbin/mount -t vxfs [generic_options] [-r] \  
[-o specific_options] special /mount_point
```

where:

- `generic_options` are the options common to most file systems
- `-r` mounts the file system as read only
- `specific_options` are options specific to the VxFS file system
- `special` is a block special device
- `/mount_point` is the directory where the file system will be mounted

For example, to mount a file system named `/db01` that supports large files on volume `/dev/vx/dsk/PRODDg/db01`:

```
# mkdir /db01  
  
# chown oracle:dba /db01  
  
# /usr/sbin/mount -t vxfs -o largefiles /dev/vx/dsk/PRODDg/db01 \  
/db01
```

If you would like `/db01` to be mounted automatically after rebooting, add a tab-separated entry for it in `/etc/fstab` as follows:

```
/dev/vx/dsk/PRODDg/db01 /dev/vx/rdisk/PRODDg/do1 /db01 vxfs \  
largefiles 0 2
```

Unmounting a file system

If you no longer need to access the data in a file system, you can unmount the file system using the `umount` command.

Before unmounting a file system, make sure the following conditions have been met:

- Prerequisites
 - A file system must exist and be mounted in order to be unmounted.
- Usage notes
 - You cannot unmount a file system that is in use.
See the `umount (1M)` manual page for more information on mounting file systems.

To unmount a file system

- 1 Use the `fuser` command to make sure that the file system is not being used:

```
# fuser -c /mount_point
```

where the `-c` option provides information on file system mount points and any files within mounted file systems.

If the file system is being used and you need to unmount it, use the `fuser -ck` command. See the `fuser(1M)` man page for more information.

- 2 Unmount the file system using one of the `umount` command options:

- `umount special`
- `umount /mount_point`
- `umount -f /mount_point`

where:

- `special` is a block special device
- `/mount_point` is the location where the file system is mounted
- `-f` forcibly unmounts the mount point

The following is an example of unmounting a file system:

To verify that the file system `/db01` is not in use and then unmount the file system:

```
# fuser -c /db01
/db01:
# umount /db01
```

About fragmentation

When free resources are initially allocated to files in a Veritas file system, they are aligned in the most efficient order possible to provide optimal performance. On an active file system, the original order is lost over time as files are created, removed, or resized. As space is allocated and deallocated from files, the available free space becomes broken into fragments. This means that space must be assigned to files in smaller and smaller extents. This process is known as fragmentation. Fragmentation leads to degraded performance and availability. The degree of fragmentation depends on file system usage and activity.

How to control fragmentation

VxFS provides online reporting and optimization utilities to enable you to monitor and defragment a mounted file system. These utilities are accessible through the file system administration command, `fsadm`. Using the `fsadm` command, you can track and eliminate fragmentation without interrupting user access to the file system.

Types of fragmentation

VxFS addresses two types of fragmentation:

- **Directory Fragmentation**
As files are created and removed, gaps are left in directory inodes. This is known as directory fragmentation. Directory fragmentation causes directory lookups to become slower.
- **Extent Fragmentation**
As files are created and removed, the free extent map for an allocation unit changes from having one large free area to having many smaller free areas. Extent fragmentation occurs when files cannot be allocated in contiguous chunks and more extents must be referenced to access a file. In a case of extreme fragmentation, a file system may have free space that cannot be allocated.

How to monitor fragmentation

You can monitor fragmentation in VxFS by running reports that describe fragmentation levels. Use the `fsadm` command to run reports on directory fragmentation and extent fragmentation. The `df` command, which reports on file system free space, also provides information useful in monitoring fragmentation.

Use the following commands to report fragmentation information:

- `fsadm -D`, which reports on directory fragmentation.
- `fsadm -E`, which reports on extent fragmentation.
- `/opt/VRTS/bin/fsadm [-t vxfs] -o s`, which prints the number of free extents of each size.

Defragmenting a file system

You can use the online administration utility `fsadm` to defragment or reorganize file system directories and extents.

The `fsadm` utility defragments a file system mounted for read/write access by:

- Removing unused space from directories.
- Making all small files contiguous.
- Consolidating free blocks for file system.

The following options are for use with the `fsadm` utility:

- | | |
|--------------------|---|
| <code>-d</code> | Reorganizes directories. Directory entries are reordered to place subdirectory entries first, then all other entries in decreasing order of time of last access. The directory is also compacted to remove free space.
Note: If you specify <code>-d</code> and <code>-e</code> , directory reorganization is always completed first. |
| <code>-a</code> | Use in conjunction with the <code>-d</code> option to consider files not accessed within the specified number of days as “aged” files. Aged files are moved to the end of the directory. The default is 14 days. |
| <code>-e</code> | Reorganizes extents. Files are reorganized to have the minimum number of extents.
Note: If you specify <code>-d</code> and <code>-e</code> , directory reorganization is always completed first. |
| <code>-D -E</code> | Produces reports on directory and extent fragmentation, respectively.
Note: If you use both <code>-D</code> and <code>-E</code> with the <code>-d</code> and <code>-e</code> options, the fragmentation reports are produced both before and after reorganization. |
| <code>-v</code> | Specifies verbose mode and reports reorganization activity. |
| <code>-l</code> | Specifies the size of a file that is considered large. The default is 64 blocks. |

- t Specifies a maximum length of time to run, in seconds.
Note: The -t and -p options control the amount of work performed by fsadm, either in a specified time or by a number of passes. By default, fsadm runs five passes. If both -t and -p are specified, fsadm exits if either of the terminating conditions are reached.
- p Specifies a maximum number of passes to run. The default is five.
Note: The -t and -p options control the amount of work performed by fsadm, either in a specified time or by a number of passes. By default, fsadm runs five passes. If both -t and -p are specified, fsadm exits if either of the terminating conditions are reached.
- s Prints a summary of activity at the end of each pass.
- r Specifies the pathname of the raw device to read to determine file layout and fragmentation. This option is used when fsadm cannot determine the raw device.

Note: You must have superuser (root) privileges to reorganize a file system using the fsadm command.

To defragment a file system

- ◆ Run the `fsadm` command followed by the options specifying the type and amount of defragmentation. Complete the command by specifying the mount point or raw device to identify the file system.

```
# /opt/VRTS/bin/fsadm [-d] [-D] [-e] [-E] [-s] [-v] \
[-l largesize] [-a days] [-t time] [-p pass_number] \
[-r rawdev_path] mount_point
```

Refer to the *Veritas File System Administrator's Guide* for instructions and information on scheduling defragmentation. *Veritas File System Administrator's Guide* for instructions and information on scheduling defragmentation.

For example, to defragment a file system:

```
# /opt/VRTS/bin/fsadm -d -D /oradata_qiovms
```

```
Directory Fragmentation Report
```

	Dirs	Total	Immed	Immeds	Dirs to	Blocks
	Searched	Blocks	Dirs	to Add	Reduce	Reduce
total	5	1	4	0	0	0

```
Directory Fragmentation Report
```

	Dirs	Total	Immed	Immeds	Dirs to	Blocks
	Searched	Blocks	Dirs	to Add	Reduce	Reduce
total	5	1	4	0	0	0

Resizing a file system

If you need to extend or shrink a VxFS file system, you can use the `fsadm` command.

If a VxFS file system requires more space, you can use this procedure to extend the size of the file system. If a VxFS File System is too large and you need the space elsewhere, you can use this procedure to shrink the file system.

Remember to increase the size of the underlying device or volume before increasing the size of the file system.

See the *Veritas Volume Manager Administrator's Guide*. *Veritas Volume Manager Administrator's Guide*.

Before resizing a file system, the following conditions must be met:

- Prerequisites
- This task requires a mounted file system. You must know either the desired size or the amount of space to add to or subtract from the file system size.
- Usage notes
- See the (1M) manual page. See the `fsadm_vxfs(1M)` manual page.

To resize a file system

- ◆ Use `fsadm` command as follows:

```
# /opt/VRTS/bin/fsadm -t vxfs [-b newsize] \  
[-r rawdev] /mount_point
```

where:

- `newsiz` is the size (in sectors) to which the file system will increase or shrink
- `/mount_point` is the location where the file system is mounted

For example, to extend the file system `/db01` to 2 GB:

```
# /opt/VRTS/bin/fsadm -t vxfs -b 2g /db01
```

Note: See the *Veritas File System Administrator's Guide* and `fsadm_vxfs(1M)` manual page for information on how to perform common file system tasks using `fsadm`.

Resizing a file system and the underlying volume

The `fsadm` command resizes the file system only. If you attempt to use `fsadm` to make the file system the same size or larger than the underlying volume, the `fsadm` command will fail. To resize the file system and its underlying volume, use the `vxresize` command instead.

Warning: Resizing a volume with a usage type other than FSGEN or RAID5 can result in data loss. If such an operation is required, use the `-f` option to forcibly resize such a volume.

Before resizing a file system and the underlying volume, the following conditions must be met:

- Prerequisites
- You must know the new desired size of the file system.
- Usage notes
- `vxresize` works with VxFS, ext2, ext3, and reiserfs file systems only.
 - If the file system is mounted or VxFS, you can grow or shrink the size. If the file system is Lite-VxFS, ext2, ext3, or reiserfs, you cannot grow or shrink the size.
 - If the file system is unmounted and VxFS or Lite-VxFS, you cannot grow or shrink the size. If the file system is ext2, ext3, or reiserfs, you can grow or shrink the size.
 - When resizing large volumes, `vxresize` may take a long time to complete.
 - Resizing a volume with a usage type other than FSGEN or RAID5 can result in data loss. If such an operation is required, use the `-f` option to forcibly resize such a volume.
 - You cannot resize a volume that contains plexes with different layout types.
 - See the `vxresize (1M)` manual page for more details.

To resize a file system and the underlying volume

- ◆ Use the `vxresize` command as follows:

```
# /etc/vx/bin/vxresize -g disk_group -b -F vxfs -t \  
homevolresize homevol volume_size disk_name disk_name
```

For example, to extend a 1-gigabyte volume, `homevol`, that contains a VxFS file system, to 10 gigabytes using the spare disks `disk10` and `disk11`, enter:

```
# /etc/vx/bin/vxresize -b -F vxfs -t homevolresize homevol 10g \  
disk10 disk11
```

The `-b` option specifies that this operation runs in the background. Its progress can be monitored by specifying the task tag `homevolresize` to the `vxtask` command.

Managing the SFDB repository

This chapter includes the following topics:

- [About the SFDB repository](#)
- [Runtime management tasks for SFDB](#)
- [Adding a new system to an HA configuration](#)
- [Accessing an off-host repository in a non-VCS environment](#)

About the SFDB repository

The SFDB repository stores metadata information required by SFDB software. This information includes data about user databases, snapshot databases, storage configuration, scheduled tasks, and storage statistics.

In prior releases of Veritas Storage Foundation for Oracle, the repository was stored on the local host as plain text files, which made the repository vulnerable to corruption or other errors. Also, repository information could not be accessed from a secondary host.

In this release of Veritas Storage Foundation for Oracle, the repository is stored in a relational database and is managed by a lightweight embedded relational DBMS-VxDBMS. VxDBMS is a special OEM version of a Sybase ASA (Adaptive Server Anywhere) DBMS, which is delivered and supported by Symantec. The SFDB repository database consists of a database file, `dbed_db.db`, and transaction log files, `yyymmddxx.log`. VxDBMS supports remote client access from any host in the network that has proper authorization and configuration.

SFDB requires only occasional interaction outside of the initial installation and configuration of Veritas Storage Foundation for Oracle.

See the *Veritas Storage Foundation Installation Guide* for more information on configuring the SFDB repository.

Runtime management tasks for SFDB

Most interactions with the SFDB repository are handled automatically by SFDB code. Administrators only need to handle SFDB backup and restore activities and to monitor the hard disk space usage of the repository. A configuration file `/etc/vx/vxbed/admin.properties` is created during installation to record the file system and volume used for the SFDB repository. The VxDBMS server starts automatically after a system reboot via `rc` files.

Starting, stopping, and checking the SFDB repository with `sfua_db_config`

See the *Veritas Storage Foundation Installation Guide* for more information on configuring the SFDB repository.

If for any reason the VxDBMS process is not running or is having problems, use the `sfua_db_config` command to start, stop, and check the status of the repository database and its server.

Backing up and restoring the SFDB repository with `sfua_rept_adm`

Use the `sfua_rept_adm` command to manage the backing up and restoring of the SFDB repository. With this command, you can:

- Create and configure a schedule for automatically backing up the SFDB repository, including specifying the type of backup (full or incremental), its start time and frequency, and the destination directory for the backed up files.
- Restore the repository from backup files.
- Disable or enable an existing backup schedule.
- Create and configure a free-space monitoring schedule that emails an alert when the free space on the file system containing the repository falls to a specified threshold.
- Disable or enable an existing free-space monitoring schedule.

Note: You must be logged in as root to use the `sfua_rept_adm` command.

Table 3-1 sfua_rept_adm command options

Option	Description
-h	Displays help for the command.
-o backup_sched	<p>Creates a full or incremental backup schedule. The backup type is specified by the accompanying -t option. Only one full and one incremental backup schedule can be created. Creating a second schedule overwrites any existing backup schedule of that same type.</p> <p>After a backup schedule is created it is automatically enabled.</p>
-o backup_enable	Re-enables the existing full or incremental backup schedule, as specified by the -t option.
-o backup_disable	Disables the existing full or incremental backup schedule, as specified by the -t option.
-o restore	Restores the SFDB repository from the backup files in the directory specified by the -m option.
-o space_monitor	Creates and configures a free-space monitoring schedule that emails a warning when the free space on the file system containing the SFDB repository reaches or goes below a threshold specified by the -w option.
-o space_monitor_enable	Enables the free-space monitoring schedule, if one exists.
-o space_monitor_disable	Disables the free-space monitoring schedule, if one exists.
-t full incr	<p>Specifies the type of backup schedule being created, enabled, or disabled by the accompanying -o option. Specify <i>full</i> for a full backup or <i>incr</i> for an incremental backup. An incremental backup copies the SFDB repository database transaction logs to the directory specified by the -m option. A full backup copies these transaction log files and the database file.</p> <p>No more than two backup schedules can be enabled simultaneously, one incremental backup and one full backup. For example, you cannot have two different incremental backup schedules.</p>

Table 3-1 sfua_rept_adm command options (*continued*)

Option	Description
<code>-f backup_freq</code>	Specifies the frequency of the scheduled backups as <i>h</i> (hours), <i>d</i> (days), or <i>w</i> (weeks) from the start time specified by the <code>-s</code> option. By default, the backup frequency value is assumed to be hours (<i>h</i>).
<code>-s start_time</code>	Specifies the time to start the backup process in <i>hh:mm:ss</i> format.
<code>-m backup_dest</code>	Specifies the directory where the backup files are stored. In a Veritas Storage Foundation for RAC environment, this directory must be a Cluster File System (CFS) and be mounted on all nodes of the cluster.
<code>-w warn_threshold</code>	Specifies the warning threshold for the free-space monitoring schedule, as a number representing the percentage of free space on the file system containing the backup files. If the percentage of free space falls to this value or lower, then a warning is emailed according to the other settings in this free-space monitoring schedule.
<code>-e notify_email</code>	Specifies the email address to send the warning message when the repository file system free space falls below the threshold specified by the <code>-w</code> option.
<code>-u smtp_sender</code>	Specifies the SMTP sender in whose name the warning email is emailed when the repository file system free space falls below the threshold specified by the <code>-w</code> option.
<code>-s smtp_server</code>	specifies the smtp email server to use when sending the warning message when the repository file system free space falls below the threshold specified by the <code>-w</code> option.

To create a backup schedule for the SFDB repository

- ◆ Use the `sfua_rept_adm -o backup_sched` command:

```
sfua_rept_adm -o backup_sched -t full|incr -f backup_freq \  
-s start_time -m backup_dest
```

After a backup schedule is created, it is automatically enabled. You can create only one of each type of backup schedule, incremental (`-t incr`) and full (`-t full`). If you create a new backup schedule, it automatically replaces any currently-enabled backup schedule. You can disable the current backup schedule with the `-o backup_disable` command, and re-enable it with `-o backup_enable`.

In a Veritas Storage Foundation for RAC environment, the backup destination directory `-m backup_dest` must be a Cluster File System (CFS) that is mounted on all nodes of the cluster.

In an HA environment, use NFS to mount the backup destination directory on all nodes.

To restore the SFDB repository from a backup

- ◆ Use the `sfua_rept_adm -o restore` command:

```
sfua_rept_adm -o restore -m backup_dest
```

This command restores the repository using the full backup and all incremental backup files from the backup directory specified by `-m backup_dest`.

To determine if a repository backup has failed

- ◆ Use either of these methods:
 - Check the system console for error messages received at the time the backup was scheduled.
 - Verify the existence of the proper backup files in the backup directory (specified by `-m backup_dest`). The type of repository backup you schedule determines which files should be found in this directory. If an incremental backup, only repository transaction log files (`yyymmddxx.log`) are created there. If a full backup, both transaction log files and a repository database file (`dbed_db.db`) are created.

Monitoring free space for the SFDB repository

To guard against the SFDB repository failing by filling its file system, use the `sfua_rept_adm -o space_monitor` command to create a monitoring schedule.

Table 3-1 shows all options for the `sfua_rept_adm` command, including those used for creating, disabling, and re-enabling a free space monitoring schedule.

This schedule monitors the available free space on the repository file system. If the free space falls below a specified threshold (a percentage value), a warning is emailed to a specified user.

Note: You must be logged in as root to use the `sfua_rept_adm` command.

To create a free-space monitoring schedule for the repository file system

- ◆ Use the `sfua_rept_adm -o space_monitor` command:

```
sfua_rept_adm -o space_monitor -w warn_threshold -e notify_email \  
-u smtp_sender -s smtp_server
```

After a free-space monitoring schedule is created, it is automatically enabled. When the free space on the file system containing the SFDB repository falls below the threshold specified by `-w warn_threshold`, a warning is sent to the email address specified by `-e notify_email`.

Adding a new system to an HA configuration

When adding a new system to an existing HA configuration, you must also add the system to the existing SFDB repository so that it can share the same repository data.

To add a new system to the SFDB repository

- 1 After installing Veritas Storage Foundation for Oracle, add the new system to the cluster.

See the *Veritas Cluster Server User's Guide*.

- 2 Make sure the system is running using the `hasys` command:

```
# hasys -state
```

- 3 Add the system to the `Sfua_Base` group by running the following command sequence:

```
# haconf -makerw

# hagr -modify Sfua_Base SystemList -add new_sys sys_id

# hares -modify sfua_ip Device new_sys_NIC -sys new_sys

# haconf -dump -makero
```

- 4 Copy the `/etc/vx/vxdbed/.odbc.ini` file from an existing node to the new system using a remote file copy utility such as `rcp`, `tcp`, or `scp`.

For example, to use `rcp`:

```
# rcp /etc/vx/vxdbed/.odbc.ini new_sys:/etc/vx/vxdbed
```

Accessing an off-host repository in a non-VCS environment

When creating an off-host clone database in a non-VCS environment, you must make sure that the secondary host has access to the SFDB repository located on the primary host. Because there is no cluster file system to ensure this shared access, you must establish access by copying the primary host's `.odbc.ini` file to the secondary host.

To share an off-host SFDB repository in a non-VCS environment

- ◆ Copy the DSN file `/etc/vx/vxdbed/.odbc.ini` from the primary host (where the repository exists and is mounted) to the corresponding location on the secondary host. Use a remote file copy utility such as `rcp`, `tcp`, or `scp` to make this copy.

For example, to use `rcp` from the primary host:

```
# rcp /etc/vx/vxdbed/.odbc.ini second_host:/etc/vx/vxdbed
```


Using Veritas Concurrent I/O

This chapter includes the following topics:

- [About Concurrent I/O](#)
- [Enabling and disabling Concurrent I/O](#)

About Concurrent I/O

Veritas Concurrent I/O improves the performance of regular files on a VxFS file system without the need for extending namespaces and presenting the files as devices. This simplifies administrative tasks and allows databases, which do not have a sequential read/write requirement, to access files concurrently. This chapter describes how to use the Concurrent I/O feature.

How Concurrent I/O works

Traditionally, Linux semantics require that read and write operations on a file occur in a serialized order. Because of this, a file system must enforce strict ordering of overlapping read and write operations. However, databases do not usually require this level of control and implement concurrency control internally, without using a file system for order enforcement.

The Veritas Concurrent I/O feature removes these semantics from the read and write operations for databases and other applications that do not require serialization.

The benefits of using Concurrent I/O are:

- Concurrency between a single writer and multiple readers
- Concurrency among multiple writers

- Minimalization of serialization for extending writes
- All I/Os are direct and do not use file system caching
- I/O requests are sent directly to file systems
- Inode locking is avoided
- Concurrent I/O can be used for control files, temporary datafiles, and archive logs

Oracle's `filesystemio_options` parameter

In Oracle9 Release 2 (9.2), you can use the `filesystemio_optionsinit.ora` parameter to enable or disable asynchronous I/O, direct I/O, or Concurrent I/O on file system files. This parameter is used on files that reside in JFS or JFS2 file systems only. This parameter is not applicable to VxFS files or ODM files.

See your Oracle documentation for more details.

Enabling and disabling Concurrent I/O

Concurrent I/O is not turned on by default and must be enabled manually. You will also have to manually disable Concurrent I/O if you choose not to use it in the future.

Enabling Concurrent I/O

Because you do not need to extend name spaces and present the files as devices, you can enable Concurrent I/O on regular files.

Before enabling Concurrent I/O, make sure the following conditions have been met:

- Prerequisites
- To use the Concurrent I/O feature, the file system must be a VxFS file system.
 - Make sure the mount point on which you plan to mount the file system exists.
 - Make sure the DBA can access the mount point.

Usage notes

- When a file system is mounted with the Concurrent I/O option, do not enable ODM. If you try to enable ODM on a file system mounted with the Concurrent I/O option, you will get an error message similar to the following:

```
ORA-600: internal error code, arguments: [ksfd_odmopn2].
```

- If Quick I/O is available and a file system is mounted with the Concurrent I/O option, do not enable Quick I/O. (Quick I/O is not available on Linux.) Oracle will not be able to open the Quick I/O files and the instance start up will fail. If you try to enable Quick I/O on a file system mounted with the Concurrent I/O option, you will receive an error message similar to the following:

```
ORA-01157: can not identify/lock datafile filename -  
see DBWR \ trace file
```

```
ORA-01110: datafile filename: '/path_name/qio.f'
```

- If the Quick I/O feature is available, do not use any Quick I/O tools if the database is using Concurrent I/O.
- See the (1M) manual page for more information about mount settings.

To enable Concurrent I/O on a file system using mount with the -o cio option

- ◆ Mount the file system using the `mount` command as follows:

```
# /usr/sbin/mount -t vxfs -o cio special /mount_point
```

where:

- *special* is a block special device
- */mount_point* is the directory where the file system will be mounted.

For example, to mount a file system named `/datavol` on a mount point named `/oradata`:

Disabling Concurrent I/O

If you need to disable Concurrent I/O, unmount the VxFS file system and mount it again without the mount option.

To disable Concurrent I/O on a file system using the mount command

- 1** Shutdown the Oracle instance.
- 2** Unmount the file sytem using the `umount` command.
- 3** Mount the file system again using the `mount` command without using the `-o cio` option.

Using Veritas Extension for Oracle Disk Manager

This chapter includes the following topics:

- [About Oracle Disk Manager](#)
- [About Oracle Disk Manager and Oracle Managed Files](#)
- [Setting up Veritas extension for Oracle Disk Manager](#)
- [How to prepare existing database storage for Oracle Disk Manager](#)
- [Verifying that Oracle Disk Manager is configured](#)
- [Disabling the Oracle Disk Manager feature](#)

About Oracle Disk Manager

Veritas Extension for Oracle Disk Manager is specifically designed for Oracle9i or later to enhance file management and disk I/O throughput. The features of Oracle Disk Manager are best suited for databases that reside in a file system contained in Veritas File System. Oracle Disk Manager allows Oracle9i or later users to improve database throughput for I/O intensive workloads with special I/O optimization.

Veritas Extension for Oracle Disk Manager supports Oracle Resilvering. With Oracle Resilvering, the storage layer receives information from the Oracle database as to which regions or blocks of a mirrored datafile to resync after a system crash. When using Oracle Resilvering, you can turn off VxVM Dirty Region Logging (DRL), which increases performance.

Oracle Disk Manager reduces administrative overhead by providing enhanced support for Oracle Managed Files. Veritas Extension for Oracle Disk Manager is

transparent to the user. Files managed using Veritas Extension for Oracle Disk Manager do not require special file naming conventions. The Oracle Disk Manager interface uses regular database files.

Note: Veritas Storage Foundation 4.1 for Oracle was the last major release that supported Oracle Disk Manager for raw devices.

Database administrators can choose the datafile type used with the Oracle product. Historically, choosing between file system files and raw devices was based on manageability and performance. The exception to this is a database intended for use with Oracle Parallel Server, which requires raw devices on most platforms. If performance is not as important as administrative ease, file system files are typically the preferred file type. However, while an application may not have substantial I/O requirements when it is first implemented, I/O requirements may change. If an application becomes dependent upon I/O throughput, converting datafiles from file system to raw devices is often necessary.

Oracle Disk Manager was designed to work with Oracle9i or later to provide both performance and manageability. Oracle Disk Manager provides support for Oracle's file management and I/O calls for database storage on VxFS file systems and on raw volumes or partitions. This feature is provided as a dynamically-loaded shared library with which Oracle binds when it is loaded. The Oracle Disk Manager library works with an Oracle Disk Manager driver that is loaded in the kernel to perform its functions.

The benefits of using Oracle Disk Manager are:

- True kernel asynchronous I/O for files and raw devices
- Reduced system call overhead
- Improved file system layout by preallocating contiguous files on a VxFS file system
- Performance on file system files that is equivalent to raw devices
- Transparent to users
- Contiguous datafile allocation

How Oracle Disk Manager improves database performance

Oracle Disk Manager improves database I/O performance to VxFS file systems by:

- Supporting kernel asynchronous I/O
- Supporting direct I/O and avoiding double buffering

- Avoiding kernel write locks on database files
- Supporting many concurrent I/Os in one system call
- Avoiding duplicate opening of files per Oracle instance
- Allocating contiguous datafiles

About kernel asynchronous I/O support

Asynchronous I/O performs non-blocking system level reads and writes, allowing the system to perform multiple I/O requests simultaneously. Kernel asynchronous I/O is better than library asynchronous I/O because the I/O is queued to the disk device drivers in the kernel, minimizing context switches to accomplish the work.

About direct I/O support and avoiding double buffering

I/O on files using `read()` and `write()` system calls typically results in data being copied twice: once between the user and kernel space, and the other between kernel space and the disk. In contrast, I/O on raw devices is copied directly between user space and disk, saving one level of copying. As with I/O on raw devices, Oracle Disk Manager I/O avoids the extra copying. Oracle Disk Manager bypasses the system cache and accesses the files with the same efficiency as raw devices. Avoiding double buffering reduces the memory overhead on the system. Eliminating the copies from kernel to user address space significantly reduces kernel mode processor utilization freeing more processor cycles to execute the application code.

About avoiding kernel write locks on database files

When database I/O is performed by way of the `write()` system call, each system call acquires and releases a kernel write lock on the file. This lock prevents simultaneous write operations on the same file. Because database systems usually implement their own locks for managing concurrent access to files, write locks unnecessarily serialize I/O writes. Oracle Disk Manager bypasses file system locking and lets the database server control data access.

About supporting many concurrent I/Os in one system call

When performing asynchronous I/O, an Oracle process may try to issue additional I/O requests while collecting completed I/Os, or it may try to wait for particular I/O requests synchronously, as it can do no other work until the I/O is completed. The Oracle process may also try to issue requests to different files. All this activity can be accomplished with one system call when Oracle uses the Oracle Disk Manager I/O interface. This interface reduces the number of system calls

performed to accomplish the same work, reducing the number of user space/kernel space context switches.

About avoiding duplicate file opens

Oracle Disk Manager allows files to be opened once, providing a “file identifier.” This is called “identifying” the files. The same file identifiers can be used by any other processes in the Oracle instance. The file status is maintained by the Oracle Disk Manager driver in the kernel. The reduction in file open calls reduces processing overhead at process initialization and termination, and it reduces the number of file status structures required in the kernel.

About allocating contiguous datafiles

Oracle Disk Manager can improve performance for queries, such as sort and parallel queries, that use temporary tablespaces. Without Oracle Disk Manager, Oracle does not initialize the datafiles for the temporary tablespaces. Therefore, the datafiles become sparse files and are generally fragmented. Sparse or fragmented files lead to poor query performance. When using Oracle Disk Manager, the datafiles are initialized for the temporary tablespaces and are allocated in a contiguous fashion, so that they are not sparse.

About Oracle Disk Manager and Oracle Managed Files

Oracle9i or later offers a feature known as Oracle Managed Files (OMF). OMF manages datafile attributes such as file names, file location, storage attributes, and whether or not the file is in use by the database. OMF is only supported for databases that reside in file systems. OMF functionality is greatly enhanced by Oracle Disk Manager.

The main requirement for OMF is that the database be placed in file system files. There are additional prerequisites imposed upon the file system itself.

OMF is a file management feature that:

- Eliminates the task of providing unique file names
- Offers dynamic space management by way of the tablespace auto-extend functionality of Oracle9i or later

OMF should only be used in file systems that reside within striped logical volumes, which support dynamic file system growth. File systems intended for OMF use must also support large, extensible files in order to facilitate tablespace auto-extension. Raw partitions cannot be used for OMF.

By default, OMF datafiles are created with auto-extend capability. This attribute reduces capacity planning associated with maintaining existing databases and implementing new applications. Due to disk fragmentation that occurs as the tablespace grows over time, database administrators have been somewhat cautious when considering auto-extensible tablespaces. Oracle Disk Manager eliminates this concern.

When Oracle Disk Manager is used in conjunction with OMF, special care is given within Veritas Extension for Disk Manager to ensure that contiguous disk space is allocated to datafiles, including space allocated to a tablespace when it is auto-extended. The table and index scan throughput does not decay as the tablespace grows.

How Oracle Disk Manager works with Oracle Managed Files

The following example illustrates the relationship between Oracle Disk Manager and OMF.

Note: Before building an OMF database, you need the appropriate `init.ora` default values. These values control the location of the `SYSTEM` tablespace, online redo logs, and control files after the `CREATE DATABASE` statement is executed.

This example shows the `init.ora` contents and the command for starting the database instance. To simplify Oracle UNDO management, the new Oracle9i or later `init.ora` parameter `UNDO_MANAGEMENT` is set to `AUTO`. This is known as System-Managed Undo.

```
$ cat initPROD.ora
UNDO_MANAGEMENT = AUTO
DB_CREATE_FILE_DEST = '/PROD'
DB_CREATE_ONLINE_LOG_DEST_1 = '/PROD'
db_block_size = 4096
db_name = PROD
$ sqlplus /nolog
SQL> connect / as sysdba
SQL> startup nomount pfile= initPROD.ora
```

The Oracle instance starts.

```
Total System Global Area 93094616 bytes
Fixed Size 279256 bytes
Variable Size 41943040 bytes
Database Buffers 50331648 bytes
Redo Buffers 540672 bytes
```

To implement a layout that places files associated with the `EMP_TABLE` tablespace in a directory separate from the `EMP_INDEX` tablespace, use the `ALTER SYSTEM` statement. This example shows how OMF handles file names and storage clauses and paths. The layout allows you to think of the tablespaces as objects in a file system as opposed to a collection of datafiles. Since OMF uses the Oracle Disk Manager file resize function, the tablespace files are initially created with the default size of 100MB and grow as needed. Use the `MAXSIZE` attribute to limit growth.

The following example shows the commands for creating an OMF database and for creating the `EMP_TABLE` and `EMP_INDEX` tablespaces in their own locale.

Note: The directory must exist for OMF to work, so the `SQL*Plus HOST` command is used to create the directories:

```
SQL> create database PROD;
```

The database is created.

```
SQL> HOST mkdir /PROD/EMP_TABLE;
SQL> ALTER SYSTEM SET DB_CREATE_FILE_DEST = '/PROD/EMP_TABLE';
```

The system is altered.

```
SQL> create tablespace EMP_TABLE DATAFILE AUTOEXTEND ON MAXSIZE \
500M;
```

A tablespace is created.

```
SQL> ALTER SYSTEM SET DB_CREATE_FILE_DEST = '/PROD/EMP_INDEX';
```

The system is altered.

```
SQL> create tablespace EMP_INDEX DATAFILE AUTOEXTEND ON MAXSIZE \
100M;
```

A tablespace is created.

Use the `ls` command to show the newly created database:

```
$ ls -lFR
total 638062
drwxr-xr-x 2 oracle9i dba 96 May  3 15:43 EMP_INDEX/
drwxr-xr-x 2 oracle9i dba 96 May  3 15:43 EMP_TABLE/
-rw-r--r-- 1 oracle9i dba 104858112 May  3 17:28 ora_1_BEhYgc0m.log
-rw-r--r-- 1 oracle9i dba 104858112 May  3 17:27 ora_2_BEhYu4NA.log
-rw-r--r-- 1 oracle9i dba 806912 May  3 15:43 ora_BEahlfUX.ctl
```

```
-rw-r--r-- 1 oracle9i dba 10489856 May 3 15:43 ora_sys_undo_BEajPSVq.dbf
-rw-r--r-- 1 oracle9i dba 104861696 May 3 15:4 ora_system_BEaiFE8v.dbf
-rw-r--r-- 1 oracle9i dba 186 May 3 15:03 PROD.ora

./EMP_INDEX:
total 204808
-rw-r--r-- 1 oracle9i dba 104861696 May 3 15:43
ora_emp_inde_BEakGfun.dbf

./EMP_TABLE:
total 204808
-rw-r--r-- 1 oracle9i dba 104861696 May 3 15:43
ora_emp_tabl_BEak1LqK.dbf
```

Setting up Veritas extension for Oracle Disk Manager

Veritas Extension for Oracle Disk Manager is part of Veritas Storage Foundation for Oracle. Veritas Extension for Oracle Disk Manager is enabled once Veritas Storage Foundation for Oracle and Oracle9i or later are installed, and the Veritas Extension for Oracle Disk Manager library is linked to the library in the `{ORACLE_HOME}/lib` directory.

Before setting up Veritas Extension for Oracle Disk Manager, the following conditions must be met:

- | | |
|---------------|--|
| Prerequisites | <ul style="list-style-type: none">■ Veritas Storage Foundation for Oracle must be installed on your system.■ Oracle9i, or later, must be installed on your system.■ If Cached Quick I/O is available, do not enable Oracle Disk Manager when Cached Quick I/O is enabled for datafiles. (Cached Quick I/O is not available on Linux.) |
| Usage Notes | <ul style="list-style-type: none">■ When the Quick I/O feature is available, Oracle Disk Manager uses the Quick I/O driver to perform asynchronous I/O. Do not turn off the Quick I/O mount option, which is the default. (Quick I/O is not available on Linux.)■ Oracle uses default file access methods if Oracle9i or later or Veritas Storage Foundation for Oracle is not installed, or VxFS 5.0 is not available in the kernel. |

To link the Veritas extension for Oracle Disk Manager library into Oracle home for Oracle 10g

- ◆ Use the `rm` and `ln` commands as follows.

```
# rm ${ORACLE_HOME}/lib/libodm10.so
# ln -s /opt/VRTSodm/lib/libodm64.so \
${ORACLE_HOME}/lib/libodm10.so
```

To link the Veritas extension for Oracle Disk Manager library into Oracle home for Oracle9i

- ◆ Use the `rm` and `ln` commands as follows.

```
# rm ${ORACLE_HOME}/lib/libodm9.so
# ln -s /opt/VRTSodm/lib/libodm64.so
${ORACLE_HOME}/lib/libodm9.so
```

When Oracle Disk Manager is enabled, a message similar to the following is sent to the alert log: "Oracle instance running with ODM: Veritas #.# ODM Library, Version #.#."

When the system and instance are configured correctly, the Oracle Disk Manager feature is used, by default, for accessing any database storage.

How to prepare existing database storage for Oracle Disk Manager

Files in a VxFS file system work with Oracle Disk Manager without any changes. The files are found and identified for Oracle Disk Manager I/O by default. To take full advantage of Oracle Disk Manager datafiles, files should not be fragmented.

You must be running Oracle9i or later to use Oracle Disk Manager.

Verifying that Oracle Disk Manager is configured

Before verifying that Oracle Disk Manager is configured, make the the following conditions are met:

- Prerequisites
- `/opt/VRTSodm/lib/libodm.so` must exist.
 - If you are using Oracle9i, `$ORACLE_HOME/lib/libodm9.so` is linked to `/opt/VRTSodm/lib/libodm.so`.
 - If you are using Oracle 10g, `$ORACLE_HOME/lib/libodm10.so` is linked to `/opt/VRTSodm/lib/libodm.so`.
 - The `VRTSdbed` license must be valid.
 - The `VRTSodm` package must be installed.

To verify that Oracle Disk Manager is configured

1 Check the `VRTSdbed` license:

```
# /opt/VRTS/bin/vxlictest -n "Veritas Storage Foundation for Oracle" \  
-f "ODM"  
  
ODM feature is licensed
```

2 Check that the `VRTSodm` package is installed:

```
# lsmod VRTSodm  
  
system VRTSodm Veritas Oracle Disk Manager
```

3 Check that it is present.

```
# ls -lL /opt/VRTSodm/lib/libodm64.so  
-rw-r--r-- 1 root sys 14336 Apr 25 18:42  
/opt/VRTSodm/lib/libodm.so
```

Note: You can also use the `dbed_checkconfig` command, which is installed with Veritas Storage Foundation for Oracle to check these conditions. See the `dbed_checkconfig (1M)` manual page for more information.

See [“Checking the database configuration environment using `dbed_checkconfig`”](#) on page 243.

To verify that Oracle Disk Manager is running

- 1 Start the Oracle database.
- 2 Check that the instance is using the Oracle Disk Manager function:

```
# cat /dev/odm/stats  
# echo $?  
0
```

- 3 Verify that the Oracle Disk Manager is loaded:

```
# /usr/sbin/kcmodule -P state odm
state loaded
```

- 4 In the alert log, verify the Oracle instance is running. The log should contain output similar to the following:

```
Oracle instance running with ODM: Veritas #.# ODM Library,
Version #.#
```

Disabling the Oracle Disk Manager feature

Because the Oracle Disk Manager feature uses regular files, you can access these files as regular VxFS files as soon as the feature is disabled.

Note: Before disabling the Oracle Disk Manager feature, you may want to back up your files.

To disable the Oracle Disk Manager feature in an Oracle instance

- 1 Shut down the database instance.
- 2 Use the `rm` and the `ln` commands to remove the link to the Oracle Disk Manager Library as follows:

For Oracle 10g

```
# rm ${ORACLE_HOME}/lib/libodm10.so
# ln -s ${ORACLE_HOME}/lib/libodm.so \
${ORACLE_HOME}/lib/libodm10.so
```

For Oracle9i

```
# rm ${ORACLE_HOME}/lib/libodm9.so
# ln -s ${ORACLE_HOME}/lib/libodmd9.so \
${ORACLE_HOME}/lib/libodm9.so
```

- 3 Restart the database instance.

Using Storage Mapping

This chapter includes the following topics:

- [About Storage Mapping](#)
- [Verifying Veritas Storage Mapping setup](#)
- [Using vxstorage_stats](#)
- [Using dbed_analyzer](#)
- [Oracle file mapping \(ORAMAP\)](#)
- [About arrays for Storage Mapping and statistics](#)

About Storage Mapping

Storage mapping is included with Veritas Storage Foundation for Oracle Enterprise Edition.

Storage mapping enables you to map datafiles, tablespaces, and tables to physical devices. You may obtain and view detailed storage topology information using the `vxstorage_stats` and `dbed_analyzer` commands or the Veritas Storage Foundation for Oracle GUI. You may also use the Oracle Enterprise Manager for Oracle 9i to access storage mapping information.

Access to mapping information is important since it allows for a detailed understanding of the storage hierarchy in which files reside, information that is critical for effectively evaluating I/O performance.

Mapping files to their underlying device is straightforward when datafiles are created directly on a raw device. With the introduction of host-based volume managers and sophisticated storage subsystems that provide RAID features, however, mapping files to physical devices has become more difficult.

With the Veritas Storage Foundation for Oracle Storage Mapping option, you can map datafiles to physical devices. Veritas Storage Mapping relies on Veritas Mapping Service (VxMS), a library that assists in the development of distributed SAN applications that must share information about the physical location of files and volumes on a disk.

The Veritas Storage Mapping option supports Oracle's set of storage APIs called Oracle Mapping ("ORAMAP" for short) that lets Oracle determine the mapping information for files and devices.

Oracle provides a set of dynamic performance views (*vs* views) that shows the complete mapping of a file to intermediate layers of logical volumes and physical devices. These views enable you to locate the exact disk on which any specific block of a file resides. You can use these mappings, along with device statistics, to evaluate I/O performance.

The Veritas Storage Foundation for Oracle Storage Mapping option supports a wide range of storage devices and allows for "deep mapping" into EMC, Hitachi, and IBM Enterprise Storage Server ("Shark") arrays. Deep mapping information identifies the physical disks that comprise each LUN and the hardware RAID information for the LUNs.

You can view storage mapping topology information and I/O statistics using:

- The `vxstorage_stats` command. This command displays the complete I/O topology mapping of specific datafiles through intermediate layers like logical volumes down to actual physical devices.
- The `dbed_analyzer` command. This command retrieves tablespace-to-physical and table-to-physical disk mapping information for all the datafiles in a specified database. It also provides information about the amount of disk space being used by a tablespace.
- Veritas Storage Foundation for Oracle GUI. The Veritas Storage Foundation for Oracle performs file mapping and displays both storage mapping topology information and I/O statistics.

In addition, you can also use the Oracle Enterprise Manager GUI to display storage mapping information after file mapping has occurred. Oracle Enterprise Manager does not display I/O statistics information. Unlike the information displayed in the Veritas Storage Foundation for Oracle GUI, the information displayed in Oracle Enterprise Manager may be "stale," that is, it may not be the latest information.

Note: For Solaris users, if you use Veritas FlashSnap Agent for Symmetrix, you cannot use the mapping functionality for non-Symmetrix arrays.

Verifying Veritas Storage Mapping setup

Before using the Veritas Storage Mapping option, verify that the features are set up correctly.

To verify that your system is using the Veritas Storage Mapping option

- 1 Verify that you have a license key for the Storage Mapping option.

```
# /opt/VRTS/bin/vxlictest -n "Veritas Mapping Services" -f \  
"Found_Edi_map"  
  
Found_Edi_map feature is licensed
```

- 2 Verify that the `VRTSvxmsa` package is installed.

```
# rpm -qa | grep VRTSvxmsa
```

Output similar to the following is displayed:

```
VRTSvxmsa-4.3-009
```

Using `vxstorage_stats`

The `vxstorage_stats` command displays detailed storage mapping information and I/O statistics about an individual VxFS file. The mapping information and I/O statistics are recorded only for VxFS files and VxVM volumes.

In `vxstorage_stats` command output, I/O topology information appears first followed by summary statistics for each object.

The command syntax is as follows:

```
/opt/VRTSdbed/bin/vxstorage_stats [-m] [-s] [-i interval \  
-c count] -f filename
```

- Prerequisites
- You must log in as the database administrator (typically, the user ID `oracle`) or `root`.

Usage notes

- The `-s` option displays the file statistics for the specified file.
- The `-c count` option specifies the number of times to display statistics within the interval specified by `-i interval`.
- The `-i interval` option specifies the interval frequency for displaying updated I/O statistics.
- The `-f filename` option specifies the file to display I/O mapping and statistics for.
- For more information, see the `vxstorage_stats(1m)` online manual page.
- The `-m` option displays the I/O topology for the specified file.

Displaying Storage Mapping information

Use the `vxstorage_stats -m` command to display storage mapping information.

To display Storage Mapping information

- ◆ Use the `vxstorage_stats` command with the `-m` option to display storage mapping information:

```
$ /opt/VRTSdbed/bin/vxstorage_stats -m -f file_name
```

For example:

```
$ /opt/VRTSdbed/bin/vxstorage_stats -m -f /oradata/system01.dbf
```

Output similar to the following is displayed:

TY	NAME	NSUB	DESCRIPTION	SIZE (sectors)	OFFSET (sectors)	PROPERTIES
fi	/oradata/system01.dbf	1	FILE	2621442048 (B)	4718592 (B)	Extents:3 Sp
v	myindex	1	MIRROR	16777216	0	
pl	vxvm:mydb/myindex-01	3	STRIPE	16779264	0	Stripe_size:
rd	/dev/vx/rdmp/c3t1d3s3	1	PARTITION	5593088	0	
sd	/dev/rdisk/c3t1d3s3	1	PARTITION	17674560	960	
sd	c3t1d3	2	MIRROR	17677440	0	
da	EMC000184502242:02:0c:02	0	DISK	143113019	0	
da	EMC000184502242:31:0c:02	0	DISK	143113019	0	
rd	/dev/vx/rdmp/c3t1d15s4	1	PARTITION	5593088	0	
sd	/dev/rdisk/c3t1d15s4	1	PARTITION	17669760	5760	
sd	c3t1d15	2	MIRROR	17677440	0	
da	EMC000184502242:01:0c:02	0	DISK	143113019	0	
da	EMC000184502242:32:0c:02	0	DISK	143113019	0	
rd	/dev/vx/rdmp/c3t1d2s4	1	PARTITION	5593088	0	
sd	/dev/rdisk/c3t1d2s4	1	PARTITION	17671680	3840	
sd	c3t1d2	2	MIRROR	17677440	0	
da	EMC000184502242:16:0c:02	0	DISK	143113019	0	
da	EMC000184502242:17:0c:02	0	DISK	143113019	0	

Note: For file type (*fi*), the `SIZE` column is number of bytes, and for volume (*v*), plex (*pl*), sub-disk (*sd*), and physical disk (*da*), the `SIZE` column is in 512-byte blocks. Stripe sizes are given in sectors.

Displaying I/O statistics information

To display I/O statistics information

- ◆ Use the `vxstorage_stats` command with the `-s` option to display I/O statistics information:

```
$ /opt/VRTSdbed/bin/vxstorage_stats -s -f file_name
```

For example:

```
$ /opt/VRTSdbed/bin/vxstorage_stats -s -f \  
/data/system01.dbf
```

Output similar to the following is displayed:

I/O OPERATIONS		I/O BLOCKS (512 byte)				AVG TIME (ms)			
OBJECT	READ	WRITE	B_READ	B_WRITE	AVG_RD	AVG_WR			
/data/system01.dbf		2	2479	8	5068810	0.00	53.28		
/dev/vx/rdisk/mydb/myindex			101	2497	1592	5069056	12.18	52.78	
vxvm:mydb/myindex-01			101	2497	1592	5069056	12.18	52.76	
/dev/rdisk/c3t1d3s3		131	1656	2096	1689696	14.43	39.09		
c3t1d3	131	1656	2096	1689696	14.43	39.09			
EMC000184502242:02:0c:02			8480	231019	275952	23296162	-	-	-
EMC000184502242:31:0c:02			3244	232131	54808	23451325	-	-	-
/dev/rdisk/c3t1d15s4		0	1652	0	1689606	0.00	46.47		
c3t1d15	0	1652	0	1689606	0.00	46.47			
EMC000184502242:01:0c:02			23824	1188997	1038336	32407727	-	-	-
EMC000184502242:32:0c:02			5085	852384	135672	29956179	-	-	-
/dev/rdisk/c3t1d2s4		14	1668	200	1689834	18.57	34.19		
c3t1d2	14	1668	200	1689834	18.57	34.19			
EMC000184502242:16:0c:02			4406	271155	121368	23463948	-	-	-
EMC000184502242:17:0c:02			3290	269281	55432	23304619	-	-	-

To display Storage Mapping and I/O statistics information at repeated intervals

- ◆ Use the `vxstorage_stats` command with the `-i interval` and `-c count` options to display storage mapping and I/O statistics information at repeated intervals. The `-i interval` option specifies the interval frequency for displaying updated I/O statistics and the `-c count` option specifies the number of times to display statistics.

```
$ /opt/VRTSdbed/bin/vxstorage_stats [-m] [-s] \
[-i interval -c count ] -f file_name
```

For example, to display statistics twice with a time interval of two seconds:

```
$ /opt/VRTSdbed/bin/vxstorage_stats -s -i2 -c2 \
-f /data/system01.dbf
```

Output similar to the following is displayed:

OBJECT	OPERATIONS		FILE BLOCKS (512 byte)				AVG TIME (ms)	
	READ	WRITE	B_READ	B_WRITE	AVG_RD	AVG_WR		
/data/system01.dbf			615	19	20752	152	3.53	24.74
/dev/vx/rdisk/mapdg/data_vol					19386	33227	895692	1376438 9.26
vxvm:mapdg/data_vol-01					19386	33227	895692	1376438 9.26 14.03
/dev/rdisk/clt10d0s2					19386	33227	895692	1376438 9.26 14.03
clt10d0					19386	33227	895692	1376438 9.26 14.03
vxvm:mapdg/data_vol-03					0	33227	0	1376438 0.00 14.21
/dev/rdisk/clt13d0s2					0	33227	0	1376438 0.00 14.21
clt13d0					0	33227	0	1376438 0.00 14.21

Using dbed_analyzer

This release adds table-level mapping, with which for a given table `dbed_analyzer` lists the disks on which it resides and the space it occupies on each disk. Use the `-o sort=table` option to use this enhancement.

Users previously could find which tablespace resides on which disk, but with table-level mapping a user can learn on which disk a heavily-used table resides. This information can help database administrators and system administrators

determine the allocation of storage, to assess backup priorities for the disk, and to identify performance bottlenecks.

Effectively performing a parallel backup requires an understanding of which tablespaces and tables reside on which disks. If two tablespaces or two tables reside on the same disk, for example, backing them up in parallel will not reduce their downtime.

The `dbed_analyzer` command provides tablespace-to-physical and table-to-physical disk mapping information for all the datafiles in a specified tablespace, list of tablespaces, or an entire database. (In contrast, the `vxstorage_stats` command provides this information on a per-file basis only.) In addition, `dbed_analyzer` provides information about the amount of disk space they are using.

- | | |
|---------------|--|
| Prerequisites | ■ You must log in as the database administrator (typically, the user ID <code>oracle</code>). |
| Usage notes | <ul style="list-style-type: none">■ The <code>-o sort=tbs</code> option provides the layout of the specified tablespaces on the physical disk as well as the amount of disk space they are using.■ The <code>-o sort=disk</code> option provides the name of the disks containing the specified tablespaces as well as the amount of disk space the tablespaces are using.■ The <code>-o sort=table</code> option identifies the disk and the space occupied on it by the specified table or list of tables.■ The <code>-f filename</code> option specifies the name of a file containing a list of the tables, tablespaces or disk names for which to obtain mapping information.■ The <code>-t</code> option specifies the name of a specified tablespace (when used with <code>-o mode=tbs</code>) or table (when used with <code>-o mode=table</code>) for which to obtain mapping information.■ If <code>-f filename</code> or <code>-t tablespace</code> is not specified then all the tablespaces in the database will be analyzed.■ For more information, see the <code>dbed_analyzer(1M)</code> online manual page. |

Obtaining Storage Mapping information for a list of tablespaces

To obtain Storage Mapping information sorted by tablespace

- ◆ Use the dbed_analyzer command with the -f filename and -o sort=tbs options:

```
$ /opt/VRTSdbed/bin/dbed_analyzer -S $ORACLE_SID -H $ORACLE_HOME \
-o sort=tbs -f filename
```

For example,

```
$ /opt/VRTSdbed/bin/dbed_analyzer -S PROD -H /usr1/oracle \
-o sort=tbs -f /tmp/tbsfile
```

Output similar to the following is displayed in the file tbsfile:

TBSNAME	DATAFILE	DEVICE	SIZE (sectors)
SYSTEM	/usr1/oracle/rw/DATA/PROD.dbf		c3t21000020379DBD5Fd0
TEMP	/usr1/oracle/rw/DATA/temp_20000		c3t21000020379DBD5Fd0
TEMP	/usr1/oracle/rw/DATA/temp_20001		c3t21000020379DBD5Fd0
SYSAUX	/usr1/oracle/rw/DATA/sysaux.dbf		c3t21000020379DBD5Fd0
ITEM	/usr1/oracle/rw/DATA/item_1000		c3t21000020379DBD5Fd0
ITM_IDX	/usr1/oracle/rw/DATA/itm_idx_2000		c3t21000020379DBD5Fd0 1021
PRODID_IDX	/usr1/oracle/rw/DATA/prodid_idx_3000		c3t21000020379DBD5Fd0
QTY_IDX	/usr1/oracle/rw/DATA/qty_idx_7000		c3t21000020379DBD5F
ROLL_1	/usr1/oracle/rw/DATA/roll_1_5000		c3t21000020379DBD5Fd0
ROLL_2	/usr1/oracle/rw/DATA/roll_2_6000		c3t21000020379DBD5Fd0
ORDERS	/usr1/oracle/rw/DATA/orders_4000		c3t21000020379DBD5Fd0
ORD_IDX	/usr1/oracle/rw/DATA/ord_idx_10000		c3t21000020379DBD5Fd0
QTY_IDX	/usr1/oracle/rw/DATA/qty_idx_7001		c3t21000020379DBD5F
ITM_IDX	/usr1/oracle/rw/DATA/itm_idx_2001		c3t21000020379DBD5F
ROLL_1	/usr1/oracle/rw/DATA/roll_1_5001		c3t21000020379DBD5Fd0
QTY_IDX	/usr1/oracle/rw/DATA/qty_idx_7002		c3t21000020379DBD5F
ROLL_2	/usr1/oracle/rw/DATA/roll_2_6001		c3t21000020379DBD5Fd0
ITEM	/usr1/oracle/rw/DATA/item_1001		c3t21000020379DBD5Fd0

To obtain Storage Mapping information sorted by disk

- ◆ Use the dbed_analyzer command with the -f filename and -o sort=disk options:

```
$ /opt/VRTSdbed/bin/dbed_analyzer -S $ORACLE_SID -H $ORACLE_HOME \
-o sort=disk -f filename
```

For example,

```
$ /opt/VRTSdbed/bin/dbed_analyzer -S PROD -H /usr1/oracle \
-o sort=disk -f /tmp/tbsfile
```

Output similar to the following is displayed in the file tbsfile:

DEVICE	TBSNAME	DATAFILE	SIZE (sectors)
c3t21000020379DBD5Fd0		SYSTEM	/usr1/oracle/rw/DATA/PROD.dbf
c3t21000020379DBD5Fd0		TEMP	/usr1/oracle/rw/DATA/temp_20000
c3t21000020379DBD5Fd0		TEMP	/usr1/oracle/rw/DATA/temp_20001
c3t21000020379DBD5Fd0		SYSAUX	/usr1/oracle/rw/DATA/sysaux.dbf
c3t21000020379DBD5Fd0		ITEM	/usr1/oracle/rw/DATA/item_1000
c3t21000020379DBD5Fd0		ITM_IDX	/usr1/oracle/rw/DATA/itm_idx_2000
c3t21000020379DBD5Fd0		PRODID_IDX	/usr1/oracle/rw/DATA/prodid_idx
c3t21000020379DBD5Fd0		QTY_IDX	/usr1/oracle/rw/DATA/qty_idx_7000
c3t21000020379DBD5Fd0		ROLL_1	/usr1/oracle/rw/DATA/roll_1_5000
c3t21000020379DBD5Fd0		ROLL_2	/usr1/oracle/rw/DATA/roll_2_6000
c3t21000020379DBD5Fd0		ORDERS	/usr1/oracle/rw/DATA/orders_4000
c3t21000020379DBD5Fd0		ORD_IDX	/usr1/oracle/rw/DATA/ord_idx_10000
c3t21000020379DBD5Fd0		QTY_IDX	/usr1/oracle/rw/DATA/qty_idx_7001
c3t21000020379DBD5Fd0		ITM_IDX	/usr1/oracle/rw/DATA/itm_idx_2001
c3t21000020379DBD5Fd0		ROLL_1	/usr1/oracle/rw/DATA/roll_1_5001
c3t21000020379DBD5Fd0		QTY_IDX	/usr1/oracle/rw/DATA/qty_idx_7002
c3t21000020379DBD5Fd0		ROLL_2	/usr1/oracle/rw/DATA/roll_2_6001
c3t21000020379DBD5Fd0		ITEM	/usr1/oracle/rw/DATA/item_1001

Oracle file mapping (ORAMAP)

Veritas has defined and implemented two libraries `libvxoramap_64.so` and `libvxoramap_64.sl`.

These two libraries provide a mapping interface to Oracle9 release 2 or later. The `libvxoramap_64.so` library serves as a bridge between Oracle's set of storage APIs (known as "ORAMAP") and Veritas Federated Mapping Service (VxMS), a library that assists in the development of distributed SAN applications that must share information about the physical location of files and volumes on a disk.

With Veritas Storage Foundation for Oracle Storage Mapping option, you can view the complete I/O topology mapping of datafiles through intermediate layers like logical volumes down to actual physical devices. This information can be used to determine the exact location of an Oracle data block on a physical device and to help identify hot spots.

Note: To use the mapping functionality, you must be using Oracle 9.2.0.3 or later.

Mapping components

You need to understand the mapping components in the System Global Area (SGA) and Oracle's representation of these components before you can interpret the mapping information in Oracle's dynamic performance views.

The mapping information in Oracle's dynamic performance views consists of:

- File components

A mapping file component is a mapping structure describing a file. It provides a set of attributes for a file, including the file's size, number of extents, and type. File components are exported to the user through `V$MAP_FILE`.

- File extent components

A mapping file extent component describes a contiguous group of blocks residing on one element. The description specifies the device offset, the extent size, the file offset, the extent type (`Data` or `Parity`), and the name of the element where the extent resides.

- Element components

A mapping element component is a mapping structure that describes a storage component within the I/O stack. Elements can be mirrors, stripes, partitions, RAID5, concatenated elements, and disks.

This component contains information about the element's mapping structure, such as the element's size, type, number of subelements, and a brief description. Element components are exported to the user through `V$MAP_ELEMENT`.

■ **Subelement components**

A mapping subelement component describes the link between an element and the next element in the I/O stack. The subelement component contains the subelement number, size, the element name for the subelement, and the element offset. Subelement components are exported to the user through `V$MAP_SUBELEMENT`.

These mapping components completely describe the mapping information for an Oracle instance.

Storage Mapping views

The mapping information that is captured is presented in Oracle's dynamic performance views. Brief descriptions of these views are provided in [Table 6-1](#).

For more detailed information refer to your Oracle documentation.

Table 6-1 Storage mapping information in Oracle dynamic performance views

View	Description
<code>V\$MAP_LIBRARY</code>	Contains a list of all the mapping libraries that have been dynamically loaded by the external process.
<code>V\$MAP_FILE</code>	Contains a list of all the file mapping structures in the shared memory of the instance.
<code>V\$MAP_FILE_EXTENT</code>	Contains a list of all the file extent mapping structures in the shared memory of the instance.
<code>V\$MAP_ELEMENT</code>	Contains a list of all the element mapping structures in the SGA of the instance.
<code>V\$MAP_EXT_ELEMENT</code>	Contains supplementary information for all element mapping structures.
<code>V\$MAP_SUBELEMENT</code>	Contains a list of all subelement mapping structures in the shared memory of the instance.
<code>V\$MAP_COMP_LIST</code>	Describes the component list associated with the element name.
<code>V\$MAP_FILE_IO_STACK</code>	Contains the hierarchical arrangement of storage containers for the file. This information is displayed as a series of rows. Each row represents a level in the hierarchy.

Verifying Oracle file mapping setup

Before you enable Oracle file mapping, verify that `$ORACLE_HOME` and `ORCLfmap` directories are properly set up.

To verify that `$ORACLE_HOME` is set up for Oracle file mapping (ORAMAP)

1 Enter:

```
# cd $ORACLE_HOME/rdbms/filemap/bin
# ls -l
-r-xr-x--- 1 root system 900616 Apr 08 19:16 fmpu1
-r-sr-xr-x 1 root system 14614 Apr 08 19:16 fmpu1hp
```

2 Verify that:

- `fmpu1hp` is owned by `root` and that the `setuid` bit is set.
- The permissions for `fmpu1hp` are set to `-r-sr-xr-x`.
- The permissions for `fmpu1` are set to `-r-xr-x---`.

3 If any of these items is not set as specified, make the appropriate corrections.

To verify the `ORCLfmap` directories are set up properly

1 Enter:

```
# cd /opt/ORCLfmap
# ls -ld prot1_32 prot1_64
```

2 Verify that both directories are owned by `root` and are writable only by `root` (have `-rwxr-xr-x` permissions).

3 If needed, change the ownership and permissions for these directories.

Enabling Oracle file mapping

You need to explicitly enable Oracle file mapping. By default it is initially disabled.

To enable Oracle file mapping with the Veritas Storage Mapping option

- 1 Ensure that the file `filemap.ora` exists and contains a valid entry for the Veritas mapping library for Oracle file mapping.

```
# cd $ORACLE_HOME/rdbms/filemap/etc
# cat filemap.ora
```

For 64-bit Oracle, the `filemap.ora` file should contain the following setting:

```
lib=Veritas:/opt/VRTSdbed/lib/libvxoramap_64.so
```

- 2 After verifying that the system is using the Veritas library for Oracle file mapping, set the `file_mapping` initialization parameter to `true`.

```
SQL> alter system set file_mapping=true;
```

The `file_mapping` initialization parameter is set to `false` by default. You do not need to shut down the instance to set this parameter. Setting `file_mapping=true` starts the `FMON` background process.

If you want storage mapping to be enabled whenever you start up an instance, set the `file_mapping` initialization parameter to `true` in the `init.ora` file.

Accessing dynamic performance views

After enabling file mapping, map Oracle datafiles with the `DBMS_STORAGE_MAP` package and use SQL commands to display the mapping information captured in Oracle's dynamic performance views.

To access dynamic performance views

- 1 Confirm that the Veritas mapping library for Oracle file mapping has been enabled.

```
SQL> select lib_idx idx, lib_name name, vendor_name vname, \
path_name path from v$map_library;
```

- 2 After file mapping has been enabled, Oracle datafiles can be mapped using the `DBMS_STORAGE_MAP` package.

For example, this shows how to map a datafile using SQL:

```
SQL> execute dbms_storage_map.map_file('/ora92/dbs/qio10m.dbf', 'DATAFILE');
```

For more information about various features and capabilities of the `DBMS_STORAGE_MAP` package, see your Oracle documentation.

- 3 Use SQL commands to display the mapping information that is captured in Oracle's dynamic performance views.

To display the contents of `v$map_file_extent`:

```
SQL> select elem_idx idx, elem_name, elem_type type, elem_size, \
elem_nsubelem nsub, elem_descr, stripe_size from v$map_element;
```

To display the contents of `v$map_element`:

To display the contents of `v$map_subelement`:

```
SQL> select * from v$map_subelement;
```

To display all the elements within the I/O stack for a specific file:

Using Oracle Enterprise Manager

Oracle Enterprise Manager is a web-based GUI for managing Oracle databases. You can use this GUI to perform a variety of administrative tasks such as creating tablespaces, tables, and indexes; managing user security; and backing up and recovering your database. You can also use Oracle Enterprise Manager to view performance and status information about your database instance.

From Oracle Enterprise Manager, you can view storage mapping information and a graphical display of the storage layout. Storage mapping information cannot be viewed with the Oracle 10g version of the Oracle Enterprise Manager client. However, the Oracle9i version of Oracle Enterprise Manager can be used with Oracle 10g to view storage mapping information.


For more information about Oracle Enterprise Manager, refer to your Oracle documentation.

To view storage information with Oracle Enterprise Manager

- 1 To view storage information, start Oracle Enterprise Manager and select a database from the left navigational pane (the object tree) of the Oracle Enterprise Manager Console.
- 2 Expand the Databases icon and select the desired database.
The Database Connect Information window appears.
- 3 Enter a user name and password to log in to the database and click **OK**.
- 4 In the object tree, expand the **Storage** icon.
- 5 Under the **Storage** icon, expand the **Datafiles** icon.
- 6 Select the datafile for which you want to view storage layout information.
- 7 In the right pane, click the **Storage Layout** tab.
- 8 Expand the objects to display their storage layout.

Within the Oracle Enterprise Manager Console, you can point to an object on the screen and a description of the object is displayed in a pop-up field. If an object name or path appears truncated, point to it and the pop-up field will display the full object name and path.

You can also right-click on an object and select **View Details** to see detailed information about the object.

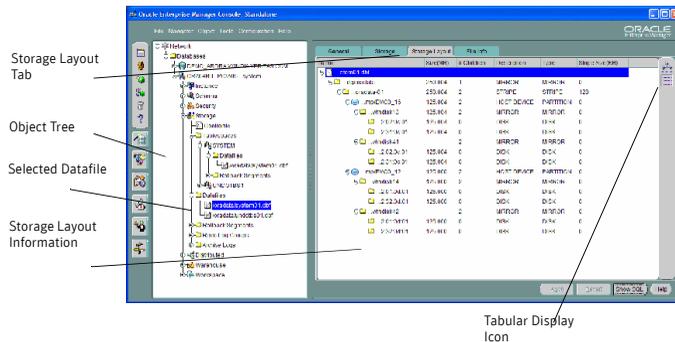

- 9 By default, storage layout information is displayed in a tabular format. That is, the **Tabular Display** icon is selected. To view a graphical display of the storage layout, click the **Graphical Display** icon.

- 10 Expand the objects to display their storage layout information graphically.
- 11 To exit, choose **Exit** from the **File** menu.

About arrays for Storage Mapping and statistics

Veritas Storage Foundation for Oracle provides “deep” mapping information and performance statistics for supported storage arrays. Deep mapping information consists of identifying the physical disks that comprise each LUN and the hardware RAID information for the LUNs.

Note: To use deep mapping, you must have Oracle 9.2.0.3. or later installed.

Veritas Array Integration Layer (VAIL) software interfaces third-party hardware storage arrays with Veritas storage software. VAIL providers are software modules that enable Veritas applications to discover, query, and manage third-party storage arrays.

On Linux, the following VAIL provider supports these third-party storage arrays:

- The `vx_emc_symmetrix` provider manages EMC Symmetrix arrays.

For the most up-to-date array support information, see the appropriate hardware compatibility list (HCL) on the Veritas Technical Support Web page at:

<http://support.veritas.com>

If you want to use storage array information accessible through the VAIL providers, install VAIL and perform any required configuration for the storage arrays and VAIL providers. To use deep mapping services and performance statistics for supported storage arrays, you must install both VAIL and Veritas Mapping Services (VxMS).

You will need to install required third-party array CLIs and APIs on the host where you are going to install VAIL before you install VAIL. If you install any required CLI or API after you install VAIL, rescan the arrays so that Veritas Storage Foundation for Oracle can discover them.

For detailed information about supported array models, see the *Veritas Array Integration Layer Array Configuration Guide*.

Converting existing database configurations to VxFS

This chapter includes the following topics:

- [About converting LVM volume groups to VxVM disk groups](#)
- [Converting native file systems to VxFS for Oracle Disk Manager](#)
- [Upgrading from earlier VxFS version layouts](#)
- [Converting from raw devices](#)

About converting LVM volume groups to VxVM disk groups

If you are currently using VxFS file systems for your database and the file systems are mounted on Logical Volume Manager (LVM) volumes, you can convert these LVM volume groups to VxVM disk groups in place. Veritas Volume Manager provides an interactive, menu-driven utility, `vxvmconvert` that performs the conversion.

The `vxvmconvert` utility changes the disk areas containing the LVM configuration information, creating equivalent VxVM configuration information. The areas of the disks used for user data, such as file systems and databases, are not affected by the conversion.

Note: As is customary before performing any kind of conversion or upgrade, back up your database and LVM configuration information before converting LVM volume groups to VxVM disk groups.

For detailed information on converting LVM volume groups, you must refer to the volume manager migration guide.

See the *Veritas Volume Manager Migration Guide*.

Converting native file systems to VxFS for Oracle Disk Manager

If you are currently using file systems native to your operating system, you can use the following procedure to upgrade each file system used by the database to a VxFS file system.

You can then use the Oracle Disk Manager feature.

Warning: Do not upgrade your root file system to VxFS.

Before starting the conversion procedure, make sure the following conditions have been met:

Prerequisites To configure Oracle Disk Manager, follow the procedure for setting up Veritas extension for Oracle Disk Manager.
See [“Setting up Veritas extension for Oracle Disk Manager”](#) on page 79.

To convert a reiserFS file system or ext3 file system to VxFS for Oracle Disk Manager

- 1 Shut down the database.
- 2 Create a backup of the reiserFS or ext3 file system.
- 3 Unmount the reiserFS or ext3 file system.
- 4 Remove the reiserFS or ext3 entry in the `/etc/vfstab` file.
- 5 Create a VxFS file system of the same size as the original reiserFS or ext3 file system, using the mount point where the reiserFS or ext3 file system was originally mounted.
See [“Creating a VxFS file system ”](#) on page 49.
- 6 Restore the backup created in step 2 to the new VxFS file system.
- 7 Restart the database.

Upgrading from earlier VxFS version layouts

Before starting the upgrade process, make sure the following conditions have been met:

- | | |
|---------------|---|
| Prerequisites | <ul style="list-style-type: none"> ■ Perform a full backup of the file system before upgrading to a new disk layout. |
| Usage notes | <ul style="list-style-type: none"> ■ The <code>vxupgrade</code> command lets you to upgrade the VxFS file system disk layout while the file system is mounted. See the <code>vxupgrade(1M)</code> manual page for more details. ■ VxFS supports two file system disk layouts: Versions 4 and 6. New file systems are created with the Version 6 (for large file systems) disk layout by default when the current version of Veritas Storage Foundation for Oracle is installed on a system. You must minimally upgrade to Version 4 disk layout if you want to use the Storage Rollback or Veritas NetBackup BLI Backup features. |

To upgrade an existing VxFS file system to a new file system disk layout version

- ◆ Use the `vxupgrade` command to upgrade to Version 4, 6, or 7 disk layout:

```
# /opt/VRTS/bin/upgrade -n new_version new_version/mount_point
```

where:

- `new_version` is the version of the file system disk layout you want to upgrade to
- `/mount_point` is the location where the file system is mounted

This is an example of upgrading to disk layout Version 7:

```
# /opt/VRTS/bin/vxupgrade -n 7 /db01
```

To use Oracle Disk Manager after upgrading the file system disk layout to version 4, 6, or 7

- ◆ Simply use the files. Because ODM uses regular files, no setup is required.

Converting from raw devices

If the database is currently using raw disks or volumes, use the following procedure to use VxFS with Oracle Disk Manager.

Warning: The procedure provided assumes that the database runs on a single file system after the upgrade.

To convert from raw devices to regular files for ODM

- 1 Create a VxFS file system using a size that is 10 percent larger than the original database or total raw device size. You can create more file systems based on your performance and availability requirements.

See “[Creating a VxFS file system](#) ” on page 49.

- 2 Shut down the database.
- 3 Copy each raw device file to the new VxFS file system.

For example, use the `dd` command to copy the file `/dev/sda` to `/db01/dbfile`:

```
$ dd if=/dev/sda of=/db01/dbfile bs=128k
```

- 4 If the database uses symbolic links to access the database files, change the symbolic links to point to the new files.

For example, if the database has a datafile specification `/data/file1` that was linked to `/dev/rdsk/sda`, change it to point to the new file:

```
$ rm /data/file1
$ ln -s /db01/dbfile /data/file1
```

- 5 If the database was using absolute paths to access the database files, rename each file within Oracle before bringing the database online. For example:

```
$ sqlplus "/" as sysdba"
SQL> startup mount;
SQL> alter database rename file filename to newfilename;
```

- 6 Restart the database. For example:

```
SQL> alter database open;
SQL> exit
```

Using Storage Checkpoints and Storage Rollback

This chapter includes the following topics:

- [About Storage Checkpoints and Storage Rollback](#)
- [Space requirements for Storage Checkpoints](#)
- [Performance of Storage Checkpoints](#)
- [Storage Checkpoint allocation policies](#)
- [Backing up and recovering the database using Storage Checkpoints](#)
- [Cloning the Oracle instance using `dbed_clonedb`](#)
- [Guidelines for Oracle recovery](#)
- [Using the GUI to perform Storage Checkpoint-related operations](#)

About Storage Checkpoints and Storage Rollback

The Veritas Storage Checkpoint feature is available with the Enterprise Edition as part of the Veritas File System package and is used for the efficient backup and recovery of Oracle databases. Storage Checkpoints can also be mounted, allowing regular file system operations to be performed. This chapter describes what Storage Checkpoints and storage rollback are and how to make use of these technologies through Veritas Storage Foundation.

The Storage Checkpoint facility is similar to the snapshot file system mechanism; however, a Storage Checkpoint persists after a system reboot. A Storage Checkpoint creates an exact image of a database instantly and provides a consistent image of the database from the point in time the Storage Checkpoint was created. The

Storage Checkpoint image is managed and available through the GUI, or the Veritas Storage Foundation command line interface (CLI).

Veritas NetBackup also makes use of Storage Checkpoints to provide a very efficient Oracle backup mechanism.

See the *Veritas Storage Foundation for Oracle Graphical User Interface Guide*.

A direct application of the Storage Checkpoint facility is Storage Rollback. Because each Storage Checkpoint is a consistent, point-in-time image of a file system, Storage Rollback is the restore facility for these on-disk backups. Storage Rollback rolls back changed blocks contained in a Storage Checkpoint into the primary file system for restoring the database faster.

For more information on Storage Checkpoints and Storage Rollback, see the *Veritas File System Administrator's Guide*.

How Storage Checkpoints and Storage Rollback work

A Storage Checkpoint is a disk and I/O efficient snapshot technology for creating a “clone” of a currently mounted file system (the primary file system). Like a snapshot file system, a Storage Checkpoint appears as an exact image of the snapped file system at the time the Storage Checkpoint was made. However, unlike a snapshot file system that uses separate disk space, all Storage Checkpoints share the same free space pool where the primary file system resides unless a Storage Checkpoint allocation policy is assigned. A Storage Checkpoint can be mounted as read-only or read-write, allowing access to the files as if it were a regular file system. A Storage Checkpoint is created using the `dbed_ckptcreate` command or the GUI.

Initially, a Storage Checkpoint contains no data—it contains only the inode list and the block map of the primary fileset. This block map points to the actual data on the primary file system. Because only the inode list and block map are needed and no data is copied, creating a Storage Checkpoint takes only a few seconds and very little space.

A Storage Checkpoint initially satisfies read requests by finding the data on the primary file system, using its block map copy, and returning the data to the requesting process. When a write operation changes a data block "n" in the primary file system, the old data is first copied to the Storage Checkpoint, and then the primary file system is updated with the new data. The Storage Checkpoint maintains the exact view of the primary file system at the time the Storage Checkpoint was taken. Subsequent writes to block "n" on the primary file system do not result in additional copies to the Storage Checkpoint because the old data only needs to be saved once. As data blocks are changed on the primary file system, the Storage Checkpoint gradually fills with the original data copied from the

primary file system, and less and less of the block map in the Storage Checkpoint points back to blocks on the primary file system.

You can set a quota to limit how much space a file system will give to all storage checkpoints, to prevent the checkpoints from consuming all free space. See the command `dbed_ckptquota` for more information.

Storage Rollback restores a database, a tablespace, or datafiles on the primary file systems to the point-in-time image created during a Storage Checkpoint. Storage Rollback is accomplished by copying the “before” images from the appropriate Storage Checkpoint back to the primary file system. As with Storage Checkpoints, Storage Rollback restores at the block level, rather than at the file level. Storage Rollback is executed using the `dbed_ckptrollback` command or the GUI.

Note: You must run the `dbed_update` command after upgrading to Veritas Storage Foundation 5.0 from a previous release. This will allow you to roll back to a Storage Checkpoint that was created with an earlier version of this product. Moreover, whenever you change the structure of the database (for example, by adding or deleting datafiles, converting `PFILE` to `SFILE`, or converting `SFILE` to `PFILE`), you must run `dbed_update`.

Mountable Storage Checkpoints can be used for a wide range of application solutions, including backup, investigations into data integrity, staging upgrades or database modifications, and data replication solutions.

If you mount a Storage Checkpoint as read-write, the GUI will not allow you to roll back to this Storage Checkpoint. This ensures that any Storage Checkpoint data that has been modified incorrectly cannot be a source of any database corruption. When a Storage Checkpoint is mounted as read-write, the `dbed_ckptmount` command creates a “shadow” Storage Checkpoint of and mounts this “shadow” Storage Checkpoint as read-write. This allows the database to still be rolled back to the original Storage Checkpoint.

Space requirements for Storage Checkpoints

To support Block-level Incremental (BLI) Backup and storage rollback, the file systems need extra disk space to store the Storage Checkpoints. The extra space needed depends on how the Storage Checkpoints are used. Storage Checkpoints that are used to keep track of the block changes contain only file system block maps, and therefore require very little additional space (less than 1 percent of the file system size).

When you use Veritas NetBackup to back up your database, Veritas NetBackup creates one set of Storage Checkpoints to provide a consistent view of the file systems for the database backups. The space required to hold this additional set of Storage Checkpoints depends on how busy the database load is when the backup is running. If the database is offline during the entire backup window, there is no additional space required.

If the database is online while the backup is running, the additional space required by each file system for Storage Checkpoints depends on the duration of the backup and the database workload. If workload is light during the backup or the backup window is relatively short (for example, for incremental backups), for most database configurations, an additional 10 percent of the file system size will be sufficient. If the database has a busy workload while a full backup is running, the file systems may require more space.

To support Storage Checkpoints and storage rollback, VxFS needs to keep track of the original block contents when the Storage Checkpoints were created. The additional space needed is proportional to the number of blocks that have been changed since a Storage Checkpoint was taken. The number of blocks changed may not be identical to the number of changes. For example, if a data block has been changed many times, only the first change requires a new block to be allocated to store the original block content. Subsequent changes to the same block require no overhead or block allocation.

If a file system that has Storage Checkpoints runs out of space, by default VxFS removes the oldest Storage Checkpoint automatically instead of returning an `ENOSPC` error code (UNIX `errno 28- No space left on device`), which can cause the Oracle instance to fail. Removing Storage Checkpoints automatically ensures the expected I/O semantics, but at the same time, eliminates a key recovery mechanism.

When restoring a file system that has data-full Storage Checkpoints from tape or other offline media, you need extra free space on the file system. The extra space is needed to accommodate the copy-on-write algorithm needed for preserving the consistent image of the Storage Checkpoints. The amount of free space required depends on the size of the restore and the number of Storage Checkpoints on the file system.

If you are restoring the entire file system, in most cases, you no longer need the existing Storage Checkpoint. You can simply re-make the file system using the `mkfs` command, and then restore the file system from tape or other offline media.

If you are restoring some of the files in the file system, you should first remove the data-full Storage Checkpoints that are no longer needed. If you have very limited free space on the file system, you may have to remove all data-full Storage Checkpoints in order for the restore to succeed.

Always reserve free disk space for growing volumes and file systems. You can also preallocate sufficient space for each file system when the file system is first created or manually grow the file system and logical volume where the file system resides.

See the `fsadm_vxfs(1)` manual page for more information.

Performance of Storage Checkpoints

Veritas File System attempts to optimize the read and write access performance on both the Storage Checkpoint and the primary file system. Reads from a Storage Checkpoint typically perform at nearly the throughput of reads from a normal VxFS file system, allowing backups to proceed at the full speed of the VxFS file system.

Writes to the primary file system are typically affected by the Storage Checkpoints because the initial write to a data block requires a read of the old data, a write of the data to the Storage Checkpoint, and finally, the write of the new data to the primary file system. Having multiple Storage Checkpoints on the same file system, however, will not make writes slower. Only the initial write to a block suffers this penalty, allowing operations like writes to the intent log or inode updates to proceed at normal speed after the initial write.

The performance impact of Storage Checkpoints on a database is less when the database files are Direct I/O files. A performance degradation of less than 5% in throughput has been observed in a typical OLTP workload when the Storage Checkpoints only keep track of changed information. For Storage Checkpoints that are used for Storage Rollback, higher performance degradation (approximately 10 to 20 percent) has been observed in an OLTP workload. The degradation should be lower in most decision-support or data warehousing environments.

Reads from the Storage Checkpoint are impacted if the primary file system is busy, because the reads on the Storage Checkpoint are slowed by all of the disk I/O associated with the primary file system. Therefore, performing database backup when the database is less active is recommended.

Storage Checkpoint allocation policies

The Veritas File System provides Multi-Volume File Systems (MVS) when used in conjunction with the Volumes Set feature in Veritas Volume Manager. A volume set is a container for multiple different volumes. MVS enables creation of a single file system over multiple volumes, each volume with properties of its own. This helps administrators specify which data goes on which volume types. For more details about MVS, see *Veritas Volume Manager Administrator's Guide*. Setting

up a storage configuration for MVS operations is a system administrator's responsibility and requires superuser (`root`) privileges.

Note: Veritas Storage Foundation for Oracle RAC does not support storage checkpoint allocation policies.

Multi-Volume File Systems provide a database administrator, through the checkpoint administration interface, the ability to create Storage Checkpoint Allocation Policies.

A Storage Checkpoint Allocation policy specifies a list of volumes and the order in which to attempt allocations. Once defined, a database administrator can use these policies to:

- Control where the storage checkpoint should be created, enabling separation of metadata and data of a storage checkpoint to different volumes.
- Separate storage checkpoints so that data allocated to a storage checkpoint is isolated from the primary file system. This helps control the space used by the checkpoint and prevents the checkpoint from fragmenting the space in the primary fileset.

When policies are assigned to a storage checkpoint, the database administrator must specify the mapping to both metadata and file data. If no policies are specified for the storage checkpoint, the data is placed randomly within the primary file system. Data and metadata of storage checkpoints can have different policies assigned to them or use the same policy to be applied to data and metadata. Multiple checkpoints can be assigned the same checkpoint allocation policy. A partial policy is also allowed; a partial policy means that the policy does not exist on all file systems used by the database.

Once the policy is assigned to checkpoints, the allocation mechanism attempts to satisfy the request from each device in the policy in the order the devices are defined. If the request cannot be satisfied from any of the devices in the policy, the request will fail, even if other devices exist in the file system which have space. Only those devices can provide allocation that are listed in the policy. This implementation is the mechanism for preventing allocation requests from using space in other devices which are not specified in the policy. It is recommended that you allocate sufficient space for the volumes defined in the Storage Checkpoint policy or update the policy to include additional volumes. This also helps in retaining the old Storage Checkpoints.

Once the assigned policy is deleted, the allocation for metadata and file data for subsequent requests of storage checkpoint will return to the no policy assigned state.

For VxFS file systems disk layout Version 7, the volumes on the VxFS Multi-Volume File System can be either one of these types: `dataonly` and `metadataok`. Only `metadataok` volumes can be used to store checkpoint metadata. By default, only the first volume that is being added to the VxVM volume set is a `metadataok` volume. This means only the first volume that is being added to the VxVM volume set can be specified in the `ckpt_metadata_policy` by default. Use the following file system command to change the default setting. To check the flags of each volume in a VxFS Multi-Volume File System, execute the following file system command as `root`:

```
/opt/VRTS/bin/fsvoladm queryflags mountpoint
```

To change a `dataonly` volume to a `metadataok` volume, execute the following file system command as `root`:

```
/opt/VRTS/bin/fsvoladm clearflags dataonly mountpoint vol-name
```

The following are usage notes for Storage Checkpoint allocation policies:

- | | |
|-------------|---|
| Usage notes | <ul style="list-style-type: none">■ Since the Storage Checkpoint allocation policies feature is associated with the MVS file system, it is available only on file systems using disk layout Version 6.■ Storage Checkpoint allocation policy requires VxVM Volume Set and VxFS Multi-Volume File Systems features to be enabled. These features are included in the Enterprise Edition of Storage Foundation.
See the Multi-Volume File System chapter in the <i>Veritas File System Administrator's Guide</i> for creating Volume Sets and MVS file systems for the primary file systems used by the database datafiles.■ Data allocation is done by the volumes in the order that was assigned in the policy.■ The maximum length of a Storage Checkpoint allocation policy name is 64 characters. |
|-------------|---|

Using Storage Checkpoint allocation policies

You can use the `dbed_ckptpolicy` command to manage Storage Checkpoint allocation policies.

See [“Creating and working with Storage Checkpoint allocation policies using `dbed_ckptpolicy`”](#) on page 256.

Note: You cannot administer Storage Checkpoint allocation policies through the GUI.

The following are usage notes for the `dbed_ckptpolicy` and `dbed_ckptcreate` commands:

- Usage notes
- See the `dbed_ckptpolicy(1M)` and `dbed_ckptcreate(1M)` manual pages for more information.
 - The `dbed_ckptpolicy` command needs to be executed by the Oracle database administrator.

In the following example, the file systems for database datafiles are set up as follows:

- Two MVS file systems `/mvsfs/v1` and `/mvsfs/v2` used for database datafiles.
- File system `/mvsfs/v1` is created on volume set `mvsvset1`.
- File system `/mvsfs/v2` is created on volume set `mvsvset2`.
- Volume set `mvsvset1` contains volumes `mvsv1`, `mvsv2`, and `mvsv3`.
- Volume set `mvsvset2` contains volumes `mvsv4` and `mvsv5`.

Use the `dbed_ckptpolicy` command with the following options.

```
$ dbed_ckptpolicy -S ORACLE_SID [ -H ORACLE_HOME ] [-n] [-h] options
```

Where `options` could be any of the following parameters:

```
-o create|update|remove -p ckpt_sample  
-o display [-c ckpt_name | -p ckpt_sample]  
-o assign -c ckpt_name -p \  
    ckpt_data_policy[,ckpt_metadata_policy]
```

Creating a Storage Checkpoint allocation policy

Create a Storage Checkpoint allocation policy with the `-o create` option to `dbed_ckptpolicy`.

To create a Storage Checkpoint allocation policy

- ◆ Use the `dbed_ckptpolicy` command as follows:

```
$ /opt/VRTS/bin/dbed_ckptpolicy -S ORACLE_SID \  
-o create -p ckpt_policy
```

Note: A partial policy indicates that the Storage Checkpoint allocation policy does not include all the file systems used by the database.

This example shows how to create a Storage Checkpoint allocation policy with the name `ckpt_sample` database for a database named `PROD`:

```
$ dbed_ckptpolicy -S PROD -o create -p ckpt_sample
```

Output similar to the following is displayed.

```
File System: /mvsfs/v2 (MVS volumes: mvsv4,mvsv5)
```

```
Assigned Data Policy: NONE (MVS Volumes: N/A)
```

```
Assigned Meta Data Policy: NONE (MVS Volumes: N/A)
```

```
Please enter the volume name(s), separated by space, for the  
policy ckpt_sample [skip,quit]: mvsv4
```

```
File System: /mvsfs/v1 (MVS volumes: mvsv1,mvsv2,mvsv3)
```

```
Assigned Data Policy: NONE (MVS Volumes: N/A)
```

```
Assigned Meta Data Policy: NONE (MVS Volumes: N/A)
```

```
Please enter the volume name(s), separated by space, for the  
policy ckpt_sample [skip,quit]: mvsv2
```

The following information will be used to create policy `ckpt_sample`

```
ckpt_sample      /mvsfs/v2      mvsv4
```

```
ckpt_sample      /mvsfs/v1      mvsv2
```

Assigning a Storage Checkpoint allocation policy

You can use either of the following methods to assign an allocation policy to a Storage Checkpoint:

- Use the `dbed_ckptpolicy` command to assign allocation policies to an existing Storage Checkpoint.

- Use the `-p ckpt_data_policy[,ckpt_metadata_policy]` option to the `dbed_ckptcreate` command to supply policies when executed.

Note: The command automatically assigns the policies when the Storage Checkpoint is created.

The following procedure uses `dbed_ckptpolicy` to assign an allocation policy to an existing Storage Checkpoint. This example uses `PROD` as the database name and `Checkpoint_1096060202` as a sample Storage Checkpoint.

To assign an allocation policy to an existing Storage Checkpoint

- 1 Create an online Storage Checkpoint for database `PROD`.

```
$ dbed_ckptcreate -S PROD -H ORACLE_HOME -o online
```

As a result, `Checkpoint_1096060202` is created.

- 2 Assign a Storage Checkpoint policy to the `Checkpoint_1096060202`.

```
$ dbed_ckptpolicy -S PROD -n -o assign \  
-c Checkpoint_1096060202 -p ckpt_data,ckpt_metadata
```

- 3 Display the details of the Storage Checkpoint allocation policy assigned to `Checkpoint_1096060202`.

```
$ dbed_ckptpolicy -S PROD -n -o display -c Checkpoint_1096060202
```

Output similar to the following is displayed:

Storage Checkpoint	File System	Data Policy	Meta Data Policy
-----	-----	-----	-----
Checkpoint_1096060202	/mvsfs/v2	ckpt_data	ckpt_metadata
Checkpoint_1096060202	/mvsfs/v1	ckpt_data	ckpt_metadata

To assign an allocation policy to a new Storage Checkpoint

- 1 Use `dbed_ckptcreate` to assign an allocation policy to a new Storage Checkpoint.

```
$ dbed_ckptcreate -S PROD -H -o online \  
-p ckpt_data,ckpt_metadata
```

As a result, a Storage Checkpoint allocation policy is assigned to Checkpoint_1096060122, which is a new Storage Checkpoint.

- 2 Display the details of the Storage Checkpoint allocation policy assigned to checkpoint 1096060122.

```
$ dbed_ckptpolicy -S PROD -n -o display \  
-c Checkpoint_1096060122
```

Output similar to the following is displayed:

Storage Checkpoint	File System	Data Policy	Meta Data Policy
-----	-----	-----	-----
Checkpoint_1096060122	/mvsfs/v2	ckpt_data	ckpt_metadata
Checkpoint_1096060122	/mvsfs/v1	ckpt_data	ckpt_metadata

Displaying a Storage Checkpoint allocation policy

To verify that the Storage Checkpoint allocation policy is correct, you can display the policy.

To display a Storage Checkpoint allocation policy

- ◆ Use the `-o display` option to list all the Storage Checkpoint allocation policies contained in the file systems used by the database.

```
$ dbed_ckptpolicy -S ORACLE_SID -n -o display
```

Output similar to the following is displayed:

Policy Name	File System Coverage
ckpt	Complete
ckpt_data	Complete
ckpt_metadata	Complete
new_ckpt	Partial
ckpt_sample	Complete

Note: `Partial` in the File System Coverage column indicates that the Storage Checkpoint allocation policy does not include one or more of the file systems used by the database.

To display Storage Checkpoint allocation policy information

- ◆ Use the `-o display -p checkpointpolicy_name` option to display information related to a specific Storage Checkpoint allocation policy.

```
$ dbed_ckptpolicy -S ORACLE_SID -n -o display \  
-p checkpointpolicy_name
```

Output similar to the following is displayed:

Policy Name	File System	MVS volumes
ckpt_sample	/mvsfs/v2	mvsv4
ckpt_sample	/mvsfs/v1	mvsv2

To display the allocation policies assigned to a Storage Checkpoint

- ◆ Use the `-o display -c checkpoint_XXXXXXXX` option to display the allocation policies assigned to the Storage Checkpoint.

```
$ dbed_ckptpolicy -S ORACLE_SID -n -o display \  
-c checkpoint_XXXXXXXX
```

Output similar to the following is displayed:

Storage Checkpoint	File System	Data Policy	Meta Data Policy
-----	-----	-----	-----
Checkpoint_1095125037	/mvsfs/v2	ckpt_data	ckpt_metadata
Checkpoint_1095125037	/mvsfs/v1	ckpt_data	ckpt_metadata

Updating a Storage Checkpoint allocation policy

After creating a Storage Checkpoint allocation policy, you can make changes at a later time.

To update a Storage Checkpoint allocation policy

- ◆ Use the `-o update -p checkpoint_policy_name` option to update an allocation policy.

This example shows how to update a Storage Checkpoint allocation policy named `ckpt_sample`:

```
$ dbed_ckptpolicy -S ORACLE_SID -n -o update -p ckpt_sample
```

Output similar to the following is displayed:

```
File System: /mvsfs/v2 (MVS volumes: mvsv4,mvsv5)
```

```
Policy: ckpt_sample (MVS volumes: mvsv4)
```

```
Please enter the volume name(s), separated by space, for the  
policy ckpt_sample [skip,quit]: mvsv5
```

```
File System: /mvsfs/v1 (MVS volumes: mvsv1,mvsv2,mvsv3)
```

```
Policy: ckpt_sample (MVS volumes: mvsv2)
```

```
Please enter the volume name(s), separated by space, for the  
policy ckpt_sample [skip,quit]: mvsv2,mvsv3
```

The following information will be used to create policy `ckpt_sample`

```
ckpt_sample      /mvsfs/v2      mvsv5
```

```
ckpt_sample      /mvsfs/v1      mvsv2,mvsv3
```

where `mvsv4` is the volume currently using the allocation policy.

The output displays the volumes that are currently assigned in the Storage Checkpoint allocation policy.

You are prompted to enter any new volumes to which you would want to assign the Storage Checkpoint allocation policy.

Removing a Storage Checkpoint allocation policy

If a Storage Checkpoint allocation policy no longer meets your needs, you can remove the policy.

To remove a Storage Checkpoint allocation policy

- ◆ Use the following command to remove a Storage Checkpoint allocation policy:

```
$ dbed_ckptpolicy -S ORACLE_SID -n -o remove \  
-p checkpointpolicy_name
```

Converting from regular VxFS file system to MVS

The following procedure describes the conversion of a regular VxFS file system to MVS file system and optionally add new volume to it. Converting a regular VxFS to MVS requires superuser (`root`) privileges.

For further details on creating and administrating the VxVM Volume Sets and VxFS Multi-Volume Files System, refer to the *Veritas Volume Manager Administrator's Guide* and *Veritas File System Administrator's Guide*.

To convert from a regular VxFS file system to MVS

- 1 Select a non-MVS file system to convert to MVS and unmount it:

```
# umount /mnt1
```

- 2 Create the volume set:

```
# vxvset -g dname make myvset old_vol
```

- 3 Mount the volume set:

```
# mount -F vxfs /dev/vx/dsk/dname/myvset /mnt1
```

- 4 Upgrade the volume set's file system to Version 6 disk layout:

```
# vxupgrade -n 6 /mnt1
```

See the *Veritas File System Installation Guide* and the `vxfsconvert(1M)` and `vxupgrade(1M)` manual pages for information on upgrading VxFS disk layouts:

- 5 Add the new volume to the volume set:

```
# vxvset -g dname addvol myvset new_vol
```

- 6 Add the new volume to the file system. You must specify the size of the volume:

```
# fsvoladm add /mnt1 new_vol 2g
```

where `new_vol` is the name of the newly added volume and `2g` is the size of the volume:

- 7 Verify the new volume in the file system:

```
# fsvoladm list /mnt1
```

Backing up and recovering the database using Storage Checkpoints

Storage Checkpoints can be created by specifying one of the following options: online, offline, or instant. To create a Storage Checkpoint with the online option, the database should be online and you must enable `ARCHIVELOG` mode for the database. For the offline option, the database should be offline. For the instant option, the database should be online and it can be running in either `ARCHIVELOG` or `NOARCHIVELOG` mode.

During the creation of the Storage Checkpoint, the tablespaces are placed in backup mode. Because it only takes a few seconds to take a Storage Checkpoint, the extra redo logs generated while the tablespaces are in online-backup mode are very small. You can roll back the entire database or individual tablespaces or datafiles to an online or offline Storage Checkpoint. After the rollback is complete, you may roll the database forward to recover the database if you have used an online Storage Checkpoint.

You can only roll back the entire database to an instant Storage Checkpoint. Rolling back individual tablespaces or datafiles to an instant Storage Checkpoint is not possible. After the rollback is complete, you need to perform database recovery. Rolling the database forward is not supported; that is, you cannot apply archived redo logs.

To allow the easiest recovery, always keep `ARCHIVELOG` mode enabled, regardless of whether the database is online or offline when you create Storage Checkpoints.

Verifying a Storage Checkpoint using the command line

After creating a Storage Checkpoint and before using it to back up or restore a database, you can verify that the Storage Checkpoint is free of errors.

The following are usage notes for verifying a Storage Checkpoint:

- Usage notes
- See the `dbed_ckptcreate(1M)` and `dbed_ckptmount(1M)` manual pages for more information.

To verify that a Storage Checkpoint is error-free using the command line

1 Create and mount a Storage Checkpoint:

```
$ /opt/VRTS/bin/dbed_ckptcreate -S PROD -H /oracle/product \
-o online

Creating online Storage Checkpoint of database PROD.

Storage Checkpoint Checkpoint_903937870 created.

$ mkdir /tmp/ckpt_ro

$ /opt/VRTS/bin/dbed_ckptmount -S PROD -c Checkpoint_903937870 \
-m /tmp/ckpt_ro
```

If the specified mount point directory does not exist, then `dbed_ckptmount` creates it before mounting the Storage Checkpoint, as long as the Oracle DBA user has permission to create it.

2 Examine the contents of the Storage Checkpoint:

```
$ ls -l /tmp/ckpt_ro/dbvol_82/dbinst1
drwxr-xr-x 3 oracle dba 1024 Nov 11 2000 .
drwxr-xr-x 3 oracle dba 512 Nov 16 11:00 ..
-rw-r--r-- 1 oracle dba 209747968 Nov 16 10:58 .tstmp
-rw-r--r-- 1 oracle dba 209747968 Nov 16 10:58 .tstab
lrwxrwxrwx 1 oracle dba 18 Nov 11 2000 tstmp -> .tstmp::cdev:vxfs:
lrwxrwxrwx 1 oracle dba 18 Nov 11 2000 tstab -> .tstab::cdev:vxfs:
```

Storage Checkpoints can only be used to restore from logical errors (for example, a human error). Because all the data blocks are on the same physical device, Storage Checkpoints cannot be used to restore files due to a media failure. A media failure requires a database restore from a tape backup or a copy of the database files kept on a separate medium. The combination of data redundancy (disk mirroring) and Storage Checkpoints is recommended for highly critical data to protect them from both physical media failure and logical errors.

Backing up using a Storage Checkpoint

You can back up a database by creating a Storage Checkpoint using the `dbed_ckptcreate` command, mount the Storage Checkpoint as read-only using

the `dbed_ckptmount` command, and then back it up using tools such as `tar` or `cpio`.

The following are usage notes for backing up a database with the `dbed_ckptcreate` command:

Usage notes ■ See the `dbed_ckptcreate(1M)`, `dbed_ckptmount(1M)`, `tar(1)`, and `cpio(1)` manual pages for more information.

To back up a frozen database image using the command line

- 1 Assuming all the database datafiles in this example reside on one VxFS file system named `/db01`, create a Storage Checkpoint using the `dbed_ckptcreate` command:

```
$ /opt/VRTS/bin/dbed_ckptcreate -S PROD -H /oracle/product \  
-o online
```

```
Creating online Storage Checkpoint of database PROD.  
Storage Checkpoint Checkpoint_903937870 created.
```

- 2 Mount the Storage Checkpoint using the `dbed_ckptmount` command:

```
$ /opt/VRTS/bin/dbed_ckptmount -S PROD -c Checkpoint_903937870 \  
-m /tmp/ckpt_ro
```

If the specified mount point directory does not exist, then `dbed_ckptmount` creates it before mounting the Storage Checkpoint, as long as the Oracle DBA user has permission to create it.

- 3 Use `tar` to back up the Storage Checkpoint:

```
$ cd /tmp/ckpt_ro  
$ ls  
db01  
$ tar cvf /tmp/PROD_db01_903937870.tar ./db01
```

Recovering a database using a Storage Checkpoint

Because Storage Checkpoints record the before images of blocks that have changed, you can use them to do a file-system-based storage rollback to the exact time when the Storage Checkpoint was taken. You can consider Storage Checkpoints as backups that are online, and you can use them to roll back an entire database, a tablespace, or a single database file. Rolling back to or restoring from any Storage

Checkpoint is generally very fast because only the changed data blocks need to be restored.

Note: Some database changes made after a Storage Checkpoint was taken may make it impossible to perform an incomplete recovery of the databases after Storage Rollback of an online or offline Storage Checkpoint using the current control files. For example, you cannot perform incomplete recovery of the database to the point right before the control files have recorded the addition or removal of datafiles. To provide recovery options, a backup copy of the control file for the database is saved in a temporary location when Storage Checkpoint rollback is performed. Use extreme caution when recovering your database using alternate control files.

Suppose a user deletes a table by mistake right after 4:00 p.m., and you want to recover the database to a state just before the mistake. You created a Storage Checkpoint (`Checkpoint_903937870`) while the database was running at 11:00 a.m., and you have `ARCHIVELOG` mode enabled.

To recover the database using a Storage Checkpoint

- 1 Ensure that the affected datafiles, tablespaces, or database are offline, and use Storage Rollback to roll back any datafiles in the database that contained the table data from the Storage Checkpoint you created at 11:00 a.m.

```
$ /opt/VRTS/bin/dbed_ckptrollback -H /oracle/product/9i -S PROD \  
-c Checkpoint_903937870
```

- 2 Start up the database instance if it is down.
- 3 Use `recover database until cancel`, `recover database until change`, or `recover database until time` to re-apply archive logs to the point before the table was deleted to recover the database to 4:00 p.m.
- 4 Open the database with `alter database open resetlogs`.
- 5 Delete the Storage Checkpoint you created at 11:00 a.m. and any other Storage Checkpoints created before that time.
- 6 Create a new Storage Checkpoint.

Cloning the Oracle instance using `dbed_clonedb`

You can use the `dbed_clonedb` command to clone an Oracle instance using a Storage Checkpoint.

Cloning an existing database using a Storage Checkpoint must be done on the same host. However, you can clone on any host within an Oracle RAC database cluster.

You have the option to manually or automatically recover the database when using the `dbed_clonedb` command:

- Manual (interactive) recovery, which requires using the `-i` option, of the clone database allows the user to control the degree of recovery by specifying which archive log files are to be replayed.
- Automatic (non-interactive) recovery, which is the default usage of the command, recovers the entire database and replays all of the archive logs. You will not be prompted for any archive log names.

Before cloning the Oracle instance, the following conditions must be met:

- | | |
|---------------|--|
| Prerequisites | <ul style="list-style-type: none"> ■ You must first create a Storage Checkpoint. See “Creating Storage Checkpoints using dbed_ckptcreate” on page 248. ■ You must be logged in as the database administrator. ■ Make sure you have enough space and system resources to create a clone database on your system. ■ A clone database takes up as much memory and machine resources as the primary database. |
| Usage notes | <ul style="list-style-type: none"> ■ The <code>dbed_clonedb</code> command is used to create a copy of a database, cloning all existing database files to new locations. ■ The <code>ORACLE_SID</code> and <code>ORACLE_HOME</code> environment variables must be set to the primary database. ■ In an Oracle RAC configuration, the clone database is started as a single instance on the mode where the <code>dbed_clonedb</code> command is executed. ■ Cloning an Oracle RAC database with an instant storage checkpoint is not supported. ■ It is assumed that the user has a basic understanding of the database recovery process. ■ See the <code>dbed_clonedb(1M)</code> manual page for more information. |

Options for the `dbed_clonedb` command are:

Table 8-1 `dbed_clonedb` command options

Option	Description
<code>-S CLONE_SID</code>	Specifies the name of the new Oracle SID, which will be the name of the new database instance.

Table 8-1 `dbed_clonedb` command options (*continued*)

Option	Description
<code>-m MOUNT_POINT</code>	Indicates the new mount point of the Storage Checkpoint.
<code>-c CKPT_NAME</code>	Indicates the name of the Storage Checkpoint.
<code>-i</code>	Runs the command in interactive mode where you must respond to prompts by the system. The default mode is non-interactive. (Optional)
<code>-o umount</code>	Shuts down the clone database and unmounts the Storage Checkpoint file system.
<code>-o restartdb</code>	Mounts the Storage Checkpoint file system and starts the clone database. The <code>-o restartdb</code> option will not attempt to recover the clone database.
<code>-d</code>	Used with the <code>-o umount</code> option. If the <code>-d</code> option is specified, the Storage Checkpoint used to create the clone database will be removed along with the clone database.

To clone an Oracle instance with manual Oracle recovery

- ◆ Use the `dbed_clonedb` command as follows:

```
$ /opt/VRTS/bin/dbed_clonedb -S NEW9 -m /local/oracle9/1 \
-c Checkpoint_988813047 -i
```

```
Primary Oracle SID is TEST9i
```

```
New Oracle SID is NEW9
```

```
Checkpoint_988813047 not mounted at /local/oracle9/1
```

```
Mounting Checkpoint_988813047 at /local/oracle9/1
```

```
Using environment-specified parameter file
```

```
  /local/oracle9/links/dbs/initTEST9i.ora
```

```
Default Oracle parameter file found:
```

```
  /local/oracle9/links/dbs/initTEST9i.ora
```

```
Copying /local/oracle9/links/dbs/initTEST9i.ora to
```

```
  /local/oracle9/1/testvol
```

Control file 'ora_control2' path not explicitly specified in
init file; assuming ORACLE_HOME/dbs

All redo-log files found

Copying initTEST9i.ora to initNEW9.ora

in /local/oracle9/1/testvol

Altering db_name in initNEW9.ora

Altering control file locations in initNEW9.ora

Creating new link for clone database init file

Creating archive log directory

About to start up new database and begin reconfiguration

Database NEW9 is being reconfigured

Altering clone database archive log directory

Updating log_archive_dest in clone database init file

Found archive log destination at /testvol

The latest archive log(s) must now be applied. To apply the
logs, open a new window and perform the following steps:

1. copy required archive log(s) from primary to clone:

primary archive logs in /testvol

clone archive logs expected in /local/oracle9/1/testvol

2. ORACLE_SID=NEW9; export ORACLE_SID # sh and ksh, OR

setenv ORACLE_SID NEW9 #csh

3. /local/oracle9/links/bin/sqlplus /nolog

4. CONNECT / AS SYSDBA

5. RECOVER DATABASE UNTIL CANCEL USING BACKUP CONTROLFILE

6. enter the archive log(s) you wish to apply

7. EXIT

Press <Return> after you have completed the above steps.

<Return>

Resetting logs on new database NEW9

Database instance NEW9 is up and running

To clone an Oracle instance with automatic Oracle recovery

◆ Use the dbed_clonedb command as follows:

```
$ /opt/VRTS/bin/dbed_clonedb -S NEW9 -m /local/oracle9/1 \  
-c Checkpoint_988813047
```

Primary Oracle SID is TEST9i

New Oracle SID is NEW9

Checkpoint_988813047 not mounted at /local/oracle9/1

Mounting Checkpoint_988813047 at /local/oracle9/1

Using environment-specified parameter file

```
/local/oracle9/links/dbs/initTEST9i.ora
```

Default Oracle parameter file found:

```
/local/oracle9/links/dbs/initTEST9i.ora
```

Copying /local/oracle9/links/dbs/initTEST9i.ora

```
to /local/oracle9/1/testvol
```

Control file 'ora_control2' path not explicitly specified in
init file; assuming ORACLE_HOME/dbs

All redo-log files found

Copying initTEST9i.ora to initNEW9.ora

```
in /local/oracle9/1/testvol
```

Altering db_name in initNEW9.ora

Altering control file locations in initNEW9.ora

Creating new link for clone database init file

Creating archive log directory

About to start up new database and begin reconfiguration

```
Database NEW9 is being reconfigured  
Starting automatic (full) database recovery  
Shutting down clone database  
Altering clone database archive log directory  
Updating log_archive_dest in clone database init file  
Found archive log destination at /testvol  
Mounting clone database  
Resetting logs on new database NEW9  
Database instance NEW9 is up and running
```

To shut down the clone database and unmount the Storage Checkpoint

- ◆ Use the `dbed_clonedb` command as follows:

```
$ /opt/VRTS/bin/dbed_clonedb -S NEW9 -o umount
```

To mount a Storage Checkpoint file system and start the clone database

- ◆ Use the `dbed_clonedb` command as follows:

```
$ /opt/VRTS/bin/dbed_clonedb -S NEW9 -o restartdb
```

```
Database instance NEW9 is up and running.
```

To delete a clone database and the Storage Checkpoint used to create it

- ◆ Use the `dbed_clonedb` command as follows:

```
$ /opt/VRTS/bin/dbed_clonedb -S NEW9 -o umount -d
```

Guidelines for Oracle recovery

For optimal Oracle recovery, consider the following guidelines:

- Back up all control files before Storage Rollback in case the subsequent Oracle recovery is not successful. Oracle recommends that you keep at least two copies of the control files for each Oracle database and that you store the copies on different disks. It is also a good idea to back up the control files before and after making structural changes to databases.
- Make sure that the control files are not rolled back.

A control file is a small binary file that describes the structure of the database and must be available to mount, open, and maintain the database. The control file stores all necessary database files information, log file information, the name of the database, and the timestamp of database creation, as well as synchronization information such as Storage Checkpoint and log sequence information that is needed for recovery. Rolling back the control file will result in an inconsistency between the physical database structure and the control file.

Note: If your intention is to roll back the database to recover from structural changes that you do not want to maintain, you may indeed want to roll back control files.

- Make sure that all archived redo logs are available.

A database backup with online and archived logs is required for a complete database recovery. Query `V$ARCHIVED_LOG` to list all the archived log information and `V$ARCHIVE_DEST` to list the status of archive destinations.

In Veritas Storage Foundation for Oracle RAC configurations, the archive log destination must be on a Veritas Cluster File System.

To restore the necessary archived redo log files, you can query `V$LOG_HISTORY` to list all the archived redo log history or query `V$RECOVERY_LOG` to list only the archived redo logs needed for recovery. The required archived redo log files can be restored to the destination specified in the `LOG_ARCHIVE_DEST` parameter or to an alternate location. If the archived redo logs were restored to an alternate location, use the `ALTER DATABASE RECOVER ... FROM` statement during media recovery.

- After Storage Rollback, perform Oracle recovery, applying some or all of the archived redo logs.

To perform a complete media recovery:

- ◆

```
SET AUTORECOVERY ON;
RECOVER DATABASE;
```

To perform an incomplete media recovery, use one of the following:

- ◆ ■

```
RECOVER DATABASE UNTIL CANCEL;
```
- ```
RECOVER DATABASE UNTIL TIME 'yyyy-mm-dd:hh:mm:ss';
```

(You can confirm the time of error by checking the `$ORACLE_HOME/rdbms/log/alert*.log` file.)

- `RECOVER DATABASE UNTIL TIME \`  
`'yyyy-mm-dd:hh:mm:ss' using backup controlfile;`
  
- `RECOVER DATABASE UNTIL CHANGE scn;`

**To open the database after an incomplete media recovery, use the following:**

- ◆ `ALTER DATABASE OPEN RESETLOGS;`

`RESETLOGS` resets the log sequence. The `RESETLOGS` option is required after an incomplete media recovery. After opening the database with the `RESETLOGS` option, remove the Storage Checkpoint you just rolled back to as well as any Storage Checkpoints that were taken before that one. These earlier Storage Checkpoints can no longer be used for Storage Rollback. After removing these Storage Checkpoints, be sure to create a new Storage Checkpoint.

---

**Caution:** Attempting to roll back to the same Storage Checkpoint more than once can result in data corruption. After rolling back, be sure to delete the Storage Checkpoint that you rolled back to and then create a new one.

---

See your Oracle documentation for complete and detailed information on recovery.

## Using the GUI to perform Storage Checkpoint-related operations

You can use the GUI to create Storage Checkpoints and then roll back an entire database, a single tablespace, or any set of datafiles using any of the previously created Storage Checkpoints.

See the *Veritas Storage Foundation for Oracle Graphical User Interface Guide*.

Veritas Storage Foundation for Oracle RAC does not support the GUI.

# Using Database Dynamic Storage Tiering

This chapter includes the following topics:

- [About Database Dynamic Storage Tiering](#)
- [Configuring Database Dynamic Storage Tiering](#)
- [Dynamic Storage Tiering policy management](#)
- [How to use file statistics](#)
- [Running Database Dynamic Storage Tiering reports](#)
- [Load balancing in a database environment](#)
- [Database Dynamic Storage Tiering use cases for Oracle](#)

## About Database Dynamic Storage Tiering

More and more data is being retained. Eventually, some of the data is no longer needed as frequently, but still takes up a large amount of disk space. Database Dynamic Storage Tiering matches data storage with the data's usage requirements so that data is relocated based on requirements determined by the database administrator (DBA). The feature enables you to manage your data so that less-frequently used data can be moved to slower, less expensive disks, allowing frequently-accessed data to be stored on the faster disks for quicker retrieval. Storage classes are used to designate which disks make up a particular tier.

There are two common ways of defining storage classes:

- Performance, or storage, cost class: The most-used class consists of fast, expensive disks. When data is no longer needed on a regular basis, the data

can be moved to a different class that is made up of slower, less expensive disks.

- Resilience class: Each class consists of non-mirrored volumes, mirrored volumes, and n-way mirrored volumes.

For example, a database is usually made up of data, an index, and logs. The data could be set up with a three-way mirror because data is critical. The index could be set up with a two-way mirror because the index is important, but can be recreated. The logs are not required on a daily basis and could be set up with no mirroring.

Dynamic Storage Tiering (DST) policies control initial file location and the circumstances under which existing files are relocated. These policies cause the files to which they apply to be created and extended on specific subsets of a file systems's volume set, known as placement classes. The files are relocated to volumes in other placement classes when they meet specified naming, timing, access rate, and storage capacity-related conditions.

In addition to preset policies, you can manually move files to faster or slower storage, when necessary. You can run reports that list active policies, display file activity, display volume usage, or show file statistics.

## Database Dynamic Storage Tiering building blocks

To use Database Dynamic Storage Tiering, your storage must be managed using the following features:

- VxFS multi-volume file system
- VxVM volume set
- Volume tags
- Dynamic Storage Tiering policies

### About VxFS multi-volume file systems

Multi-volume file systems are file systems that occupy two or more virtual volumes. The collection of volumes is known as a volume set, and is made up of disks or disk array LUNs belonging to a single Veritas Volume Manager (VxVM) disk group. A multi-volume file system presents a single name space, making the existence of multiple volumes transparent to users and applications. Each volume retains a separate identity for administrative purposes, making it possible to control the locations to which individual files are directed. This feature is available only on file systems using disk layout Version 6 or later.

See [“Converting a VxFS file system to a VxFS multi-volume file system”](#) on page 140.

See the `fsvoladm(1M)` manual page.

## About VxVM volume sets

Volume sets allow several volumes to be represented by a single logical object. Volume sets cannot be empty. All I/O from and to the underlying volumes is directed via the I/O interfaces of the volume set. The volume set feature supports the multi-volume enhancement to Veritas File System (VxFS). This feature allows file systems to make best use of the different performance and availability characteristics of the underlying volumes. For example, file system metadata could be stored on volumes with higher redundancy, and user data on volumes with better performance.

## About volume tags

You make a VxVM volume part of a placement class by associating a volume tag with it. For file placement purposes, VxFS treats all of the volumes in a placement class as equivalent, and balances space allocation across them. A volume may have more than one tag associated with it. If a volume has multiple tags, the volume belongs to multiple placement classes and is subject to allocation and relocation policies that relate to any of the placement classes. Multiple tagging should be used carefully.

A placement class is a Dynamic Storage Tiering attribute of a given volume in a volume set of a multi-volume file system. This attribute is a character string, and is known as a volume tag.

## About Dynamic Storage Tiering policies

Dynamic Storage Tiering allows administrators of multi-volume VxFS file systems to manage the placement of files on individual volumes in a volume set by defining placement policies that control both initial file location and the circumstances under which existing files are relocated. These placement policies cause the files to which they apply to be created and extended on specific subsets of a file system's volume set, known as placement classes. The files are relocated to volumes in other placement classes when they meet the specified naming, timing, access rate, and storage capacity-related conditions.

# Database Dynamic Storage Tiering in a High Availability (HA) environment

Veritas Cluster Server does not provide a bundled agent for volume sets. If issues arise with volumes or volume sets, the issues can only be detected at the DiskGroup and Mount resource levels.

The DiskGroup agent brings online, takes offline, and monitors a Veritas Volume Manager (VxVM) disk group. This agent uses VxVM commands. When the value of the StartVolumes and StopVolumes attributes are both 1, the DiskGroup agent onlines and offlines the volumes during the import and deport operations of the disk group. When using volume sets, set StartVolumes and StopVolumes attributes of the DiskGroup resource that contains the volume set to 1. If a file system is created on the volume set, use a Mount resource to mount the volume set.

The Mount agent brings online, takes offline, and monitors a file system or NFS client mount point.

If you are using any of the Database Dynamic Storage Tiering commands in a high availability (HA) environment, the time on each system in the cluster must be synchronized. Otherwise, the scheduled task may not be executed at the expected time after a service group failover.

For more information, see the *Veritas Cluster Server Bundled Agents Reference Guide*.

## Configuring Database Dynamic Storage Tiering

To use Database Dynamic Storage Tiering, you must:

- Review Database Dynamic Storage Tiering command requirements.
- Define database parameters.
- Set up storage classes.
- Convert an existing VxFS database file system to a VxFS multi-volume file system for use with Database Dynamic Storage Tiering.
- Classify, or tag, volumes so that the tags indicate the quality of the underlying disk.
- Display the free space on each class.
- Add or remove volumes as necessary.

### Database Dynamic Storage Tiering command requirements

Before defining your database parameters, review the following command requirements:

- An Oracle database must be up and running.
- Only the Oracle database administrator can run Database Dynamic Storage Tiering commands.

- Run the `dbed_update` command before running any of the Database Dynamic Storage Tiering commands. You should also run the `dbed_update` command if any of the database files change.

Because the Database Dynamic Storage Tiering commands retrieve database information from the repository, the repository must be up to date.

- Define the `LD_LIBRARY_PATH` environment variable as follows:

```
LD_LIBRARY_PATH=$LD_LIBRARY_PATH:/opt/VRTSdbms3/lib; \
export LD_LIBRARY_PATH
```

- If you are using any of the Database Dynamic Storage Tiering commands in a high availability (HA) environment, the time on each system in the cluster must be synchronized.
- Create the volumes that you want to add to the multi-volume file system in the same disk group as the file system volume. As root, use the following command to change the owner of each volume:

```
opt/VRTS/bin/vxedit -g disk_group \
set user=oracle volume
```

- Change the owner of the mount point on which you want to implement Database Dynamic Storage Tiering to oracle.

## Defining database parameters

Running the `dbdst_admin` command defines parameters for the entire database. You must run this command at least once to define the database parameters for Database Dynamic Storage Tiering. Three pre-defined storage classes will be created (PRIMARY, SECONDARY, and BALANCE). Parameter values are stored in the SFDB repository.

Set at least one of the parameters in `maxclass`, `minclass`, `statinterval`, `sweepinterval`, `purgetime`, or `purgeinterval`, to enable default values. Add at least one class to enable the default classes.

[Table 9-1](#) lists the options for the `dbdst_admin` command.

**Table 9-1** dbdst\_admin command options

| Option          | Description                                                                       |
|-----------------|-----------------------------------------------------------------------------------|
| -S \$ORACLE_SID | Specifies the <code>ORACLE_SID</code> , which is the name of the Oracle instance. |

**Table 9-1** dbdst\_admin command options (*continued*)

| Option         | Description                                                                                                                                                                                                                                                                                              |
|----------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| list           | Lists all the Database Dynamic Storage Tiering parameters of the database, including class name and description. This option should be used exclusively from the other options.                                                                                                                          |
| maxclass=      | Maximum number of storage classes allowed in the database. Default value is 4.                                                                                                                                                                                                                           |
| minclass=      | Minimum number of storage classes allowed in the database. Default value is 2.                                                                                                                                                                                                                           |
| sweepinterval= | Interval for file sweeping for file relocation. Default value is 1, which means one per day. If this value is set to 0, all scheduled sweep tasks will become unscheduled.                                                                                                                               |
| sweepertime=   | Time per day for the file sweep to take place. Times are entered in 24-hour periods and should list hour: minute. For example, 8:30 AM is represented as 08:30 and 10:00 PM is represented as 22:00. Default value is 22:00.                                                                             |
| statinterval=  | Interval in minutes for gathering file statistics. Default value is 30, which represents every 30 minutes. If this value is set to 0, all scheduled tasks will become unscheduled.                                                                                                                       |
| purgeinterval= | Number of days after which the file statistics in the repository will be summarized and purged. Default value is 30. It is recommended that you set your purge interval sooner because you will not be able to view any statistics until the first 30-day interval is over, if you use the default.      |
| purgetime=     | Time per day for the file purge to take place. Times are entered in 24-hour periods and should list hour: minute. For example, 8:30 AM is represented as 08:30 and 8:00 PM is represented as 20:00. Default value is 20:00.                                                                              |
| addclass=      | Parameter that allows you to add a class to a database. The information should be entered as <code>class:"description"</code> , where <code>class</code> represents the class name and <code>description</code> is a string of up to 64 characters enclosed by double quotes used to describe the class. |
| rmclass=       | Parameter that allows you to remove a class from a database. Enter the class name as it appears in the database.                                                                                                                                                                                         |

---

**Note:** If you do not want to change specific default values, you can omit those parameters when you run the `dbdst_admin` command. You only need to enter the parameters that need to be changed.

---

Before you define database parameters, review the following information:

#### To define database parameters

- ◆ Use the `dbdst_admin` command as follows:

```
$ /opt/VRTS/bin/dbdst_admin -S $ORACLE_SID -o list,maxclass=number,\
minclass=number,sweepinterval=interval,sweeptime=hh:mm,\
statinterval=interval,purgeinterval=interval,purgetime=hh:mm,\
addclass=class:"description",rmclass=class
```

For example, to add a class called `tier1` for database `PROD`, and to set up a purge interval of one, meaning that the file statistics will be gathered for one day and then summarized and purged, use the `dbdst_admin` command as follows:

```
$ /opt/VRTS/bin/dbdst_admin -S PROD -o addclass=tier1:"Fast Storage",\
purgeinterval=1
```

## Setting up storage classes

When you define your database parameters, three pre-defined storage classes are created. You will need to add or remove storage classes to fit your needs.

### Adding storage classes

In addition to the default storage classes, you can add storage classes to better manage your data.

Before adding a storage class, review the following information:

#### To add a storage class

- ◆ Use the `dbdst_admin` command as follows:

```
$ /opt/VRTS/bin/dbdst_admin -S $ORACLE_SID -o addclass=class:\
"description"
```

For example, to create a storage class named `"FAST"` for an EMC array, use the `dbdst_admin` command as follows:

```
$ /opt/VRTS/bin/dbdst_admin -S $ORACLE_SID -o addclass=FAST:\
"fast EMC array"
```

## Removing storage classes

If you no longer require a specific storage class, you can remove it. You cannot remove the pre-defined storage classes (PRIMARY, SECONDARY, and BALANCE).

Before removing a storage class, review the following information:

### To remove a storage class

- ◆ Use the `dbdst_admin` command as follows:

```
$ /opt/VRTS/bin/dbdst_admin -S $ORACLE_SID rmclass=class
```

For example, to remove a storage class called "SLOW," use the `dbdst_admin` command as follows:

```
$ /opt/VRTS/bin/dbdst_admin -S $ORACLE_SID rmclass=SLOW
```

## Displaying storage classes

You can display a list of Database Dynamic Storage Tiering properties and storage classes using the `dbdst_admin` command.

Before displaying your storage classes, review the following information:

### To display existing storage classes and properties

- ◆ Use the `dbdst_admin` command as follows:

```
$ /opt/VRTS/bin/dbdst_admin -S $ORACLE_SID -o list
```

## Converting a VxFS file system to a VxFS multi-volume file system

To convert your existing VxFS file system to a VxFS multi-volume file system, you must convert a single volume to a volume set.

### Converting a single volume to a volume set

When you convert to a volume set using the `dbdst_convert` command, the original volume will be renamed to a new volume name. The mount device name will become the new volume set name. Creating the new volume set name with the mount device name nullifies the need to rename the mount device in various locations.

Before converting to a volume set, make sure the following conditions have been met:

- |               |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
|---------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Prerequisites | <ul style="list-style-type: none"><li>■ The Oracle database must not be active.</li><li>■ Create at least one additional volume.</li></ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| Usage notes   | <ul style="list-style-type: none"><li>■ You must convert the single-volume file system on which you plan to implement Database Dynamic Storage Tiering.</li><li>■ The file system can be mounted or unmounted when you run the <code>dbdst_convert</code> command.</li><li>■ If the file system has <i>n</i> volumes, volumes 1 through <i>n</i>-1 will be placed in the storage class "PRIMARY" and volume <i>n</i> will be placed in the storage class "SECONDARY."</li><li>■ The volumes specified when running the conversion must be in the same disk group as the mount device.</li></ul> |

### To convert a mount device from a single volume device to a volume set

- 1 Use the `dbdst_convert` command as follows:

```
$ /opt/VRTS/bin/dbdst_convert -S $ORACLE_SID -M mount_device -v \
volume_name, volume_name
```

- 2 Bring database objects online.

For example, to convert a volume-based oradata file system to a Database Dynamic Storage Tiering-ready volume set file system on mount device `/dev/vx/dsk/oradg/oradata`, use the `dbdst_convert` command as follows:

```
$ /opt/VRTS/bin/dbdst_convert -S PROD -M /dev/vx/dsk/oradg/oradata -v \
new_vol1,new_vol2
```

After conversion, you will have a volume set named `oradata` containing three volumes (`oradata_b4vset`, `new_vol1`, and `new_vol2`). The file system will have two storage classes defined as `PRIMARY` and `SECONDARY`. The volumes will be assigned as follows:

- `PRIMARY` storage class will contain volumes `oradata_b4vset` and `new_vol1`.
- `SECONDARY` storage class will contain volume `new_vol2`.

## Classifying volumes into a storage class

Before creating a DST policy or manually moving data, assign classes to your volumes.

Before assigning classes to volumes, review the following information:

- Usage notes
- You must convert your VxFS file system to a multi-volume file system first.
  - Storage classes must be registered using the `dbdst_admin` command before assigning classes to volumes.
  - The database can be online or offline.

**To classify a volume**

- ◆ Use the `dbdst_classify` command as follows:

```
$ /opt/VRTS/bin/dbdst_classify -S $ORACLE_SID -M mount_device \
-v volume_name:class[, volume_name:class]
```

For example, to assign the class "FAST" to volume `new_vol1`, use the `dbdst_classify` command as follows:

```
$ /opt/VRTS/bin/dbdst_classify -S $ORACLE_SID -M /dev/vx/dsk/oradg/oradata \
-v new_vol1:FAST
```

## Displaying free space on your storage classes

To see the free space, class information, and volume information on your storage classes, use the `dbdst_show_fs` command.

[Table 9-2](#) on page 142. shows the `dbdst_show_fs` command options.

**Table 9-2** dbdst\_show\_fs command options

| Option          | Description                                                         |
|-----------------|---------------------------------------------------------------------|
| -S \$ORACLE_SID | Specifies the ORACLE_SID, which is the name of the Oracle instance. |
| -o volume       | Displays the free space on volumes in each class.                   |
| -m              | Specifies the mount point.                                          |

Before displaying the free space on a storage class, review the following information:

- Prerequisites
- Make sure the file system is mounted.
- Usage notes
- See the `dbdst_show_fs(1M)` manual page.

### To display the free space on a storage class

- ◆ Use the `dbdst_show_fs` command as follows:

```
$ /opt/VRTS/bin/dbdst_show_fs -S $ORACLE_SID -o volume \
-m mount_point
```

## Adding new volumes to a storage class

You can use the `dbdst_addvol` command to add volumes to a volume set.

Before adding a volume, review the following information:

- Usage notes
- The database must be inactive when adding volumes to a storage class.

### To add a volume to a volume set

- ◆ Use the `dbdst_addvol` command as follows:

```
$ /opt/VRTS/bin/dbdst_addvol -S $ORACLE_SID -M mount_device \
-v volume_name:class[,volume_name:class]
```

## Removing volumes from a storage class

You may need to remove a volume from a volume set. To remove a volume, use the `dbdst_rmvol` command.

Before removing a volume, review the following information:

- Usage notes
- The database must be inactive when removing volumes from a storage class.
  - Only a volume that does not contain any file system data can be removed

### To remove a volume from a volume set

- ◆ Use the `dbdst_rmvol` command as follows:

```
$ /opt/VRTS/bin/dbdst_rmvol -S $ORACLE_SID -M mount_device \
-v volume_name[,volume_name]
```

# Dynamic Storage Tiering policy management

You can choose to manually relocate files or tablespaces, or you can use a preset Dynamic Storage Tiering (DST) policy.

## Relocating files

You can relocate flashback logs, archive logs, datafiles, and external files if the files are no longer being used frequently. For example, if you maintain seasonal data, you may choose to move the files when you are in different seasons.

[Table 9-3](#) on page 144, shows the `dbdst_file_move` command options.

**Table 9-3** `dbdst_file_move` command options

| Option                                 | Description                                                                                                                                                                                                                                                                                                    |
|----------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <code>-o archive[n]   flashback</code> | Specifies which archive logs or Flashback logs to move. Do not use this option with the <code>-f</code> option. Flashback is supported by Oracle 10g or later.                                                                                                                                                 |
| <code>-o external   datafile</code>    | Specifies whether to move external files or datafiles. Use this option with the <code>-f</code> option.                                                                                                                                                                                                        |
| <code>-f listfile</code>               | Specifies a listfile that contains a list of files or directories to be moved.                                                                                                                                                                                                                                 |
| <code>-c class[:days]</code>           | Specifies the storage class to which the files should be moved. If the <code>days</code> option is used, the files will be moved to the class specified if they have not been accessed in the number of days specified. Do not specify <code>days</code> if you are using the <code>-o datafile</code> option. |
| <code>-R</code>                        | Removes the policy for the specified object.                                                                                                                                                                                                                                                                   |

Before relocating a file, review the following information:

- Usage notes
- Multiple partitions cannot reside on the same tablespace.

### To relocate a file

- ◆ Use the `dbdst_file_move` command as follows:

```
/opt/VRTS/bin/dbdst_file_move -S $ORACLE_SID -o datafile \
-f listfile -c storage_class:days [-c storage_class:days]
```

## Relocating tablespaces

Use the `dbdst_tbs_move` command to move tablespaces to the desired storage class. The command queries the SFDB repository for the tablespace file names, then performs a one-time move based on your immediate requirements.

### To relocate a tablespace

- ◆ Use the `dbdst_tbs_move` command as follows:

```
$ /opt/VRTS/bin/dbdst_tbs_move -S $ORACLE_SID -t tablespace \
-c class
```

where

- *tablespace* indicates which tablespace to move.
- *class* indicates to which class the tablespace should be moved.

## Relocating table partitions

Use the `dbdst_partition_move` to move table partitions. The command queries the database to validate the names of the table and partition. From this information, a list of datafiles is derived and a one-time move of the files to the desired class is executed.

Before relocating a table partition, review the following information:

|               |                                                                                     |
|---------------|-------------------------------------------------------------------------------------|
| Prerequisites | The database must be up when you run the <code>dbdst_partition_move</code> command. |
|---------------|-------------------------------------------------------------------------------------|

### To relocate a table partition

- ◆ Use the `dbdst_partition_move` command as follows:

```
$ /opt/VRTS/bin/dbdst_partition_move -S $ORACLE_SID -T table_name \
-p partition_name -c class
```

where

- `-T` indicates the table name.
- `-p` indicates the partition name.
- `-c` indicates the class to which the table partition is to be moved.

For example, to move the `SALES_Q1` partition of the `SALES` table to storage class `SLOW`, use the `dbdst_partition_move` as follows:

```
$ /opt/VRTS/bin/dbdst_partition_move -S $ORACLE_SID -T SALES \
-p SALES_Q1 -c SLOW
```

## Using preset policies

Use the `dbdst_preset_policy` command to set a policy based on file name patterns before the files are created.

[Table 9-4](#) on page 146, shows the `dbdst_preset_policy` options.

**Table 9-4** dbdst\_preset\_policy command options

| Option                       | Description                                                                                                                                                                                                                         |
|------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <code>-d directory</code>    | Indicates the directory on which the placement policy will be applied.                                                                                                                                                              |
| <code>-e</code>              | Enforces the file system of the specified directory. Use this option if there was an error in the previous enforcement that has been corrected and needs to be enforced again.                                                      |
| <code>-R</code>              | Removes all pattern-based placement policies related to this directory.                                                                                                                                                             |
| <code>-l</code>              | Lists the existing file placement that is set to the specified directory.                                                                                                                                                           |
| <code>-P pattern_spec</code> | Specifies file patterns and class assignment. This option will automatically place files in the desired class as soon as they are created. Existing files and newly created files will be moved immediately to the class specified. |
| <code>-f pattern_file</code> | Specifies a file that contains a particular class and pattern. New files with this pattern will be placed in the class immediately. Existing files will be moved as well.                                                           |
| <code>-E</code>              | Specifies that existing files should be moved to the designated class in a one-time move to be scheduled at a later time, such as the sweeptime specified in the <code>dbdst_admin</code> command.                                  |

### To create a preset policy

- ◆ Use the `dbdst_preset_policy` command as follows:

```
$ /opt/VRTS/bin/dbdst_preset_policy -S $ORACLE_SID -d directory \
-P pattern_spec
```

# How to use file statistics

You can choose to collect statistics on one or more data files in your database. Collecting statistics allows you to make decisions as to when to move files to slower or faster storage. By default, statistics are collected every thirty minutes.

## Setting up statistic collection

To set up statistic collection on files, use the `dbdst_fstat` command.

[Table 9-5](#) on page 147. shows the `dbdst_fstat` command options.

**Table 9-5** dbdst\_fstat command options

| Option                       | Description                                                                                |
|------------------------------|--------------------------------------------------------------------------------------------|
| <code>-o start   stop</code> | Starts or stops file statistics collection.                                                |
| <code>-o stopall</code>      | Stops all statistics collection.                                                           |
| <code>-o list</code>         | Lists files for which statistics are to be collected.                                      |
| <code>-f listfile</code>     | Specifies a user-defined file that contains a list of files on which to gather statistics. |
| <code>filename</code>        | Specifies the file on which to gather statistics.                                          |
| <code>-t tablespace</code>   | Specifies the tablespace on which to gather statistics.                                    |

### To start collecting statistics on a file

- ◆ Use the `dbdst_fstat` command as follows:

```
$ /opt/VRTS/bin/dbdst_fstat -S $ORACLE_SID -o start \
-f listfile
```


## Viewing file statistics

After you have set up statistic collection, you can use the GUI to view the statistics. When you defined your database parameters, the purge interval default value is 30, which means that statistics will be collected and summarized after the initial 30-day period, unless you used a different value. Set a smaller value if you want to view statistics earlier.


For more details, see the *Veritas Storage Foundation for Oracle Graphical User Interface Guide* or the Java GUI online help.

To view file statistics in the GUI

- 1 Select **DBEDAgent > Oracle Database**, then click on a specific instance.
- 2 Right click on a specific database and choose **Database Dynamic Statistics Chart**.
- 3 Enter report parameters and click **Next**. You will see information similar to the following:

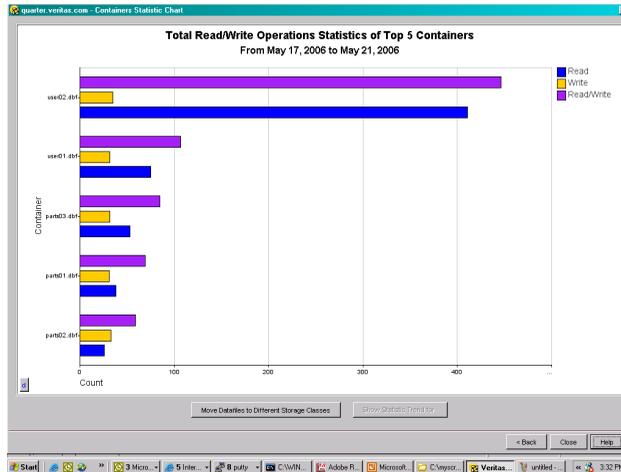

- 4 To display the statistical trend, click **Show Statistical Trend**. The Show Statistical Trend line chart displays.

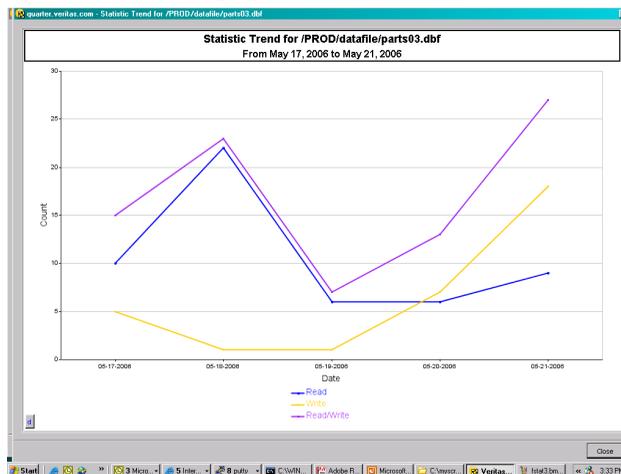

- 5 To close the chart pages when finished, click **Close**.

## Running Database Dynamic Storage Tiering reports

You can create a report that lists all updated allocation policies or you can view an audit report, which lists recent relocation changes for a specific date range resulting from your policies.

### Viewing modified allocation policies

To create a list of modified allocation policies, use the `dbdst_report` command with the `policy` option.

#### To list allocation policies

- ◆ Use the `dbdst_report` command as follows:

```
$ /opt/VRTS/bin/dbdst_report -S $ORACLE_SID -o policy
```

For example, to view a list of modified allocation policies, use the `dbdst_report` command as follows:

```
$ /opt/VRTS/bin/dbdst_report -S $ORACLE_SID -o policy
```

### Viewing audit reports

To view an audit report, which lists recent file relocation changes within a specific date range, use the `dbdst_report` command with the `audit` option.

#### To view an audit report

- ◆ Use the `dbdst_report` command as follows:

```
$ /opt/VRTS/bin/dbdst_report -S $ORACLE_SID -o audit \
startdate=yyyy-mm-dd,enddate=yyyy-mm-dd
```

For example, to view an audit report of changes from January 1, 2006 through March 1, 2006, use the `dbdst_report` command as follows:

```
$ /opt/VRTS/bin/dbdst_report -S $ORACLE_SID -o audit \
startdate=2006-01-01,enddate=2006-03-01
```

## Load balancing in a database environment

To get better performance in a database environment, normally you would use a volume striped over several disks. As the amount of data stored in the file system increases over time, additional space in the form of new disks must be added.

To increase space, you could perform a volume relay layout using the `vxrelayout` command. However, changing a large volume from a four-way striped volume to six-way striped volume involves moving old block information into temporary space and writing those blocks from the temporary space to a new volume, which takes a long time. To solve this problem, Veritas Storage Foundation for Oracle offers a new feature called a Load Balanced File System (LBFS).

An LBFS is created on a multi-volume file system where individual volumes are not striped over individual disks. For data-availability, these individual volumes can be mirrored. The file system on the LBFS has a special placement policy called a balance policy. When the balance policy is applied, all the files are divided into small "chunks" and the chunks are laid out on volumes so that adjacent chunks are on different volumes. The default chunk size is 1MB and can be modified. Since every file contains chunks on all available volumes, it is important that individual volumes that make up the LBFS and volume set be of same size and same access properties. Setting up the file system in this way provides the same benefit as striping your volumes. Use the `dbdst_make1bfs` command to create an LBFS file system. Note that you cannot convert an existing file system to an LBFS file system.

## Load balancing file system

You can define allocation policies with a balance allocation order and "chunk" size to files or a file system, known as load balancing. The chunk size is the maximum size of any extent that files or a file system with this assigned policy can have. The chunk size can only be specified for allocation policies with a balance allocation order.

A load balancing policy specifies the balance allocation order and a non-zero chunk size. The balance allocation order distributes allocations randomly across the volumes specified in the policy and limits each allocation to a maximum size equal to the specified chunk size.

Load balancing extends the behavior of policy enforcement by rebalancing extent allocations such that each volume in the policy is as equally used as possible. Policy enforcement handles the following cases:

- New volumes are added to the policy, and the extents associated with a file need rebalancing across all volumes, including the new ones.
- Volumes are removed from the volume set or from the policy, and the extents for a file residing on a removed volume need to be moved to other volumes in the policy.
- A load balancing policy is assigned to a file and its extents have to be reorganized to meet the chunk size requirements defined in the policy.

The load balancing policy is intended for balancing data extents belonging to files across volumes defined in the policy. However, there is no restriction imposed in assigning load balancing policy for metadata.

---

**Note:** If the fixed extent size is less than the chunk size, then the extent size will be limited to the largest multiple of the fixed extent size that is less than the chunk size. If the fixed extent size is greater than the chunk size, then the extent size will be the fixed extent size.

---

## Creating a Load Balancing File System

Use the `dbdst_makelbfs` command to create a Load Balancing File System (LBFS). In an LBFS, the file extents are distributed on every volume.

Before creating an LBFS, review the following information:

- |               |                                                                                                                                                                                                                                                                                                                                                                                                                             |
|---------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Prerequisites | <ul style="list-style-type: none"> <li>■ You must run the <code>dbed_update</code> command before running the <code>dbdst_makelbfs</code> command to make sure the repository is updated.</li> <li>■ The mount point at which you want to mount the LBFS should exist and be owned by the user.</li> </ul>                                                                                                                  |
| Usage notes   | <ul style="list-style-type: none"> <li>■ The <code>dbdst_makelbfs</code> command can be executed while the database is online.</li> <li>■ You can not convert an existing file system into an LBFS.</li> <li>■ It is recommended that you mirror your volumes either within the disk array or with Veritas Volume Manager.</li> <li>■ For more information, see the <code>dbdst_makelbfs(1M)</code> manual page.</li> </ul> |

[Table 9-6](#) on page 151. provides the `dbdst_makelbfs` command options.

**Table 9-6** `dbdst_makelbfs` command options

| Option                       | Description                                                                                                                         |
|------------------------------|-------------------------------------------------------------------------------------------------------------------------------------|
| <code>-s \$ORACLE_SID</code> | Specifies the name of the Oracle database for which information will be retrieved.                                                  |
| <code>-m mount_point</code>  | Specifies the mount point where the newly created LBFS needs to be mounted. This mount point should exist and be owned by the user. |
| <code>-g disk_group</code>   | Specifies the disk group on which the volumes reside.                                                                               |

**Table 9-6** dbdst\_makelbfs command options (*continued*)

| Option                | Description                                                                                                                                                                                                                             |
|-----------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| -C <i>chunk_size</i>  | Indicates the size in megabytes (MB) of each file extent. The default size is 1MB.                                                                                                                                                      |
| -v <i>volume_name</i> | Specifies a volume or list of volumes to be used to create a volume set and LBFS. All volumes specified in the list must be owned by the user executing the command.<br><br>The volumes should be separated with a comma and no spaces. |

**To create a Load Balancing File System**

- ◆ Use the `dbdst_makelbfs` command as follows:

```
$ /opt/VRTS/bin/dbdst_makelbfs -S $ORACLE_SID -m mount_point \
-g disk_group -C chunk_size -v volume_name,volume_name
```

For example, to create an LBFS with volumes vol1,vol2,vol3 and vol4 on the PROD database, use the `dbdst_makelbfs` command as follows:

```
$ /opt/VRTS/bin/dbdst_makelbfs -S PROD -g oradata -m /ora_lbf s \
-C 2 -v vol1,vol2,vol3,vol4
```

## Adding volumes to a Load Balancing File System

To add additional space to a load balancing file system (LBFS), use the `dbdst_addvol` command using the balance class name. When you add new volumes, all the file-chunks will be redistributed so that adjacent chunks are different volumes, and every volume has approximately same amount of free space.

**Prerequisites** ■ You must have a Load Balancing File System.  
 See [“Creating a Load Balancing File System”](#) on page 151.

**Usage notes** ■ For more details, see the `dbdst_addvol(1M)` manual page.

**To add a volume to a Load Balancing File System**

- ◆ Use the `dbdst_addvol` command as follows:

```
$ /opt/VRTS/bin/dbdst_addvol -S $ORACLE_SID -M mount_device \
-v volume_name:class_name,volume_name:class_name
```

For example, to add two new volumes, `new_vol1` and `new_vol2`, to an existing LBFS, use the `dbdst_addvol` command as follows:

```
$ /opt/VRTS/bin/dbdst_addvol -S PROD -M /dev/vx/dsk/oradata/vol1 \
-v new_vol1:BALANCE,new_vol2:BALANCE
```

## Database Dynamic Storage Tiering use cases for Oracle

Use cases were created in order to provide examples of how and why you would use Database Dynamic Storage Tiering.

### Migrating partitioned data and tablespaces

Perhaps the simplest application of multi-tier storage to databases is relocation of individual table partitions between different placement classes as usage requirements change. If exact relocation times are unpredictable, or if relocation is infrequent, administrators may wish to relocate table partitions as business requirements surface rather than defining strict periodic relocation schedules.

Ad hoc relocation of table partitions can be useful, for example, with databases that track sales and inventory for seasonal businesses such as sports equipment or outdoor furniture retailing. As the selling season for one type of inventory (for example, summer equipment or furniture) approaches, database table partitions that represent in-season goods can be relocated to high-performance storage, since they will be accessed frequently during the coming months. Similarly, partitions that represent out-of-season goods can be relocated to lower-cost storage, since activity against them is likely to be infrequent.

For example, sales are mostly catalog-driven for a large retailer specializing in sports equipment. Product details are saved in a large database and the product table is partitioned based on type of activity. Some of the products are seasonal and do not sell well at other times. For example, very few snow skis are sold during the summer. To achieve season-based migration, see the following example. Assume the table `product_tab` has two partitions, `summer` and `winter`. Each of these partitions is mapped to a separate data file.

First, you must set up your system to use Database Dynamic Storage Tiering.

### To add the `fast_storage` and `slow_storage` storage classes

- ◆ Use the `dbdst_admin` command as follows:

```
$ /opt/VRTS/bin/dbdst_admin -S PROD -o addclass=\
fast_storage:"Fast Storage for Production DB"

$ /opt/VRTS/bin/dbdst_admin -S PROD -o addclass=\
slow_storage:"Slow Storage for Production DB"
```

### To convert the database's file system and add volumes for use with Database Dynamic Storage Tiering

- ◆ Use the `dbdst_convert` command as follows:

```
$ /opt/VRTS/bin/dbdst_convert -S PROD \
-M /dev/vx/dsk/oradg/oradata -v new_vol1,new_vol2,new_vol3
```

### To classify volumes into storage classes

- ◆ Use the `dbdst_classify` command as follows:

```
$ /opt/VRTS/bin/dbdst_classify -S PROD \
-M /dev/vx/dsk/oradg/oradata -v new_vol1:fast_storage

$ /opt/VRTS/bin/dbdst_classify -S PROD \
-M /dev/vx/dsk/oradg/oradata -v new_vol2:slow_storage,\
new_vol3:slow_storage
```

Once the volumes are configured, an administrator can define file placement policy rules that specify seasonal relocation of selected tablespaces and partitions and assign them to the database's file system.

### To move summer data to slower storage and winter data to faster storage at the beginning of winter

- ◆ Use the `dbdst_partition_move` command as follows:

```
$ /opt/VRTS/bin/dbdst_partition_move -S PROD -T product_tab \
-p winter -c fast_storage

$ /opt/VRTS/bin/dbdst_partition_move -S PROD -T product_tab \
-p summer -c slow_storage
```

These commands relocate the files that comprise the winter partition of the `product_tab` table to placement class `fast_storage`, and the files that comprise the summer partition to placement class `slow_storage`. Database Dynamic Storage Tiering determines which files comprise the winter and summer partitions of

product\_tab, and uses underlying DST services to immediately relocate those files to the fast\_storage and slow\_storage placement classes respectively.

### To move winter data to slower storage and summer data to faster storage at the beginning of summer

- ◆ Use the `dbdst_partition_move` command as follows:

```
$ /opt/VRTS/bin/dbdst_partition_move -S PROD -T product_tab \
-p summer -c fast_storage

$ /opt/VRTS/bin/dbdst_partition_move -S PROD -T product_tab \
-p winter -c slow_storage
```

Database Dynamic Storage Tiering formulates DST policy rules that unconditionally relocate the files containing the target partitions to the destination placement classes. It merges these rules into the database file system's active policy, assigns the resulting composite policy to the file system, and enforces it immediately to relocate the subject files. Because the added policy rules precede any other rules in the active policy, the subject files remain in place until the `dbdst_partition_move` command is next executed, at which time the rules are removed and replaced with others.

## Scheduling the relocation of archive and Flashback logs

Because they are the primary mechanism for recovering from data corruption, database logs are normally kept on premium storage, both for I/O performance and data reliability reasons. Even after they have been archived, logs are normally kept online for fast recovery, but the likelihood of referring to an archived log decreases significantly as its age increases. This suggests that archived database logs might be relocated to lower-cost volumes after a certain period of inactivity.

Similarly, Veritas Storage Foundation for Oracle Flashback technology creates logs that can be used for quick recovery from database corruption by restoring a database to its state at a previous time. Flashback logs are normally kept for a shorter period than archived database logs. If used at all, they are typically used within a few hours of creation. Two or three days is a typical Flashback log lifetime.


The rapidly decaying probability of use for archive and Flashback logs suggests that regular enforcement of a placement policy that relocates them to lower-cost storage after a period of inactivity can reduce an enterprise's average cost of online storage.

For example, a customer could be using a large OLTP Oracle database with thousands of active sessions, which needs to be up and running 24 hours a day and seven days a week with uptime of over 99%, and the database uses Flashback

technology to correct any accidental errors quickly. The database generates large number of archive logs per day. If the database goes down for any reason, there is business requirement to bring the database back online and functional with in 15 minutes. To prevent Oracle log switch delays during transactions, the archive logs need to be created in a fast EMC array. Archive logs older than a week can be moved to a mid-range Clarion array. Archive logs older than 15 days can be moved to slow JBOD disks. Archive logs are purged after 30 days. Current Flashback logs are created manually by the database administrator on fast EMC storage and can be moved to Clarion storage after two days. The database administrator then deletes the Flashback logs after a week. To set up a system like this, see the following example. Assume that archive logs and Flashback logs are created on the same file system, /oralog. On the file system, /oralog/archive1 contains archive logs and /oralog/flashback contains Flashback logs.

Figure 9-1 on page 156, illustrates a three-tier volume configuration that is suitable for automatic relocation and deletion of archive logs and Flashback logs.

**Figure 9-1** Database storage configuration suitable for automatic relocation of archive and Flashback logs

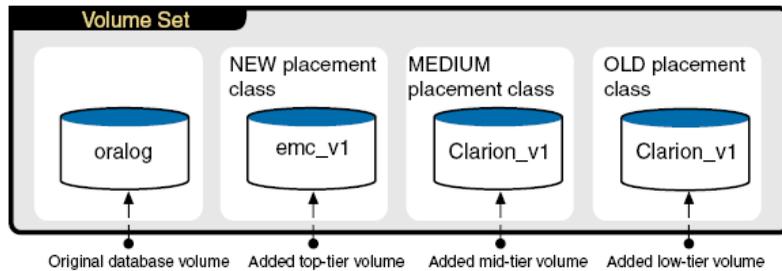

The file system used by the production database in this example originally resides on the single volume oralog, which must be prepared by adding volumes and placement classes assigned to the volumes.

**To add the NEW, MEDIUM, and OLD storage classes**

- ◆ Use the `dbdst_admin` command as follows:

```
$ /opt/VRTS/bin/dbdst_admin -S PROD -o addclass=\
NEW:"EMC Storage for Production DB"

$ /opt/VRTS/bin/dbdst_admin -S PROD -o addclass=\
MEDIUM:"Clarion Storage for Production DB"

$ /opt/VRTS/bin/dbdst_admin -S PROD -o addclass=\
OLD:"JBOD Storage for Production DB"
```

## To convert the database's file system and add volumes for use with Database Dynamic Storage Tiering

- ◆ Use the `dbdst_convert` command as follows:

```
$ /opt/VRTS/bin/dbdst_convert -S PROD \
-M /dev/vx/dsk/oradg/oralog -v emc_v1,clarion_v1,jbod_v1
```

## To classify volumes into storage classes

- ◆ Use the `dbdst_classify` command as follows:

```
$ /opt/VRTS/bin/dbdst_classify -S PROD \
-M /dev/vx/dsk/oradg/oralog -v emc_v1:NEW

$ /opt/VRTS/bin/dbdst_classify -S PROD \
-M /dev/vx/dsk/oradg/oralog -v clarion_v1:MEDIUM

$ /opt/VRTS/bin/dbdst_classify -S PROD \
-M /dev/vx/dsk/oradg/oralog -v jbod_v1:OLD
```

Once the volumes are configured, an administrator can define file placement policy rules that specify access age-based relocation of selected files and assign them to the database's file system.

## To define rules that periodically relocate Flashback and archive logs

- ◆ Use the `dbdst_file_move` command as follows:

```
$ /opt/VRTS/bin/dbdst_file_move -S PROD -o flashback -c MEDIUM:2
```

This relocates files in the Flashback directory that have not been accessed for two days to the MEDIUM volume.

```
$ /opt/VRTS/bin/dbdst_file_move -S PROD -o archive1 -c MEDIUM:7 -c OLD:15
```

This relocates files in the archive1 directory that have not been accessed for seven days to the MEDIUM volume, and files that have not been accessed for 15 days to the OLD volume.

Database Dynamic Storage Tiering translates these commands into DST access age-based policy rules, merges them with the file system's placement policy, and assigns the resulting policy to the file system. By default, Database Dynamic Storage Tiering enforces the active policy daily. During enforcement, the new rules relocate qualifying files to the destination storage tiers specified in the `dbdst_file_move` commands used to create the policies.



# Using Database FlashSnap for backup and off-host processing

This chapter includes the following topics:

- [About Veritas Database FlashSnap](#)
- [How to plan for Database FlashSnap](#)
- [Hosts and storage for Database FlashSnap](#)
- [Summary of database snapshot steps](#)
- [Creating a snapplan \(dbed\\_vmchecksnap\)](#)
- [Validating a snapplan \(dbed\\_vmchecksnap\)](#)
- [Displaying, copying, and removing a snapplan \(dbed\\_vmchecksnap\)](#)
- [Creating a snapshot \(dbed\\_vmsnap\)](#)
- [Backing up the database from snapshot volumes \(dbed\\_vmclonedb\)](#)
- [Cloning a database \(dbed\\_vmclonedb\)](#)
- [Resynchronizing your database to the snapshot](#)
- [Resynchronizing the snapshot to your database](#)
- [Removing a snapshot volume](#)
- [Using Database FlashSnap in an HA environment](#)

## About Veritas Database FlashSnap

Veritas Database FlashSnap is included with Veritas Database Edition Enterprise Edition.

Database FlashSnap lets you capture an online image of an actively changing database at a given instant, known as a snapshot. You can perform backups and off-host processing tasks on snapshots while providing continuous availability of your critical data, with minimal interruption to users. Database FlashSnap commands can be executed from either the command line or the GUI.

Veritas Database FlashSnap offers you a flexible way to efficiently manage multiple point-in-time copies of your data, and reduce resource contention on your business-critical servers. Database FlashSnap allows database administrators to create a consistent copy of a database without root privileges by creating a snapshot. A snapshot copy of the database is referred to as a database snapshot.

You can use a database snapshot on the same host as the production database or on a secondary host sharing the same storage. A database snapshot can be used for off-host processing applications, such as backup, data warehousing, and decision-support queries. When the snapshot is no longer needed, the database administrator can import the original snapshot back to the primary host and resynchronize the snapshot to the original database volumes.

Database FlashSnap also allows you to resynchronize your original database volumes from the data in the snapshot if the original volumes become corrupted. This is referred to as reverse resynchronization.

Database FlashSnap can significantly reduce the time it takes to back up your database, increase the availability of your production database, and still maintain your production database's performance.

---

**Note:** To use Database FlashSnap, you must have Veritas Storage Foundation Enterprise Edition on all systems on which you intend to use Database FlashSnap.

---

To use Database FlashSnap, you must first configure the volumes used by the database.

---

**Note:** Veritas Storage Foundation for Oracle RAC does not support reverse resynchronization, off-host operations (such as off-host database cloning), or operation through the GUI.

---

## Typical database problems solved with Database FlashSnap

Database FlashSnap is designed to enable you to use database snapshots to overcome the following types of problems encountered in enterprise database environments:

- In many companies, there is a clear separation between the roles of system administrators and database administrators. Creating database snapshots typically requires superuser (root) privileges, privileges that database administrators do not usually have.
- In some companies, database administrators are granted root privileges, but managing storage is typically not central to their job function or their core competency.
- Creating database snapshots is a complex process, especially in large configurations where thousands of volumes are used for the database. One mistake can render the snapshots useless.

Because it does not require root privileges, Database FlashSnap overcomes these obstacles by enabling database administrators to create consistent snapshots of the database more easily. The snapshots can be utilized for repetitive use.

## About Database FlashSnap applications

The following are typical applications of Veritas Database FlashSnap:

- **Database Backup and Restore**  
Enterprises require 24/7 online data availability. They cannot afford the downtime involved in backing up critical data offline. By creating a clone database or a duplicate volume snapshot of data, and then using it to back up your data, your business-critical applications can continue to run without extended down time or impacted performance. After a clone database or snapshot volume is created, it can be used as a source to back up the original database.
- **Decision-Support Analysis and Reporting**  
Operations such as decision-support analysis and business reporting may not require access to real-time information. You can direct such operations to use a clone database that you have created from snapshots using Veritas Database FlashSnap, rather than allowing them to compete for access to the primary volume or database. When required, you can quickly resynchronize the clone database with the primary database to get up-to-date information.
- **Application Development and Testing**  
Development or service groups can use a clone database created with Database FlashSnap as a test database for new applications. A clone database provides

developers, system testers, and quality assurance groups with a realistic basis for testing the robustness, integrity, and performance of new applications.

■ Logical Error Recovery

Logical errors caused by an administrator or an application program can compromise the integrity of a database. You can recover a database by restoring the database files from a volume snapshot or by recovering logical objects (such as tables, for example) from a clone database created from volume snapshots using Database FlashSnap. These solutions are faster than fully restoring database files from tape or other backup media.

## Database FlashSnap

The system administrator needs to configure storage according to the requirements specified in the snapplan.

Database FlashSnap allows you to check the storage setup against requirements set forth in the snapplan. Depending on the results, the database administrator may need to modify the snapplan or the system administrator may need to adjust the storage configuration. Properly configuring storage is the only aspect of using Database FlashSnap that requires the system administrator's participation.

---

**Note:** In Oracle RAC configurations, Database Flashsnap commands must be run on the Veritas Cluster Volume Manager master node, and only `online` snapshots are supported. Also note that off-host processing is not used in Oracle RAC configurations.

---

To use Database FlashSnap, a database administrator must first define their snapshot requirements. For example, they need to determine whether off-host processing is required and, if it is, which host should be used for it. In addition, it is also important to consider how much database downtime can be tolerated. Database snapshot requirements are defined in a file called a snapplan. The snapplan specifies snapshot options that will be used when creating a snapshot image (such as whether the snapshot mode will be `online`, `offline`, or `instant`).

After creating the snapplan, the database administrator must validate it to ensure that it is correct. During validation the snapplan is copied to the repository before using it to create a snapshot. Depending on the validation results, the database administrator may need to modify the snapplan or the system administrator may need to adjust the storage configuration.

After storage is configured as specified in the snapplan and the snapplan has been validated, the database administrator can create snapshots of the database and create database clones based on the snapshots on either the same host or a secondary one, or on the same host if used within Oracle RAC.

A database clone can be used on a secondary host for off-host processing, including decision-support analysis and reporting, application development and testing, database backup, and logical error recovery. After a user has finished using the clone on a secondary host, the database administrator can shut down the clone and move the snapshot database back to the primary host. Regardless of whether a snapshot is used on the primary or secondary host, it can be resynchronized with the primary database using Database FlashSnap. Database FlashSnap utilizes Veritas Volume Manager FastResync to quickly resynchronize the changed section between the primary and snapshot.

Database FlashSnap can also be used to recover the primary copy of the database if it becomes corrupted by overwriting it with the snapshot. You can recover the primary database with a snapshot using the reverse resynchronization functionality of Database FlashSnap. In an Oracle RAC configuration, reverse resynchronization is not supported. Also in Oracle RAC, the `dbed_vmsnap` and `dbed_vmclonedb` commands need to be executed on the CVM master node. The `dbed_vmchecksnap` command can be executed at any node within the cluster except when using `-o validate` option.

See the *Veritas Volume Manager User's Guide*.

## Database FlashSnap commands

The Database FlashSnap feature consists of three commands:

- `dbed_vmchecksnap` (used on the primary host)  
Creates and validates the snapshot plan used to create a snapshot image of an Oracle database. You can also use `dbed_vmchecksnap` to copy, list, or remove a snapplan or make sure the storage is configured properly for the task. The `dbed_vmchecksnap` command is also used on the secondary host to list the snapplan.  
In Oracle RAC, this command can be used on any node within the RAC cluster except when validating a snapplan, when `dbed_vmchecksnap` must be run on the CVM master node.
- `dbed_vmsnap` (used on the primary host)  
Creates a snapshot image of an Oracle database by splitting the mirror volumes used by the database. You can also use `dbed_vmsnap` to resynchronize snapshot volumes with their original volumes. The command also allows you to resynchronize the original volumes from the data in the snapshot volumes, which is useful if the original volumes become corrupted. Resynchronizing the original volumes from the snapshot volumes is known as reverse resynchronization.  
In Oracle RAC, this command must be run on the CVM master node.

- `dbed_vmclonedb` (used on the primary or secondary host)

Mounts and starts a clone database using snapshot volumes. It can also shut down a clone database and deport its volumes, as well as restart a clone database that has been shut down. The snapshot image can be brought up on the same host running the primary database or on a secondary host.

In Oracle RAC, this command must be run on the CVM master node.

All of these commands can be executed by the Oracle database administrator and do not require superuser (`root`) privileges.

---

**Note:** Database FlashSnap operations can be executed from either the command line or the GUI.

---

## Database FlashSnap options

Database FlashSnap offers three options for creating database snapshots. The option you choose is specified in the `snapplan`.

- `online`

With this option, the tablespaces are put into online backup mode before the snapshot is created. This type of snapshot is also a valid database backup. Select this option if you are performing a point-in-time recovery from logical errors.

- `instant`

With this option, the database can be up and running, and the tablespaces do not need to be put into online backup mode before the snapshot is created. However, all the file systems used by the database (including those containing the online redo logs and control files) are temporarily frozen and the cache is flushed before the snapshot is created. By freezing the file systems, the snapshot will be a consistent point-in-time image of the database from which a database clone can be created.

An instant snapshot can be used to guard against data corruption or for off-host decision-support queries. However, it is not a valid database backup and cannot be used to perform a point-in-time recovery or off-host backup since tablespaces are not put into online backup mode before the snapshot is created. The instant option is much faster than the online option.

- `offline`

Use this option to clone or back up a database. With the `offline` option, the database must be shut down when the snapshot is created, and online redo logs are required.

---

**Note:** In Oracle RAC configurations, only the `online` option can be used.

---

## How to plan for Database FlashSnap

Before using Database FlashSnap, you must determine your intended application. You then need to make the following decisions:

- Which snapshot mode is appropriate: `online`, `offline`, or `instant`?  
Veritas Storage Foundation for Oracle RAC uses only the `online` mode.
- Will you need one or two hosts?

### Snapshot mode

If your purpose is to use the snapshot for backup or to recover the database after logical errors have occurred, choose the `online` option. In the event that your production database is offline, choose `offline`. If you intend to use the snapshot for decision-support analysis, reporting, development, or testing, choose `instant`. An instant snapshot is not suitable for recovery because it is not necessarily an exact copy of the primary database.

With Veritas Storage Foundation for Oracle RAC, you do not select a snapshot mode because only the `online` mode is used.

### One or two snapshot hosts

If maintaining the performance of your primary database is critical, you can offload processing of the snapshots to a secondary host. For off-host processing, storage must be shared between the primary and secondary hosts.

If cost savings is most important, you can choose to do the processing on the same host as the primary database to save on hardware costs.

## Hosts and storage for Database FlashSnap

Database FlashSnap requires sufficient Veritas Volume Manager disk space, and can be used on the same host that the database resides on (the primary host) or on a secondary host.

With Veritas Storage Foundation for Oracle RAC, Database FlashSnap can be used on the same cluster that the database resides on.

Setting up a storage configuration for Database FlashSnap operations is a system administrator's responsibility and requires superuser (root) privileges. Database FlashSnap utilities do not address setting up an appropriate storage configuration.

## Single-host configuration


Figure 10-1 shows the suggested arrangement for implementing Database FlashSnap solutions on the primary host to avoid disk contention.

---

**Note:** A single-host configuration does not apply to Veritas Storage Foundation for Oracle RAC configurations because a RAC cluster contains multiple hosts.

---

**Figure 10-1** Example of a Database FlashSnap solution on a primary host

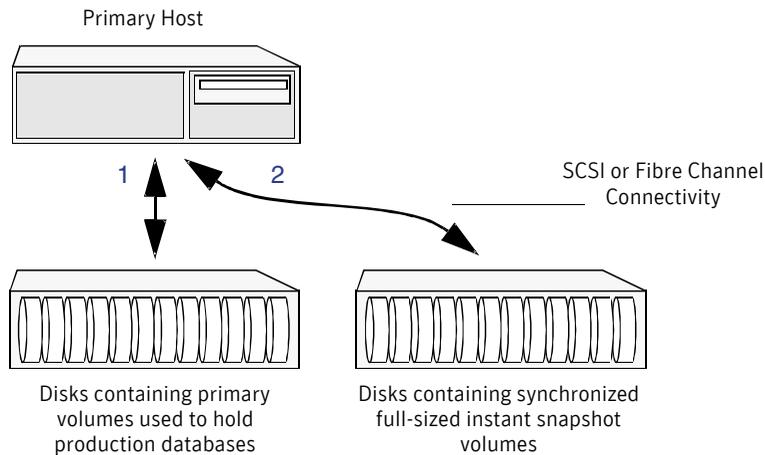

## Two-host or Oracle RAC configuration


A Database FlashSnap configuration with two hosts allows CPU- and I/O-intensive operations to be performed for online backup and decision support without degrading the performance of the primary host running the production database. A two-host configuration also allows the snapshot database to avoid contending for I/O resources on the primary host.

Because Veritas Storage Foundation for Oracle RAC uses multiple hosts, an Oracle RAC configuration appears much like a two-host configuration, but without the concepts of "off-host" processing or primary and secondary hosts.

Figure 10-2 shows a two-host configuration, or the equivalent with an Oracle RAC configuration.

For off-host processing applications, both the primary and secondary hosts need to share the storage in which the snapshot database is created. Both the primary and secondary hosts must be able to access the disks containing the snapshot volumes.

**Figure 10-2** Example of an off-host or Oracle RAC Database FlashSnap solution

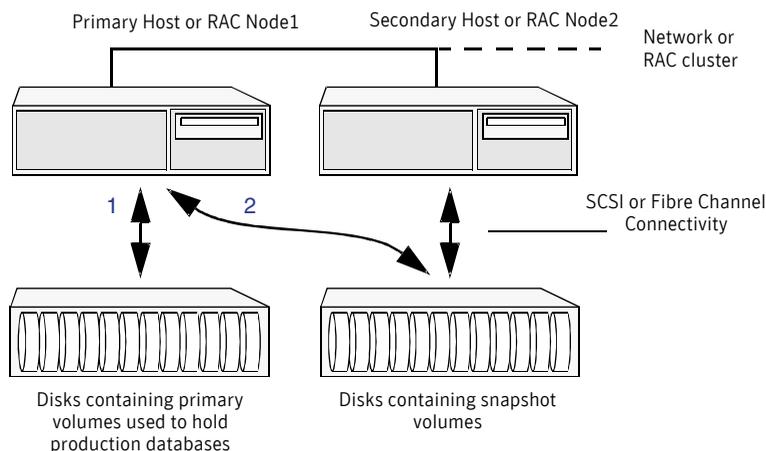

## Host and storage requirements

Before using Database FlashSnap, ensure that:

- All files are on VxFS file systems over VxVM volumes. Raw devices are not supported.
- Symbolic links to datafiles are not supported.
- `ORACLE_HOME` is on a separate file system.
- Archive logs are on a separate VxFS file system (or cluster file system) and are on a different VxFS file system (or cluster file system) than Oracle datafiles or `ORACLE_HOME`.
- The database does not contain `BFILES` and external tables.
- Oracle datafiles, archive logs, redo logs, and control files are in a single disk group.

In addition, before attempting to use Database FlashSnap with two hosts, ensure that:

- The versions of Veritas Storage Foundation for Oracle on the primary and secondary hosts are the same.
- The same version of Oracle is installed on both hosts.
- The Oracle binaries and datafiles are on different volumes and disks.
- The UNIX login for the database user and group must be the same on both hosts.
- You have a Veritas Storage Foundation for Oracle Enterprise Edition license on both hosts.

---

**Note:** These two-host requirements do not apply to Veritas Storage Foundation for Oracle RAC configurations.

---

## Creating a snapshot mirror of a volume or volume set used by the database

With Database FlashSnap, you can mirror the volumes used by the database to a separate set of disks, and those mirrors can be used to create a snapshot of the database. These snapshot volumes can be split and placed in a separate disk group. This snapshot disk group can be imported on a separate host, which shares the same storage with the primary host. The snapshot volumes can be resynchronized periodically with the primary volumes to get recent changes of the datafiles. If the primary datafiles become corrupted, you can quickly restore them from the snapshot volumes. Snapshot volumes can be used for a variety of purposes, including backup and recovery, and creating a clone database.

You must create snapshot mirrors for all of the volumes used by the database datafiles before you can create a snapshot of the database.

Before creating a snapshot mirror, make sure the following conditions have been met:

## Prerequisites

- You must be logged in as superuser (root).
- The disk group must be version 110 or later. For more information on disk group versions, see the `vxvg(1M)` online manual page.
- Be sure that a data change object (DCO) and a DCO log volume are associated with the volume for which you are creating the snapshot.
- Persistent FastResync must be enabled on the existing database volumes and disks must be assigned for the snapshot volumes. FastResync optimizes mirror resynchronization by tracking updates to stored data that have been missed by a mirror. When a snapshot mirror is reattached to its primary volumes, only the updates that were missed need to be re-applied to resynchronize it. FastResync increases the efficiency of the volume snapshot mechanism to better support operations such as backup and decision support. For detailed information about FastResync, see the *Veritas Volume Manager Administrator's Guide*.
- Snapshot mirrors and their associated DCO logs should be on different disks than the original mirror plexes, and should be configured correctly for creating snapshots by the system administrator.
- When creating a snapshot mirror, create the snapshot on a separate controller and separate disks from the primary volume.
- Snapplan validation (`dbed_vmchecksnap`) fails if any volume in the disk group is not used for the database.
- Allocate separate volumes for archive logs.
- Do not place any datafiles, including control files, in the `$ORACLE_HOME/dbs` directory.

- Usage notes
- Create a separate disk group for Oracle database-related files.
  - Do not share volumes between Oracle database files and other software.
  - `ORACLE_HOME` cannot be included in the snapshot mirror.
  - Resynchronization speed varies based on the amount of data changed in both the primary and snapshot volumes during the break-off time.
  - Do not share any disks between the original mirror and the snapshot mirror.
  - Snapshot mirrors for datafiles and archive logs should be created so that they do not share any disks with the data of the original volumes. If they are not created in this way, the VxVM disk group cannot be split and, as a result, Database FlashSnap will not work.
  - In Oracle RAC configurations, use the `vxctl -c mode` command to determine the hostname of the VxVM CVM master node. Prepare the volume for being snapshot from this CVM master node.

**Note:** Database FlashSnap commands support third-mirror break-off snapshots only. The snapshot mirror must be in the `SNAPDONE` state.

### To create a snapshot mirror of a volume

#### 1 Create a volume:

```
vxassist -g diskgroup make volume_name size disk_name
```

For example:

```
vxassist -g PRODDg make snapvset_1 8g data01
```

#### 2 Create a DCO and enable FastResync on the volume:

```
vxsnap -g diskgroup prepare volume_name [alloc=storage_attribute]
```

For example:

```
vxsnap -g PRODDg prepare snapvset [alloc="snap01"]
```

**3 Verify that a DCO and DCO log are attached to the volume:**

```
vxprint -g diskgroup -F%fastresync volume_name
vxprint -g diskgroup -F%hasdcolog volume_name
```

This command returns `on` if a DCO and DCO log are attached to the specified volume.

For example:

```
vxprint -g PRODDg -F%fastresync snapdata
on
vxprint -g PRODDg -F%hasdcolog snapdata
on
```

**4 Create a mirror of the volume:**

```
vxsnap -g diskgroup addmir volume_name [alloc=storage_attribute]
```

For example:

```
vxsnap -g PRODDg addmir snapdata [alloc="data02"]
```

**5 List the available mirrored data plex for the volume:**

```
vxprint -g diskgroup -F%name -e"pl_v_name in \"volume_name\""
```

For example:

```
vxprint -g PRODDg -F%name -e"pl_v_name in \"snapdata\""
snapdata-01
snapdata-02
```

**6 Set the `dbed_flashsnap` tag on the break-off data plex for the volume:**

```
vxedit -g diskgroup set putil2=dbed_flashsnap plex_name
```

For example:

```
vxedit -g PRODDg set putil2=dbed_flashsnap snapdata-02
```

**7 Verify that the `dbed_flashsnap` tag has been set on the data plex for each volume in the volume set:**

```
vxprint -g diskgroup -F%name -e"pl_v_name in \"volume_name\" \
&& p2 in \"dbed_flashsnap\""
```

**For example:**

```
vxprint -g PRODDg -F%name -e"pl_v_name in \"snapdata\" \
&& p2 in \"dbed_flashsnap\""
snapdata-02
```

**8 Verify the disk group configuration:**

```
vxprint -g diskgroup
```

**For example:**

```
vxprint -g PRODDg
```

| TY | NAME            | ASSOC           | KSTATE   | LENGTH   | PLOFFS | STATE    | TUTILO | PUTILO |
|----|-----------------|-----------------|----------|----------|--------|----------|--------|--------|
| dg | PRODDg          | PRODDg          | -        | -        | -      | -        | -      | -      |
| dm | data01          | Disk_17         | -        | 33483648 | -      | -        | -      | -      |
| dm | data02          | Disk_24         | -        | 33483648 | -      | -        | -      | -      |
| v  | snapdata        | fsgen           | ENABLED  | 16777216 | -      | ACTIVE   | -      | -      |
| pl | snapdata-01     | snapdata        | ENABLED  | 16777216 | -      | ACTIVE   | -      | -      |
| sd | data01-01       | snapdata-01     | ENABLED  | 16777216 | 0      | -        | -      | -      |
| pl | snapdata-02     | snapdata        | ENABLED  | 16777216 | -      | SNAPDONE | -      | -      |
| sd | data02-01       | snapdata-02     | ENABLED  | 16777216 | 0      | -        | -      | -      |
| dc | snapdata_dco    | snapdata        | -        | -        | -      | -        | -      | -      |
| v  | snapdata_dcl    | gen             | ENABLED  | 1696     | -      | ACTIVE   | -      | -      |
| pl | snapdata_dcl-01 | snapdata_dcl    | ENABLED  | 1696     | -      | ACTIVE   | -      | -      |
| sd | data01-02       | snapdata_dcl-01 | ENABLED  | 1696     | 0      | -        | -      | -      |
| pl | snapdata_dcl-02 | snapdata_dcl    | DISABLED | 1696     | -      | DCOSNP   | -      | -      |
| sd | data02-02       | snapdata_dcl-02 | ENABLED  | 1696     | 0      | -        | -      | -      |

## To create a snapshot mirror of a volume set

### 1 Create a volume:

```
vxassist -g diskgroup make volume_name size disk_name
```

For example:

```
vxassist -g PRODDg make snapvset_1 8g snap01
vxassist -g PRODDg make snapvset_2 4g snap01
```

### 2 Create a volume set for use by VxFS:

```
vxvset -g diskgroup -t vxfs make vset_name volume_name
```

For example:

```
vxvset -g PRODDg -t vxfs make snapvset snapvset_1
```

### 3 Add the volume to the volume set:

```
vxvset -g diskgroup addvol vset_name volume_name
```

For example:

```
vxvset -g PRODDg addvol snapvset snapvset_2
```

### 4 Create a DCO and enable FastResync on the volume set:

```
vxsnap -g diskgroup prepare vset_name [alloc=storage_attribute]
```

For example:

```
vxsnap -g PRODDg prepare snapvset [alloc="snap01"]
```

- 5 Verify that a DCO and DCO log are attached to each volume in the volume set:

```
vxprint -g diskgroup -F%fastresync volume_name
vxprint -g diskgroup -F%hasdcolog volume_name
```

This command returns on if a DCO and DCO log are attached to the specified volume.

For example:

```
vxprint -g PRODdg -F%fastresync snapvset_1
on
vxprint -g PRODdg -F%fastresync snapvset_2
on
vxprint -g PRODdg -F%hasdcolog snapvset_1
on
vxprint -g PRODdg -F%hasdcolog snapvset_2
on
```

- 6 Create a mirror of the volume set volumes:

```
vxsnap -g diskgroup addmir vset_name [alloc=storage_attribute]
```

For example:

```
vxsnap -g PRODdg addmir snapvset [alloc="snap02"]
```

- 7 List the available mirrored data plex for each volume in the volume set:

```
vxprint -g diskgroup -F%name -e"pl_v_name in \"volume_name\""
```

For example:

```
vxprint -g PRODdg -F%name -e"pl_v_name in \"snapvset_1\""
snapvset_1-01
snapvset_1-02

vxprint -g PRODdg -F%name -e"pl_v_name in \"snapvset_2\""
snapvset_2-01
snapvset_2-02
```

- 8 Set the `dbed_flashsnap` tag on the break-off data plex for each volume in the volume set:

```
vxedit -g diskgroup set putil2=dbed_flashsnap plex_name
```

For example:

```
vxedit -g PRODDg set putil2=dbed_flashsnap snapvset_1-02
vxedit -g PRODDg set putil2=dbed_flashsnap snapvset_2-02
```

**9** Verify that the `dbed_flashsnap` tag has been set on the data plex for each volume in the volume set:

```
vxprint -g diskgroup -F%name -e"pl_v_name in \"volume_name\" \
&& p2 in \"dbed_flashsnap\""
```

For example:

```
vxprint -g PRODDg -F%name -e"pl_v_name in \"snapvset_1\" \
&& p2 in \"dbed_flashsnap\""
snapvset_1-02
```

```
vxprint -g PRODDg -F%name -e"pl_v_name in \"snapvset_2\" \
&& p2 in \"dbed_flashsnap\""
snapvset_2-02
```

**10 Verify the snapshot volume configuration:**

```
vxprint -g diskgroup
```

For example:

```
vxprint -g PRODDg
TY NAME ASSOC KSTATE LENGTH PLOFFS STATE TUTILO PUTILO
dg PRODDg PRODDg - - - - - -

dm snap01 Disk_9 - 33483648 - - - -
dm snap02 Disk_11 - 33483648 - - - -

vt snapvset - ENABLED - - ACTIVE - -
v snapvset_1 snapvset ENABLED 16777216 - ACTIVE - -
pl snapvset_1-01 snapvset_1 ENABLED 16777216 - ACTIVE - -
sd snap01-01 snapvset_1-01 ENABLED 16777216 0 - - -
pl snapvset_1-02 snapvset_1 ENABLED 16777216 - SNAPDONE - -
sd snap02-01 snapvset_1-02 ENABLED 16777216 0 - - -
dc snapvset_1_dco snapvset_1 - - - - - -
v snapvset_1_dcl gen ENABLED 1696 - ACTIVE - -
pl snapvset_1_dcl-01 snapvset_1_dcl ENABLED 1696 - ACTIVE - -
sd snap01-03 snapvset_1_dcl-01 ENABLED 1696 0 - - -
pl snapvset_1_dcl-02 snapvset_1_dcl DISABLED 1696 - DCOSNP - -
sd snap02-02 snapvset_1_dcl-02 ENABLED 1696 0 - - -
v snapvset_2 snapvset ENABLED 8388608 - ACTIVE - -
pl snapvset_2-01 snapvset_2 ENABLED 8388608 - ACTIVE - -
sd snap01-02 snapvset_2-01 ENABLED 8388608 0 - - -
pl snapvset_2-02 snapvset_2 ENABLED 8388608 - SNAPDONE - -
sd snap02-03 snapvset_2-02 ENABLED 8388608 0 - - -
dc snapvset_2_dco snapvset_2 - - - - - -
v snapvset_2_dcl gen ENABLED 1120 - ACTIVE - -
pl snapvset_2_dcl-01 snapvset_2_dcl ENABLED 1120 - ACTIVE - -
sd snap01-04 snapvset_2_dcl-01 ENABLED 1120 0 - - -
pl snapvset_2_dcl-02 snapvset_2_dcl DISABLED 1120 - DCOSNP - -
sd snap02-04 snapvset_2_dcl-02 ENABLED 1120 0 - - -
```

This example shows the steps involved in creating a snapshot mirror for the volume `data_vol` belonging to the disk group `PRODDg`.

Prepare the volume `data_vol` for mirroring:

```
vxsnap -g PRODDg prepare data_vol alloc=PRODDg01
```

Verify that `FastResync` is enabled:

```
vxprint -g PRODDg -F%fastresync data_vol
on
```

Verify that a DCO and a DCO log are attached to the volume:

```
vxprint -g PRODDg -F%hasdcolog data_vol
on
```

Create a snapshot mirror of `data_vol`:

```
vxsnap -g PRODDg addmir data_vol alloc=PRODDg02
```

List the data plexes:

```
vxprint -g PRODDg -F%name -e"pl_v_name in \"data_vol\""
data_vol-01
data_vol-02
```

Choose the plex that is in the `SNAPDONE` state. Use the `vxprint -g diskgroup` command to identify the plex that is in the `SNAPDONE` state.

Decide which data plex you want to use and set the `dbed_flashsnap` tag for it:

```
vxedit -g PRODDg set putil2=dbed_flashsnap data_vol-02
```

Verify that the `dbed_flashsnap` tag has been set to the desired data plex, `data_vol-02`:

```
vxprint -g PRODDg -F%name -e"pl_v_name in \"data_vol\" \
&& p2 in \"dbed_flashsnap\""
data_vol-02
```

To verify that the snapshot volume was created successfully, use the `vxprint -g disk_group` command as follows:

```
vxprint -g PRODDg
```

|    |                 |                 |          |         |   |          |   |   |
|----|-----------------|-----------------|----------|---------|---|----------|---|---|
| v  | data_vol        | fsgen           | ENABLED  | 4194304 | - | ACTIVE   | - | - |
| pl | data_vol-01     | data_vol        | ENABLED  | 4194304 | - | ACTIVE   | - | - |
| sd | PRODdg03-01     | data_vol-01     | ENABLED  | 4194304 | 0 | -        | - | - |
| pl | data_vol-02     | data_vol        | ENABLED  | 4194304 | - | SNAPDONE | - | - |
| sd | PRODdg02-01     | data_vol-02     | ENABLED  | 4194304 | 0 | -        | - | - |
| dc | data_vol_dco    | data_vol        | -        | -       | - | -        | - | - |
| v  | data_vol_dcl    | gen             | ENABLED  | 560     | - | ACTIVE   | - | - |
| pl | data_vol_dcl-01 | data_vol_dcl    | ENABLED  | 560     | - | ACTIVE   | - | - |
| sd | PRODdg01-01     | data_vol_dcl-01 | ENABLED  | 5600    | - | -        | - | - |
| pl | data_vol_dcl-02 | data_vol_dcl    | DISABLED | 560     | - | DCOSNP   | - | - |
| sd | PRODdg02-02     | data_vol_dcl-02 | ENABLED  | 5600    | - | -        | - | - |

Identify that the specified plex is in the `SNAPDONE` state. In this example, it is `data_vol-02`.

The snapshot mirror is now ready to be used.

## Upgrading existing volumes to use Veritas Volume Manager 5.0

You may have to upgrade a volume created using a version older than VxVM 5.0 so that it can take advantage of Database FlashSnap.

---

**Note:** The plexes of the DCO volume require persistent storage space on disk to be available. To make room for the DCO plexes, you may need to add extra disks to the disk group, or reconfigure existing volumes to free up space in the disk group. Another way to add disk space is to use the disk group move feature to bring in spare disks from a different disk group.

Existing snapshot volumes created by the `vxassist` command are not supported. A combination of snapshot volumes created by `vxassist` and `vxsnap` are not supported.

---

**To upgrade an existing volume created with an earlier version of VxVM**

- 1 Upgrade the disk group that contains the volume to a version 120 or higher before performing the remainder of this procedure. Use the following command to check the version of a disk group:

```
vxdg list diskgroup
```

To upgrade a disk group to the latest version, use the following command:

```
vxdg upgrade diskgroup
```

- 2 If the volume to be upgraded has a DRL plex or subdisk from an earlier version of VxVM, use the following command to remove this:

```
vxassist [-g diskgroup] remove log volume [nlog=n]
```

Use the optional attribute `nlog=n` to specify the number, *n*, of logs to be removed. By default, the `vxassist` command removes one log.

- 3 For a volume that has one or more associated snapshot volumes, use the following command to reattach and resynchronize each snapshot:

```
vxsnap [-g diskgroup] snapback snapvol
```

If persistent FastResync was enabled on the volume before the snapshot was taken, the data in the snapshot plexes is quickly resynchronized from the original volume. If persistent FastResync was not enabled, a full resynchronization is performed.

- 4 Use the following command to turn off persistent FastResync for the volume:

```
vxvol [-g diskgroup] set fastresync=off volume
```

- 5 Use the following command to dissociate a DCO object from an earlier version of VxVM, DCO volume and snap objects from the volume:

```
vxassist [-g diskgroup] remove log volume logtype=dco
```

- 6** Use the following command on the volume to upgrade it:

```
vxsnap [-g diskgroup] prepare volume \
alloc="disk_name1,disk_name2"
```

Provide two disk names to avoid overlapping the storage of the snapshot DCO plex with any other non-moving data or DCO plexes.

The `vxsnap prepare` command automatically enables persistent FastResync on the volume and on any snapshots that are generated from it. It also associates a DCO and DCO log volume with the volume to be snapshot.

- 7** To view the existing DCO plexes and see whether there are enough for the existing data plexes, enter:

```
vxprint -g diskgroup
```

There needs to be one DCO plex for each existing data plex.

- 8** If there are not enough DCO plexes for the existing data plexes, create more DCO plexes:

```
vxsnap [-g diskgroup] addmir dco_volume_name [alloc=disk_name]
```

where `dco_volume_name` is the name of the DCO volume you are creating.

- 9** If the plex is in a `SNAPDONE` state, convert it to an `ACTIVE` state:

```
vxplex [-g diskgroup] convert state=ACTIVE data_plex
```

- 10** Convert the data plexes to a `SNAPDONE` state and associate a DCO plex with the data plex that will be used for snapshot operations:

```
vxplex [-g diskgroup] -o dcoplex=dco_plex_name convert \
state=SNAPDONE data_plex
```

where `dco_plex_name` is the name of the DCO plex you are creating.

In this example, the volume, `data_vol`, is upgraded to make use of VxVM 5.0 features.

Upgrade the disk group, `PRODdg`:

```
vxdg upgrade PRODdg
```

Remove the DRL plexes or subdisks, belonging to an earlier version of VxVM, from the volume to be upgraded:

```
vxassist -g PRODdg remove log data_vol logtype=drl
```

Reattach any snapshot volume back to the primary volume to be upgraded:

```
vxsnap -g PRODDg snapback SNAP-data_vol
```

Turn off FastResync on the volume to be upgraded:

```
vxvol -g PRODDg set fastresync=off data_vol
```

Disassociate and remove any older DCO object and DCO volumes:

```
vxassist -g PRODDg remove log data_vol logtype=dcv
```

Upgrade the volume by associating a new DCO object and DCO volume:

```
vxsnap -g PRODDg prepare data_vol alloc="PRODDg01 PRODDg02"
```

View the existing DCO plexes and plex state.

In this example, there are enough DCO plexes for the data plexes. Also, no data plex is associated with a DCO plex.

```
vxprint -g PRODDg
```

```
v data_vol fsgen ENABLED 4194304 - ACTIVE - -
pl data_vol-01 data_vol ENABLED 4194304 - ACTIVE - -
sd PRODDg01-01 data_vol-01 ENABLED 4194304 0 - - -
pl data_vol-04 data_vol ENABLED 4194304 - SNAPDONE - -
sd PRODDg02-03 data_vol-04 ENABLED 4194304 0 - - -
dc data_vol_dco data_vol ---- - -
v data_vol_dcl gen ENABLED 560 - ACTIVE - -
pl data_vol_dcl-01 data_vol_dcl ENABLED 560 - ACTIVE - -
sd PRODDg01-02 data_vol_dcl-01 ENABLED 560 0 - - -
pl data_vol_dcl-02 data_vol_dcl ENABLED 560 - ACTIVE - -
sd PRODDg02-02 data_vol_dcl-02 ENABLED 560 0 - - -
```

Convert the data plex state from SNAPDONE to ACTIVE:

```
vxplex -g PRODDg convert state=ACTIVE data_vol-04
```

Associate the data plex with a new DCO plex and convert it back to a SNAPDONE state:

```
vxplex -g PRODDg -o dcoplex=data_vol_dcl-02 convert \
state=SNAPDONE data_vol-04
```

```
vxprint -g PRODDg
```

```

pl data_vol-03 - DISABLED 4194304 - - -
sd PRODDg02-01 data_vol-03 ENABLED 4194304 0 - -
v data_vol fsgen ENABLED 4194304 - ACTIVE -
pl data_vol-01 data_vol ENABLED 4194304 - ACTIVE -
sd PRODDg01-01 data_vol-01 ENABLED 4194304 0 - -
pl data_vol-04 data_vol ENABLED 4194304 - SNAPDONE -
sd PRODDg02-03 data_vol-04 ENABLED 4194304 0 - -
dc data_vol_dco data_vol - - -
v data_vol_dcl gen ENABLED 560 - ACTIVE -
pl data_vol_dcl-01 data_vol_dcl ENABLED 560 - ACTIVE -
sd PRODDg01-02 data_vol_dcl-01 ENABLED 560 0 - -
pl data_vol_dcl-02 data_vol_dcl DISABLED 560 - DCOSNP -
sd PRODDg02-02 data_vol_dcl-02 ENABLED 560 0 - -

```

In this example, there are fewer DCO plexes than data plexes.

```
vxprint -g PRODDg
```

```

pl data_vol-03 - DISABLED 4194304 - - -
sd PRODDg02-01 data_vol-03 ENABLED 4194304 0 - -
v data_vol fsgen ENABLED 4194304 - ACTIVE -
pl data_vol-01 data_vol ENABLED 4194304 - ACTIVE -
sd PRODDg01-01 data_vol-01 ENABLED 4194304 0 - -
pl data_vol-04 data_vol ENABLED 4194304 - ACTIVE -
sd PRODDg02-03 data_vol-04 ENABLED 4194304 0 - -
dc data_vol_dco data_vol ---- -
v data_vol_dcl gen ENABLED 560 - ACTIVE -
pl data_vol_dcl-01 data_vol_dcl ENABLED 560 - ACTIVE -
sd PRODDg01-02 data_vol_dcl-01 ENABLED 560 0 - -

```

Add a DCO plex to the DCO volume using the `vxassist mirror` command:

```
vxsnap -g PRODDg addmir data_vol_dcl alloc=PRODDg02
```

Associate the data plex with the new DCO plex and convert it to a `SNAPDONE` state:

```
vxplex -g PRODDg -o dcomplex=data_vol_dcl-02 convert
state=SNAPDONE -V data_vol-04
```

```
vxprint -g PRODDg
```

```

pl data_vol-03 - DISABLED 4194304 - - -
v data_vol fsgen ENABLED 4194304 - ACTIVE -
pl data_vol-01 data_vol ENABLED 4194304 - ACTIVE -
sd PRODDg01-01 data_vol-01 ENABLED 4194304 0 - -
pl data_vol-04 data_vol ENABLED 4194304 - SNAPDONE -
sd PRODDg02-03 data_vol-04 ENABLED 4194304 0 - -
dc data_vol_dco data_vol - - -
v data_vol_dcl gen ENABLED 60 - ACTIVE -
pl data_vol_dcl-01 data_vol_dcl ENABLED 560 - ACTIVE -
sd PRODDg01-02 data_vol_dcl-01 ENABLED 560 0 - -
pl data_vol_dcl-02 data_vol_dcl DISABLED 560 - DCOSNP -
sd PRODDg02-02 data_vol_dcl-02 ENABLED 560 0 - -

```

## Upgrading from Veritas Database Edition 3.5 for Oracle with Database FlashSnap

In this release of Veritas Storage Foundation for Oracle, Database FlashSnap does not support snapshots of `vxdbavol` and `ORACLE_HOME`. If you have upgraded from Veritas Database Edition 3.5 for Oracle with Database FlashSnap, you must remove the volume plexes for `vxdbavol` and `ORACLE_HOME`, and revalidate the snapplan before using Database FlashSnap with this release of Veritas Storage Foundation for Oracle.

---

**Note:** This upgrade procedure does not apply to Veritas Storage Foundation for Oracle RAC configurations.

---

### To remove the volume plexes for `vxdbavol` and `ORACLE_HOME`

- 1 As root, snapback the snapshot plexes.

```
vxsnap [-g diskgroup] snapback snapvol
```

- 2 Turn off FastResync.

```
vxvol [-g diskgroup] set fastresync=off volume
```

- 3 Remove the DCO object.

```
vxassist [-g diskgroup] remove log volume logtype=dco
```

#### 4 Remove the volume plexes for `vxdbavol` and `ORACLE_HOME`.

```
vxplex -g diskgroup -o rm dis plex_name
```

#### 5 Log in as the DBA user and revalidate your snapplan.

```
$ /opt/VRTS/bin/dbed_vmchecksnap -S ORACLE_SID -H ORACLE_HOME \
-f SNAPPLAN -o validate
```

## Summary of database snapshot steps

You can use Database FlashSnap commands to create a snapshot of your entire database on the same host or on a different one. Three types of snapshots can be created: `online`, `offline`, or `instant`.

If the `SNAPSHOT_MODE` specified in the `snapplan` is set to `online`, `dbed_vmsnapfirst` puts the tablespaces to be snapshot into backup mode. After the snapshot is created, the tablespaces are taken out of backup mode, the log files are switched to ensure that the extra redo logs are archived, and a snapshot of the archive logs is created.

If the `SNAPSHOT_MODE` is set to `offline`, the database must be shut down before the snapshot is created. Online redo logs and control files are required and will be used to ensure a full database recovery.

If the `SNAPSHOT_MODE` is set to `instant`, tablespaces are not put into and out of backup mode. Online redo logs and control files are required and will be used to ensure a full database recovery.

Both online and offline snapshots provide a valid backup copy of the database. You can use the snapshot as a source for backing up the database or creating a clone database for decision-support purposes. Instant snapshots do not represent a valid backup copy for point-in-time recovery.

By using Database FlashSnap commands, you can create snapshots of all volumes on a database using the `snapplan`. Optionally, you can use the `VxVM` command (`vxsnap`) to create volume snapshots. However, unlike the Database FlashSnap commands, the `vxsnap` command does not automate disk group content reorganization functions.

For more information about the `vxsnap` command, see *Veritas Volume Manager Administrator's Guide*.

---

**Note:** Make sure the volumes used by the database are configured properly before attempting to take a snapshot. This requires superuser (`root`) privileges.

Anytime you change the structure of the database (for example, by adding or deleting datafiles, converting `PFILE` to `SPFILE`, or converting `SPFILE` to `PFILE`), you must run `dbed_update`.

Database FlashSnap commands must be run by the Oracle database administrator instance owner.

---

### To create a snapshot image of a database

- 1 Create a snapshot mirror of a volume or volume set.

See [“Creating a snapshot mirror of a volume or volume set used by the database”](#) on page 168.

- 2 Use the `dbed_vmchecksnap` command to create a snapplan template and check the volume configuration to ensure that it is valid for creating volume snapshots of the database.

The snapplan contains detailed database and volume configuration information that is needed for snapshot creation and resynchronization. You can modify the snapplan template with a text editor.

The `dbed_vmchecksnap` command can also be used to:

- List all snapplans associated with a specific `ORACLE_SID` (`dbed_vmchecksnap -o list`).
- Remove the snapplan from the repository (`dbed_vmchecksnap -o remove -f SNAPPLAN`).
- Copy a snapplan from the repository to your local directory (`dbed_vmchecksnap -o copy -f SNAPPLAN`).

- 3 Use the `dbed_vmsnap` command to create snapshot volumes for the database.

- 4 On the secondary host, use the `dbed_vmclonedb` command to create a clone database using the disk group deported from the primary host.


The `dbed_vmclonedb` command imports the disk group that was deported from the primary host, recovers the snapshot volumes, mounts the file systems, recovers the database, and brings the database online. If the secondary host is different, the database name can be same. You can use the `-o recoverdb` option to let `dbed_vmclonedb` perform an automatic database recovery, or you can use the `-o mountdb` option to perform your own point-in-time recovery and bring up the database manually. For a point-in-time recovery, the snapshot mode must be `online`.

You can also create a clone on the primary host. Your snapplan settings specify whether a clone should be created on the primary or secondary host.

- 5 You can now use the clone database to perform database backup and other off-host processing work.
- 6 The clone database can be used to reverse resynchronize the original volume from the data in the snapshot, or can be discarded by rejoining the snapshot volumes with the original volumes (that is, by resynchronizing the snapshot volumes) for future use.

Figure 10-3 depicts the sequence of steps leading up to taking a snapshot using Database FlashSnap.

Figure 10-3 Prerequisites for creating a snapshot of your database

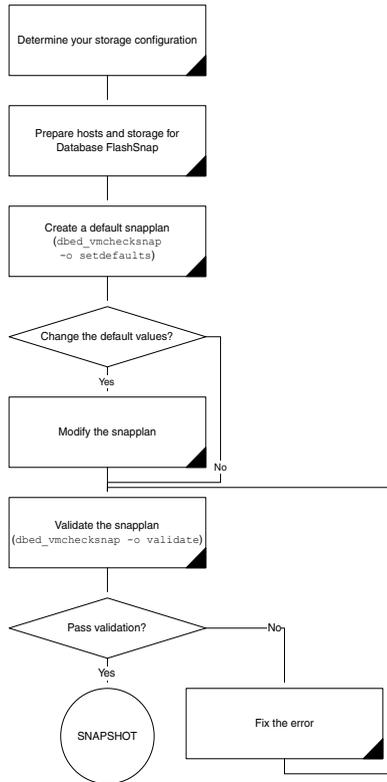

There are many actions you can take after creating a snapshot of your database using Database FlashSnap. You can create a clone of the database for backup and off-host processing purposes. You can resynchronize the snapshot volumes with the primary database. In the event of primary database failure, you can recover it by reverse resynchronizing the snapshot volumes.

Figure 10-4 shows the actions you can perform after creating a snapshot of your database using Database FlashSnap.



You can name a snapplan file whatever you choose. Each entry in the snapplan file is a line in `parameter=argument` format.

**Table 10-1** shows which parameters are set when using `dbed_vmchecksnap` to create or validate a snapplan.

**Table 10-1** Parameter values for `dbed_vmchecksnap`

| Parameter            | Value                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
|----------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| SNAPSHOT_VERSION     | Specifies the snapshot version for this major release of Veritas Storage Foundation for Oracle.                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| PRIMARY_HOST         | The name of the host where the primary database resides.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| SECONDARY_HOST       | The name of the host where the database will be imported.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| PRIMARY_DG           | The name of the VxVM disk group used by the primary database.                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| SNAPSHOT_DG          | The name of the disk group containing the snapshot volumes.<br><br>The snapshot volumes will be put into this disk group on the primary host and deported. The secondary host can import this disk group to start a clone database.                                                                                                                                                                                                                                                                                                      |
| ORACLE_SID           | The name of the Oracle database. By default, the name of the Oracle database is included in the snapplan.                                                                                                                                                                                                                                                                                                                                                                                                                                |
| ARCHIVELOG_DEST      | The full path of the archive logs.<br><br>There are several archive log destinations that can be used for database recovery if you are multiplexing the archive logs. You must specify which archive log destination to use.<br><br>It is recommended that you have the archive log destination on a separate volume if <code>SNAPSHOT_ARCHIVE_LOG</code> is <code>yes</code> .                                                                                                                                                          |
| SNAPSHOT_ARCHIVE_LOG | <code>yes</code> or <code>no</code><br><br>Specifies whether to create a snapshot of the archive log volumes. Specify <code>yes</code> to split the archive log volume mirrors and deport them to the secondary host. When using the Oracle remote archive log destination feature to send the archive logs to the secondary host, you can specify <code>no</code> to save some space.<br><br>Because the archive logs may not always be delivered to the secondary host reliably, it is recommended that you specify <code>yes</code> . |

**Table 10-1** Parameter values for dbed\_vmchecksnap (*continued*)

| Parameter           | Value                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
|---------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| SNAPSHOT_MODE       | <p>online or offline or instant</p> <p>Specifies whether the database snapshot should be online, offline, or instant.</p> <p>If the snapshot is created while the database is online, the <code>dbed_vmsnap</code> command will put the tablespaces into backup mode. After <code>dbed_vmsnap</code> finishes creating the snapshot, it will take the tablespaces out of backup mode, switch the log files to ensure that the extra redo logs are archived, and create a snapshot of the archived logs.</p> <p>If the database is offline, it is not necessary to put the tablespaces into backup mode. The database must be shut down before creating an offline snapshot.</p> <p>If the database snapshot is instant, <code>dbed_vmsnap</code> will skip putting the tablespace into backup mode.</p> <p><b>Note:</b> If <code>SNAPSHOT_MODE</code> is set to <code>offline</code> or <code>instant</code>, a two-host configuration is required and the <code>-r relocate_path</code> option is not allowed.</p> |
| SNAPSHOT_PLAN_FOR   | <p>The default value is <code>database</code> and cannot be changed.</p> <p>Specifies the database object for which you want to create a snapshot.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| SNAPSHOT_PLEX_TAG   | <p>Specifies the snapshot plex tag. Use this variable to specify a tag for the plexes to be snapshot. The maximum length of the <code>plex_tag</code> is 15 characters. The default plex tag is <code>dbed_flashsnap</code>.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| SNAPSHOT_PLEX_TAG   | <p>Specifies the snapshot plex tag. Use this variable to specify a tag for the plexes to be snapshot. The maximum length of the <code>plex_tag</code> is 15 characters.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| SNAPSHOT_VOL_PREFIX | <p>Specifies the snapshot volume prefix. Use this variable to specify a prefix for the snapshot volumes split from the primary disk group. A volume name cannot be more than 32 characters. You should consider the length of the volume name when assigning the prefix.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |

**Table 10-1** Parameter values for dbed\_vmchecksnap (*continued*)

| Parameter            | Value                                                                                                                                                                         |
|----------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| ALLOW_REVERSE_RESYNC | yes or no<br><br>By default, reverse resynchronization is off (set equal to no). If it is set to yes, data from the snapshot volume can be used to update the primary volume. |
| SNAPSHOT_MIRROR      | Specifies the number of plexes to be snapshot. The default value is 1.                                                                                                        |

When you first run `dbed_vmchecksnap`, use the `-o setdefaults` option to create a snapplan using default values for variables. You may then edit the file manually to set the variables for different snapshot scenarios.

Before creating a snapplan, make sure the following conditions have been met:

- Prerequisites
- Storage must be configured properly. See [“Hosts and storage for Database FlashSnap”](#) on page 165.
  - You must be the Oracle database administrator.
  - The disk group must be version 110 or later. For more information on disk group versions, see the `vxchg(1M)` manual page.
  - Be sure that a DCO and DCO volume are associated with the volume for which you are creating the snapshot.
  - Snapshot plexes and their associated DCO logs should be on different disks than the original plexes, and should be configured correctly for creating snapshots by the system administrator.
  - Persistent FastResync must be enabled on the existing database volumes and disks must be assigned for the snapshot volumes.
  - The database must be running in archive log mode. Archive log mode is set in the Oracle initialization parameter file (`init.ora`).
  - The Oracle database must have at least one mandatory archive destination. See [“Establishing a mandatory archive destination”](#) on page 196.
  - `ORACLE_HOME` cannot reside on disk which will be used for snapshot.

- Usage notes
- The snapplan must be created on the primary host.
  - After creating the snapplan using the `dbed_vmchecksnap` command, you can use a text editor to review and update the file, if necessary.
  - It is recommended that you create a local working directory to store your snapplans in.
  - See the `dbed_vmchecksnap(1M)` online manual page for more information.
  - If the `SNAPSHOT_MODE` for the database is set to `online`, the primary and secondary hosts can be the same. If the `SNAPSHOT_MODE` is set to `offline` or `instant`, the primary and secondary hosts must be different.

### To create a snapplan

- 1 Change directories to the working directory you want to store your snapplan in.

```
$ cd /working_directory
```

- 2 Create a snapplan with default values using the `dbed_vmchecksnap` command:

```
$ /opt/VRTS/bin/dbed_vmchecksnap -S ORACLE_SID \
-H ORACLE_HOME -f SNAPPLAN -o setdefaults -t host_name \
[-p PLEX_TAG]
```

- 3 Open the snapplan file in a text editor and modify it as needed.

In this example, a snapplan, `snap1`, is created for a snapshot image in a single-host configuration and default values are set. The host is named `host1` and the working directory is `/export/snap_dir`.

```
$ cd /export/snap_dir
```

```
$ /opt/VRTS/bin/dbed_vmchecksnap -S PROD -H /oracle/product/9i \
-f snap1 -o setdefaults -t host1
```

```
Snapplan snap1 for PROD.
```

```
=====
SNAPSHOT_VERSION=5.0
PRIMARY_HOST=host1
SECONDARY_HOST=host1
PRIMARY_DG=PRODDg
SNAPSHOT_DG=SNAP_PRODDg
ORACLE_SID=PROD
ARCHIVELOG_DEST=/prod_ar
```

```
SNAPSHOT_ARCHIVE_LOG=yes
SNAPSHOT_MODE=online
SNAPSHOT_PLAN_FOR=database
SNAPSHOT_PLEX_TAG=dbed_flashsnap
SNAPSHOT_VOL_PREFIX=SNAP_
ALLOW_REVERSE_RESYNC=no
SNAPSHOT_MIRROR=1
```

In this example, a snapplan, `snap2`, is created for a snapshot image in a two-host configuration, and default values are set. The primary host is `host1`, the secondary host is `host2`, and the working directory is `/export/snap_dir`.

```
$ cd /export/snap_dir

$ /opt/VRTS/bin/dbed_vmchecksnap -S PROD -H /oracle/product/9i \
-f snap2 -o setdefaults -t host2
```

```
Snapplan snap2 for PROD.
=====
SNAPSHOT_VERSION=5.0
PRIMARY_HOST=host1
SECONDARY_HOST=host2
PRIMARY_DG=PRODDG
SNAPSHOT_DG=SNAP_PRODDG
ORACLE_SID=PROD
ARCHIVELOG_DEST=/mytest/arch
SNAPSHOT_ARCHIVE_LOG=yes
SNAPSHOT_MODE=online
SNAPSHOT_PLAN_FOR=database
SNAPSHOT_PLEX_TAG=dbed_flashsnap
SNAPSHOT_VOL_PREFIX=SNAP_
ALLOW_REVERSE_RESYNC=no
SNAPSHOT_MIRROR=1
```

By default, a snapplan's `SNAPSHOT_PLEX_TAG` value is set as `dbed_flashsnap`. You can use the `-p` option to assign a different tag name. Use the `-p` option when creating the snapplan with the `setdefaults` option.

In the following example, the `-p` option is used with `setdefaults` to assign `my_tag` as the `SNAPSHOT_PLEX_TAG` value.

```
dbed_vmchecksnap -S $ORACLE_SID -H $ORACLE_HOME -o setdefaults \
-p my_tag -f snap1 -t host2

Snapplan snap1 for PROD
=====
```

```
SNAPSHOT_VERSION=5.0
PRIMARY_HOST=host1
SECONDARY_HOST=host2
PRIMARY_DG=PRODdg
SNAPSHOT_DG=SNAP_PRODdg
ORACLE_SID=PROD
ARCHIVELOG_DEST=/arch_data
SNAPSHOT_ARCHIVE_LOG=yes
SNAPSHOT_MODE=online
SNAPSHOT_PLAN_FOR=database
SNAPSHOT_PLEX_TAG=my_tag
SNAPSHOT_VOL_PREFIX=SNAP_
ALLOW_REVERSE_RESYNC=no
SNAPSHOT_MIRROR=1
```

## Creating multi-mirror snapshots

To make Database Snapshots highly available, the snapped snapshot volume should contain more than one mirror. This makes the snapshot volumes available even if one of the mirrors gets disabled. Snapshot volumes can be mounted and the entire database snapshot is usable even if one of the mirror gets disabled. The multi-mirror snapshots are enabled with the `SNAPSHOT_MIRROR=n` keyword in the snapplan.

---

**Note:** Multi-mirror snapshots require no changes to the Command Line usage or arguments for the Flashsnap tools.

Before taking the snapshot, make sure all tagged snapshot mirrors are in the `SNAPDONE` state.

---

### To create a multi-mirror snapshot

- 1 Add the second mirror and DCO log. When allocating storage for the second mirror and DCO logs, make sure the snap volumes are splittable. If snap volumes are not splittable, `dbed_vmchecksnap` fails with appropriate errors.

```
vxsnap -g dg_a addmir dg_a_voll alloc=dg_a03
```

- 2 Tag the newly added mirror with the same tag as that of the first mirror. Assume that the volume has `fastresync = on`, has `dcolog = on`, and already has one `SNAPDONE` mirror and is tagged with .

```
vxedit -g dg_a set putil2=dbed_flashsnap dg_a_voll-03
```

- 3 Add the `SNAPSHOT_MIRROR` keyword to the snapplan. Here is a sample snapplan.

```
SNAPSHOT_VERSION=5.0
PRIMARY_HOST=host1
SECONDARY_HOST=host1
PRIMARY_DG=PRODdg
SNAPSHOT_DG=SNAP_PRODdg
ORACLE_SID=PROD
ARCHIVELOG_DEST=/prod_ar
SNAPSHOT_ARCHIVE_LOG=yes
SNAPSHOT_MODE=online
SNAPSHOT_PLAN_FOR=database
SNAPSHOT_PLEX_TAG=dbed_flashsnap
SNAPSHOT_VOL_PREFIX=SNAP_
ALLOW_REVERSE_RESYNC=no
SNAPSHOT_MIRROR=2
```

## Establishing a mandatory archive destination

When cloning a database using Database FlashSnap , the Oracle database must have at least one mandatory archive destination.

If no mandatory archive destination is set, `dbed_vmchecksnap` results in this error message:

```
SFORA dbed_vmchecksnap ERROR V-81-5677 Could not find a mandatory,
primary and valid archive destination for database PROD.
```

Please review the `LOG_ARCHIVE_DEST_n` parameters and check `v$archive_dest`.

This example shows how to establish a mandatory archive destination using SQL\*Plus:

```
alter system set log_archive_dest_1 = \
'LOCATION=/ora_mnt/oracle/oradata/PROD/archivelogs MANDATORY \
[REOPEN]' [scope=both];
```

For more information about Oracle parameters for archiving redo logs, see your Oracle documentation.

## Validating a snapplan (dbed\_vmchecksnap)

After creating a snapplan, the next steps are to validate the snapplan parameters and check whether the snapshot volumes have been configured correctly for creating snapshots. If validation is successful, the snapplan is copied to the repository. The snapplan is validated using the `dbed_vmchecksnap` command with the `-o validate` option.

In Veritas Storage Foundation for Oracle RAC configurations, `dbed_vmchecksnap` with the `-o validate` option can be executed only on the VxVM CVM master node.

Consider the following prerequisites and notes before validating a snapplan:

- |               |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
|---------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Prerequisites | <ul style="list-style-type: none"><li>■ The database must be up and running while executing the <code>dbed_vmchecksnap</code> command.</li></ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| Usage notes   | <ul style="list-style-type: none"><li>■ The <code>dbed_vmchecksnap</code> command must be run as the Oracle database administrator.</li><li>■ The default behavior is to force validation. Use the <code>-n</code> option if you want to skip validation.</li><li>■ After validating the snapplan, you have the option of modifying the snapplan file to meet your storage configuration requirements.</li><li>■ If a snapplan is updated or modified, you must re-validate it. It is recommended that snapplans are revalidated when changes are made in the database disk group.</li><li>■ The <code>dbed_vmchecksnap</code> command can be used on the primary or secondary host. In an Oracle RAC configuration both need to be specified as the host name of the CVM master node.</li><li>■ See the <code>dbed_vmchecksnap(1M)</code> manual page for more information.</li></ul> |

### To validate a snapplan

- 1 Change directories to the working directory your snapplan is stored in:

```
$ cd /working_directory
```

- 2 Validate the snapplan using the dbed\_vmchecksnap command:

```
$ /opt/VRTS/bin/dbed_vmchecksnap -S ORACLE_SID \
-H ORACLE_HOME -f SNAPPLAN -o validate
```

In an HA environment, you must modify the default snapplan, use the virtual host name defined for the resource group for the PRIMARY\_HOST and/or SECONDARY\_HOST, and run validation. In an Oracle RAC configuration both primary and secondary hosts need to be set to the host name of the CVM master node.

In the following example, a snapplan, `snap1`, is validated for a snapshot image in a single-host or Oracle RAC cluster configuration. The primary host is `host1` and the working directory is `/export/snap_dir`.

```
$ cd /export/snap_dir

$ /opt/VRTS/bin/dbed_vmchecksnap -S PROD -H /oracle/product/9i \
-f snap1 -o validate

PRIMARY_HOST is host1

SECONDARY_HOST is host1

The version of PRIMARY_DG-PRODDg is 140.

SNAPSHOT_DG is SNAP_PRODDg

SNAPSHOT_MODE is online

The database is running in archivelog mode.

ARCHIVELOG_DEST is /prod_ar

SNAPSHOT_PLAN_FOR is database

SNAPSHOT_ARCHIVE_LOG is yes

ARCHIVELOG_DEST=/prod_ar is mount on /dev/vx/dsk/PRODDg/prod_ar.

Examining Oracle volume and disk layout for snapshot

Volume prodvoll on PRODDg is ready for snapshot.
Original plex and DCO log for prodvoll is on PRODDg1.
```

```
Snapshot plex and DCO log for prodvol2 is on PRODDg2.

Volume prodvol2 on PRODDg is ready for snapshot.
Original plex and DCO log for prodvol2 is on PRODDg1.

Snapshot plex and DCO log for prodvol2 is on PRODDg2.

SNAP_PRODDg for snapshot will include: PRODDg2

ALLOW_REVERSE_RESYNC is NO

The snapplan snap1 has been created.
```

**In the following example, a snapplan, snap2, is validated for a snapshot image in a two-host configuration. The primary host is host1, the secondary host is host2, and the working directory is /export/snap\_dir. This example does not apply to Oracle RAC configurations.**

```
$ cd /export/snap_dir

$ /opt/VRTS/bin/dbed_vmchecksnap -S PROD -H \
/oracle/product/9i -f snap2 -o validate

PRIMARY_HOST is host1
SECONDARY_HOST is host2
The version of PRIMARY_DG-PRODDg is 140.
SNAPSHOT_DG is SNAP_PRODDg
SNAPSHOT_MODE is online
The database is running in archivelog mode.
ARCHIVELOG_DEST is /mytest/arch
SNAPSHOT_PLAN_FOR is database
ARCHIVELOG_DEST=/mytest/arch is mount on /dev/vx/dsk/PRODDg/arch.
Examining Oracle volume and disk layout for snapshot.
Volume prodvol1 on PRODDg is ready for snapshot.
Original plex and DCO log for arch is on PRODDg1.
Snapshot plex and DCO log for arch is on PRODDg2.
Volume prodvol2 on PRODDg is ready for snapshot.
Original plex and DCO log for prod_db is on PRODDg1.
Snapshot plex and DCO log for prod_db is on PRODDg2.
SNAP_PRODDg for snapshot will include: PRODDg2
ALLOW_REVERSE_RESYNC is NO
The snapplan snap2 has been created.
```

## Displaying, copying, and removing a snapplan (dbed\_vmchecksnap)

Consider these notes before listing all snapplans for a specific Oracle database, displaying a snapplan file, or copying and removing snapplans.

- Usage notes
- If the local snapplan is updated or modified, you must re-validate it.
  - If the database schema or disk group is modified, you must revalidate it after running `dbed_update`.

### To list all available snapplans for a specific Oracle database

- ◆ Use the `dbed_vmchecksnap` command as follows:

```
$ /opt/VRTS/bin/dbed_vmchecksnap -S ORACLE_SID -o list
```

In the following example, all available snapplans are listed for the database `PROD`.

```
$ /opt/VRTS/bin/dbed_vmchecksnap -S PROD -o list
```

The following snapplan(s) are available for `PROD`:

| SNAP_PLAN | SNAP_STATUS | DB_STATUS | SNAP_READY |
|-----------|-------------|-----------|------------|
| snap1     | init_full   | -         | yes        |
| snap2     | init_full   | -         | yes        |

---

**Note:** The command output displays all available snapplans, their snapshot status (`SNAP_STATUS`), database status (`DB_STATUS`), and whether a snapshot may be taken (`SNAP_READY`).

---

**To display detailed information for a snapplan**

- ◆ Use the `dbed_vmchecksnap` command as follows:

```
$ /opt/VRTS/bin/dbed_vmchecksnap -S ORACLE_SID \
-f SNAPPLAN -o list
```

In the following example, the snapplan `snap1` is displayed.

```
$ /opt/VRTS/bin/dbed_vmchecksnap -S PROD -f snap1 -o list
SNAPSHOT_VERSION=4.0
PRIMARY_HOST=host1
SECONDARY_HOST=host1
PRIMARY_DG=PRODdg
SNAPSHOT_DG=SNAP_PRODdg
ORACLE_SID=PROD
ARCHIVELOG_DEST=/prod_ar
SNAPSHOT_ARCHIVE_LOG=yes
SNAPSHOT_MODE=online
SNAPSHOT_PLAN_FOR=database
SNAPSHOT_PLEX_TAG=dbed_flashsnap
SNAPSHOT_VOL_PREFIX=SNAP_
ALLOW_REVERSE_RESYNC=yes
SNAPSHOT_MIRROR=1
STORAGE_INFO
PRODdg02
SNAP_PLEX=prod_ar-02

STATUS_INFO
SNAP_STATUS=init_full
DB_STATUS=init
LOCAL_SNAPPLAN=/export/snap_dir/snap1
```

### To copy a snapplan from the repository to your current directory

- ◆ If you want to create a snapplan similar to an existing snapplan, you can simply create a copy of the existing snapplan and modify it. To copy a snapplan from the repository to your current directory, the snapplan must not already be present in the current directory.

Use the `dbed_vmchecksnap` command as follows:

```
$ /opt/VRTS/bin/dbed_vmchecksnap -S ORACLE_SID \
-f SNAPPLAN -o copy
```

This example shows the snapplan, `snap1`, being copied from the repository to the current directory.

```
$ /opt/VRTS/bin/dbed_vmchecksnap -S PROD -f snap1 -o copy
Copying 'snap1' to '/export/snap_dir'
```

### To remove a snapplan from the repository

- ◆ A snapplan can be removed from a local directory or the repository if the snapplan is no longer needed.

Use the `dbed_vmchecksnap` command as follows:

```
$ /opt/VRTS/bin/dbed_vmchecksnap -S ORACLE_SID -f SNAPPLAN \
-o remove
```

This example shows the snapplan, `snap1`, being removed from the repository.

```
$ /opt/VRTS/bin/dbed_vmchecksnap -S PROD -f snap1 -o remove
The snapplan snap1 has been removed.
```

## Creating a snapshot (dbed\_vmsnap)

The `dbed_vmsnap` command creates a snapshot of an Oracle database by splitting the mirror volumes used by the database into a snapshot database. In standalone (that is, non-RAC) configurations, you can use the snapshot image on either the same host as the database or on a secondary host provided storage is shared by the two hosts.

The snapshot image created by `dbed_vmsnap` is a frozen image of an Oracle datafiles. `dbed_vmsnap` ensures that a backup control file is created when the snapshot database is created, which allows for complete data recovery, if needed.

Before creating a snapshot, make the sure the following conditions are met:

- Prerequisites
- You must be logged in as the Oracle database administrator.
  - You must create and validate a snapplan using `dbed_vmchecksnap` before you can create a snapshot image with `dbed_vmsnap`.
- Usage notes
- The `dbed_vmsnap` command can only be used on the primary host, or if in an Oracle RAC configuration, on the CVM master node.
  - Do not share volumes between Oracle database files and other software.
  - When creating a snapshot volume, create the snapshot on a separate controller and on separate disks from the primary volume.
  - Make sure your archive log destination is separate from your Oracle database volumes.
  - Do not place any datafiles, including control files, in the `$ORACLE_HOME/dbs` directory.
  - Resynchronization speed varies based on the amount of data changed in both the primary and secondary volumes when the mirror is broken off.
  - See the `dbed_vmsnap(1M)` manual page for more information.

### To create a snapshot

- 1 If `SNAPSHOT_MODE` is set to `offline` in the snapplan, shut down the database. Skip this step if in a Veritas Storage Foundation for Oracle RAC environment, because only the `online` mode is supported.
- 2 Create the snapshot image using the `dbed_vmsnap` command:

```
$ /opt/VRTS/bin/dbed_vmsnap -S ORACLE_SID -f SNAPPLAN \
-o snapshot [-F]
```

---

**Note:** To force snapshot creation, use the `-F` option. The `-F` option can be used after a snapshot operation has failed and the problem was fixed without using Veritas Storage Foundation for Oracle commands. (That is, the volumes were synchronized without using Veritas Storage Foundation for Oracle commands.) In this situation, the status of the snapplan will appear as unavailable for creating a snapshot. The `-F` option ignores the unavailable status, checks for the availability of volumes, and creates the snapshot after the volumes pass the availability check.

After the snapshot is created, `dbed_vmsnap` returns values you will need to run `dbed_vmclonedb`. These values include the snapshot disk group, the snapplan name, and the primary database server name (`server_name`). Make a note of these values so you have them when running `dbed_vmclonedb`. You can also use the command `dbed_vmchecksnap -f snapplan -o list` to access the information regarding the snapshot disk group.

---

The snapshot volumes now represent a consistent backup copy of the database. You can back up the database by copying the snapshot volumes to tape or other backup media.

See [“Backing up the database from snapshot volumes \(dbed\\_vmclonedb\)”](#) on page 205.

You can also create another Oracle database for decision-support purposes.

See [“Cloning a database \(dbed\\_vmclonedb\)”](#) on page 209.

In this example, a snapshot image of the database, `PROD`, is created for a single-host configuration (or for the RAC cluster, if in an Oracle RAC configuration). In this case, the `SECONDARY_HOST` parameter is set the same as the `PRIMARY_HOST` parameter in the snapplan.

```
$ /opt/VRTS/bin/dbed_vmsnap -S PROD -f snap1 -o snapshot
```

```
dbed_vmsnap started at 2004-04-02 14:15:27
```

```
VxDBA repository is up to date.
```

```
The database is running in archivelog mode.
```

```
A snapshot of ORACLE_SID PROD is in DG SNAP_PRODDg.
```

```
Snapplan snap1 is used for the snapshot.
```

If `-r <relocate_path>` is used in `dbed_vmclonedb`, make sure `<relocate_path>` is created and owned by Oracle DBA. Otherwise, the following mount points need to be created and owned by Oracle DBA:

```
/prod_db.
```

```
/prod_ar.
```

```
dbed_vmsnap ended at 2004-04-02 14:16:11
```

In this example, a snapshot image of the primary database, `PROD`, is created for a two-host configuration. In this case, the `SECONDARY_HOST` parameter specifies a different host name than the `PRIMARY_HOST` parameter in the snapplan.

---

**Note:** This example does not apply to an Oracle RAC configuration.

---

```
$ /opt/VRTS/bin/dbed_vmsnap -S PROD -f snap2 -o snapshot
```

```
dbed_vmsnap started at 2004-04-09 23:01:10
```

```
VxDBA repository is up to date.
```

```
The database is running in archivelog mode.
```

```
A snapshot of ORACLE_SID PROD is in DG SNAP_PRODdg.
```

```
Snapplan snap2 is used for the snapshot.
```

```
VxDBA repository volume is SNAP_arch.
```

If `-r <relocate_path>` is used in `dbed_vmclonedb`, make sure `<relocate_path>` is created and owned by Oracle DBA. Otherwise, the following mount points need to be created and owned by Oracle DBA:

```
dbed_vmsnap ended at 2004-04-09 23:02:58
```

## Backing up the database from snapshot volumes (dbed\_vmclonedb)

Snapshots are most commonly used as a source for backing up a database. The advantage of using snapshot volumes is that the backup will not contest the I/O bandwidth of the physical devices. Making the snapshot volumes available on a secondary host will eliminate the extra loads put on processors and I/O adapters by the backup process on the primary host.

A clone database can also serve as a valid backup of the primary database. You can back up the primary database to tape using snapshot volumes.

[Figure 10-5](#) shows a typical configuration when snapshot volumes are located on the primary host.

**Figure 10-5** Example system configuration for database backup on the primary host


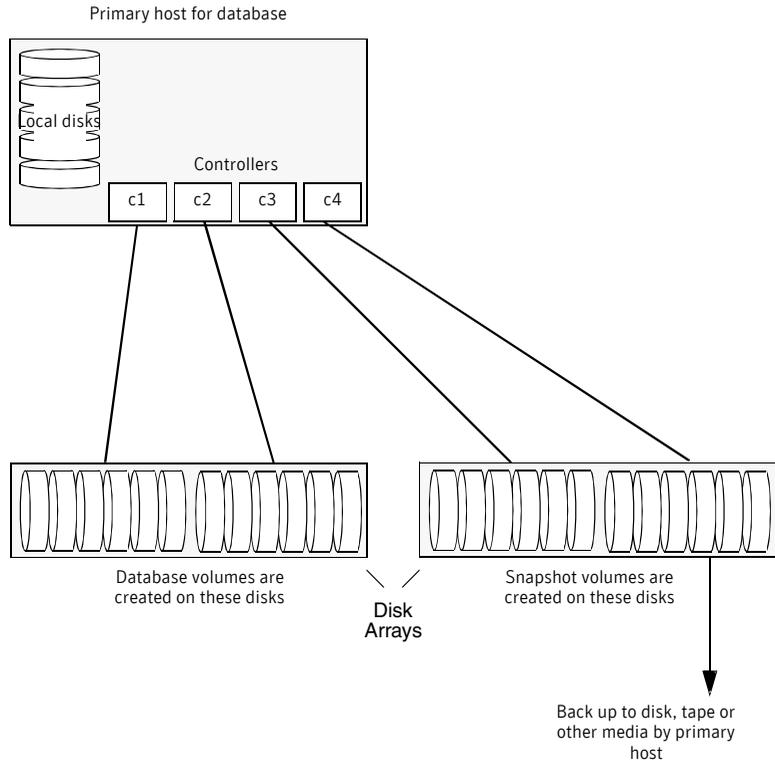


Figure 10-6 shows a typical configuration when snapshot volumes are used on a secondary host.

**Figure 10-6** Example system configuration for database backup on a secondary host

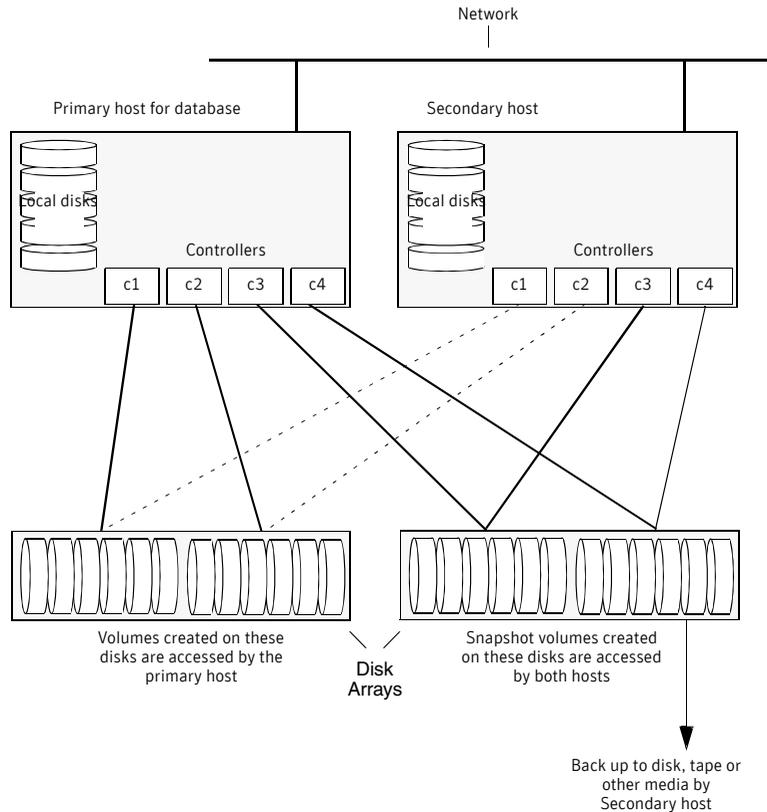

**Prerequisites**

- You must be logged in as the Oracle database administrator to use `dbed_vmclonedb` command.
- Before you can use the `dbed_vmclonedb` command, you must create and validate a snapplan, and create a snapshot. See “Summary of database snapshot steps” on page 185. See “Validating a snapplan (dbed\_vmchecksnap)” on page 197. See “Creating a snapshot (dbed\_vmsnap)” on page 202.
- The volume snapshot must contain the entire database.
- Before you can use the `dbed_vmclonedb` command with the `-r relocate_path` option (which specifies the initial mount point for the snapshot image), the system administrator must create the mount point and then change the owner to the Oracle database administrator.

- Usage notes
- The `dbed_vmclonedb` command can be used on the secondary host.
  - In a single-host configuration, the primary and secondary hosts are the same.
  - In a single-host configuration, `-r relocate_path` is required.
  - If `SNAPSHOT_MODE` is set to `offline` or `instant`, a two-host configuration is required and `-r relocate_path` is not allowed.
  - See the `dbed_vmclonedb(1M)` manual page for more information.

## Mounting the snapshot volumes and backing up

Before using the snapshot volumes to do a backup, you must first mount them.

### To mount the snapshot volumes

- ◆ Use the `dbed_vmclonedb` command as follows:

```
$ /opt/VRTS/bin/dbed_vmclonedb -S ORACLE_SID -g snap_dg \
-o mount,new_sid=new_sid,server_name=svr_name [-H ORACLE_HOME] \
[-r relocate_path]
```

You can now back up an individual file or a group of files under a directory onto the backup media.

In this example, snapshot volumes are mounted.

```
$ /opt/VRTS/bin/dbed_vmclonedb -S PROD -g SNAP_PRODDg \
-o mount,new_sid=NEWPROD,server_name=kagu -f snap1 -r /clone/single

dbed_vmclonedb started at 2004-04-02 15:35:41
Mounting /clone/single/prod_db on /dev/vx/dsk/SNAP_PRODDg/SNAP_prod_db.
Mounting /clone/single/prod_ar on /dev/vx/dsk/SNAP_PRODDg/SNAP_prod_ar.
dbed_vmclonedb ended at 2004-04-02 15:35:50
```

### To mount a Storage Checkpoint carried over from the snapshot volumes to a secondary host

- 1 On the secondary host, list the Storage Checkpoints carried over from the primary database using:

```
$ /opt/VRTS/bin/dbed_ckptdisplay -S ORACLE_SID -n
```

- 2 You can mount one of the listed Storage Checkpoints using:

```
$ /opt/VRTS/bin/dbed_ckptmount -S ORACLE_SID -c CKPT_NAME \
-m MOUNT_POINT
```

Consider the following limitations when working with Storage Checkpoints carried over from the primary database:

- Any mounted Storage Checkpoints must be unmounted before running the following command:

```
$ /opt/VRTS/bin/dbed_vmclonedb -o umount,new_sid=new_sid \
-f SNAPPLAN
```

- It is only possible to mount a Storage Checkpoint carried over with the snapshot volumes in a two-host configuration if the snapshot volumes were mounted with the `dbed_vmclonedb` command with the `-o mount` option without the use of `-r relocate_path..`
- Storage Checkpoints carried over with the snapshot volumes can be mounted before a clone database is created using `dbed_vmclonedb` with the `-o mount` option. After a clone database is created using `dbed_vmclonedb` with the `-o recoverdb` option, however, Storage Checkpoints are no longer present.

#### To back up the database using the snapshot

- ◆ Copy the snapshot volumes to tape or other appropriate backup media.  
If you use the Oracle online backup method, you must also back up all the archived log files in order to do a complete restore and recovery of the database.

## Restoring from backup

Backup copies are used to restore volumes lost due to disk failure, or data destroyed due to human error. If a volume's data is corrupted and you know that you need to restore it from backup, you can use Database FlashSnap's reverse resynchronization function to restore the database.

## Cloning a database (dbed\_vmclonedb)

Veritas Storage Foundation lets you create a clone database using snapshot volumes. You can use snapshots of a primary database to create a clone of the database at a given point in time. You can then implement decision-support analysis and report generation operations that take their data from the database clone rather than from the primary database to avoid introducing additional burdens on the production database.

A clone database can also serve as a valid back up of the primary database.

See [“Backing up the database from snapshot volumes \(dbed\\_vmclonedb\)”](#) on page 205.

You can also back up the primary database to tape using snapshot volumes.

The resynchronization functionality of Database FlashSnap allows you to quickly refresh the clone database with up-to-date information from the primary database. Reducing the time taken to update decision-support data also lets you generate analysis reports more frequently.

## Using Database FlashSnap to clone a database

In a single-host configuration, the `dbed_vmclonedb` command creates a clone database on the same host. The command can also be used to shut down the clone database and unmount its file systems. When creating or unmounting the clone database in a single-host configuration, `-r relocate_path` is required so that the clone database's file systems use different mount points than those used by the primary database.

In an Oracle RAC cluster configuration, `dbed_vmclonedb` creates a clone database on the CVM master node. Also in Oracle RAC, you must use `-r relocate_path` when creating or unmounting the clone database.

When used in a two-host configuration, the `dbed_vmclonedb` command imports the snapshot disk group, mounts the file systems on the snapshot volumes, and starts a clone database. It can also reverse the process by shutting down the clone database, unmounting the file systems, and deporting the snapshot disk group. You must use `-o server_name=svr_name` when cloning a database. This also applies to an Oracle RAC configuration.

---

**Warning:** When creating a clone database, all Storage Checkpoints in the original database are discarded.

---

- Prerequisites
- You must be logged in as the Oracle database administrator.
  - Before you can use the `dbed_vmclonedb` command, review the procedure for taking a snapshot of a database, especially the steps required to validate a snapplan and to create the snapshot.  
See “[Summary of database snapshot steps](#)” on page 185.  
See “[Validating a snapplan \(dbed\\_vmchecksnap\)](#)” on page 197.  
See “[Creating a snapshot \(dbed\\_vmsnap\)](#)” on page 202.
  - The volume snapshot must contain the entire database.
  - The system administrator must provide the database administrator with access to the necessary volumes and mount points.
  - Before you can use the `dbed_vmclonedb` command with the `-r relocate_path` option (which specifies the initial mount point for the snapshot image), the system administrator must create the mount point and then change the owner to the Oracle database administrator.
  - If `SNAPSHOT_MODE` is set to `offline` or `instant`, a two-host configuration is required and `-r relocate_path` is not allowed.
  - The Oracle database must have at least one mandatory archive destination.  
See “[Establishing a mandatory archive destination](#)” on page 196.
- Usage notes
- The `dbed_vmclonedb` command can be used on the secondary host.
  - In a single-host and Oracle RAC configuration, `-r relocate_path` is required. This command is also needed if the name of the clone database is different than the primary database.
  - The `server_name=svr_name` option is required.
  - The initialization parameters for the clone database are copied from the primary database. This means that the clone database takes up the same memory and machine resources as the primary database. If you want to reduce the memory requirements for the clone database, shut down the clone database and then start it up again using a different `init.ora` file that has reduced memory requirements. If the host where `dbed_vmclonedb` is run has little available memory, you may not be able to start up the clone database and the cloning operation may fail.
  - See the `dbed_vmclonedb(1M)` manual page for more information.

### To mount a database and recover it manually

#### 1 Start and mount the clone database to allow manual database recovery:

```
$ /opt/VRTS/bin/dbed_vmclonedb -S ORACLE_SID -g snap_dg \
-o mountdb,new_sid=new_sid,server_name=svr_name -f SNAPPLAN \
[-H ORACLE_HOME] [-r relocate_path]
```

#### 2 Recover the database manually.

#### 3 Update the snapshot status information for the clone database in the SFDB repository:

```
$ /opt/VRTS/bin/dbed_vmclonedb \
-o update_status,new_sid=new_sid,server_name=svr_name \
-f SNAPPLAN [-r relocate_path]
```

In this example, file systems are mounted without bringing up the clone database. The clone database must be manually created and recovered before it can be used. This example is for a clone created on the same host as the primary database.

```
$ /opt/VRTS/bin/dbed_vmclonedb -S PROD -g SNAP_PRODDg \
-o mountdb,new_sid=NEWPROD,server_name=orasvr -f snap1 -r /clone

dbed_vmclonedb started at 2004-04-02 15:34:41
Mounting /clone/prod_ar on /dev/vx/dsk/SNAP_PRODDg/SNAP_prod_ar.
Mounting /clone/prod_db on /dev/vx/dsk/SNAP_PRODDg/SNAP_prod_db.
All redo-log files found.
Database NEWPROD (SID=NEWPROD) is in recovery mode.
If the database NEWPROD is recovered manually, you must run
dbed_vmclonedb -o update_status to change the snapshot status.
dbed_vmclonedb ended at 2004-04-02 15:34:59
```

The database is recovered manually using dbinitdb.

The database status (database\_recovered) needs to be updated for a clone database on the primary host after manual recovery has been completed.

```
$ /opt/VRTS/bin/dbed_vmclonedb \
-o update_status,new_sid=NEWPROD,server_name=orasvr -f snap1 \
-r /clone

dbed_vmclonedb started at 2004-04-02 15:19:16
The snapshot status has been updated.
dbed_vmclonedb ended at 2004-04-02 15:19:42
```

In this example, file systems are mounted without recovering the clone database. The clone database must be manually recovered before it can be used. This example is for a clone created on a secondary host.

```
$ /opt/VRTS/bin/dbed_vmclonedb -S PROD -g SNAP_PRODDg \
-o mountdb,new_sid=NEWPROD,server_name=orasvr -f snap2

dbed_vmclonedb started at 2004-04-09 23:26:50
Mounting /clone/arch on /dev/vx/dsk/SNAP_PRODDg/SNAP_arch.
Mounting /clone/prod_db on /dev/vx/dsk/SNAP_PRODDg/SNAP_prod_db.
All redo-log files found.
Database NEWPROD (SID=NEWPROD) is in recovery mode.
If the database NEWPROD is recovered manually, you must run
dbed_vmclonedb -o update_status to change the snapshot status.
dbed_vmclonedb ended at 2004-04-09 23:27:17
```

The database is recovered manually.

The snapshot status (database\_recovered) is updated for a clone database on a secondary host after manual recovery has been completed.

```
$ /opt/VRTS/bin/dbed_vmclonedb \
-o update_status,new_sid=NEWPROD,server_name=orasvr -f snap2

dbed_vmclonedb started at 2004-04-09 23:34:01
The snapshot status has been updated.
dbed_vmclonedb ended at 2004-04-09 23:34:35
```

### To clone the database automatically

◆ Use the `dbed_vmclonedb` command as follows:

```
$ /opt/VRTS/bin/dbed_vmclonedb -S ORACLE_SID -g snap_dg \
-o recoverdb,new_sid=new_sid,server_name=svr_name -f SNAPPLAN \
[-H ORACLE_HOME] [-r relocate_path]
```

Where:

- `ORACLE_SID` is the name of the Oracle database used to create the snapshot.
- `snap_dg` is the name of the diskgroup that contains all the snapshot volumes.
- `new_sid` specifies the `ORACLE_SID` for the clone database.
- `server_name=svr_name` specifies the server on which the primary database resides.
- `SNAPPLAN` is the name of the snapplan file.

- *ORACLE\_HOME* is the *ORACLE\_HOME* setting for the *ORACLE\_SID* database.
- *relocate\_path* is the name of the initial mount point for the snapshot image.

---

**Note:** When cloning a database on a secondary host, ensure that *PRIMARY\_HOST* and *SECONDARY\_HOST* parameters in the snapplan file are different.

---

When the `-o recoverdb` option is used with `dbed_vmclonedb`, the clone database is recovered automatically using all available archive logs. If the `-o recoverdb` option is not used, you can perform point-in-time recovery manually.

In the following example, a clone of the primary database is automatically created on the same host as the primary database.

```
$ /opt/VRTS/bin/dbed_vmclonedb -S PROD -g SNAP_PRODDg \
-o recoverdb,new_sid=NEWPROD,server_name=orasvr -f snap1 -r /clone

dbed_vmclonedb started at 2004-04-02 14:42:10
Mounting /clone/prod_db on /dev/vx/dsk/SNAP_PRODDg/SNAP_prod_db.
Mounting /clone/prod_ar on /dev/vx/dsk/SNAP_PRODDg/SNAP_prod_ar.
All redo-log files found.
Database NEWPROD (SID=NEWPROD) is running.
dbed_vmclonedb ended at 2004-04-02 14:43:05
```

In the following example, a clone of the primary database is automatically created on a secondary host.

```
$ /opt/VRTS/bin/dbed_vmclonedb -S PROD -g SNAP_PRODDg \
-o recoverdb,new_sid=NEWPROD,server_name=orasvr -f snap2

dbed_vmclonedb started at 2004-04-09 23:03:40
Mounting /clone/arch on /dev/vx/dsk/SNAP_PRODDg/SNAP_arch.
Mounting /clone/prod_db on /dev/vx/dsk/SNAP_PRODDg/SNAP_prod_db.
All redo-log files found.
Database NEWPROD (SID=NEWPROD) is running.
dbed_vmclonedb ended at 2004-04-09 23:04:50
```

## Shutting down the clone database and unmounting file systems

When you are done using the clone database, you can shut it down and unmount all snapshot file systems with the `dbed_vmclonedb -o umount` command.

---

**Note:** Any mounted Storage Checkpoints need to be unmounted before running `dbed_vmclonedb -o umount`.

---

### To shut down the clone database and unmount all snapshot file systems

- ◆ Use the `dbed_vmclonedb` command as follows:

```
$ /opt/VRTS/bin/dbed_vmclonedb \
-o umount,new_sid=new_sid,server_name=svr_name \
-f SNAPPLAN [-r relocate_path]
```

In this example, the clone database is shut down and file systems are unmounted for a clone on the same host as the primary database (a single-host configuration).

```
$ /opt/VRTS/bin/dbed_vmclonedb \
-o umount,new_sid=NEWPROD,server_name=orasvr -f snap1 -r /clone

dbed_vmclonedb started at 2004-04-02 15:11:22
NOTICE: Umounting /clone/prod_db.
NOTICE: Umounting /clone/prod_ar.
dbed_vmclonedb ended at 2004-04-02 15:11:47
```

In this example, the clone database is shut down, file systems are unmounted, and the snapshot disk group is deported for a clone on a secondary host (a two-host configuration).

```
$ /opt/VRTS/bin/dbed_vmclonedb \
-o umount,new_sid=NEWPROD,server_name=orasvr -f snap2

dbed_vmclonedb started at 2004-04-09 23:09:21
NOTICE: Umounting /clone/arch.
NOTICE: Umounting /clone/prod_db.
dbed_vmclonedb ended at 2004-04-09 23:09:50
```

## Restarting a clone database

If the clone database is down as a result of using `dbed_vmclonedb -o umount` or rebooting the system, you can restart it with the `-o restartdb` option.

---

**Note:** This option can only be used when a clone database is created successfully. If the clone database is recovered manually, `-o update_status` must be run to update the status before `-o restartdb` will work.

---

### To start the clone database

- ◆ Use the `dbed_vmclonedb` command as follows:

```
$ /opt/VRTS/bin/dbed_vmclonedb -S ORACLE_SID -g snap_dg \
-o restartdb,new_sid=new_sid,server_name=svr_name -f SNAPPLAN \
[-H ORACLE_HOME] [-r relocate_path]
```

In this example, the clone database is re-started on the same host as the primary database (a single-host configuration).

```
$ /opt/VRTS/bin/dbed_vmclonedb -S PROD -g SNAP_PRODDg \
-o restartdb,new_sid=NEWPROD,server_name=orasvr -f snap1 -r /clone

dbed_vmclonedb started at 2004-04-02 15:14:49
Mounting /clone/prod_db on
/dev/vx/dsk/SNAP_PRODDg/SNAP_prod_db.
Oracle instance NEWPROD successfully started.
dbed_vmclonedb ended at 2004-04-02 15:15:19
```

In this example, the clone database is re-started on the secondary host (a two-host configuration).

```
$ /opt/VRTS/bin/dbed_vmclonedb -S PROD -g SNAP_PRODDg \
-o restartdb,new_sid=NEWPROD,server_name=orasvr \
-f snap2

dbed_vmclonedb started at 2003-04-09 23:03:40
Mounting /clone/arch on
/dev/vx/dsk/SNAP_PRODDg/SNAP_arch.
Mounting /clone/prod_db on
/dev/vx/dsk/SNAP_PRODDg/SNAP_prod_db.
Oracle instance NEWPROD successfully started.
dbed_vmclonedb ended at 2003-04-09 23:04:50
```

## Recreating Oracle tempfiles

After a clone database is created and opened, the tempfiles are added if they were residing on the snapshot volumes. If the tempfiles were not residing on the same file systems as the datafiles, `dbed_vmsnap` does not include the underlying volumes in the snapshot. In this situation, `dbed_vmclonedb` issues a warning message and you can then recreate any needed tempfiles on the clone database as described in the following procedure.

## To recreate the Oracle tempfiles

- 1 If the tempfiles were not residing on the same file systems as the datafiles, dbed\_vmclonedb will display the WARNING and INFO messages similar to the following:

```
WARNING: Not all tempfiles were included in snapshot for $ORACLE_SID,
there is no snapshot volume for
/clone_path/temp02.dbf.
WARNING: Could not recreate tempfiles for $ORACLE_SID
due to lack of free space.
INFO: The sql script for adding tempfiles to $ORACLE_SID
is at /tmp/add_tf.$ORACLE_SID.sql.
```

---

**Note:** *\$ORACLE\_SID* is the name of the clone database.

---

- 2 A script named `add_tf.$ORACLE_SID.sql` is provided in the `/tmp` directory for the purpose of recreating Oracle tempfiles. This script contains the SQL\*Plus commands to recreate the missing tempfiles.
- 3 Make a copy of the `add_tf.$ORACLE_SID.sql` script and open it to view the list of missing tempfiles.

An example of the `add_tf.$ORACLE_SID.sql` script is shown below:

```
$ cat /tmp/add_tf.$ORACLE_SID.sql
-- Commands to add tempfiles to temporary tablespaces.
-- Online tempfiles have complete space information.
-- Other tempfiles may require adjustment.
ALTER TABLESPACE TEMP ADD TEMPFILE
'/clone_path/temp01.dbf'
SIZE 4194304 REUSE AUTOEXTEND ON NEXT 1048576 MAXSIZE 33554432 ;
ALTER TABLESPACE TEMP ADD TEMPFILE
'/clone_path/temp02.dbf' REUSE;
ALTER DATABASE TEMPFILE '/clone_path2/temp02.dbf'
OFFLINE;
```

- 4 Evaluate whether you need to recreate any temp files. If you want to recreate tempfiles, proceed to the next step.

- 5 In the `add_tf.$ORACLE_SID.sql` file, edit the sizes and default path names of the tempfiles as needed to reside on cloned volumes configured for database storage.

---

**Note:** Do not run the script without first editing it because path names may not exist and the specified mount points may not contain sufficient space.

---

- 6 After you have modified the `add_tf.$ORACLE_SID.sql` script, execute it against your clone database.
- 7 After you have successfully run the script, you may delete it.

## Resynchronizing your database to the snapshot

If your database becomes corrupted, you can use reverse resynchronization to recover the database from a clone. The reverse resynchronization feature of Veritas Database FlashSnap enables you to resynchronize the primary database or volume with a clone database or snapshot volume.

---

**Note:** In Veritas Storage Foundation for Oracle RAC configurations, the reverse resynchronization option is not supported.

---

Reverse resynchronization requires the primary database to be offline so that it remains unchanged.

---

**Warning:** After completing a reverse resynchronization, the content of the original database is discarded. Storage Checkpoints taken on the original database or the clone database before or after the snapshot was created are discarded. The `dbed_vmsnap -o reverse_resync_commit` command cannot be undone and should be used with extreme caution.

---

Before resynchronizing a database to a snapshot, make sure the following conditions have been met:

- Prerequisites
- You must be logged in as the Oracle database administrator.
  - Before you can reverse resynchronize the snapshot image, review the database snapshot procedure and create the snapshot.
  - The mount point for the primary database must be created by and owned by the Oracle DBA user before mounting the VxFS file system.
  - If a clone database has been created, you must shut it down and unmount the file systems using the `dbed_vmclonedb -o umount` command before you can reverse resynchronize the snapshot image. This command also deports the disk group if the primary and secondary hosts are different. See [“Shutting down the clone database and unmounting file systems”](#) on page 214.
  - The primary database must be offline.
- Usage notes
- The `dbed_vmsnap` command can only be executed on the primary host.
  - If the Oracle authentication password is used, you need to recreate it using the `ORAPWD` utility after executing `dbed_vmsnap -o reverse_resync_commit`.

### To begin reverse resynchronization

- ◆ Use the `-o reverse_resync_begin` option to the `dbed_vmsnap` command:

```
$ /opt/VRTS/bin/dbed_vmsnap -S ORACLE_SID -f SNAPPLAN \
-o reverse_resync_begin
```

Any mounted storage checkpoints must be unmounted before running `dbed_vmsnap -o reverse_resync`.

After executing `reverse_resync_commit`, checkpoints created on the original database will be deleted.

The `-o reverse_resync_begin` option imports the disk group that was deported from the secondary host and joins it back to the original disk group. The command unmounts the original volumes, mounts the snapshot volumes with the file systems that are configured for the primary database, and brings up the database snapshot image as the primary database. This operation requires the primary database to be offline so that its contents remain unchanged.

### To abort reverse resynchronization

- ◆ Use the `-o reverse_resync_begin` option of the `dbed_vmsnap` command:

```
$ /opt/VRTS/bin/dbed_vmsnap -S ORACLE_SID -f SNAPPLAN \
-o reverse_resync_abort
```

The `-o reverse_resync_abort` option aborts `-o reverse_resync_begin`, unmounts the snapshot volumes, and mounts the original volumes back with the file systems that are configured to use the volume. This operation is only allowed after `-o reverse_resync_begin` has been executed and cannot be used after reverse resynchronization has been committed (`-o reverse_resync_commit`).

### To commit reverse resynchronization changes

- 1 Use the `-o reverse_resync_commit` option of the `dbed_vmsnap` command:

```
$ /opt/VRTS/bin/dbed_vmsnap -S ORACLE_SID -f SNAPPLAN \
-o reverse_resync_commit
```

The `-o reverse_resync_commit` option commits the reverse resynchronization changes after you have verified that they are acceptable. The operation resynchronizes the original volume from the data in the snapshot.

- 2 Restart the primary database in `ARCHIVELOG` mode so that it is ready to take another snapshot.

If the Oracle authentication password file is used for the database, it needs to be recreated using the `ORAPWD` utility after the `reverse_resync_commit` operation is performed.

This example is valid only for the `online_snapshot` mode.

Reverse resynchronization is started on the primary host:

```
$ /opt/VRTS/bin/dbed_vmsnap -S PROD -f snap1 \
-o reverse_resync_begin
```

```
dbed_vmsnap started at 2004-04-02 15:53:45
Database PROD (SID=PROD) is running.
dbed_vmsnap ended at 2004-04-02 15:54:29
```

Reverse resynchronization is aborted on the primary host.

```
$ /opt/VRTS/bin/dbed_vmsnap -S PROD -f snap1 \
-o reverse_resync_abort
```

```
dbed_vmsnap started at 2004-04-02 16:16:44
The option reverse_resync_abort has been completed.
dbed_vmsnap ended at 2004-04-02 16:16:51
```

Reverse resynchronization changes are committed on the primary host.

```
$ /opt/VRTS/bin/dbed_vmsnap -S PROD -f snap1 \
-o reverse_resync_commit
```

```
dbed_vmsnap started at 2004-04-02 16:18:44
The option reverse_resync_commit has been completed.
dbed_vmsnap ended at 2004-04-02 16:18:56
```

## Resynchronizing the snapshot to your database

When you have finished using a clone database or want to refresh it, you can resynchronize it with the original database. This is also known as refreshing the snapshot volume or merging the split snapshot image back to the current database image. After resynchronizing, the snapshot can be retaken for backup or decision-support purposes.

There are two choices when resynchronizing the data in a volume:

- Resynchronizing the snapshot from the original volume.
- Resynchronizing the original volume from the snapshot. This choice is known as reverse resynchronization. Reverse resynchronization may be necessary to restore a corrupted database and is usually much quicker than using alternative approaches such as full restoration from backup media. Reverse resynchronization is not supported in Oracle RAC configurations.

Before resynchronizing the snapshot to your database, make sure the following conditions are met:

- |               |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
|---------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Prerequisites | <ul style="list-style-type: none"><li>■ You must be logged in as the Oracle database administrator.</li><li>■ Before you can resynchronize the snapshot image, you must validate a snapplan and create the snapshot. See <a href="#">“Summary of database snapshot steps”</a> on page 185. See <a href="#">“Validating a snapplan (dbed_vmchecksnap)”</a> on page 197. See <a href="#">“Creating a snapshot (dbed_vmsnap)”</a> on page 202.</li><li>■ If a clone database has been created, shut it down and unmount the file systems using the <code>dbed_vmclonedb -o umount</code> command. This command also deports the disk group. See <a href="#">“Shutting down the clone database and unmounting file systems”</a> on page 214.</li></ul> |
|---------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|

- Usage notes
- The `dbed_vmsnap` command can only be executed on the primary host, or if in an Oracle RAC configuration, on the CVM master node.
  - In a two-host configuration, the `dbed_vmsnap` command imports the disk group that was deported from the secondary host and joins the disk group back to the original disk group. The snapshot volumes again become plexes of the original volumes. The snapshot is then resynchronized.  
Two-host operations are not applicable to Oracle RAC configurations.
  - See the `dbed_vmsnap(1M)` manual page for more information.
  - As a good practice, it is recommended to remove the old archive logs after performing a reverse resynchronization.

### To resynchronize the snapshot image

- ◆ Use the `dbed_vmsnap` command as follows:

```
$ /opt/VRTS/bin/dbed_vmsnap -S ORACLE_SID -f SNAPPLAN -o resync
```

In this example, the snapshot image is resynchronized with the primary database.

```
$ /opt/VRTS/bin/dbed_vmsnap -S PROD -f snap1 -o resync
```

Now you can again start creating snapshots.

## Removing a snapshot volume

If a snapshot volume is no longer needed, you can remove it and free up the disk space for other uses by using the `vxedit rm` command.

- Prerequisites
- You must be logged in as root.
  - If the volume is on a mounted file system, you must unmount it before removing the volume.

### To remove a snapplan and snapshot volume

- 1 To remove the snapshot and free up the storage used by it:

If the snapshot has been taken:

- Remove the snapshot as follows:

```
vxsnap -g diskgroup dis snapshot_volume
vxvol -g diskgroup stop snapshot_volume
vxedit -g diskgroup -rf rm snapshot_volume
```

If the snapshot has not been taken and the snapshot plex (mirror) exists:

- Remove the snapshot as follows:

```
vxsnap -g diskgroup rmmir volume
```

- 2 Remove the DCO and DCO volume:

```
vxsnap -g diskgroup unprepare volume
```

- 3 Remove the snapplan:

```
/opt/VRTS/bin/dbed_vmchecksnap -D db -f snapplan -o remove
```

For example, the following commands will remove a snapshot volume from disk group PRODDg:

```
vxsnap -g PRODDg dis snap_v1
vxvol -g PRODDg stop snap_v1
vxedit -g PRODDg -rf rm snap_v1
```

## Using Database FlashSnap in an HA environment

Veritas Storage Foundation for Oracle supports Database FlashSnap in the HA environment.

---

**Note:** This HA information does not apply to using Database FlashSnap in a Veritas Storage Foundation for Oracle RAC environment.

---

When using Database FlashSnap in the HA environment, observe the following limitations:

- Modify the default snapplan to use the virtual host name defined for the database resource group for the `PRIMARY_HOST` and/or the `SECONDARY_HOST` parameters and validate the snapplan before creating a snapshot by running the following command:

```
dbed_vmchecksnap -S ORACLE_SID -H ORACLE_HOME -f SNAPPLAN \
-o validate
```

- The primary database must be down before you perform reverse resynchronization (`dbed_vmsnap -S ORACLE_SID -f SNAPPLAN -o reverse_resync_begin`). When Veritas Cluster Server (VCS) detects that the

primary database is down, it starts the failover process and the repository is unmounted and the `dbed_vmsnap` command is aborted.

**To avoid the VCS failover process**

- 1** As root, temporarily freeze the VCS resource group for the database:

```
hagr -freeze ResourceGroup
```

- 2** Shut down the primary database.

- 3** Run reverse resynchronization:

```
dbed_vmsnap -S ORACLE_SID -f SNAPPLAN -o \
reverse_resync_begin
```

- 4** After reverse resynchronization changes are committed (`-o reverse_resync_commit`), verify that the database has been started in ARCHIVELOG mode. This information is provided in the status messages that appear after running committing reverse resynchronization changes.

- 5** Unfreeze the resource group:

```
hagr -unfreeze ResourceGroup
```

# Using Veritas NetBackup for database backup

This chapter includes the following topics:

- [About using Veritas NetBackup for backup and restore](#)
- [About using Veritas NetBackup to backup and restore Oracle Disk Manager files](#)

## About using Veritas NetBackup for backup and restore

Veritas NetBackup provides for high performance, online (hot) backups of databases that must be available on a 24x7 basis, as well as offline (cold) database backups. Veritas NetBackup lets you back up and restore database files and directories. You can set up schedules for automatic, unattended, online, and offline database backup, as well as full or incremental backup. These backups are managed entirely by the NetBackup server. You can also manually back up database files from any of the NetBackup clients. Client users can perform database backups and restores from their client systems on demand.

## About using Veritas NetBackup to backup and restore Oracle Disk Manager files

Oracle allocates Oracle Disk Manager files with contiguous extent layouts for good database performance. When you back up your database using Veritas NetBackup, extent attributes are backed up automatically. When you restore database files they are allocated using these extent attributes. If you are using Oracle RMAN's conventional backup method with any backup software, datafiles are also restored with the proper extent layouts.

If you are not using NetBackup or you are using RMAN's "proxy copy" backup method with a backup software other than NetBackup, the extent attributes may not be backed up. To ensure the restored datafiles have proper extent layouts, preallocate the lost datafiles using the `odmmkfile` command. This command preallocates contiguous space for files prior to restoring them.

See the `odmmkfile(1M)` manual page.

For example, to preallocate an Oracle datafile with size 100 M, assuming the Oracle database block size is 8K, use the `odmmkfile` command and enter:

```
$ /opt/VRTS/bin/odmmkfile -h 8k -s 100m filename
```

# Tuning for performance

This chapter includes the following topics:

- [Additional documentation](#)
- [About tuning VxVM](#)
- [About tuning VxFS](#)
- [About tuning Oracle databases](#)

## Additional documentation

Use the tuning tips and information provided in this chapter in conjunction with other more in-depth publications, such as:

- *Oracle Performance Tuning Tips & Techniques* (Osborne McGraw-Hill)
- *Oracle9i Installation Guide* (Oracle Corporation)
- *Oracle 10g Installation Guide* (Oracle Corporation)
- *Oracle Performance Tuning* (O'Reilly & Associates)
- *Oracle Performance Tuning and Optimization* (Sams Publishing)
- *Veritas Volume Manager Administrator's Guide*, chapter on “VxVM Performance Monitoring”

## About tuning VxVM

Veritas Volume Manager (VxVM) is tuned for most configurations ranging from small systems to larger servers. On smaller systems with less than a hundred drives, tuning should not be necessary and Veritas Volume Manager should be capable of adopting reasonable defaults for all configuration parameters. On very

large systems, however, there may be configurations that require additional tuning of these parameters, both for capacity and performance reasons.

For more information on tuning VxVM, see the *Veritas Volume Manager Administrator's Guide*.

## About obtaining volume I/O statistics

If your database is created on a single file system that is on a single volume, there is typically no need to monitor the volume I/O statistics. If your database is created on multiple file systems on multiple volumes, or the volume configurations have changed over time, it may be necessary to monitor the volume I/O statistics for the databases.

Use the `vxstat` command to access information about activity on volumes, plexes, subdisks, and disks under VxVM control, and to print summary statistics to the standard output. These statistics represent VxVM activity from the time the system initially booted or from the last time the counters were reset to zero. If no VxVM object name is specified, statistics from all volumes in the configuration database are reported. Use the `-g` option to specify the database disk group to report statistics for objects in that database disk group.

VxVM records the following I/O statistics:

- count of operations
- number of blocks transferred (one operation can involve more than one block)
- average operation time (which reflects the total time through the VxVM interface and is not suitable for comparison against other statistics programs)

VxVM records the preceding three pieces of information for logical I/Os, including reads, writes, atomic copies, verified reads, verified writes, plex reads, and plex writes for each volume. VxVM also maintains other statistical data such as read failures, write failures, corrected read failures, corrected write failures, and so on. In addition to displaying volume statistics, the `vxstat` command is capable of displaying more detailed statistics on the components that form the volume. For detailed information on available options, refer to the `vxstat(1M)` manual page.

To reset the statistics information to zero, use the `-r` option. You can reset the statistics information for all objects or for only those objects that are specified. Resetting just prior to an operation makes it possible to measure the impact of that particular operation.

The following is an example of output produced using the `vxstat` command:

| OPERATIONS |      | BLOCKS |       | AVG TIME (ms) |       |      |       |
|------------|------|--------|-------|---------------|-------|------|-------|
| TYPE       | NAME | READ   | WRITE | READ          | WRITE | READ | WRITE |

|     |           |       |        |        |         |      |       |
|-----|-----------|-------|--------|--------|---------|------|-------|
| vol | blop      | 0     | 0      | 0      | 0       | 0.0  | 0.0   |
| vol | foobarvol | 0     | 0      | 0      | 0       | 0.0  | 0.0   |
| vol | rootvol   | 73017 | 181735 | 718528 | 1114227 | 26.8 | 27.9  |
| vol | swapvol   | 13197 | 20252  | 105569 | 162009  | 25.8 | 397.0 |
| vol | testvol   | 0     | 0      | 0      | 0       | 0.0  | 0.0   |

Additional information is available on how to use the `vxstat` output to identify volumes that have excessive activity and how to reorganize, change to a different layout, or move these volumes.

Additional volume statistics are available for RAID-5 configurations.

See the `vxstat(1M)` manual page.

See the “Performance Monitoring” section of the “Performance Monitoring and Tuning” chapter in the *Veritas Volume Manager Administrator's Guide*.

## About tuning VxFS

Veritas File System provides a set of tuning options to optimize file system performance for different application workloads. VxFS provides a set of tunable I/O parameters that control some of its behavior. These I/O parameters help the file system adjust to striped or RAID-5 volumes that could yield performance far superior to a single disk. Typically, data streaming applications that access large files see the largest benefit from tuning the file system.

### How monitoring free space works

In general, VxFS works best if the percentage of free space in the file system is greater than 10 percent. This is because file systems with 10 percent or more of free space have less fragmentation and better extent allocation. Regular use of the `df` command to monitor free space is desirable. Full file systems may have an adverse effect on file system performance. Full file systems should therefore have some files removed or should be expanded.

See the `fsadm_vxfs(1M)` manual page.

### About monitoring fragmentation

Fragmentation reduces performance and availability. Regular use of `fsadm`'s fragmentation reporting and reorganization facilities is therefore advisable.

The easiest way to ensure that fragmentation does not become a problem is to schedule regular defragmentation runs using the `cron` command.

Defragmentation scheduling should range from weekly (for frequently used file systems) to monthly (for infrequently used file systems). Extent fragmentation should be monitored with `fsadm` command.

There are three factors that can be used to determine the degree of fragmentation:

- Percentage of free space in extents that are less than eight blocks in length
- Percentage of free space in extents that are less than 64 blocks in length
- Percentage of free space in extents that are 64 or more blocks in length

An unfragmented file system will have the following characteristics:

- Less than 1 percent of free space in extents that are less than eight blocks in length
- Less than 5 percent of free space in extents that are less than 64 blocks in length
- More than 5 percent of the total file system size available as free extents that are 64 or more blocks in length

A badly fragmented file system will have one or more of the following characteristics:

- More than 5 percent of free space in extents that are less than 8 blocks in length
- More than 50 percent of free space in extents that are less than 64 blocks in length
- Less than 5 percent of the total file system size available as free extents that are 64 or more blocks in length

The optimal period for scheduling extent reorganization runs can be determined by choosing a reasonable interval, scheduling `fsadm` runs at the initial interval, and running the extent fragmentation report feature of `fsadm` before and after the reorganization.

The “before” result is the degree of fragmentation prior to the reorganization. If the degree of fragmentation approaches the percentages for bad fragmentation, reduce the interval between `fsadm`. If the degree of fragmentation is low, increase the interval between `fsadm` runs.

## How tuning VxFS I/O parameters works

VxFS provides a set of tunable I/O parameters that control some of its behavior. These I/O parameters are useful to help the file system adjust to striped or RAID-5

volumes that could yield performance far superior to a single disk. Typically, data streaming applications that access large files see the biggest benefit from tuning the file system.

If VxFS is being used with Veritas Volume Manager, the file system queries VxVM to determine the geometry of the underlying volume and automatically sets the I/O parameters. VxVM is queried by `mkfs` when the file system is created to automatically align the file system to the volume geometry. If the default alignment from `mkfs` is not acceptable, the `-o align=n` option can be used to override alignment information obtained from VxVM. The `mount` command also queries VxVM when the file system is mounted and downloads the I/O parameters.

If the default parameters are not acceptable or the file system is being used without VxVM, then the `/etc/vx/tunefstab` file can be used to set values for I/O parameters. The `mount` command reads the `/etc/vx/tunefstab` file and downloads any parameters specified for a file system. The `tunefstab` file overrides any values obtained from VxVM. While the file system is mounted, any I/O parameters can be changed using the `vxtunefs` command, which can have tunables specified on the command line or can read them from the `/etc/vx/tunefstab` file.

The `vxtunefs` command can be used to print the current values of the I/O parameters.

See the `vxtunefs(1M)` and `tunefstab(4)` manual pages.

## About tunable VxFS I/O parameters

The following are tunable VxFS I/O parameters:

|                            |                                                                                                                                                                                                                                                                                                                 |
|----------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <code>read_pref_io</code>  | The preferred read request size. The file system uses this parameter in conjunction with the <code>read_nstream</code> value to determine how much data to read ahead. The default value is 64K.                                                                                                                |
| <code>write_pref_io</code> | The preferred write request size. The file system uses this parameter in conjunction with the <code>write_nstream</code> value to determine how to do flush behind on writes. The default value is 64K.                                                                                                         |
| <code>read_nstream</code>  | The number of parallel read requests of size <code>read_pref_io</code> that you can have outstanding at one time. The file system uses the product of <code>read_nstream</code> multiplied by <code>read_pref_io</code> to determine its read ahead size. The default value for <code>read_nstream</code> is 1. |

|                                     |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
|-------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <code>write_nstream</code>          | The number of parallel write requests of size <code>write_pref_io</code> that you can have outstanding at one time. The file system uses the product of <code>write_nstream</code> multiplied by <code>write_pref_io</code> to determine when to do flush behind on writes. The default value for <code>write_nstream</code> is 1.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| <code>discovered_direct_iosz</code> | Any file I/O requests larger than the <code>discovered_direct_iosz</code> are handled as discovered direct I/O. A discovered direct I/O is unbuffered similar to direct I/O, but does not require a synchronous commit of the inode when the file is extended or blocks are allocated. For larger I/O requests, the CPU time for copying the data into the page cache and the cost of using memory to buffer the I/O data becomes more expensive than the cost of doing the disk I/O. For these I/O requests, using discovered direct I/O is more efficient than regular I/O. The default value of this parameter is 256K.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| <code>initial_extent_size</code>    | Changes the default initial extent size. VxFS determines the size of the first extent to be allocated to the file based on the first write to a new file. Normally, the first extent is the smallest power of 2 that is larger than the size of the first write. If that power of 2 is less than 8K, the first extent allocated is 8K. After the initial extent, the file system increases the size of subsequent extents (see <code>max_seqio_extent_size</code> ) with each allocation. Since most applications write to files using a buffer size of 8K or less, the increasing extents start doubling from a small initial extent. <code>initial_extent_size</code> can change the default initial extent size to be larger, so the doubling policy will start from a much larger initial size and the file system will not allocate a set of small extents at the start of file. Use this parameter only on file systems that will have a very large average file size. On these file systems, it will result in fewer extents per file and less fragmentation. <code>initial_extent_size</code> is measured in file system blocks. |
| <code>max_direct_iosz</code>        | The maximum size of a direct I/O request that will be issued by the file system. If a larger I/O request comes in, then it is broken up into <code>max_direct_iosz</code> chunks. This parameter defines how much memory an I/O request can lock at once, so it should not be set to more than 20 percent of memory.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |

|                                    |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
|------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <code>max_diskq</code>             | Limits the maximum disk queue generated by a single file. When the file system is flushing data for a file and the number of pages being flushed exceeds <code>max_diskq</code> , processes will block until the amount of data being flushed decreases. Although this doesn't limit the actual disk queue, it prevents flushing processes from making the system unresponsive. The default value is 1MB.                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
| <code>max_seqio_extent_size</code> | Increases or decreases the maximum size of an extent. When the file system is following its default allocation policy for sequential writes to a file, it allocates an initial extent that is large enough for the first write to the file. When additional extents are allocated, they are progressively larger (the algorithm tries to double the size of the file with each new extent) so each extent can hold several writes' worth of data. This is done to reduce the total number of extents in anticipation of continued sequential writes. When the file stops being written, any unused space is freed for other files to use. Normally, this allocation stops increasing the size of extents at 2048 blocks, which prevents one file from holding too much unused space. <code>max_seqio_extent_size</code> is measured in file system blocks. |

`write_throttle`

**Warning:** The `write_throttle` parameter is useful in special situations where a computer system has a combination of a lot of memory and slow storage devices. In this configuration, sync operations (such as `fsync()`) may take so long to complete that the system appears to hang. This behavior occurs because the file system is creating dirty pages (in-memory updates) faster than they can be asynchronously flushed to disk without slowing system performance.

Lowering the value of `write_throttle` limits the number of dirty pages per file that a file system will generate before flushing the pages to disk. After the number of dirty pages for a file reaches the `write_throttle` threshold, the file system starts flushing pages to disk even if free memory is still available. The default value of `write_throttle` typically generates a lot of dirty pages, but maintains fast user writes. Depending on the speed of the storage device, if you lower `write_throttle`, user write performance may suffer, but the number of dirty pages is limited, so sync operations will complete much faster.

Because lowering `write_throttle` can delay write requests (for example, lowering `write_throttle` may increase the file disk queue to the `max_diskq` value, delaying user writes until the disk queue decreases), it is recommended that you avoid changing the value of `write_throttle` unless your system has a large amount of physical memory and slow storage devices.

If the file system is being used with VxVM, it is recommended that you set the VxFS I/O parameters to default values based on the volume geometry.

If the file system is being used with a hardware disk array or volume manager other than VxVM, align the parameters to match the geometry of the logical disk. With striping or RAID-5, it is common to set `read_pref_io` to the stripe unit size and `read_nstream` to the number of columns in the stripe. For striping arrays, use the same values for `write_pref_io` and `write_nstream`, but for RAID-5 arrays, set `write_pref_io` to the full stripe size and `write_nstream` to 1.

For an application to do efficient disk I/O, it should issue read requests that are equal to the product of `read_nstream` multiplied by `read_pref_io`. Generally, any multiple or factor of `read_nstream` multiplied by `read_pref_io` should be a good size for performance. For writing, the same rule of thumb applies to the `write_pref_io` and `write_nstream` parameters. When tuning a file system, the best thing to do is try out the tuning parameters under a real-life workload.

If an application is doing sequential I/O to large files, it should issue requests larger than the `discovered_direct_iosz`. This causes the I/O requests to be performed as discovered direct I/O requests, which are unbuffered like direct I/O but do not require synchronous inode updates when extending the file. If the file is too large to fit in the cache, then using unbuffered I/O avoids throwing useful data out of the cache and lessons CPU overhead.

## Obtaining file I/O statistics using Veritas extension for Oracle Disk Manager

The `odmstat` command provides access to activity information on Oracle Disk Manager files on VxFS systems. Refer to the `odmstat(1M)` manual page for more information. The command reports statistics on the activity from the time that the files were opened by the Oracle Disk Manager interface. The command has an option for zeroing the statistics. When the file is closed, the statistics are discarded.

The `odmstat` command displays the following I/O statistics:

- Number of read and write operations
- Number of data blocks read and written
- Average time spent on read and write operations

**To obtain i/O statistics**

- ◆ Use the `odmstat` command as follows:

```
/opt/VRTS/bin/odmstat -i 5 /mnt/odmfile*
```

| FILE NAME                | OPERATIONS |       | FILE BLOCKS |       | AVG TIME (ms) |       |
|--------------------------|------------|-------|-------------|-------|---------------|-------|
|                          | READ       | WRITE | READ        | WRITE | READ          | WRITE |
| Mon May 11 16:21:10 2015 |            |       |             |       |               |       |
| /db/cust.dbf             | 0          | 0     | 0           | 0     | 0.0           | 0.0   |
| /db/system.dbf           | 0          | 0     | 0           | 0     | 0.0           | 0.0   |
| Mon May 11 16:21:15 2015 |            |       |             |       |               |       |
| /db/cust.dbf             | 371        | 0     | 371         | 0     | 0.2           | 0.0   |
| /db/system.dbf           | 0          | 371   | 0           | 371   | 0.0           | 5.7   |
| Mon May 11 16:21:20 2015 |            |       |             |       |               |       |
| /db/cust.dbf             | 813        | 0     | 813         | 0     | 0.3           | 0.0   |
| /db/system.dbf           | 0          | 813   | 0           | 813   | 0.0           | 5.5   |
| Mon May 11 16:21:25 2015 |            |       |             |       |               |       |
| /db/cust.dbf             | 816        | 0     | 816         | 0     | 0.3           | 0.0   |
| /db/system.dbf           | 0          | 816   | 0           | 816   | 0.0           | 5.3   |
| Mon May 11 16:21:30 2015 |            |       |             |       |               |       |
| /db/cust.dbf             | 0          | 0     | 0           | 0     | 0.0           | 0.0   |
| /db/system.dbf           | 0          | 0     | 0           | 0     | 0.0           | 0.0   |

**About I/O statistics**

When running your database through the file system, the read-write lock on each file allows only one active write per file. When you look at the disk statistics using `iostat`, the disk reports queueing time and service time. The service time is the time that I/O spends on the disk, and the queueing time is how long it waits for all of the other I/Os ahead of it. At the volume level or the file system level, there is no queueing, so `vxstat` and `qiostat` do not show queueing time.

For example, if you send 100 I/Os at the same time and each takes 10 milliseconds, the disk reports an average of 10 milliseconds of service and 490 milliseconds of queuing time. The `vxstat`, `odmstat`, and `qiostat` report an average of 500 milliseconds service time.

## About tuning Oracle databases

To achieve optimal performance on your Oracle database, the database needs to be tuned to work with VxFS. There are a number of Oracle parameters that you can tune to improve your Oracle database performance.

### Asynchronous I/O

Oracle Disk Manager supports kernel asynchronous I/O, which reduces CPU utilization and improves transaction throughput.

Enabling the following parameters lets Oracle take advantage of asynchronous I/O and avoids having to configure multiple DBWR slaves:

- If you are using ODM on Oracle9, you do not need to change any `init.ora` parameters.

Your Oracle Installation Guide provides detailed instructions on implementing asynchronous I/O on your system.

### Setting Oracle block reads during sequential scans

The `DB_FILE_MULTIBLOCK_READ_COUNT` parameter specifies the maximum number of blocks Oracle reads in one I/O operation during a sequential scan. The `/etc/system` tunable parameter `maxphys` establishes the maximum physical I/O transfer size at the operating system level. To take advantage of the maximum transfer size, the Oracle `init.ora` parameter `DB_FILE_MULTIBLOCK_READ_COUNT` should be set to `maxphys/DB_BLOCK_SIZE`.

For example, if `maxphys` is set to 1048576 and `DB_BLOCK_SIZE` is set to 4096, then `DB_FILE_MULTIBLOCK_READ_COUNT` should be set to 256.

### Setting slave parameters

ODM provides support for asynchronous I/O, eliminating the need for multiple logwriter slaves or database writer slaves. This parameter is set to 0 by default.

## Configuring memory allocation

Never configure Oracle to make use of more memory than is physically available on the system. Oracle may have to compete with other processes for system memory resources, and all of these potential processes must be considered when sizing and allocating memory. In the ideal configuration, a system that is dedicated to Oracle simplifies the tuning and monitoring issues and ensures best performance.

# Veritas Storage Foundation for Oracle Command Line Interface

This appendix includes the following topics:

- [Overview of commands](#)
- [About the command line interface](#)

## Overview of commands

Veritas Storage Foundation for Oracle provides a command line interface (CLI) to many key operations also supplied from within the GUI application. The command line interface lets you incorporate command operations into scripts and other administrative processes. These commands can be executed using the CLI or the Veritas Storage Foundation for Oracle GUI.

---

**Note:** The Veritas Storage Foundation for Oracle command line interface depends on certain tablespace, datafile, or container information (depending on your database) that is collected and stored in the SFDB repository. Some CLI commands update the repository by default. It is important to regularly ensure the repository is up-to-date by using the command.

---

All Veritas Storage Foundation for Oracle commands supported in the command line interface are located in the `/opt/VRTS/bin` directory. Online manual pages are located in the `/opt/VRTS/man` directory. Follow the installation instructions provided in the *Veritas Storage Foundation Installation Guide* to ensure you can use these commands and view the online manual pages.

**Warning:** Unless explicitly stated, commands are not supported by Veritas Storage Foundation for Oracle RAC.

**Table A-1** summarizes the commands available to you from the command line.

**Table A-1** Veritas Storage Foundation for Oracle commands

| Command                                                                                     | Description                                                                                                                                                                                                         |
|---------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| dbed_update<br>This command is supported by Veritas Storage Foundation for Oracle RAC.      | Updates the SFDB repository in Veritas Storage Foundation for Oracle.                                                                                                                                               |
| dbed_checkconfig                                                                            | Checks the configuration of an Oracle database in a Veritas Storage Foundation for Oracle environment.                                                                                                              |
| dbed_saveconfig                                                                             | Saves the configuration of an Oracle database in a Veritas Storage Foundation for Oracle environment.                                                                                                               |
| dbed_ckptcreate<br>This command is supported by Veritas Storage Foundation for Oracle RAC.  | Creates a Storage Checkpoint for an Oracle database.                                                                                                                                                                |
| dbed_ckptdisplay<br>This command is supported by Veritas Storage Foundation for Oracle RAC. | Displays Storage Checkpoints for an Oracle database.                                                                                                                                                                |
| dbed_ckptmount<br>This command is supported by Veritas Storage Foundation for Oracle RAC.   | Mounts a Storage Checkpoint for an Oracle database.                                                                                                                                                                 |
| dbed_ckptplan                                                                               | Used to obtain estimates of space usage for Storage Checkpoints. dbed_ckptplan manages scheduled Storage Checkpoint creation and summarizes statistics from these Storage Checkpoints.                              |
| dbed_ckptpolicy                                                                             | Creates and administers Storage Checkpoint allocation policies for a Multi-Volume File System (MVS). You can display, create, update, assign, and remove Storage Checkpoint allocation policies using this command. |
| dbed_ckptquota                                                                              | Administers quotas for Storage Checkpoints.                                                                                                                                                                         |

**Table A-1** Veritas Storage Foundation for Oracle commands (continued)

| Command                                                                                          | Description                                                                                                                                                                                                                                     |
|--------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| dbed_ckptremove<br><br>This command is supported by Veritas Storage Foundation for Oracle RAC.   | Removes a Storage Checkpoint for an Oracle database.                                                                                                                                                                                            |
| dbed_ckptrollback<br><br>This command is supported by Veritas Storage Foundation for Oracle RAC. | Rolls back an Oracle database to a Storage Checkpoint point-in-time image.                                                                                                                                                                      |
| dbed_ckptumount<br><br>This command is supported by Veritas Storage Foundation for Oracle RAC.   | Unmounts a Storage Checkpoint for an Oracle database.                                                                                                                                                                                           |
| dbed_clonedb<br><br>This command is supported by Veritas Storage Foundation for Oracle RAC.      | Creates a copy of an Oracle database by cloning all existing database files and recreating the control file accordingly. This cloned database can only be started on the same host as the existing database as long as it uses a different SID. |
| qio_convertdbfiles<br><br><b>Note:</b> This command is not available on Linux.                   | Converts VxFS files to Quick I/O files.                                                                                                                                                                                                         |
| dbed_analyzer<br><br>This command is supported by Veritas Storage Foundation for Oracle RAC.     | Maps tablespaces to physical disks and retrieves the information, including the percentage of disk space used by a tablespace.                                                                                                                  |
| edgetmsg2<br><br>This command is supported by Veritas Storage Foundation for Oracle RAC.         | Manages message log files. You can use this utility to display and list message log files. You can also use this utility to write a message to a log file or to the console, or read the log file and print to the console.                     |
| vxstorage_stats<br><br>This command is supported by Veritas Storage Foundation for Oracle RAC.   | Displays storage object I/O statistics.                                                                                                                                                                                                         |

## About the command line interface

You can use the Veritas Storage Foundation for Oracle command line interface to perform administrative operations. For more detailed information about the

commands and their syntax and available options, see the individual manual pages.

---

**Warning:** Unless explicitly stated in the "Usage notes" section, commands are not supported by Veritas Storage Foundation for Oracle RAC.

---

## Updating the repository using `dbed_update`

You can use the `dbed_update` command to update the repository.

Any time you change the structure of the database (for example, by adding or deleting datafiles, converting `PFILE` to `SFILE`, or converting `SFILE` to `PFILE`), you must run `dbed_update`.

Before updating the repository, review the following information:

- |               |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
|---------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Prerequisites | <ul style="list-style-type: none"> <li>■ You must be logged on as the database administrator (typically, the user ID <code>oracle</code>).</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                           |
| Usage notes   | <ul style="list-style-type: none"> <li>■ This command is supported by Veritas Storage Foundation for Oracle RAC.</li> <li>■ The <code>dbed_update</code> command saves or updates the information related to the Oracle database in the SFDB repository.</li> <li>■ The database must be up and running, and the <code>ORACLE_SID</code> and the <code>ORACLE_HOME</code> variable arguments must be specified with the <code>-S</code> and <code>-H</code> options, respectively.</li> <li>■ See the <code>dbed_update(1M)</code> manual page for more information.</li> </ul> |

[Table A-2](#) lists the options for updating the repository.

**Table A-2** Options for updating the repository

| Option | Description                                                                                                                                                                                                                                                                                           |
|--------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| -S     | <p>Specifies the <code>ORACLE_SID</code>, which is the name of the Oracle instance, for which a snapshot image will be created.</p> <p>In an Oracle RAC environment, the <code>ORACLE_SID</code> is the name of the local Oracle RAC instance. The command can be run on any Oracle RAC instance.</p> |
| -H     | <p>Specifies the Oracle home directory that corresponds to the <code>ORACLE_HOME</code>.</p>                                                                                                                                                                                                          |
| -G     | <p>Specifies the name of the VCS service group for the database if the Oracle database is under VCS control.</p>                                                                                                                                                                                      |

**Table A-2** Options for updating the repository (*continued*)

| Option | Description                             |
|--------|-----------------------------------------|
| -P     | Specifies the Oracle pfile information. |

**To update the SFDB repository**

- ◆ Use the `dbed_update` command as follows:

```
$ /opt/VRTS/bin/dbed_update -S PROD -H /oracle/product/9i
```

## Checking the database configuration environment using `dbed_checkconfig`

You can use the command to verify and report on the database environment from the command line.

Before checking the configuration environment, the following conditions must be met:

- |               |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
|---------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Prerequisites | <ul style="list-style-type: none"> <li>■ You must be logged on as the database administrator (typically, the user ID <code>oracle</code>).</li> </ul>                                                                                                                                                                                                                                                                                                                                   |
| Usage notes   | <ul style="list-style-type: none"> <li>■ The <code>dbed_checkconfig</code> command is used to verify various elements of the database environment. The utility attempts to use certain basic rules on database settings, file system and volume parameters and layout options to verify how resilient and well configured a configuration is. The information provided is valid for the supplied database.</li> <li>■ See the <code>dbed_checkconfig(1M)</code> manual page.</li> </ul> |

**To check the database configuration environment**

- ◆ Use the command as follows:

```
$ /opt/VRTS/bin/dbed_checkconfig -S PROD -H /oracle/product/9i
```

```
Examining file system attributes.
```

```
All file systems are VxFS.
```

```
All file systems are VxFS Version 4 or higher layout.
```

```
All file systems have the same version layout (version 6).
```

```
Examining Quick I/O settings.
```

```
All datafiles are Quick I/O files.
```

```
Examining Cached Quick I/O settings.
```

No file systems have Cached Quick I/O enabled.  
Examining datafiles fragmentation.

5 files are fragmented.  
Examining File System tunable settings.

Parameters for all VxFS file systems used by PROD.  
Filesystem i/o parameters for /prod\_db  
read\_pref\_io = 65536  
read\_nstream = 1  
read\_unit\_io = 65536  
write\_pref\_io = 65536  
write\_nstream = 1  
write\_unit\_io = 65536  
pref\_strength = 10  
buf\_breakup\_size = 1048576  
discovered\_direct\_iosz = 262144  
max\_direct\_iosz = 1048576  
default\_indir\_size = 8192  
qio\_cache\_enable = 0  
write\_throttle = 0  
max\_diskq = 1048576  
initial\_extent\_size = 8  
max\_seqio\_extent\_size = 2048  
max\_buf\_data\_size = 8192  
hsm\_write\_prealloc = 0  
read\_ahead = 1  
inode\_aging\_size = 0  
inode\_aging\_count = 0  
fcl\_maxalloc = 65075200  
fcl\_keeptime = 0  
fcl\_winterval = 3600  
Examining Oracle volume and file system layout.

Data for database PROD is contained in one volume group.  
Examining Oracle internal information.

Oracle Version is 9.2.0.4.0.  
Control file /prod\_db/control1 is on file system /prod\_db.  
Control file /prod\_db/control2 is on file system /prod\_db.  
Total of 2 control files over 1 file systems.

SFORA dbed\_checkconfig WARNING V-81-3122: Control files are not spread over multiple file systems. Spread control files over multiple file systems for better redundancy.

Examining Oracle automatic extension of datafiles.

Total of 0 datafiles are configured to auto extend.

Total of 9 datafiles are defined to the database.

Examining Oracle log modes.

The database is running in archivelog mode.

The database is running in automatic log archiving mode.

### To check the database configuration environment and not update the repository

- ◆ Use the `dbed_checkconfig` command with the `-v` and `-n` options as follows:

```
$ /opt/VRTS/bin/dbed_checkconfig -S PROD -H /oracle\
/product/9i -v -n
```

where:

- `-v` lists all files.
- `-n` stops the repository from being updated.

Examining file system attributes.

All file systems are VxFS.

All file systems are VxFS Version 4 or higher layout.

All file systems have the same version layout (version 6).

Examining Quick I/O settings.

All datafiles are Quick I/O files.

Examining Cached Quick I/O settings.

No file systems have Cached Quick I/O enabled.

Examining datafiles fragmentation.

5 files are fragmented.

/prod\_db/index02.dbf is fragmented.

/prod\_db/rolbak1.dbf is highly fragmented.

/prod\_db/system.dbf is highly fragmented.

/prod\_db/data01.dbf is highly fragmented.

/prod\_db/data02.dbf is highly fragmented.

Examining File System tunable settings.

Parameters for all VxFS file systems used by PROD.

```
Filesystem i/o parameters for /prod_db
read_pref_io = 65536
```

```
read_nstream = 1
read_unit_io = 65536
write_pref_io = 65536
write_nstream = 1
write_unit_io = 65536
pref_strength = 10
buf_breakup_size = 1048576
discovered_direct_iosz = 262144
max_direct_iosz = 1048576
default_indir_size = 8192
qio_cache_enable = 0
write_throttle = 0
max_diskq = 1048576
initial_extent_size = 8
max_seqio_extent_size = 2048
max_buf_data_size = 8192
hsm_write_prealloc = 0
read_ahead = 1
inode_aging_size = 0
inode_aging_count = 0
fcl_maxalloc = 65075200
fcl_keeptime = 0
fcl_winterval = 3600
```

Examining Oracle volume and file system layout.

Data for database PROD is contained in one volume group.

Examining Oracle internal information.

Oracle Version is 9.2.0.4.0.

Control file /prod\_db/control1 is on file system /prod\_db.

Control file /prod\_db/control2 is on file system /prod\_db.

Total of 2 control files over 1 file systems.

SFORA dbed\_checkconfig WARNING V-81-3122: Control files are not spread

over multiple file systems. Spread control files over multiple file systems for better redundancy.

Examining Oracle automatic extension of datafiles.

Total of 0 datafiles are configured to auto extend.

The following datafiles are not configured to autoextend:

```
/prod_db/deflt.dbf
/prod_db/temp.dbf
/prod_db/index02.dbf
/prod_db/index01.dbf
/prod_db/data1.dbf
/prod_db/rolbak1.dbf
/prod_db/system.dbf
/prod_db/data01.dbf
/prod_db/data02.dbf
```

Total of 9 datafiles are defined to the database.

Examining Oracle log modes.

The database is running in archive log mode.

The database is running in automatic log archiving mode.

## Saving the database configuration environment using `dbed_saveconfig`

You can use the `dbed_saveconfig` command to save configuration information on the database, Symantec products, and system hardware from the command line.

Before saving the configuration environment, the following conditions must be met:

- Prerequisites
- You must be logged on as the database administrator (typically, the user ID `oracle`).

Usage notes

- The `dbed_saveconfig` command is used to collect and record configuration information on the database, Symantec products, and system hardware. Information is gathered in the context of a specified database. The utility attempts to gather enough information to allow an administrator to reconstruct a system and database from scratch, in the case of a complete system failure.
- Information collected is in the form of many system configuration files and the results of querying the system hardware, Symantec products, and the database. The location where configuration information has been saved is displayed as output from the `dbed_saveconfig` command. Alternatively, you can use the `-l` option to designate this location.
- See the `dbed_saveconfig(1M)` manual page.

**To save the database configuration environment**

- ◆ Use the `dbed_saveconfig` command as follows:

```
$ /opt/VRTS/bin/dbed_saveconfig -S PROD -H /oracle/product/9i

Saving System and Oracle Information, please wait ...

System configuration information saved to directory:

/tmp/vxdbed.DR.1148
```

**To save the database configuration environment without updating the repository**

- ◆ Use the `dbed_saveconfig` command with the `-n` option as follows:

```
$ /opt/VRTS/bin/dbed_saveconfig -S PROD -H /oracle/product/9i -n

Saving System and Oracle Information, please wait ...

System configuration information saved to directory:

/tmp/vxdbed/DR.1149
```

## Creating Storage Checkpoints using `dbed_ckptcreate`

You can use the `dbed_ckptcreate` command to create a Storage Checkpoint from the command line.

Storage Checkpoints can be either online, offline, or instant. By default, Storage Checkpoints are offline. If `online` is specified, the database is put into hot-backup mode when the Storage Checkpoint is created. If `offline` is specified, the database

is expected to be down. If `instant` is specified, the database must be online and a Storage Checkpoint will be taken for a “crash recovery”-type Storage Rollback.

Before creating a Storage Checkpoint, the following conditions must be met:

- |               |                                                                                                                                                                                                                                                                                                                                                                                                                                                |
|---------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Prerequisites | <ul style="list-style-type: none"><li>■ You must be logged on as the database administrator (typically, the user ID <code>oracle</code>).</li><li>■ For best recoverability, always keep <code>ARCHIVELOG</code> mode enabled when you create Storage Checkpoints.</li></ul>                                                                                                                                                                   |
| Usage notes   | <ul style="list-style-type: none"><li>■ This command is supported by Veritas Storage Foundation for Oracle RAC.</li><li>■ In a Veritas Storage Foundation for Oracle environment, <code>dbed_ckptcreate</code> stores Storage Checkpoint information under the following directory:<br/><code>/etc/vx/vxdbed/\$ORACLE_SID/checkpoint_dir</code></li><li>■ See the <code>dbed_ckptcreate(1M)</code> manual page for more information.</li></ul> |

### To create Storage Checkpoints while the database is online

- ◆ Use the `dbed_ckptcreate` command as follows:

```
$ /opt/VRTS/bin/dbed_ckptcreate -S PROD \
-H /oracle/product/9i -o online

Creating online Storage Checkpoint of database PROD.

Storage Checkpoint Checkpoint_971672042 created.
```

### To create Storage Checkpoints without updating the repository while the database is online

- ◆ Use the `dbed_ckptcreate` command as follows:

```
$ /opt/VRTS/bin/dbed_ckptcreate -S PROD \
-H /oracle/product/9i -o online -n

Creating online Storage Checkpoint of database PROD.

Storage Checkpoint Checkpoint_971672043 created.
```

### To create Storage Checkpoints while the database is offline

- ◆ Use the `dbed_ckptcreate` command as follows:

```
$ /opt/VRTS/bin/dbed_ckptcreate -S PROD \
-H /oracle/product/9i -o offline

Creating offline Storage Checkpoint of database PROD.

Storage Checkpoint Checkpoint_971672044 created.
```

The default option is `online`.

### To create instant Storage Checkpoints

- ◆ Ensure that the database is online and use the `dbed_ckptcreate` command as follows:

```
$ /opt/VRTS/bin/dbed_ckptcreate -S PROD \
-H /oracle/product/9i -o instant

Creating instant Storage Checkpoint of database PROD.

Storage Checkpoint Checkpoint_971672045 created.
```

### To assign a Storage Checkpoint allocation policy to a Storage checkpoint

- ◆ Use the `dbed_ckptcreate` command as follows:

```
$ /opt/VRTS/bin/dbed_ckptcreate -S PROD \
-H /oracle/product/9i -o online -p ckpt_data,ckpt_metadata

Creating online Storage Checkpoint of database PROD.

Storage Checkpoint Checkpoint_971672044 created.
```

## Scheduling Storage Checkpoints using `dbed_ckptcreate` and `cron`

You can use the `dbed_ckptcreate` command to schedule Storage Checkpoint creation in a `cron` job or other administrative script.

Before scheduling Storage Checkpoints, the following conditions must be met:

- Prerequisites
- You must be logged on as the database administrator (typically, the user ID `oracle`).

## Usage notes

- Although `dbed_ckptcreate` is supported by Veritas Storage Foundation for Oracle RAC, this feature is not supported.
- Create a new `crontab` file or edit an existing `crontab` file to include a Storage Checkpoint creation entry with the following space-delimited fields:  
`minute hour day_of_month month_of_year day_of_week \`  
`/opt/VRTS/bin/dbed_ckptcreate`  
 where:  
`minute` - numeric values from 0-59 or \*  
`hour` - numeric values from 0-23 or \*  
`day_of_month` - numeric values from 1-31 or \*  
`month_of_year` - numeric values from 1-12 or \*  
`day_of_week` - numeric values from 0-6, with 0=Sunday or \*  
 Each of these variables can either be an asterisk (meaning all legal values) or a list of elements separated by commas. An element is either a number or two numbers separated by a hyphen (meaning an inclusive range).
- See the `dbed_ckptcreate(1M)`, `cron(1M)`, and `crontab(1)` manual pages for more information.

## Scheduling Storage Checkpoint creation in a cron job

Although the `dbed_ckptcreate` command is supported by Veritas Storage Foundation for Oracle RAC, this feature is not supported.

- To create a Storage Checkpoint twice a day, at 5:00 a.m. and 7:00 p.m., every Monday through Friday, include the following entry in your `crontab` file:

```
0 5,19 * * 1-5 /opt/VRTS/bin/dbed_ckptcreate -S PROD \
-H /oracle/product/9i -o instant
```

- To create a Storage Checkpoint at 11:30 p.m., on the 1st and 15th day of each month, include the following entry in your `crontab` file:

```
30 23 1,15 * * /opt/VRTS/bin/dbed_ckptcreate -S PROD \
-H /oracle/product/9i -o instant
```

- To create a Storage Checkpoint at 1:00 a.m. every Sunday while the database is offline, include the following entry in your `crontab` file:

```
0 1 * * 0 /opt/VRTS/bin/dbed_ckptcreate -S PROD \
-H /oracle/product/9i -o offline
```

## Displaying Storage Checkpoints using `dbed_ckptdisplay`

You can use the `dbed_ckptdisplay` command to display the Storage Checkpoints associated with an Oracle database from the command line.

You can also use it to display fileset quota values.

Before displaying Storage Checkpoints, the following conditions must be met:

- Prerequisites
  - You may be logged in as either the database administrator or `root`.
- Usage Notes
  - This command is supported by Veritas Storage Foundation for Oracle RAC.
  - In addition to displaying the Storage Checkpoints created by Veritas Storage Foundation for Oracle, `dbed_ckptdisplay` also displays other Storage Checkpoints (for example, Storage Checkpoints created by the Capacity Planning Utility and NetBackup).
  - The **Status** field identifies if the Storage Checkpoint is partial (P), complete (C), invalid (I), mounted (M), read-only (R), writable (W), or of type online (ON), offline (OF), instant (IN), or unknown (UN).
  - In a Veritas Storage Foundation for Oracle environment, Database FlashSnap commands are integrated with Storage Checkpoint functionality. It is possible to display and mount Storage Checkpoints carried over with snapshot volumes to a secondary host. However limitations apply.
  - See the `dbed_ckptdisplay(1M)` manual page for more information.

### To display Storage Checkpoints created by Veritas Storage foundation for Oracle

- ◆ Use the `dbed_ckptdisplay` command as follows to display information for Storage Checkpoints created by Veritas Storage Foundation for Oracle:

```
$ /opt/VRTS/bin/dbed_ckptdisplay -S PROD \
-H /oracle/product/9i

Checkpoint_975876659 Sun Apr 3 12:50:59 2005 P+R+IN

Checkpoint_974424522_wr001 Thu May 16 17:28:42 2005 C+R+ON

Checkpoint_974424522 Thu May 16 17:28:42 2005 P+R+ON
```

**To display other Storage Checkpoints**

- ◆ Use the `dbed_ckptdisplay` command as follows:

```
$ /opt/VRTS/bin/dbed_ckptdisplay -S PROD \
-H /oracle/product/9i -o other

NetBackup_incr_PROD_955133480 NBU /db01
NetBackup_full_PROD_9551329 52 NBU /db01
```

**To display other Storage Checkpoints without updating the repository**

- ◆ Use the `dbed_ckptdisplay` command as follows:

```
$ /opt/VRTS/bin/dbed_ckptdisplay -S PROD \
-H /oracle/product/9i -o other -n

NetBackup_incr_PROD_955133480 NBU /db01
NetBackup_full_PROD_9551329 52 NBU /db01
```

**To display all Storage Checkpoints**

- ◆ Use the `dbed_ckptdisplay` command as follows:

```
$ /opt/VRTS/bin/dbed_ckptdisplay -S PROD \
-H /oracle/product/9i -o all

Checkpoint_971672042 Sun May 15 13:55:53 2005 C+R+IN
Checkpoint_903937870 Fri May 13 22:51:10 2005 C+R+ON
Checkpoint_901426272 Wed May 11 16:17:52 2005 P+R+ON
NetBackup_incr_PROD_955133480 NBU /db01
NetBackup_full_PROD_9551329 52 NBU /db01
```

### To display all Storage Checkpoints without updating the repository

- ◆ Use the `dbed_ckptdisplay` command as follows:

```
$ /opt/VRTS/bin/dbed_ckptdisplay -S PROD \
-H /oracle/product/9i -o all -n

Checkpoint_971672042 Sun May 15 13:55:53 2005 C+R+IN
Checkpoint_903937870 Fri May 13 22:51:10 2005 C+R+ON
Checkpoint_901426272 Wed May 11 16:17:52 2005 P+R+ON

NetBackup_incr_PROD_955133480 NBU /db01
NetBackup_full_PROD_9551329 52 NBU /db01
```

### To display fileset quota values

- ◆ Use the `dbed_ckptdisplay` command as follows:

```
$ /opt/VRTS/bin/dbed_ckptdisplay -S PROD -c \
Checkpoint_903937870 -Q

Checkpoint_903937870 Wed Mar 19 9:12:20 2005 C+R+ON

Filesystem HardLim SoftLim CurrentUse

/oradata1/indx1_1 100000 50000 2028
/oradata1/user1_1 100000 50000 2028
/oradata1/temp 150000 80000 2142
/oradata1/system1 150000 70000 3092
```

---

**Warning:** This feature of `dbed_ckptdisplay` is not supported by Veritas Storage Foundation for RAC.

---

## Mounting Storage Checkpoints using `dbed_ckptmount`

You can use the `dbed_ckptmount` command to mount a Storage Checkpoint for the database from the command line.

Before mounting Storage Checkpoints, review the following information:

- Prerequisites
- You may be logged in as either the database administrator or `root`.

- Usage notes
- This command is supported by Veritas Storage Foundation for Oracle RAC.
  - The `dbed_ckptmount` command is used to mount a Storage Checkpoint into the file system namespace. Mounted Storage Checkpoints appear as any other file system on the machine and can be accessed using all normal file system based commands.
  - Storage Checkpoints can be mounted as read-only or read-write. By default, Storage Checkpoints are mounted as read-only.
  - If the `rw` (read-write) option is used, `_wrxxx`, where `xxx` is an integer, will be appended to the Storage Checkpoint name.
  - If the specified mount point directory does not exist, then `dbed_ckptmount` creates it before mounting the Storage Checkpoint, as long as the Oracle database owner has permission to create it.
  - Database FlashSnap commands are integrated with Storage Checkpoint functionality. It is possible to display and mount Storage Checkpoints carried over with snapshot volumes to a secondary host. However limitations apply.  
See “[Mounting the snapshot volumes and backing up](#)” on page 208.
  - See the `dbed_ckptmount(1M)` manual page for more information.

### To mount Storage Checkpoints with the read/write option

- ◆ Use the `dbed_ckptmount` command as follows:

```
$ /opt/VRTS/bin/dbed_ckptmount -S PROD -c Checkpoint_971672042 \
-m /tmp/ckpt_rw -o rw
```

```
Creating Storage Checkpoint on /tmp/ckpt_rw/share/oradata with
name Checkpoint_971672042_wr001
```

## Unmounting Storage Checkpoints using `dbed_ckptumount`

You can use the `dbed_ckptumount` command to unmount a Storage Checkpoint from the command line.

Before unmounting Storage Checkpoints, the following conditions must be met:

- Prerequisites
- You may be logged in as either the database administrator or `root`.

- Usage notes
- This command is supported by Veritas Storage Foundation for Oracle RAC.
  - The `dbed_ckptumount` command is used to unmount a mounted Storage Checkpoint from the file system namespace. Mounted Storage Checkpoints appear as any other file system on the machine and can be accessed using all normal file system based commands. When mounted Storage Checkpoints are not required, they can be unmounted.
  - See the `dbed_ckptumount(1M)` manual page for more information.

### To unmount Storage Checkpoints

- ◆ Use the `dbed_ckptumount` command as follows:

```
$ /opt/VRTS/bin/dbed_ckptumount -S PROD \
-c Checkpoint_971672042_wr001
```

## Creating and working with Storage Checkpoint allocation policies using `dbed_ckptpolicy`

You can use the `dbed_ckptpolicy` command to create and administer Storage Checkpoint allocation policies for Multi-Volume File Systems (MVSs). Storage Checkpoint allocation policies specify a list of volumes and the order in which to allocate data to them.

Before creating or working with Storage Checkpoint allocation policies, the following conditions must be met:

- Prerequisites
- You must be logged on as the database administrator (typically, the user ID `oracle`).

- Usage notes
- The `dbed_ckptpolicy` command can be used only on file systems using disk layout Version 6.
  - The VxVM volume set and VxFS Multi-Volume File System features must be enabled to use Storage Checkpoint allocation policies.
  - If you want to set a Storage Checkpoint allocation policy for a particular file system in the database, the VxFS Multi-Volume File System feature must be enabled on that file system.
  - The status of a Storage Checkpoint allocation policy is either `partial` or `complete`. A `partial` policy is one that does not exist on all file systems used by the database. A `complete` policy is one that exists on all file systems.
  - After an allocation policy is assigned to a Storage Checkpoint, the allocation mechanism attempts to satisfy requests from each device in the order specified in the allocation policy. If the request cannot be satisfied from any of the devices in the allocation policy, the request will fail, even if other devices that have space exist in the file system. Only devices listed in the policy can be allocated.
  - See the `dbed_ckptpolicy(1M)` manual page for more information.

### To create a Storage Checkpoint allocation policy

- ◆ Use the `dbed_ckptpolicy` command as follows:

```
$ /opt/VRTS/bin/dbed_ckptpolicy -S ORACLE_SID \
-o create -p ckpt_policy
```

Output similar to the following is displayed:

```
File System: /mvsfs/v2 (MVS volumes: mvsv4,mvsv5)
Assigned Data Policy: NONE (MVS Volumes: N/A)
Assigned Meta Data Policy: NONE (MVS Volumes: N/A)
Please enter the volume name(s), sperated by space,
for the policy ckpt_policy [skip,quit]: mvsv4
```

```
File System: /mvsfs/v1 (MVS volumes: mvsv1,mvsv2,mvsv3)
Assigned Data Policy: NONE (MVS Volumes: N/A)
Assigned Meta Data Policy: NONE (MVS Volumes: N/A)
Please enter the volume name(s), separated by space,
for the policy ckpt_policy [skip,quit]: mvsv2
```

```
The following information will be used to create policy ckpt_sample
ckpt_sample /mvsfs/v2 mvsv4
ckpt_sample /mvsfs/v1 mvsv2
```

This example assumes the following:

- Two MVS file systems `/mvsfs/v1` and `/mvsfs/v2` are used for datafiles.
- File system `/mvsfs/v1` is created on volume set `mvsset1`.
- File system `/mvsfs/v2` is created on volume set `mvsset2`.
- Volume set `mvsset1` contains volumes `mvsv1`, `mvsv2`, and `mvsv3`.
- Volume set `mvsset2` contains volumes `mvsv4` and `mvsv5`.

**To display Storage Checkpoint allocation policy within the database**

- ◆ Use the `dbed_ckptpolicy` command as follows:

```
$ /opt/VRTS/bin/dbed_ckptpolicy -S ORACLE_SID \
-n -o display [-c storage_ckpt | -p ckpt_policy]
```

If `-p ckpt_policy` and `-c storage_ckpt` options are not specified, output similar to the following is displayed:

| Policy Name   | File System Coverage |
|---------------|----------------------|
| ckpt          | Complete             |
| ckpt_data     | Complete             |
| ckpt_metadata | Complete             |
| new_ckpt      | Partial              |
| ckpt_sample   | Complete             |

If `-p ckpt_policy` option is specified, output similar to the following is displayed:

| Policy Name | File System | MVS volumes |
|-------------|-------------|-------------|
| ckpt_sample | /mvsfs/v2   | mvsv4       |
| ckpt_sample | /mvsfs/v1   | mvsv2       |

If the `-c storage_ckpt` option is specified, output similar to the following is displayed:

| Storage Checkpoint    | File System | Data Policy | Meta Data Policy |
|-----------------------|-------------|-------------|------------------|
| Checkpoint_1095125037 | /mvsfs/v2   | ckpt_data   | ckpt_metadata    |
| Checkpoint_1095125037 | /mvsfs/v1   | ckpt_data   | ckpt_metadata    |

**To update a Storage Checkpoint allocation policy**

- ◆ Use the `dbed_ckptpolicy` command as follows:

```
$ /opt/VRTS/bin/dbed_ckptpolicy -S ORACLE_SID \
-n -o update -p ckpt_policy
```

Output similar to the following is displayed:

```
File System: /mvsfs/v2 (MVS volumes: mvsv4,mvsv5)
Policy: ckpt_sample (MVS volumes: mvsv4)
Please enter the volume name(s), separated by space,
for the policy ckpt_sample [skip,quit]: mvsv5
```

```
File System: /mvsfs/v1 (MVS volumes: mvsv1,mvsv2,mvsv3)
Policy: ckpt_sample (MVS volumes: mvsv2)
Please enter the volume name(s), separated by space,
for the policy ckpt_sample [skip,quit]: mvsv2,mvsv3
```

```
The following information will be used to create policy ckpt_sample
ckpt_sample /mvsfs/v2 mvsv5
ckpt_sample /mvsfs/v1 mvsv2,mvsv3
```

**To assign a Storage Checkpoint allocation policy**

- ◆ Use the `dbed_ckptpolicy` command as follows to assign an allocation policy to a specified Storage Checkpoint:

```
$ /opt/VRTS/bin/dbed_ckptpolicy -S ORACLE_SID \
-n -o assign -c ckpt_name -p ckpt_policy[,ckpt_metadata_policy]
```

**To remove a Storage Checkpoint allocation policy**

- ◆ Use the `dbed_ckptpolicy` command as follows to remove an allocation policy from a specified Storage Checkpoint:

```
$ /opt/VRTS/bin/dbed_ckptpolicy -S ORACLE_SID \
-n -o remove -p ckpt_policy
```

## Administering Storage Checkpoint quotas using `dbed_ckptquota`

You can use the `dbed_ckptquota` command to administer file system quotas for Storage Checkpoint for a database from the command line.

Before administering Storage Checkpoint quotas, the following conditions must be met:

- Prerequisites
- You must be logged on as the database administrator (typically, the user ID `oracle`).
  - The repository entry for the database must exist and the DBA must be the owner of all file systems to be affected.
- Usage notes
- See the `dbed_ckptquota(1M)` manual page for more information.

### To set quota limits for all file systems in the database and enable quota enforcement

- ◆ Use the `dbed_ckptquota` command as follows to set the hard and soft limits for all file systems in the database and enable quota enforcement:

```
$ /opt/VRTS/bin/dbed_ckptquota -S PROD -H /ora10i \
-o set=50000,40000,enable
```

### To set quota limits for all file systems specified in a list file

- ◆ Use the `dbed_ckptquota` command as follows:

```
$ /opt/VRTS/bin/dbed_ckptquota -S PROD -H /ora10i \
-o set=25000,20000 -f quotacfg
```

### To disable quota limits for a file system

- ◆ Use the `dbed_ckptquota` command as follows:

```
$ /opt/VRTS/bin/dbed_ckptquota -S PROD -H /ora10i \
-o disable /ora/testvol03
```

### To display quota values for all file systems in the database

- ◆ Use the `dbed_ckptquota` command as follows:

```
$ /opt/VRTS/bin/dbed_ckptquota -S PROD -H /ora10i \
-o display
```

| Filesystem     | Hardlimit | Softlimit | CurrentUse |
|----------------|-----------|-----------|------------|
| /ora/prod      | 50000     | 40000     | 136        |
| /ora/testvol01 | 25000     | 20000     | 128        |
| /ora/testvol02 | 50000     | 40000     | 128        |
| /ora/testvol03 | 50000     | 40000     | 0          |
| /ora/testvol04 | 25000     | 20000     | 128        |
| /ora/testvol05 | 50000     | 40000     | 128        |

The numbers in the “Hardlimit” and “Softlimit” columns represent the total numbers of file system blocks allowed.

`CurrentUse` displays the number of filesystem blocks currently used by all Storage Checkpoints in the filesystem. If there are no Storage Checkpoints, or if quotas have been disabled, `CurrentUse` will display 0.

## Performing Storage Rollback using `dbed_ckptrollback`

You can use the `dbed_ckptrollback` command to rollback an Oracle database to a Storage Checkpoint.

Before performing a Storage Rollback, the following conditions must be met:

- Prerequisites
- You may be logged in as either the database administrator or `root`.

- Usage notes
- This command is supported by Veritas Storage Foundation for Oracle RAC.
  - The `dbed_ckptrollback` command rolls an Oracle database back to a specified Storage Checkpoint. You can perform a Storage Rollback for the entire database, a specific tablespace, or list of datafiles.  
Database rollback for the entire database requires that the database be inactive before Storage Rollback commences. The `dbed_ckptrollback` command will not commence if the Oracle database is active. However, to perform a Storage Rollback of a tablespace or datafile, only the tablespace or datafile to be rolled back must be offline (not the entire database).
  - You must run the `dbed_update` command after upgrading to Veritas Storage Foundation 5.0 for Oracle from a previous release. This will allow you to roll back to a Storage Checkpoint that was created with an earlier version of this product.
  - See the `dbed_ckptrollback(1M)` manual page for more information.

### To roll back an Oracle database to a Storage Checkpoint

- ◆ Use the `dbed_ckptrollback` command as follows:

```
$ /opt/VRTS/bin/dbed_ckptrollback -S PROD -H \
/oracle/product/9i -c Checkpoint_903937870
```

### To rollback a tablespace to a Storage Checkpoint

- ◆ Use the `dbed_ckptrollback` command with the `-T` option as follows:

```
$ /opt/VRTS/bin/dbed_ckptrollback -S PROD -H \
/oracle/product/9i -T DATA01 -c Checkpoint_903937870
```

If the Oracle database is running, you must take the tablespace offline before running this command. If the tablespace is online, the command will fail.

In the case of an instant Storage Checkpoint, rolling back a tablespace does not apply.

### To rollback datafiles to a Storage Checkpoint

- ◆ Use the `dbed_ckptrollback` command with the `-F` option as follows:

```
$ /opt/VRTS/bin/dbed_ckptrollback -S PROD -H /oracle/product/9i\
-F /share/oradata1/data01.dbf /share/oradata2/index01.dbf \
-c Checkpoint_903937870
```

If the Oracle database is running, you must take the datafile offline before running this command. If the datafile is online, the command will fail.

In the case of an instant Storage Checkpoint, rolling back datafiles does not apply.

## Removing Storage Checkpoints using `dbed_ckptremove`

You can use the `dbed_ckptremove` command to remove a Storage Checkpoint for an Oracle database at the command line.

Before removing Storage Checkpoints, the following conditions must be met:

- |               |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
|---------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Prerequisites | ■ You may be logged in as either the database administrator or <code>root</code> .                                                                                                                                                                                                                                                                                                                                                                                                               |
| Usage notes   | ■ This command is supported by Veritas Storage Foundation for Oracle RAC.<br>■ The <code>dbed_ckptremove</code> command is used to remove a Storage Checkpoint from the file system, or file systems, it is associated with. The Storage Checkpoint must have been created using the GUI or the <code>dbed_ckptcreate(1M)</code> command.<br>■ You must unmount the Storage Checkpoint before you can remove it.<br>■ See the <code>dbed_ckptremove(1M)</code> manual page for more information. |

### To remove Storage Checkpoints

- ◆ Use the `dbed_ckptremove` command as follows:

```
$ /opt/VRTS/bin/dbed_ckptremove -S PROD \
-c Checkpoint_971672042_wr001
```

## Managing the Capacity Planning Utility using `dbed_ckptplan`

---

**Note:** This utility is not available in Veritas Storage Foundation for Oracle on Linux.

---

You can use the `dbed_ckptplan` command to manage the Storage Checkpoint Capacity Planning utility at the command line.

Before using `dbed_ckptplan` to manage the Capacity Planning utility, note the following:

- The `dbed_ckptplan` command is used to obtain estimates on space usage for Storage Checkpoints. It obtains estimates by managing scheduled Storage Checkpoint creation and summarizing statistics from these Storage Checkpoints. You can only use the Storage Checkpoint Capacity Planning Utility in an environment that contains no Storage Checkpoints created by other tools or products.
- See the `dbed_ckptplan(1M)`, `cron(1M)`, and `crontab(1M)` manual pages for more information.

#### To create Capacity Planning Utility schedules

- ◆ Use the `dbed_ckptplan` command as follows:

```
$ /opt/VRTS/bin/dbed_ckptplan -s
```

#### To display capacity planning utility schedules

- ◆ Use the `dbed_ckptplan` command as follows:

```
$ /opt/VRTS/bin/dbed_ckptplan -l
```

#### To display Storage Checkpoint space usage on a VxFS file system

- ◆ Use the `dbed_ckptplan` command as follows:

```
$ /opt/VRTS/bin/dbed_ckptplan -p
```

#### To remove capacity planning utility schedules

- ◆ Use the `dbed_ckptplan` command as follows:

```
$ /opt/VRTS/bin/dbed_ckptplan -r
```

## Cloning the Oracle instance using `dbed_clonedb`

You can use the `dbed_clonedb` command to clone an Oracle instance using a Storage Checkpoint in either a Veritas Storage Foundation for Oracle or Veritas Storage Foundation for Oracle RAC environment.

In a Veritas Storage Foundation for Oracle environment, cloning an existing database using a Storage Checkpoint must be done on the same host. In a Veritas

Storage Foundation for Oracle RAC environment, cloning an existing database can be done on any node within the RAC database cluster. The clone database is started as a single instance on the node on which the `dbed_clonedb` command is executed.

You have the option to manually or automatically recover the database when using the `dbed_clonedb` command:

- Manual (interactive) recovery, which requires using the `-i` option, of the clone database allows the user to control the degree of recovery by specifying which archive log files are to be replayed.
- Automatic (non-interactive) recovery, which is the default usage of the command, recovers the entire database and replays all of the archive logs. You will not be prompted for any archive log names.

Before cloning the Oracle instance, review the following information:

- |               |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
|---------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Prerequisites | <ul style="list-style-type: none"><li>■ You must first create a Storage Checkpoint. See <a href="#">“Creating Storage Checkpoints using <code>dbed_ckptcreate</code>”</a> on page 248.</li><li>■ You must be logged in as the database administrator.</li><li>■ Make sure you have enough space and system resources to create a clone database on your system.</li><li>■ A clone database takes up as much memory and machine resources as the primary database.</li><li>■ In a Veritas Storage Foundation for Oracle RAC environment, the archive log destination is required to be on a Veritisa Cluster File System file system.</li></ul>                                                                                                  |
| Usage notes   | <ul style="list-style-type: none"><li>■ This command is supported by Veritas Storage Foundation for Oracle RAC.</li><li>■ In a Veritas Storage Foundation for Oracle RAC environment, cloning an Oracle database with an instant Storage Checkpoint is not supported.</li><li>■ The <code>dbed_clonedb</code> command is used to create a copy of a database, cloning all existing database files to new locations.</li><li>■ The <code>ORACLE_SID</code> and <code>ORACLE_HOME</code> environment variables must be set to the primary database.</li><li>■ It is assumed that the user has a basic understanding of the database recovery process.</li><li>■ See the <code>dbed_clonedb(1M)</code> manual page for more information.</li></ul> |

[Table A-3](#) lists the options for cloning the Oracle database.

**Table A-3** dbed\_clonedb command options

| Option                        | Description                                                                                                                                                                                                               |
|-------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| -S CLONE_SID                  | Specifies the name of the new Oracle SID, which will be the name of the new database instance.                                                                                                                            |
| -m MOUNT_POINT                | Indicates the new mount point of the Storage Checkpoint.                                                                                                                                                                  |
| -c CKPT_NAME                  | Indicates the name of the Storage Checkpoint.                                                                                                                                                                             |
| -i                            | Runs the command in interactive mode where you must respond to prompts by the system. The default mode is non-interactive. (Optional)                                                                                     |
| -o umount                     | Shuts down the clone database and unmounts the Storage Checkpoint file system.                                                                                                                                            |
| -o restartdb                  | Mounts the Storage Checkpoint file system and starts the clone database. The -o restartdb option will not attempt to recover the clone database.                                                                          |
| -d                            | Used with the -o umount option. If the -d option is specified, the Storage Checkpoint used to create the clone database will be removed along with the clone database.                                                    |
| -p<br>pfile_modification_file | Specifies a file containing initialization parameters to be modified or added to the clone database's initialization parameter file prior to startup. The format is the same as the Oracle initialization parameter file. |

**To clone an Oracle instance with manual Oracle recovery**

- ◆ Use the dbed\_clonedb command as follows:

```
$ /opt/VRTS/bin/dbed_clonedb -S NEW9 -m /local/oracle9/1 \
-c Checkpoint_988813047 -i
```

```
Primary Oracle SID is TEST9i
New Oracle SID is NEW9
Checkpoint_988813047 not mounted at /local/oracle9/1
Mounting Checkpoint_988813047 at /local/oracle9/1
Using environment-specified parameter file
/local/oracle9/links/dbs/initTEST9i.ora
Default Oracle parameter file found:
/local/oracle9/links/dbs/initTEST9i.ora
Copying /local/oracle9/links/dbs/initTEST9i.ora to
/local/oracle9/1/testvol
```

```
Control file 'ora_control2' path not explicitly
specified in init file; assuming ORACLE_HOME/dbs
```

```
All redo-log files found
```

```
Copying initTEST9i.ora to initNEW9.ora
 in /local/oracle9/1/testvol
```

```
Altering db_name in initNEW9.ora
```

```
Altering control file locations in initNEW9.ora
```

```
Creating new link for clone database init file
```

```
Creating archive log directory
```

```
About to start up new database and begin reconfiguration
```

```
Database NEW9 is being reconfigured
```

```
Altering clone database archive log directory
```

```
Updating log_archive_dest in clone database init file
```

```
Found archive log destination at /testvol
```

```
The latest archive log(s) must now be applied.
```

```
To apply the logs, open a new window and perform the following steps:
```

```
1. copy required archive log(s) from primary to clone:
```

```
 primary archive logs in /testvol
```

```
 clone archive logs expected in /local/oracle9/1/testvol
```

```
2. ORACLE_SID=NEW9; export ORACLE_SID # sh and ksh, OR
 setenv ORACLE_SID NEW9 #csh
```

```
3. /local/oracle9/links/bin/sqlplus /nolog
```

```
4. CONNECT / AS SYSDBA
```

```
5. RECOVER DATABASE UNTIL CANCEL USING BACKUP CONTROLFILE
```

```
6. enter the archive log(s) you wish to apply
```

```
7. EXIT
```

```
Press <Return> after you have completed the above steps.
```

```
<>
```

```
Resetting logs on new database NEW9
```

```
Database instance NEW9 is up and running
```

### To clone an Oracle instance with automatic Oracle recovery

◆ Use the `dbed_clonedb` command as follows:

```
$ /opt/VRTS/bin/dbed_clonedb -S NEW9 -m /local/oracle9/1 \
-c Checkpoint_988813047
```

```
Primary Oracle SID is TEST9i
```

```
New Oracle SID is NEW9
```

```
Checkpoint_988813047 not mounted at /local/oracle9/1
```

```
Mounting Checkpoint_988813047 at /local/oracle9/1
```

```
Using environment-specified parameter file
 /local/oracle9/links/dbs/initTEST9i.ora
Default Oracle parameter file found:
 /local/oracle9/links/dbs/initTEST9i.ora
Copying /local/oracle9/links/dbs/initTEST9i.ora
 to /local/oracle9/1/testvol
```

```
Control file 'ora_control2' path not explicitly
specified in init file; assuming ORACLE_HOME/dbs
```

```
All redo-log files found
Copying initTEST9i.ora to initNEW9.ora
 in /local/oracle9/1/testvol
Altering db_name in initNEW9.ora
Altering control file locations in initNEW9.ora
Creating new link for clone database init file
Creating archive log directory
About to start up new database and begin reconfiguration
Database NEW9 is being reconfigured
Starting automatic (full) database recovery
Shutting down clone database
Altering clone database archive log directory
Updating log_archive_dest in clone database init file
Found archive log destination at /testvol
Mounting clone database
Resetting logs on new database NEW9
Database instance NEW9 is up and running
```

### **To shut down the clone database and unmount the Storage Checkpoint**

- ◆ Use the `dbed_clonedbcommand` as follows:

```
$ /opt/VRTS/bin/dbed_clonedb -S NEW9 -o umount
```

### **To mount a Storage Checkpoint file system and start the clone database**

- ◆ Use the `dbed_clonedbcommand` as follows:

```
$ /opt/VRTS/bin/dbed_clonedb -S NEW9 -o restartdb
```

```
Database instance NEW9 is up and running.
```

**To delete a clone database and the Storage Checkpoint used to create it**

- ◆ Use the `dbed_clonedb` command as follows:

```
$ /opt/VRTS/bin/dbed_clonedb -S NEW9 -o umount -d
```

## Creating and working with snapplans using `dbed_vmchecksnap`

A snapplan specifies snapshot scenarios for a database (such as `online`, `instant`, or `offline`). You can name a snapplan file whatever you choose.

The `dbed_vmchecksnap` command is supported by Veritas Storage Foundation for Oracle RAC.

You can use the `dbed_vmchecksnap -o setdefaults` option to create the snapplan and set default values for the parameters. You may then modify the snapplan file using a text editor.

You can also use the command to validate, copy, list, or remove a snapplan and check the storage to make sure it is configured appropriately for the Database FlashSnap feature.

See “[Validating a snapplan \(dbed\\_vmchecksnap\)](#)” on page 197.

---

**Note:** You must have the Enterprise Edition of Veritas Storage Foundation for Oracle to use this command.

---

### Snapplan parameters

When using `dbed_vmchecksnap -o setdefaults` option to create the snapplan, the following parameters are set:

**Table A-4** Snapplan parameters

| Parameter                     | Value                                                                                                                                                              |
|-------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <code>SNAPSHOT_VERSION</code> | Specifies the snapshot version for this release of Veritas Storage Foundation for Oracle                                                                           |
| <code>PRIMARY_HOST</code>     | Specifies the name of the host where the primary database resides.<br><br>In Oracle RAC, <code>PRIMARY_HOST</code> specifies the host name of the CVM master node. |

**Table A-4** Snapplan parameters (*continued*)

| Parameter            | Value                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
|----------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| SECONDARY_HOST       | <p>Specifies the name of the host where the clone database will reside.</p> <p>In a Veritas Storage Foundation for Oracle environment, if the primary and secondary hosts are the same, the snapshot volumes will not be deported.</p> <p>In Oracle RAC, SECONDARY_HOST specifies the host name of the CVM master node.</p>                                                                                                                                                                     |
| PRIMARY_DG           | <p>Specifies the name of the Volume Manager disk group used by the primary database.</p>                                                                                                                                                                                                                                                                                                                                                                                                        |
| SNAPSHOT_DG          | <p>Specifies the name of the disk group containing the snapshot volumes.</p> <p>In a Veritas Storage Foundation for Oracle environment, the snapshot volumes will be put into this disk group on the primary host and deported if the primary and secondary hosts are different. The secondary host will import this disk group to start a clone database.</p>                                                                                                                                  |
| ORACLE_SID           | <p>The name of the Oracle database.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| ARCHIVELOG_DEST      | <p>Specifies the full path of the archive logs.</p> <p>There are several archive log destinations that can be used for database recovery if you are multiplexing the archive logs. You must specify which archive log destination to use.</p> <p>It is recommended that you have the archive log destination on a separate volume if SNAPSHOT_ARCHIVE_LOG is <b>yes</b> .</p>                                                                                                                   |
| SNAPSHOT_ARCHIVE_LOG | <p><b>yes or no</b></p> <p>Specifies whether to create a snapshot of the archive log volumes. Specify <b>yes</b> to split the archive log volume mirrors and deport them to the secondary host. When using the Oracle remote archive log destination feature to send the archive logs to the secondary host, you can specify <b>no</b> to save some space.</p> <p>Because the archive logs may not always be delivered to the secondary host reliably, it is recommended that you specify .</p> |

**Table A-4** Snapplan parameters (*continued*)

| Parameter           | Value                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
|---------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| SNAPSHOT_MODE       | <p><b>online</b> or <b>offline</b> or <b>instant</b></p> <p>Specifies whether the database snapshot should be online, offline, or instant.</p> <p>Only online snapshot mode is supported by Veritas Storage Foundation for Oracle RAC.</p> <p>If the snapshot is created while the database is online, the <code>dbed_vmsnap</code> command will put the tablespaces into backup mode. After <code>dbed_vmsnap</code> finishes creating the snapshot, it will take the tablespaces out of backup mode, switch the log files to ensure that the extra redo logs are archived, and create a snapshot of the archived logs.</p> <p>If the database is offline, it is not necessary to put the tablespaces into backup mode.</p> <p>If the snapshot mode is <code>instant</code>, a snapshot will be taken regardless of whether the database is online or offline. If it is online <code>dbed_vmsnap</code> will skip putting the tablespace into backup mode.</p> <p><b>Note:</b> If <code>SNAPSHOT_MODE</code> is set to <code>offline</code> or <code>instant</code>, a two-host configuration is required and the <code>-r relocate_path</code> option is not allowed.</p> |
| SNAPSHOT_PLAN_FOR   | <p>The default value is <b>database</b> and cannot be changed.</p> <p>Specifies the database object for which you want to create a snapshot.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| SNAPSHOT_PLEX_TAG   | <p>Specifies the name of the tag set to the plexes that will be used by <code>dbed_vmsnap</code> to take the snapshot. The <code>dbed_vmchecksnap</code> command will use this tag name to search if all the volumes in the database have the plexes with this tag name set.</p> <p>By default, <code>SNAPSHOT_PLEX_TAG=dbed_flashsnap</code>.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| SNAPSHOT_VOL_PREFIX | <p>Specifies the snapshot volume prefix. Use this variable to specify a prefix for the snapshot volumes split from the primary disk group. A volume name cannot be more than 32 characters.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |

**Table A-4** Snapplan parameters (*continued*)

| Parameter            | Value                                                                                                                                                                                                                                                                                                                                                                                                |
|----------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| ALLOW_REVERSE_RESYNC | <p><b>yes or no</b></p> <p>By default, reverse resynchronization is off (set equal to <code>no</code>). If it is set to <code>yes</code>, this parameter allows you to restore the original volume from a snapshot. The original database, however, must be down for this operation.</p> <p>In a Veritas Storage Foundation for Oracle RAC environment, this parameter must be set to <b>no</b>.</p> |
| SNAPSHOT_MIRROR      | <p>Specifies the number of plexes to be snapshot. The default value is 1.</p>                                                                                                                                                                                                                                                                                                                        |

## Creating a snapplan

Before creating a snapplan, the following conditions must be met:

### Prerequisites

- You must be the Oracle database administrator.
- The disk group must be version 110 or later. For more information on disk group versions, see the `vxdg(1M)` manual page.
- Be sure that a DCO and DCO volume are associated with the volume(s) for which you are creating the snapshot.
- Snapshot plexes and their associated DCO logs should be on different disks than the original plexes, and should be configured correctly for creating snapshots by the system administrator.
- Persistent FastResync must be enabled on the existing database volumes and disks must be assigned for the snapshot volumes.
- The database must be running in archive log mode. Archive log mode is set in the Oracle initialization parameter file (`init.ora`).
- `ORACLE_HOME` cannot reside on disk which will be used for snapshot.
- If the QuickLog feature is available, it must be disabled before creating a snapplan.

- Usage notes
- This command is supported by Veritas Storage Foundation for Oracle RAC.
  - In a Veritas Storage Foundation for Oracle RAC environment, the snapplan can be created on any node within the Oracle RAC cluster; however, the `-o validate` option must be run on the Veritas Volume Manager CVM master node.
  - In a Veritas Storage Foundation for Oracle environment, the snapplan must be created on the primary host.
  - After creating the snapplan using the `dbed_vmchecksnap` command, you can use a text editor to review and update the file, if necessary.
  - It is recommended that you create a local working directory to store your snapplans in. This applies to Veritas Storage Foundation for Oracle only.
  - See the `dbed_vmchecksnap(1M)` online manual page for more information.
  - If the `SNAPSHOT_MODE` for the database is set to `online`, the primary and secondary hosts can be the same. If the `SNAPSHOT_MODE` is set to `offline` or `instant`, the primary and secondary hosts must be different. This applies to Veritas Storage Foundation for Oracle only.

[Table A-5](#) lists the options for creating a snapplan.

**Table A-5** Options for creating a snapplan

| Option                      | Description                                                                                                                                                                                                                                                                                                                                                                                 |
|-----------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <code>-s</code>             | For Veritas Storage Foundation for Oracle, specifies the <code>ORACLE_SID</code> , which is the name of the Oracle database instance, for which a snapshot image will be created.<br><br>For Veritas Storage Foundation for Oracle RAC, specifies the <code>ORACLE_SID</code> , which is the name of the Oracle database instance where the Veritas Volume Manager CVM master node resides. |
| <code>-H</code>             | Specifies the Oracle home directory that corresponds to the <code>ORACLE_SID</code> .                                                                                                                                                                                                                                                                                                       |
| <code>-f SNAPPLAN</code>    | Specifies the local path or the full path of the snapplan that you are creating.                                                                                                                                                                                                                                                                                                            |
| <code>-o setdefaults</code> | Creates a default snapplan. This option can be used with the <code>-o validate</code> option to validate that the configuration is correct.                                                                                                                                                                                                                                                 |

**Table A-5** Options for creating a snapplan (*continued*)

| Option            | Description                                                                                                                                                                                                                                                                                                                                             |
|-------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| -o validate       | Validates each parameter in the snapplan and checks whether the snapshot volumes have been configured correctly for creating snapshots, and copies the snapplan to the repository.                                                                                                                                                                      |
| -o list           | Lists all the snapplans associated with a specific \$ORACLE_SID.                                                                                                                                                                                                                                                                                        |
| -o copy           | Copies the snapplan from the repository to your current local directory.                                                                                                                                                                                                                                                                                |
| -o remove         | Removes the snapplan from the repository.                                                                                                                                                                                                                                                                                                               |
| -t SECONDARY_HOST | Specifies the name of the host to which the snapshot image will be deported. If it is the same as the primary server, the snapshot volumes will not be deported. This argument is required if -o setdefaults is used. It is ignored if specified for -o validate.<br><br>In Oracle RAC, SECONDARY_HOST specifies the host name for the CVM master node. |
| -p plex_tag       | Specifies the tag name for the plexes used to create the snapshot. This argument is required if -o setdefaults is used.                                                                                                                                                                                                                                 |

**To create a snapplan and set the default values for a single host or an Oracle RAC cluster**

- ◆ Use the `dbed_vmchecksnap` command as follows:

```
$ /opt/VRTS/bin/dbed_vmchecksnap -S PROD -H /oracle/product/9i \
-f snap1 -o setdefaults -t host1
```

```
SNAPSHOT_VERSION=5.0
PRIMARY_HOST=host1
SECONDARY_HOST=host1
PRIMARY_DG=PRODDG
SNAPSHOT_DG=SNAP_PRODDG
ORACLE_SID=PROD
ARCHIVELOG_DEST=/prod_ar
SNAPSHOT_ARCHIVE_LOG=yes
SNAPSHOT_MODE=online
SNAPSHOT_PLAN_FOR=database
```

```
SNAPSHOT_PLEX_TAG=dbed_flashsnap
SNAPSHOT_VOL_PREFIX=SNAP_
ALLOW_REVERSE_RESYNC=no
SNAPSHOT_MIRROR=1
```

### To create a snapplan and set the default values in a two-host configuration

- ◆ Use the `dbed_vmchecksnap` command as follows:

```
$ /opt/VRTS/bin/dbed_vmchecksnap -S PROD \
-H /oracle/product/9i -f snap2 -o setdefaults -t host2
```

---

**Warning:** This procedure does not apply to Veritas Storage Foundation for Oracle RAC.

---

```
Snapplan snap2 for PROD.
```

```
=====
SNAPSHOT_VERSION=4.0
PRIMARY_HOST=host1
SECONDARY_HOST=host2
PRIMARY_DG=PRODdg
SNAPSHOT_DG=SNAP_PRODdg
ORACLE_SID=PROD
ARCHIVELOG_DEST=/mytest/arch
SNAPSHOT_ARCHIVE_LOG=yes
SNAPSHOT_MODE=online
SNAPSHOT_PLAN_FOR=database
SNAPSHOT_PLEX_TAG=dbed_flashsnap
SNAPSHOT_VOL_PREFIX=SNAP_
ALLOW_REVERSE_RESYNC=no
SNAPSHOT_MIRROR=1
```

### Validating a snapplan

You can use the `dbed_vmchecksnap` command with the `-o validate` option to validate a snapplan and check the storage to make sure it is configured appropriately for the Database FlashSnap feature.

**To validate a snapplan for a snapshot image to be used on the primary host (single instance Oracle)**

- ◆ Use the `dbed_vmchecksnap` command as follows:

```
$ /opt/VRTS/bin/dbed_vmchecksnap -S PROD -H /oracle/product/9i \
-f snap1 -o validate
```

```
PRIMARY_HOST is host1
SECONDARY_HOST is host1
The version of PRIMARY_DG-PRODDg is 110.
SNAPSHOT_DG is SNAP_PRODDg
SNAPSHOT_MODE is online
The database is running in archivelog mode.
ARCHIVELOG_DEST is /prod_ar
SNAPSHOT_PLAN_FOR is database
SNAPSHOT_ARCHIVE_LOG is yes
ARCHIVELOG_DEST=/prod_ar is mount on /dev/vx/dsk/PRODDg/prod_ar.
Examining Oracle volume and disk layout for snapshot
Volume prod_db on PRODDg is ready for snapshot.
Original plex and DCO log for prod_db is on PRODDg01.
Snapshot plex and DCO log for prod_db is on PRODDg02.
SNAP_PRODDg for snapshot will include: PRODDg02
ALLOW_REVERSE_RESYNC is yes
The snapplan snap1 has been created.
```

**To validate a snapplan for a snapshot image to be used on the VxVM CVM master node (Oracle RAC)**

- ◆ Use the `dbed_vmchecksnap` command as follows:

```
$ /opt/VRTS/bin/dbed_vmchecksnap -S PROD -H /oracle/product/9i \
-f snap1 -o validate
```

```
PRIMARY_HOST is host1
SECONDARY_HOST is host1
The version of PRIMARY_DG-PRODDg is 110.
SNAPSHOT_DG is SNAP_PRODDg
SNAPSHOT_MODE is online
The database is running in archivelog mode.
ARCHIVELOG_DEST is /prod_ar
SNAPSHOT_PLAN_FOR is database
SNAPSHOT_ARCHIVE_LOG is yes
ARCHIVELOG_DEST=/prod_ar is mount on /dev/vx/dsk/PRODDg/prod_ar.
```

```
Examining Oracle volume and disk layout for snapshot
Volume prod_db on PRODDg is ready for snapshot.
Original plex and DCO log for prod_db is on PRODDg01.
Snapshot plex and DCO log for prod_db is on PRODDg02.
SNAP_PRODDg for snapshot will include: PRODDg02
ALLOW_REVERSE_RESYNC is no
The snapplan snap1 has been created.
```

### To validate a snapplan for a snapshot image to be used on the secondary host

- ◆ Use the `dbed_vmchecksnap` command as follows:

```
$ /opt/VRTS/bin/dbed_vmchecksnap -S PROD -H \
/oracle/product/9i -f snap2 -o validate
```

---

**Warning:** This procedure does not apply to Veritas Storage Foundation for Oracle RAC.

---

```
PRIMARY_HOST is host1
SECONDARY_HOST is host2
The version of PRIMARY_DG-PRODDg is 110.
SNAPSHOT_DG is SNAP_PRODDg
SNAPSHOT_MODE is online
The database is running in archivelog mode.
ARCHIVELOG_DEST is /mytest/arch
SNAPSHOT_PLAN_FOR is database
SNAPSHOT_ARCHIVE_LOG is yes
ARCHIVELOG_DEST=/mytest/arch is mount on /dev/vx/dsk/PRODDg/rch.
Examining Oracle volume and disk layout for snapshot.
Volume prod_db on PRODDg is ready for snapshot.
Original plex and DCO log for prod_db is on PRODDg01.
Snapshot plex and DCO log for prod_db is on PRODDg02.
SNAP_PRODDg for snapshot will include: PRODDg02
ALLOW_REVERSE_RESYNC is yes
The snapplan snap2 has been created.
```

### Listing and viewing snapplans using `dbed_vmchecksnap`

The `dbed_vmchecksnap` command allows you to list and view existing snapplans.

### To list all available snapplans for a specific Oracle database

- ◆ Use the `dbed_vmchecksnap` command as follows:

```
$ /opt/VRTS/bin/dbed_vmchecksnap -S PROD -o list
```

The following snapplan(s) are available for PROD:

| SNAP_PLAN | SNAP_STATUS | DB_STATUS | SNAP_READY |
|-----------|-------------|-----------|------------|
| snap1     | init_full   | -         | yes        |
| snap2     | init_full   | -         | yes        |
| snap3     | init_full   | -         | yes        |

The command output displays all available snapplans, their snapshot status (`SNAP_STATUS`), database status (`DB_STATUS`), and whether a snapshot may be taken (`SNAP_READY`).

See [“Database FlashSnap snapshot status and database status”](#) on page 301.

### To view a snapplan in a single-instance Oracle or Oracle RAC environment

- ◆ Use the `dbed_vmchecksnap` command as follows:

```
$ /opt/VRTS/bin/dbed_vmchecksnap -S PROD -f snap1 -o list
```

```
SNAPSHOT_VERSION=5.0
PRIMARY_HOST=host1
SECONDARY_HOST=host1
PRIMARY_DG=PRODdg
SNAPSHOT_DG=SNAP_PRODdg
ORACLE_SID=PROD
ARCHIVELOG_DEST=/prod_ar
SNAPSHOT_ARCHIVE_LOG=yes
SNAPSHOT_MODE=online
SNAPSHOT_PLAN_FOR=database
SNAPSHOT_PLEX_TAG=dbed_flashsnap
SNAPSHOT_VOL_PREFIX=SNAP_
ALLOW_REVERSE_RESYNC=no
SNAPSHOT_MIRROR=1

STORAGE_INFO
PRODdg02
SNAP_PLEX=prod_db-02 prod_ar-02
```

```
STATUS_INFO
SNAP_STATUS=init_full
```

## Copying or removing a snapplan using `dbed_vmchecksnap`

The `dbed_vmchecksnap` command allows you to copy or remove snapplans.

### To copy a snapplan from the repository to your local directory

- ◆ Assuming that the snapplan is not already present in your local directory, use the `dbed_vmchecksnap` command as follows:

```
$ /opt/VRTS/bin/dbed_vmchecksnap -S PROD -f snap1 -o copy

Copying 'snap1' to '/export/snap_dir'
```

### To remove a snapplan

- ◆ Use the `dbed_vmchecksnap` command as follows:

```
$ /opt/VRTS/bin/dbed_vmchecksnap -S PROD -f snap1 -o remove

The snapplan snap1 has been removed from the repository.
```

## Creating, resynchronizing, or reverse resynchronizing a snapshot database using `dbed_vmsnap`

You can use the `dbed_vmsnap` command to create a snapshot image of a database. The snapshot can be used locally or on another host that is physically attached to the shared storage. You can also resynchronize the snapshot image back to the primary database.

The `dbed_vmsnap` command is supported by Veritas Storage Foundation for Oracle RAC; however, only creating and resynchronizing a database are supported.

Before creating, resynchronizing, or reverse resynchronizing a snapshot database, review the following information:

- Prerequisites
- You must be logged in as the Oracle database administrator.
  - You must create and validate a snapplan using `dbed_vmchecksnap` before you can create a snapshot image with `dbed_vmsnap`.

- Usage notes
- Creating and resynchronizing a database are supported by Veritas Storage Foundation for Oracle RAC. Reverse resynchronization is not supported.
  - The `dbed_vmsnap` command can only be used on the primary host. In an Oracle RAC environment, the `dbed_vmsnap` command can only be used on the Veritas Volume Manager CVM volume.
  - If possible, do not share volumes between Oracle database files and other software.
  - When creating a snapshot volume, create the snapshot on a separate controller and on separate disks from the primary volume.
  - Make sure your archive log destination is separate from your Oracle database volumes. In an Oracle RAC environment, make sure the archive log is on the Veritas Volume Manager CVM master node.
  - Do not place any datafiles, including control files, in the `$ORACLE_HOME/dbs` directory.
  - Resynchronization speed varies based on the amount of data changed in both the primary and secondary volumes when the mirror is broken off.
  - See the `dbed_vmsnap(1M)` manual page for more information.

Options for the `dbed_vmsnap` command are:

**Table A-6** `dbed_vmsnap` command options

| Option                                 | Description                                                                                                                                                                                                                                                                                                                                                                                 |
|----------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <code>-S ORACLE_SID</code>             | For Veritas Storage Foundation for Oracle, specifies the <code>ORACLE_SID</code> , which is the name of the Oracle database instance, for which a snapshot image will be created.<br><br>For Veritas Storage Foundation for Oracle RAC, specifies the <code>ORACLE_SID</code> , which is the name of the Oracle database instance where the Veritas Volume Manager CVM master node resides. |
| <code>-f SNAPPLAN</code>               | Specifies the name of the snapplan you are using.                                                                                                                                                                                                                                                                                                                                           |
| <code>-o snapshot [-F]   resync</code> | Specifies whether to create a snapshot or synchronize the snapshot image with the current database image. The <code>-F</code> option prepares the volumes for being snapshot and forces snapshot creation.                                                                                                                                                                                  |
| <code>-o reverse_resync_begin</code>   | Begins reverse resynchronization.<br><br>Not supported by Veritas Storage Foundation for Oracle RAC.                                                                                                                                                                                                                                                                                        |

**Table A-6** dbed\_vmsnap command options (*continued*)

| Option                      | Description                                                                                                                                                                                           |
|-----------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| -o<br>reverse_resync_commit | Commits the reverse resynchronization changes after you have verified that they are acceptable.<br><br>Not supported by Veritas Storage Foundation for Oracle RAC.                                    |
| -o<br>reverse_resync_abort  | Aborts reverse resynchronization and mounts the original volumes back with the file systems that are configured to use the volume.<br><br>Not supported by Veritas Storage Foundation for Oracle RAC. |

**To create a snapshot image on the primary host (single instance Oracle)**

- ◆ Use the `dbed_vmsnap` command as follows:

```
$ /opt/VRTS/bin/dbed_vmsnap -S PROD -f snap1 -o snapshot
```

```
dbed_vmsnap started at 2005-04-02 14:15:27
```

```
The database is running in archivelog mode.
```

```
A snapshot of ORACLE_SID PROD is in DG SNAP_PRODDg.
```

```
Snapplan snap1 is used for the snapshot.
```

```
Oracle Database server is orasvr.
```

```
If -r <relocate_path> is used in dbed_vmclonedb, make sure
<relocate_path> is created and owned by Oracle DBA. Otherwise,
the following mount points need to be created and owned by
Oracle DBA:
```

```
 /prod_db.
```

```
 /prod_ar.
```

```
dbed_vmsnap ended at 2004-04-02 14:16:11
```

### To create a snapshot image on the CVM master node (Oracle RAC)

- ◆ Use the `dbed_vmsnap` command as follows:

```
$ /opt/VRTS/bin/dbed_vmsnap -S PROD -f snap1 -o snapshot

dbed_vmsnap started at 2005-04-02 14:15:27
The database is running in archivelog mode.
A snapshot of ORACLE_SID PROD is in DG SNAP_PRODdg.
Snapplan snap1 is used for the snapshot.
Oracle Database server is orasvr.
If -r <relocate_path> is used in dbed_vmclonedb, make sure
<relocate_path> is created and owned by Oracle DBA. Otherwise,
the following mount points need to be created and owned by
Oracle DBA:

 /prod_db.
 /prod_ar.

dbed_vmsnap ended at 2004-04-02 14:16:11
```

### To resynchronize a snapshot to your database

- ◆ Use the `dbed_vmsnap` command as follows:

```
$ /opt/VRTS/bin/dbed_vmsnap -S PROD -f snap1 -o resync

dbed_vmsnap started at 2005-03-15 10:07:10

The option resync has been completed.

dbed_vmsnap ended at 2005-03-15 10:07:21
```

### To resynchronize your database to a snapshot

- ◆ Assuming the mount point for the primary database was created and owned by the Oracle DBA user before mounting the VxFS file system, use the `dbed_vmsnap` command as follows:

```
$ /opt/VRTS/bin/dbed_vmsnap -S PROD -f snap1 \
-o reverse_resync_begin

dbed_vmsnap started at 2004-04-02 15:53:45

Database PROD (SID=PROD) is running.

dbed_vmsnap ended at 2004-04-02 15:54:29
```

### To abort resynchronizing your database to a snapshot

- ◆ Use the `dbed_vmsnap` command as follows:

```
$ /opt/VRTS/bin/dbed_vmsnap -S PROD -f snap1 -o \
reverse_resync_abort
```

```
dbed_vmsnap started at 2004-04-02 16:16:44
```

```
The option reverse_resync_abort has been completed.
```

```
dbed_vmsnap ended at 2004-04-02 16:16:51
```

This option is only allowed when `reverse_resync_begin` has been run. It is not allowed if `reverse_resync_commit` has been executed.

---

**Warning:** The procedure is not supported by Veritas Storage Foundation for Oracle RAC.

---

### To commit reverse resynchronization changes

- ◆ Use the `dbed_vmsnap` command as follows:

---

**Warning:** Upon completion of reverse resynchronization, the content of the original database is discarded. Storage Checkpoints taken on either the original database or the clone database before or after the snapshot was created are discarded. Storage Checkpoints taken before the snapshot was created are preserved. The `dbed_vmsnap -o reverse_resync_commit` command cannot be undone and should be used with extreme caution.

---

```
$ /opt/VRTS/bin/dbed_vmsnap -S PROD -f snap1 -o \
reverse_resync_commit
```

```
dbed_vmsnap started at 2005-04-02 16:16:44
```

```
The option reverse_resync_commit has been completed.
```

```
dbed_vmsnap ended at 2005-04-02 16:18:56
```

This option is only allowed after `reverse_resync_begin` has been run.

---

**Warning:** The procedure is not supported by Veritas Storage Foundation for Oracle RAC.

---

## Creating or shutting down a clone database using `dbed_vmclonedb`

You can use the `dbed_vmclonedb` command to create or shutdown a clone database on either the primary or secondary host using snapshot volumes from the primary host.

In an Oracle RAC environment, you can create or shutdown a clone database using snapshot volumes on the CVM master node.

Before creating or shutting down a clone database, the following conditions must be met:

- Prerequisites
- You must be logged in as the Oracle database administrator to use `dbed_vmclonedb` command.
  - Before you can use the `dbed_vmclonedb` command, you must create and validate a snapplan and create a snapshot.
  - The volume snapshot must contain the entire database.
  - The system administrator must provide the database administrator with access to the necessary volumes and mount points.
  - Before you can use the `dbed_vmclonedb` command with the `-r relocate_path` option (which specifies the initial mount point for the snapshot image), the system administrator must create the mount point and then change the owner to the Oracle database administrator. This parameter is required for Oracle RAC.
  - If `SNAPSHOT_MODE` is set to `offline` or `instant`, a two-host configuration is required and `-r relocate_path` is not allowed. (This does not apply to Veritas Storage Foundation for Oracle RAC.)

- Usage notes
- This command is supported by Veritas Storage Foundation for Oracle RAC.
  - For Veritas Storage Foundation for Oracle RAC, the `dbed_vmclonedb` command must be run from on the CVM master node.
  - For Veritas Storage Foundation for Oracle, the `dbed_vmclonedb` command can be used on the secondary host.
  - In a single-host configuration, the primary and secondary hosts are the same. In an Oracle RAC environment, the primary and secondary hosts are set to the CVM master node.
  - In single-host and Oracle RAC configurations, `-r relocate_path` is required.
  - In a two-host configuration, the `server_name=svr_name` option is required. This option is required in an Oracle RAC environment as well.
  - Database FlashSnap commands are integrated with Storage Checkpoint functionality. It is possible to display and mount Storage Checkpoints carried over with snapshot volumes to a secondary host. However limitations apply.
  - See the `dbed_vmclonedb(1M)` manual page for more information.

Options for are:

**Table A-7** `dbed_vmclonedb` options

| Option                     | Description                                                                                                                                                                                                                                                                                                                                                                                 |
|----------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <code>-S ORACLE_SID</code> | For Veritas Storage Foundation for Oracle, specifies the <code>ORACLE_SID</code> , which is the name of the Oracle database instance, for which a snapshot image will be created.<br><br>For Veritas Storage Foundation for Oracle RAC, specifies the <code>ORACLE_SID</code> , which is the name of the Oracle database instance where the Veritas Volume Manager CVM master node resides. |
| <code>-g snap_dg</code>    | Specifies the name of the disk group that contains all snapshot volumes.                                                                                                                                                                                                                                                                                                                    |
| <code>-o mount</code>      | Mounts the file systems so you can use them to do a backup.                                                                                                                                                                                                                                                                                                                                 |
| <code>-o mountdb</code>    | Starts the database to allow manual database recovery.                                                                                                                                                                                                                                                                                                                                      |
| <code>-o recoverdb</code>  | Automatically recovers the database.                                                                                                                                                                                                                                                                                                                                                        |
| <code>-o restartdb</code>  | Restarts the database if the clone database is shut down. A clone database must exist to use the <code>-o restartdb</code> option.                                                                                                                                                                                                                                                          |

**Table A-7** dbed\_vmclonedb options (*continued*)

| Option                        | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
|-------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| -o update_status              | Updates the database status information in the repository.                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| -o umount                     | Shuts down the clone database and unmounts all snapshot files.                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| new_sid=new_sid               | Specifies the new ORACLE_SID for the snapshot image.<br>This is a required argument.                                                                                                                                                                                                                                                                                                                                                                                                             |
| server_name=                  | Specifies the host on which the primary Oracle instance runs.                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| -f SNAPPLAN                   | Indicates the name of the snapplan that you are using.                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| -H ORACLE_HOME                | Specifies the Oracle home directory that corresponds to the ORACLE_SID.                                                                                                                                                                                                                                                                                                                                                                                                                          |
| -p<br>pfile_modification_file | Specifies a file containing initialization parameters to be modified or added to the clone database's initialization parameter file prior to startup. The format is the same as the Oracle initialization parameter file.                                                                                                                                                                                                                                                                        |
| -r relocate_path              | <p>Specifies the initial mount point for the snapshot image.</p> <p>If you are creating a clone in a single-host configuration or cloning an Oracle RAC database, -r is required. Otherwise, it is an optional argument.</p> <p>If -r relocate_path is used with the -o mount   mountdb   recoverdb options, it will also be required to restart or unmount the clone database.</p> <p><b>Note:</b> Do not use -r relocate_path if the SNAPSHOT_MODE parameter is set to instant or offline.</p> |

### To clone the primary database automatically in a single-host configuration or a RAC cluster

- ◆ Use the `dbed_vmclonedb` command as follows:

```
$ /opt/VRTS/bin/dbed_vmclonedb -S PROD -g SNAP_PRODDg \
-o recoverdb,new_SID=NEWPROD,server_name=orasvr -f snap1 -r /clone

dbed_vmclonedb started at 2004-04-02 14:42:10

Mounting /clone/prod_db on
/dev/vx/dsk/SNAP_PRODDg/SNAP_prod_db.

Mounting /clone/prod_ar on
/dev/vx/dsk/SNAP_PRODDg/SNAP_prod_ar.

All redo-log files found.

Database NEWPROD (SID=NEWPROD) is running.

dbed_vmclonedb ended at 2003-04-02 14:43:05
```

### To clone the primary database on a secondary host automatically in a two-host configuration

- ◆ Use the `dbed_vmclonedb` command as follows:

```
$ /opt/VRTS/bin/dbed_vmclonedb -S PROD -g SNAP_PRODDg \
-o recoverdb,new_SID=NEWPROD,server_name=orasvr -f snap2

dbed_vmclonedb started at 2004-04-09 23:03:40

Mounting /clone/arch on /dev/vx/dsk/SNAP_PRODDg/SNAP_arch.

Mounting /clone/prod_db on
/dev/vx/dsk/SNAP_PRODDg/SNAP_prod_db.

All redo-log files found.

Database NEWPROD (SID=NEWPROD) is running.

dbed_vmclonedb ended at 2004-04-09 23:04:50
```

---

**Warning:** This procedure does not apply to Veritas Storage Foundation for Oracle RAC.

---

## To clone the primary database manually in a single-host configuration or a RAC cluster

- 1 Mount the file systems.
- 2 Create a clone using the `dbed_vmclonedb` command.

```
$ /opt/VRTS/bin/dbed_vmclonedb -S PROD -g SNAP_PRODDg \
-o mountdb,new_SID=NEWPROD -f snap1,server_name=orasvr -r /clone

dbed_vmclonedb started at 2003-04-02 15:34:41

Mounting /clone/prod_db on
/dev/vx/dsk/SNAP_PRODDg/SNAP_prod_db.

Mounting /clone/prod_ar on
/dev/vx/dsk/SNAP_PRODDg/SNAP_prod_ar.

All redo-log files found.

Database NEWPROD (SID=NEWPROD) is in recovery mode.

If the database NEWPROD is recovered manually, you must run
dbed_vmclonedb -o update_status to change the snapshot status.

dbed_vmclonedb ended at 2004-04-02 15:34:59
```

- 3 Recover the database manually.
- 4 Update the snapshot status (`database_recovered`) for the clone database on the primary host after manual recovery has been completed.

```
$ /opt/VRTS/bin/dbed_vmclonedb -o
update_status,new_sid=NEWPROD,server_name=orasvr -f snap1 -r /clone

dbed_vmclonedb started at 2004-04-02 15:19:16

The snapshot status has been updated.

dbed_vmclonedb ended at 2004-04-02 15:19:42
```

## To clone the primary database manually in a two-host configuration

- 1 Mount the file systems.
- 2 Create a clone using the `dbed_vmclonedb` command.

```
$ /opt/VRTS/bin/dbed_vmclonedb -S PROD -g SNAP_PRODDg \
-o mountdb,new_sid=NEWPROD,server_name=orasvr -f snap2

dbed_vmclonedb started at 2003-04-09 23:26:50

Mounting /clone/arch on /dev/vx/dsk/SNAP_PRODDg/SNAP_arch.

Mounting /clone/prod_db on
/dev/vx/dsk/SNAP_PRODDg/SNAP_prod_db.

All redo-log files found.

Database NEWPROD (SID=NEWPROD) is in recovery mode.

If the database NEWPROD is recovered manually, you must run
dbed_vmclonedb -o update_status to change the snapshot status.

dbed_vmclonedb ended at 2004-04-02 15:34:59
```

- 3 Recover the database manually.
- 4 Update the snapshot status (`database_recovered`) for the clone database on the secondary host after manual recovery has been completed.

```
$ /opt/VRTS/bin/dbed_vmclonedb -o \
update_status,new_sid=NEWPROD,server_name=orasvr -f snap2

dbed_vmclonedb started at 2004-04-06 09:22:27

The snapshot status has been updated.

dbed_vmclonedb ended at 2004-04-06 09:22:40
```

---

**Warning:** This procedure does not apply to Veritas Storage Foundation for Oracle RAC.

---

**To shut down the clone database and unmount all snapshot file systems in a single-host configuration or in a RAC cluster**

- ◆ Use the `dbed_vmclonedb` command as follows:

```
$ /opt/VRTS/bin/dbed_vmclonedb -o umount,new_sid=NEWPROD,\
server_name=orasvr -f snap1 -r /clone

dbed_vmclonedb started at 2004-04-02 15:11:22

Unmounting /clone/prod_db.

Unmounting /clone/prod_ar.

dbed_vmclonedb ended at 2004-04-02 15:11:47
```

**To shut down the clone database and unmount all snapshot file systems in a two-host configuration**

- ◆ Use the `dbed_vmclonedb` command as follows:

```
$ /opt/VRTS/bin/dbed_vmclonedb -o umount,new_sid=NEWPROD,\
server_name=orasvr -f snap2

dbed_vmclonedb started at 2004-04-09 23:09:21

Unmounting /clone/arch.

Unmounting /clone/prod_db.

dbed_vmclonedb ended at 2004-04-09 23:09:50
```

This shuts down the clone database, unmounts file systems, and deports the snapshot disk group for a clone on a secondary host.

---

**Warning:** This procedure does not apply to Veritas Storage Foundation for Oracle RAC.

---

**To restart a clone database in a single-host configuration or a RAC cluster**

- ◆ Use the `dbed_vmclonedb` command as follows:

```
$ /opt/VRTS/bin/dbed_vmclonedb -S PROD -g SNAP_PRODDg \
-o restartdb,new_sid=NEWPROD,server_name=orasvr -f snap1 -r /clone

dbed_vmclonedb started at 2004-04-02 15:14:49

Mounting /clone/prod_db on
/dev/vx/dsk/SNAP_PRODDg/SNAP_prod_db.

Mounting /clone/prod_ar on
/dev/vx/dsk/SNAP_PRODDg/SNAP_prod_ar.

Oracle instance NEWPROD successfully started.

dbed_vmclonedb ended at 2004-04-02 15:15:19
```

**To restart a clone database in a two-host configuration**

- ◆ Use the `dbed_vmclonedb` command as follows:

```
$ /opt/VRTS/bin/dbed_vmclonedb -S PROD -g SNAP_PRODDg \
-o restartdb,new_sid=NEWPROD,server_name=orasvr -f snap2

dbed_vmclonedb started at 2003-04-09 23:03:40

Mounting /clone/arch on
/dev/vx/dsk/SNAP_PRODDg/SNAP_arch.

Mounting /clone/prod_db on
/dev/vx/dsk/SNAP_PRODDg/SNAP_prod_db.

Oracle instance NEWPROD successfully started.

dbed_vmclonedb ended at 2003-04-09 23:04:50
```

---

**Warning:** This procedure does not apply to Veritas Storage Foundation for Oracle RAC.

---

## Managing log files using edgetmsg2

You can use the `edgetmsg2` utility to manage message log files. You can use the `edgetmsg2` utility to write a message to a log file or to the console, read the log file and print to the console, and display the available log files.

Before managing log files with the `edgetmsg2` command, review the following information:

- Prerequisites**
- You must be logged in as the Database Administrator or root to use this command.
- Usage notes**
- The default log file for a database is located in the following directory:  
`/etc/vx/vxdbed/logs/sfua_database.log`  
 where `database` is the `ORACLE_SID`.
  - By default, only messages with a severity equal to or greater than `ERROR` will be logged.
  - See the `edgetmsg2(1M)` manual page for more information.

[Table A-8](#) lists options for `edgetmsg2`.

**Table A-8** `edgetmsg2` options

| Option                                                | Description                                                                                                                                                                               |
|-------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <code>-s set_num</code>                               | Specifies the message catalogue set number. The default is 1.                                                                                                                             |
| <code>-M msgid[:severity]</code>                      | Specifies the message ID and severity to be printed.                                                                                                                                      |
| <code>-f msg_catalog   logfile   log_directory</code> | Specifies the message catalogue path, log file, or log directory.                                                                                                                         |
| <code>-v severity   severity</code>                   | Overwrites the minimum log severity or creates a severity filter. The severity values are either 0-8 or 100-108.                                                                          |
| <code>-p</code>                                       | Pauses the cursor at the end of a display message. By default, a line feed is added to each display message. Use the <code>-p</code> option to indicate that no line feed is to be added. |
| <code>-o list [,suppress_time]</code>                 | Displays the content of a log file. You can specify <code>,suppress_time</code> to exclude time information in the utility output.                                                        |
| <code>-o report[,no_archive]</code>                   | Displays the available log files. You can specify <code>,no_archive</code> to exclude log files from the utility output.                                                                  |

**Table A-8** edgetmsg2 options (continued)

| Option                  | Description                                                                                                                                                                                              |
|-------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| -t from_time[,to_time]  | Reduces the length of the utility output by specifying the time range to include. This option must be used together with the -o list option. Use the following format: <code>yyy-mm-dd HH:MM:SS</code> . |
| -S ORACLE_SID           | Specifies the ORACLE_SID for an Oracle database.                                                                                                                                                         |
| "default format string" | Specifies the C language <code>printf()</code> format string.                                                                                                                                            |
| [args]                  | Specifies arguments for the format string conversion characters.                                                                                                                                         |

**To print a message**

- ◆ Use the `edgetmsg2` command as follows:

```
$ /opt/VRTS/bin/edgetmsg2 [-s set_num] \
[-M msgid[:severity]] \
[-f msg_catalog] [-v severity] [-p] [-m value] \
["default format string" [args]]
```

**To read a message log file**

- ◆ Use the `edgetmsg2` command as follows:

```
$ /opt/VRTS/bin/edgetmsg2 -o list[,suppress_time] \
-S ORACLE_SID | [-f logfile] \
[-v severity] [-t from_time,to_time]
```

**To list available log files**

- ◆ Use the `edgetmsg2` command as follows:

```
$ /opt/VRTS/bin/edgetmsg2 -o report[,no_archive] \
[-f log_directory]
```

## Displaying I/O mapping and statistics using `vxstorage_stats`

You can use the `vxstorage_stats` command to display I/O mapping and statistics about Veritas File System files one file at a time. The statistics are recorded only for VxFS files and VxVM volumes. These statistics show I/O activity.

Before displaying I/O mapping and statistics, the following conditions must be met:

Prerequisites ■ You may be logged in as either the database administrator or `root`.

Command usage for `vxstorage_stats` is as follows:

```
$ /opt/VRTS/bin/vxstorage_stats [-m] [-s] [-i interval -c count] \
-f file_name
```

Table A-9 lists options for the `vxstorage_stats` command.

**Table A-9** vxstorage\_stats command options

| Option                   | Description                                                             |
|--------------------------|-------------------------------------------------------------------------|
| <code>-m</code>          | Displays the I/O topology for the specified file.                       |
| <code>-s</code>          | Displays the file statistics for the specified file.                    |
| <code>-c count</code>    | Specifies the number of times to display statistics.                    |
| <code>-i interval</code> | Specifies the interval frequency for displaying updated I/O statistics. |
| <code>-f filename</code> | Specifies the file to display I/O mapping and statistics for.           |

**To display I/O mapping information**

◆ Use the `vxstorage_stats` command with the `-m` option as follows:

```
$ /opt/VRTS/bin/vxstorage_stats -m -f \
/oradata/system01.dbf
```

For file type (`fi`), the `SIZE` column is number of bytes, and for volume (`v`), plex (`p1`), sub-disk (`sd`), and physical disk (`da`), the `SIZE` column is in 512-byte blocks. Stripe sizes are given in sectors.

| TY NAME                                     | NSUB | DESCRIPTION   | SIZE<br>(sectors) | OFFSET<br>(sectors) |
|---------------------------------------------|------|---------------|-------------------|---------------------|
| PROPERTIES                                  |      |               |                   |                     |
| <code>fi /oradata/system01.dbf</code>       | 1    | FILE          | 5251072 (B)       | 43344               |
| Extents: 3 Sparse Extents:0                 |      |               |                   |                     |
| <code>v /dev/vx/dsk/oradg/oradatavol</code> | 1    | MIRROR        | 9830400           | 0                   |
| <code>p1 vxvm:oradg/oradatavol-01</code>    | 1    | CONCAT_VOLUME | 9830400           | 0                   |
| <code>rd /dev/vx/dmp/sdc3</code>            | 1    | PARTITION     | 9830400           | 0                   |
| <code>sd /dev/sdc3</code>                   | 1    | PARTITION     | 10406400          | 0                   |
| <code>da /dev/sdc</code>                    | 0    | DISK          | 10485760          | 0                   |

**To display the entire I/O mapping and statistics for each I/O stack**

- ◆ Use the `vxstorage_stats` command with the `-m` and `-s` options as follows:

```
$ /opt/VRTS/bin/vxstorage_stats -m -s -f /data/system01.dbf
```

For example, to display statistics two times with a time interval of two seconds:

```
$ /opt/VRTSdbed/bin/vxstorage_stats -s -i2 -c2 \
-f /data/system01.dbf
```

| TY NAME                        | NSUB | DESCRIPTION   | SIZE<br>(sectors) | OFFSET<br>(sectors) |
|--------------------------------|------|---------------|-------------------|---------------------|
| PROPERTIES                     |      |               |                   |                     |
| fi /oradata/system01.dbf       | 1    | FILE          | 5251072 (B)       | 43344               |
| Extents: 3 Sparse Extents:0    |      |               |                   |                     |
| v /dev/vx/dsk/oradg/oradatavol | 1    | MIRROR        | 9830400           | 0                   |
| pl vxvm:oradg/oradatavol-01    | 1    | CONCAT_VOLUME | 9830400           | 0                   |
| rd /dev/vx/dmp/sdc3            | 1    | PARTITION     | 9830400           | 0                   |
| sd /dev/sdc3                   | 1    | PARTITION     | 10406400          | 0                   |
| da /dev/sdc                    |      |               |                   |                     |

## Mapping tablespaces to disks using `dbed_analyzer`

The `dbed_analyzer` command provides tablespace-to-physical disk mapping information for all the datafiles in a specified database. In addition, `dbed_analyzer` provides information about the percentage of disk space being used by a tablespace.

Because the `dbed_analyzer` command output can be long, it is written to a file for easier viewing. The file name is `dbed_analyzer_${ORACLE_SID}.log` and it is located `/tmp`.

Before mapping tablespaces to disks, the following conditions must be met:

- |               |                                                                                                |
|---------------|------------------------------------------------------------------------------------------------|
| Prerequisites | ■ You must log in as the database administrator (typically, the user ID <code>oracle</code> ). |
| Usage notes   | ■ For more information, see the <code>dbed_analyzer(1M)</code> online manual page.             |

[Table A-10](#) lists options for the `dbed_analyzer` command.

**Table A-10** dbed\_analyzer command options

| Option        | Description                                                                                                                            |
|---------------|----------------------------------------------------------------------------------------------------------------------------------------|
| -o sort=tbs   | Provides the layout of the specified tablespaces on the physical disk as well as the percentage of disk space they are using.          |
| -o sort=disk  | Provides the name of the disks containing the specified tablespaces as well as the percentage of disk space the tablespaces are using. |
| -f filename   | Specifies the name of a file containing a list of the tablespaces for which to obtain mapping information.                             |
| -t tablespace | Specifies the name of a tablespace for which to obtain mapping information.                                                            |

**To obtain storage mapping information sorted by tablespace**

- ◆ Use the `dbed_analyzer` command with the `-f filename` and `-o sort=tbs` options:

```
$ /opt/VRTS/bin/dbed_analyzer -S $ORACLE_SID -H $ORACLE_HOME \
-o sort=tbs -f filename
```

Output similar to the following is displayed in the file `filename`:

| TBSNAME    | DATAFILE                             | DEVICE                | SIZE (sectors) |
|------------|--------------------------------------|-----------------------|----------------|
| SYSTEM     | /usr1/oracle/rw/DATA/PROD.dbf        | c3t21000020379DBD5Fd0 | 819216         |
| TEMP       | /usr1/oracle/rw/DATA/temp_20000      | c3t21000020379DBD5Fd0 | 1021968        |
| TEMP       | /usr1/oracle/rw/DATA/temp_20001      | c3t21000020379DBD5Fd0 | 2048016        |
| SYSAUX     | /usr1/oracle/rw/DATA/sysaux.dbf      | c3t21000020379DBD5Fd0 | 819216         |
| ITEM       | /usr1/oracle/rw/DATA/item_1000       | c3t21000020379DBD5Fd0 | 1021968        |
| ITM_IDX    | /usr1/oracle/rw/DATA/itm_idx_2000    | c3t21000020379DBD5Fd0 | 1021968        |
| PRODID_IDX | /usr1/oracle/rw/DATA/prodid_idx_3000 | c3t21000020379DBD5Fd0 | 1021968        |
| QTY_IDX    | /usr1/oracle/rw/DATA/qty_idx_7000    | c3t21000020379DBD5Fd0 | 1021968        |
| ROLL_1     | /usr1/oracle/rw/DATA/roll_1_5000     | c3t21000020379DBD5Fd0 | 1021968        |
| ROLL_2     | /usr1/oracle/rw/DATA/roll_2_6000     | c3t21000020379DBD5Fd0 | 1021968        |
| ORDERS     | /usr1/oracle/rw/DATA/orders_4000     | c3t21000020379DBD5Fd0 | 1021968        |
| ORD_IDX    | /usr1/oracle/rw/DATA/ord_idx_10000   | c3t21000020379DBD5Fd0 | 1021968        |
| TY_IDX     | /usr1/oracle/rw/DATA/qty_idx_7001    | c3t21000020379DBD5Fd0 | 1024016        |
| ITM_IDX    | /usr1/oracle/rw/DATA/itm_idx_2001    | c3t21000020379DBD5Fd0 | 1024016        |
| ROLL_1     | /usr1/oracle/rw/DATA/roll_1_5001     | c3t21000020379DBD5Fd0 | 1024016        |
| QTY_IDX    | /usr1/oracle/rw/DATA/qty_idx_7002    | c3t21000020379DBD5Fd0 | 1024016        |
| ROLL_2     | /usr1/oracle/rw/DATA/roll_2_6001     | c3t21000020379DBD5Fd0 | 1024016        |
| ITEM       | /usr1/oracle/rw/DATA/item_1001       | c3t21000020379DBD5Fd0 | 4096016        |

**To obtain storage mapping information sorted by disk**

- ◆ Use the `dbed_analyzer` command with the `-f filename` and `-o sort=disk` options:

```
$ /opt/VRTS/bin/dbed_analyzer -S $ORACLE_SID -H $ORACLE_HOME -o \
sort=disk -f filename
```

Output similar to the following is displayed in the file `filename`:

| DEVICE                | TBSNAME    | DATAFILE                             | SIZE(sectors) |
|-----------------------|------------|--------------------------------------|---------------|
| c3t21000020379DBD5Fd0 | SYSTEM     | /usr1/oracle/rw/DATA/PROD.dbf        | 819216        |
| c3t21000020379DBD5Fd0 | TEMP       | /usr1/oracle/rw/DATA/temp_2000       | 1021968       |
| c3t21000020379DBD5Fd0 | TEMP       | /usr1/oracle/rw/DATA/temp_20001      | 2048016       |
| c3t21000020379DBD5Fd0 | SYSAUX     | /usr1/oracle/rw/DATA/sysaux.dbf      | 819216        |
| c3t21000020379DBD5Fd0 | ITEM       | /usr1/oracle/rw/DATA/item_1000       | 1021968       |
| c3t21000020379DBD5Fd0 | ITM_IDX    | /usr1/oracle/rw/DATA/itm_idx_2000    | 1021968       |
| c3t21000020379DBD5Fd0 | PRODIG_IDX | /usr1/oracle/rw/DATA/prodid_idx_3000 | 1021968       |
| c3t21000020379DBD5Fd0 | QTY_IDX    | /usr1/oracle/rw/DATA/qty_idx_7000    | 1021968       |
| c3t21000020379DBD5Fd0 | ROLL_1     | /usr1/oracle/rw/DATA/roll_1_5000     | 1021968       |
| c3t21000020379DBD5Fd0 | ROLL_2     | /usr1/oracle/rw/DATA/roll_2_6000     | 1021968       |
| c3t21000020379DBD5Fd0 | ORDERS     | /usr1/oracle/rw/DATA/orders_4000     | 1021968       |
| c3t21000020379DBD5Fd0 | ORD_IDX    | /usr1/oracle/rw/DATA/ord_idx_10000   | 1021968       |
| c3t21000020379DBD5Fd0 | QTY_IDX    | /usr1/oracle/rw/DATA/qty_idx_7001    | 1024016       |
| c3t21000020379DBD5Fd0 | ITM_IDX    | /usr1/oracle/rw/DATA/itm_idx_2001    | 1024016       |
| c3t21000020379DBD5Fd0 | ROLL_1     | /usr1/oracle/rw/DATA/roll_1_5001     | 1024016       |
| c3t21000020379DBD5Fd0 | QTY_IDX    | /usr1/oracle/rw/DATA/qty_idx_7002    | 1024016       |
| c3t21000020379DBD5Fd0 | ROLL_2     | /usr1/oracle/rw/DATA/roll_2_6001     | 1024016       |
| c3t21000020379DBD5Fd0 | ITEM       | /usr1/oracle/rw/DATA/item_1001       | 4096016       |



# Using third-party software to back up files

This appendix includes the following topics:

- [About backing up and restoring Oracle Disk Manager files using Oracle RMAN](#)
- [About using backup software other than VERITAS NetBackup to back up and restore ODM files](#)

## About backing up and restoring Oracle Disk Manager files using Oracle RMAN

Oracle allocates Oracle Disk Manager files with contiguous extent layouts for good database performance. When you restore database files they are allocated using these extent attributes. If you are using Oracle RMAN's conventional backup method with any backup software, datafiles are also restored with the proper extent layouts.

If you are using RMAN's “proxy copy” backup method with a backup software other than NetBackup, the extent attributes may not be backed up. To ensure the restored datafiles have proper extent layouts, preallocate the lost datafiles using the `odmmkfile` command. This command preallocates contiguous space for files prior to restoring them.

See the `odmmkfile(1)` manual page.

To preallocate an Oracle datafile with size 100M, assuming the Oracle database block size is 8K, use the `odmmkfile` command and enter:

```
/opt/VRTS/bin/odmmkfile -h 8k -s 100m filename
```

## **About using backup software other than VERITAS NetBackup to back up and restore ODM files**

If you are using backup software other than VERITAS NetBackup, ensure that it can back up and restore VxFS extent attributes. This is important because restored Oracle Disk Manager (ODM) files rely on proper extent layouts for best performance.

# Veritas Database FlashSnap status information

This appendix includes the following topics:

- [Database FlashSnap snapshot status and database status](#)

## Database FlashSnap snapshot status and database status

The Veritas Database FlashSnap functionality provides both snapshot status information and snapshot database status information for various stages of snapplan and snapshot procedures. You can view the status information through the CLI and through the GUI.

For more information about Database FlashSnap GUI functionality, see the *Veritas Storage Foundation for Oracle Graphical User Interface Guide*.

You can obtain both the snapshot status and the database status from the command line using the `dbed_vmchecksnap` command with the `-o list` option. The snapshot status and database status information may also appear in error messages.

### Snapshot status details

To view snapshot status information from the command line, use the `dbed_vmchecksnap` command with the `-o list` option to list all available snapplans for a specified database. Snapshot status information is displayed in the command output under the column heading `SNAP_STATUS`.

**Table C-1** shows detailed information about each snapshot status (`SNAP_STATUS`) value.

**Table C-1** Snapshot status values

| SNAP_STATUS                                                                    | Completed operations                                                                                                                                                                                     | Allowed operations                                                                                                                                                                                                                                     |
|--------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| init_full                                                                      | <ul style="list-style-type: none"> <li>■ dbed_vmchecksnap -o validate (successful)</li> <li>■ dbed_vmsnap -o resync (successful)</li> <li>■ dbed_vmsnap -o reverse_resync_commit (successful)</li> </ul> | <ul style="list-style-type: none"> <li>■ dbed_vmsnap -o snapshot</li> </ul>                                                                                                                                                                            |
| init_db                                                                        | <ul style="list-style-type: none"> <li>■ dbed_vmchecksnap -o validate -f <i>snapplan</i> (failed)</li> </ul>                                                                                             | <ul style="list-style-type: none"> <li>■ Ensure that your storage configuration has been set up correctly.</li> </ul>                                                                                                                                  |
| snapshot_start                                                                 | <ul style="list-style-type: none"> <li>■ dbed_vmsnap -o snapshot (failed)</li> </ul>                                                                                                                     | <ul style="list-style-type: none"> <li>■ Contact your system administrator for help. Use Veritas Volume Manager commands to resynchronize the snapshot volumes, and use <code>dbed_vmsnap -o snapshot -F</code> to force snapshot creation.</li> </ul> |
| snapshot_end                                                                   | <ul style="list-style-type: none"> <li>■ dbed_vmsnap -o snapshot (successful)</li> <li>■ dbed_vmsnap -o reverse_resync_abort (successful)</li> </ul>                                                     | <ul style="list-style-type: none"> <li>■ dbed_vmsnap -o resync</li> <li>■ dbed_vmsnap -o reverse_resync_begin</li> <li>■ dbed_vmclonedb -o mount mountdb recoverdb</li> </ul>                                                                          |
| snapshot_vol_start<br>snapshot_vol_end<br>snapshot_dg_start<br>snapshot_dg_end | <ul style="list-style-type: none"> <li>■ dbed_vmsnap -o snapshot (failed)</li> </ul>                                                                                                                     | <ul style="list-style-type: none"> <li>■ Re-run <code>dbed_vmsnap -o snapshot</code></li> </ul>                                                                                                                                                        |
| resync_vol_start<br>resync_vol_end<br>snapshot_dg_start<br>snapshot_dg_end     | <ul style="list-style-type: none"> <li>■ dbed_vmsnap -o resync (failed)</li> </ul>                                                                                                                       | <ul style="list-style-type: none"> <li>■ Re-run <code>dbed_vmsnap -o resync</code></li> </ul>                                                                                                                                                          |

**Table C-1** Snapshot status values (*continued*)

| <b>SNAP_STATUS</b>          | <b>Completed operations</b>                                                                                       | <b>Allowed operations</b>                                                                                                                                                                                                                                                   |
|-----------------------------|-------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| resync_start                | <ul style="list-style-type: none"> <li>■ <code>dbed_vmsnap -o resync</code> (failed)</li> </ul>                   | <ul style="list-style-type: none"> <li>■ Contact your system administrator for help. Use Veritas Volume Manager commands to resynchronize the snapshot volumes, and use <code>dbed_vmsnap -o snapshot -F</code> to force snapshot creation.</li> </ul>                      |
| reverse_resync_begin_start  | <ul style="list-style-type: none"> <li>■ <code>dbed_vmsnap -o reverse_resync_begin</code> (failed)</li> </ul>     | <ul style="list-style-type: none"> <li>■ Contact Veritas support.</li> </ul>                                                                                                                                                                                                |
| reverse_resync_begin_end    | <ul style="list-style-type: none"> <li>■ <code>dbed_vmsnap -o reverse_resync_begin</code> (successful)</li> </ul> | <ul style="list-style-type: none"> <li>■ <code>dbed_vmsnap -o reverse_resync_abort</code></li> <li>■ <code>dbed_vmsnap -o reverse_resync_commit</code></li> </ul>                                                                                                           |
| reverse_resync_abort_end    | <ul style="list-style-type: none"> <li>■ <code>dbed_vmsnap -o reverse_resync_abort</code> (successful)</li> </ul> | <ul style="list-style-type: none"> <li>■ <code>dbed_vmsnap -o reverse_resync_begin</code></li> <li>■ <code>dbed_vmsnap -o resync</code></li> <li>■ <code>dbed_vmclonedb -o restartdb</code> (with <code>DB_STATUS</code> set to <code>database_recovered</code>)</li> </ul> |
| reverse_resync_commit_start | <ul style="list-style-type: none"> <li>■ <code>dbed_vmsnap -o reverse_resync_commit</code> (failed)</li> </ul>    | <ul style="list-style-type: none"> <li>■ Contact Veritas support.</li> </ul>                                                                                                                                                                                                |
| mount_start                 | <ul style="list-style-type: none"> <li>■ <code>dbed_vmclonedb -o mount</code> (failed)</li> </ul>                 | <ul style="list-style-type: none"> <li>■ <code>dbed_vmclonedb -o umount</code></li> </ul>                                                                                                                                                                                   |
| mount_end                   | <ul style="list-style-type: none"> <li>■ <code>dbed_vmclonedb -o mount</code> (successful)</li> </ul>             | <ul style="list-style-type: none"> <li>■ <code>dbed_vmclonedb -o umount</code></li> </ul>                                                                                                                                                                                   |
| restartdb_start             | <ul style="list-style-type: none"> <li>■ <code>dbed_vmclonedb -o restartdb</code> (failed)</li> </ul>             | <ul style="list-style-type: none"> <li>■ <code>dbed_vmclonedb -o umount</code></li> <li>■ Start the snapshot database manually.</li> </ul>                                                                                                                                  |
| restartdb_end               | <ul style="list-style-type: none"> <li>■ <code>dbed_vmclonedb -o restartdb</code> (successful)</li> </ul>         | <ul style="list-style-type: none"> <li>■ <code>dbed_vmclonedb -o umount</code></li> </ul>                                                                                                                                                                                   |
| mountdb_start               | <ul style="list-style-type: none"> <li>■ <code>dbed_vmclonedb -o mountdb</code> (failed)</li> </ul>               | <ul style="list-style-type: none"> <li>■ Recover the snapshot database manually, then run <code>dbed_vmclonedb -o update_status</code></li> </ul>                                                                                                                           |

**Table C-1** Snapshot status values (*continued*)

| SNAP_STATUS     | Completed operations                                                                         | Allowed operations                                                                                                                                                                                 |
|-----------------|----------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| mountdb_end     | <ul style="list-style-type: none"> <li>■ dbed_vmclonedb -o mountdb (successful)</li> </ul>   | <ul style="list-style-type: none"> <li>■ dbed_vmclonedb -o update_status</li> <li>■ dbed_vmclonedb -o umount</li> </ul>                                                                            |
| recoverdb_start | <ul style="list-style-type: none"> <li>■ dbed_vmclonedb -o recoverdb (failed)</li> </ul>     | <ul style="list-style-type: none"> <li>■ Recover the snapshot database manually, then run dbed_vmclonedb -o update_status</li> <li>■ dbed_vmclonedb -o umount</li> </ul>                           |
| recoverdb_end   | <ul style="list-style-type: none"> <li>■ dbed_vmclonedb -o recoverdb (successful)</li> </ul> | <ul style="list-style-type: none"> <li>■ dbed_vmclonedb -o umount</li> </ul>                                                                                                                       |
| umount_start    | <ul style="list-style-type: none"> <li>■ dbed_vmclonedb -o umount (failed)</li> </ul>        | <ul style="list-style-type: none"> <li>■ Verify that your file system(s) are not busy and retry the command.</li> </ul>                                                                            |
| umount_end      | <ul style="list-style-type: none"> <li>■ dbed_vmclonedb -o umount (successful)</li> </ul>    | <ul style="list-style-type: none"> <li>■ dbed_vmclonedb -o mount</li> <li>■ dbed_vmclonedb -o restartdb</li> <li>■ dbed_vmsnap -o resync</li> <li>■ dbed_vmsnap -o reverse_resync_begin</li> </ul> |

## Database status details

To view snapshot status information from the command line, use the `dbed_vmchecksnap` command with the `-o list` option to list all available snapplans for a specified database. Database status information is displayed in the command output under the column heading `DB_STATUS`.

[Table C-2](#) shows detailed information about each database status (`DB_STATUS`) value.

**Table C-2** Database status values

| DB_STATUS | Completed operations                                                                                                                                                                                  |
|-----------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| init      | <ul style="list-style-type: none"> <li>■ dbed_vmchecksnap -o validate (successful)</li> <li>dbed_vmsnap -o snapshot (successful)</li> <li>dbed_vmsnap -o reverse_resync_begin (successful)</li> </ul> |

**Table C-2** Database status values (*continued*)

| DB_STATUS          | Completed operations                          |
|--------------------|-----------------------------------------------|
| database_recovered | ■ dbed_vmclonedb -o<br>recoverdb (successful) |



# Glossary

|                                             |                                                                                                                                                                                                                                                                                                                                                                 |
|---------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>address-length pair</b>                  | Identifies the starting block address and the length of an extent (in file system or logical blocks).                                                                                                                                                                                                                                                           |
| <b>archived log mode</b>                    | Used to retrieve information on transactions that occur during a hot backup.                                                                                                                                                                                                                                                                                    |
| <b>asynchronous I/O</b>                     | A format of I/O that performs non-blocking reads and writes. This enables the system to handle multiple I/O requests simultaneously.                                                                                                                                                                                                                            |
| <b>atomic operation</b>                     | An operation that either succeeds completely or fails and leaves everything as it was before the operation was started. If the operation succeeds, all aspects of the operation take effect at once and the intermediate states of change are invisible. If any aspect of the operation fails, then the operation aborts without leaving partial changes.       |
| <b>autoextend</b>                           | An Oracle feature that automatically grows a database file by a prespecified size, up to a prespecified maximum size.                                                                                                                                                                                                                                           |
| <b>backup mode</b>                          | A state of the Oracle tablespace that lets you perform online backup.                                                                                                                                                                                                                                                                                           |
| <b>Block-Level Incremental (BLI) Backup</b> | A method used to back up only changed data blocks, not changed files, since the last backup.                                                                                                                                                                                                                                                                    |
| <b>block map</b>                            | A file system is divided into fixed-size blocks when it is created. As data is written to a file, unused blocks are allocated in ranges of blocks, called extents. The extents are listed or pointed to from the inode. The term used for the data that represents how to translate an offset in a file to a file system block is the “block map” for the file. |
| <b>boot disk</b>                            | A disk used for booting an operating system.                                                                                                                                                                                                                                                                                                                    |
| <b>buffered I/O</b>                         | A mode of I/O operation (where I/O is any operation, program, or device that transfers data to or from a computer) that first transfers data into the Operating System buffer cache.                                                                                                                                                                            |
| <b>cache</b>                                | Any memory used to reduce the time required to respond to an I/O request. The read cache holds data in anticipation that it will be requested by a client. The write cache holds data written until it can be safely stored on non-volatile storage media.                                                                                                      |
| <b>cluster</b>                              | A set of hosts that share a set of disks.                                                                                                                                                                                                                                                                                                                       |
| <b>cluster-shareable disk group</b>         | A disk group in which the disks are shared between more than one host.                                                                                                                                                                                                                                                                                          |
| <b>cold backup</b>                          | The process of backing up a database that is not in active use.                                                                                                                                                                                                                                                                                                 |

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
|---------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>command launcher</b>         | A graphical user interface (GUI) window that displays a list of tasks that can be performed by Veritas Volume Manager or other objects. Each task is listed with the object type, task (action), and a description of the task. A task is launched by clicking on the task in the Command Launcher. concatenation A Veritas Volume Manager layout style characterized by subdisks that are arranged sequentially and contiguously.                       |
| <b>concurrent I/O</b>           | A form of Direct I/O that does not require file-level write locks when writing to a file. Concurrent I/O allows the relational database management system (RDBMS) to write to a given file concurrently.                                                                                                                                                                                                                                                 |
| <b>configuration database</b>   | A set of records containing detailed information on existing Veritas Volume Manager objects (such as disk and volume attributes). A single copy of a configuration database is called a configuration copy.                                                                                                                                                                                                                                              |
| <b>control file</b>             | An Oracle control file specifies the physical structure of an Oracle database, including such things as the database name, names and locations of the datafiles and redo log files, and the timestamp of when the database was created. When you start an Oracle database, the control file is used to identify the database instance name redo log files that must be opened for transaction recording and recovery and datafiles where data is stored. |
| <b>copy-on-write</b>            | <p>A technique for preserving the original of some data. As data is modified by a write operation, the original copy of data is copied.</p> <p>Applicable to Storage Checkpoint technology, where original data, at the time of the Storage Checkpoint, must be copied from the file system to the Storage Checkpoint when it is to be overwritten. This preserves the frozen image of the file system in the Storage Checkpoint.</p>                    |
| <b>data block</b>               | A logical database data storage unit. Blocks contain the actual data. When a database is created, a data block size is specified. The database then uses and allocates database space in data blocks.                                                                                                                                                                                                                                                    |
| <b>data change object (DCO)</b> | A Veritas Volume Manager object used to manage FastResync map information in the DCO log volume. A DCO and a DCO log volume must be associated with a volume in order to implement persistent FastResync on that volume.                                                                                                                                                                                                                                 |
| <b>Data Storage Checkpoint</b>  | A Storage Checkpoint that is a complete image of a file system. For more information, see "Storage Checkpoint."                                                                                                                                                                                                                                                                                                                                          |
| <b>database</b>                 | A database is a collection of information that is organized in a structured fashion. Two examples of databases are Relational Databases (such as Oracle, Sybase, or DB2), where data is stored in tables and generally accessed by one or more keys and Flat File Databases, where data is not generally broken up into tables and relationships. Databases generally provide tools and/or interfaces to retrieve data.                                  |

|                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                            |
|---------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>datafile</b>                 | A physical database attribute that contains database data. An Oracle datafile can only be associated with a single database. One or more datafiles form a logical database storage unit called a tablespace.                                                                                                                                                                                                                               |
| <b>DCO</b>                      | See "data change object (DCO)."                                                                                                                                                                                                                                                                                                                                                                                                            |
| <b>DCO log volume</b>           | A volume used to hold persistent FastResync change maps.                                                                                                                                                                                                                                                                                                                                                                                   |
| <b>Decision Support Systems</b> | Decision Support Systems (DSS) are computer-based systems used to model, identify, and solve problems, and make decisions.                                                                                                                                                                                                                                                                                                                 |
| <b>defragmentation</b>          | The act of reorganizing data to reduce fragmentation. Data in file systems become fragmented over time.                                                                                                                                                                                                                                                                                                                                    |
| <b>device file</b>              | A block- or character-special file located in the /dev directory representing a device.                                                                                                                                                                                                                                                                                                                                                    |
| <b>device name</b>              | The name of a device file, which represents a device. AIX syntax is Disk_#; HP-UX syntax is c#t#d#; Linux syntax is sda, where "a" could be any alphabetical letter; Solaris syntax is c#t#d#s#.                                                                                                                                                                                                                                           |
| <b>direct I/O</b>               | An unbuffered form of I/O that bypasses the kernel's buffering of data. With direct I/O, data is transferred directly between the disk and the user application.                                                                                                                                                                                                                                                                           |
| <b>Dirty Region Logging</b>     | The procedure by which the Veritas Volume Manager monitors and logs modifications to a plex. A bitmap of changed regions is kept in an associated subdisk called a log subdisk.                                                                                                                                                                                                                                                            |
| <b>disk access name</b>         | The name used to access a physical disk, such as Disk_1 on an AIX system, c1t1d1 on an HP-UX system, sda on a Linux system, or c0t0d0s0 on a Solaris system. The term device name can also be used to refer to the disk access name.                                                                                                                                                                                                       |
| <b>disk array</b>               | A collection of disks logically and physically arranged into an object. Arrays provide benefits including data redundancy and improved performance.                                                                                                                                                                                                                                                                                        |
| <b>disk cache</b>               | A section of RAM that provides a cache between the disk and the application. Disk cache enables the computer to operate faster. Because retrieving data from hard disk can be slow, a disk caching program helps solve this problem by placing recently accessed data in the disk cache. Next time that data is needed, it may already be available in the disk cache; otherwise a time-consuming operation to the hard disk is necessary. |
| <b>disk group</b>               | <p>A collection of disks that share a common configuration.</p> <p>A disk group configuration is a set of records containing detailed information on existing Veritas Volume Manager objects (such as disk and volume attributes) and their relationships. Each disk group has an administrator-assigned name and an internally defined unique ID. The root disk group (rootdg) is a special private disk group</p>                        |

|                             |                                                                                                                                                                                                                                                                    |
|-----------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>disk name</b>            | A Veritas Volume Manager logical or administrative name chosen for the disk, such as disk03. The term disk media name is also used to refer to the disk name.                                                                                                      |
| <b>DMP</b>                  | See “Dynamic Multipathing.”                                                                                                                                                                                                                                        |
| <b>DSS</b>                  | See “Decision Support Systems.”                                                                                                                                                                                                                                    |
| <b>Dynamic Multipathing</b> | Dynamic Multipathing (DMP) is a Veritas Volume Manager feature that allows the use of multiple paths to the same storage device for load balancing and redundancy.                                                                                                 |
| <b>error handling</b>       | Routines in a program that respond to errors. The measurement of quality in error handling is based on how the system informs the user of such conditions and what alternatives it provides for dealing with them.                                                 |
| <b>evacuate</b>             | Moving subdisks from the source disks to target disks.                                                                                                                                                                                                             |
| <b>exabyte</b>              | A measure of memory or storage. An exabyte is approximately 1,000,000,000,000,000,000 bytes (technically 2 to the 60th power, or 1,152,921,504,606,846,976 bytes). Also EB.                                                                                        |
| <b>extent</b>               | A logical database attribute that defines a group of contiguous file system data blocks that are treated as a unit. An extent is defined by a starting block and a length.                                                                                         |
| <b>extent attributes</b>    | The extent allocation policies associated with a file and/or file system. For example, see “address-length pair.”                                                                                                                                                  |
| <b>failover</b>             | The act of moving a service from a failure state back to a running/available state. Services are generally applications running on machines and failover is the process of restarting these applications on a second system when the first has suffered a failure. |
| <b>file system</b>          | A collection of files organized together into a structure. File systems are based on a hierarchical structure consisting of directories and files.                                                                                                                 |
| <b>file system block</b>    | The fundamental minimum size of allocation in a file system.                                                                                                                                                                                                       |
| <b>fileset</b>              | A collection of files within a file system.                                                                                                                                                                                                                        |
| <b>fixed extent size</b>    | An extent attribute associated with overriding the default allocation policy of the file system.                                                                                                                                                                   |
| <b>fragmentation</b>        | Storage of data in non-contiguous areas on disk. As files are updated, new data is stored in available free space, which may not be contiguous. Fragmented files cause extra read/write head movement, slowing disk accesses.                                      |
| <b>gigabyte</b>             | A measure of memory or storage. A gigabyte is approximately 1,000,000,000 bytes (technically, 2 to the 30th power, or 1,073,741,824 bytes). Also GB, Gbyte, and G-byte.                                                                                            |

|                               |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
|-------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>high availability (HA)</b> | The ability of a system to perform its function continuously (without significant interruption) for a significantly longer period of time than the combined reliabilities of its individual components. High availability is most often achieved through failure tolerance and inclusion of redundancy; from redundant disk to systems, networks, and entire sites.                                                                                                                                                                                                                |
| <b>hot backup</b>             | The process of backing up a database that is online and in active use.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| <b>hot pluggable</b>          | To pull a component out of a system and plug in a new one while the power is still on and the unit is still operating. Redundant systems can be designed to swap disk drives, circuit boards, power supplies, CPUs, or virtually anything else that is duplexed within the computer. Also known as hot swappable.                                                                                                                                                                                                                                                                  |
| <b>inode list</b>             | An inode is an on-disk data structure in the file system that defines everything about the file, except its name. Inodes contain information such as user and group ownership, access mode (permissions), access time, file size, file type, and the block map for the data contents of the file. Each inode is identified by a unique inode number in the file system where it resides. The inode number is used to find the inode in the inode list for the file system. The inode list is a series of inodes. There is one inode in the list for every file in the file system. |
| <b>instance</b>               | When you start a database, a system global area (SGA) is allocated and the Oracle processes are started. The SGA is the area of memory used for database information shared by all database users. The Oracle processes and the SGA create what is called an Oracle instance.                                                                                                                                                                                                                                                                                                      |
| <b>intent logging</b>         | A logging scheme that records pending changes to a file system structure. These changes are recorded in an intent log.                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| <b>interrupt key</b>          | A way to end or break out of any operation and return to the system prompt by pressing Ctrl-C.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| <b>kilobyte</b>               | A measure of memory or storage. A kilobyte is approximately a thousand bytes (technically, 2 to the 10th power, or 1,024 bytes). Also KB, Kbyte, kbyte, and K-byte.                                                                                                                                                                                                                                                                                                                                                                                                                |
| <b>large file</b>             | A file more than two gigabytes in size. An operating system that uses a 32-bit signed integer to address file contents will not support large files; however, the Version 4 disk layout feature of VxFS supports file sizes of up to two terabytes.                                                                                                                                                                                                                                                                                                                                |
| <b>large file system</b>      | A file system more than two gigabytes in size. VxFS, in conjunction with VxVM, supports large file systems.                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| <b>latency</b>                | The amount of time it takes for a given piece of work to be completed. For file systems, this typically refers to the amount of time it takes a given file system operation to return to the user. Also commonly used to describe disk seek times.                                                                                                                                                                                                                                                                                                                                 |
| <b>load balancing</b>         | The tuning of a computer system, network tuning, or disk subsystem in order to more evenly distribute the data and/or processing across available resources. For                                                                                                                                                                                                                                                                                                                                                                                                                   |

example, in clustering, load balancing might distribute the incoming transactions evenly to all servers, or it might redirect them to the next available server.

|                            |                                                                                                                                                                                                                                                                                                                       |
|----------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>load sharing</b>        | The division of a task among several components without any attempt to equalize each component's share of the load. When several components are load sharing, it is possible for some of the shared components to be operating at full capacity and limiting performance, while others components are under utilized. |
| <b>Logical Unit Number</b> | A method of expanding the number of SCSI devices that can be placed on one SCSI bus. Logical Unit Numbers address up to seven devices at each SCSI ID on an 8-bit bus or up to 15 devices at each ID on a 16-bit bus.                                                                                                 |
| <b>logical volume</b>      | See "volume."                                                                                                                                                                                                                                                                                                         |
| <b>LUN</b>                 | See "Logical Unit Number."                                                                                                                                                                                                                                                                                            |
| <b>master node</b>         | A computer which controls another computer or a peripheral.                                                                                                                                                                                                                                                           |
| <b>megabyte</b>            | A measure of memory or storage. A megabyte is approximately 1,000,000 bytes (technically, 2 to the 20th power, or 1,048,576 bytes). Also MB, Mbyte, mbyte, and K-byte.                                                                                                                                                |
| <b>metadata</b>            | Data that describes other data. Data dictionaries and repositories are examples of metadata. The term may also refer to any file or database that holds information about another database's structure, attributes, processing, or changes.                                                                           |
| <b>mirror</b>              | A duplicate copy of a volume and the data therein (in the form of an ordered collection of subdisks). Each mirror is one copy of the volume with which the mirror is associated. The terms mirror and plex can be used synonymously.                                                                                  |
| <b>mirroring</b>           | A layout technique that mirrors the contents of a volume onto multiple plexes. Each plex duplicates the data stored on the volume, but the plexes themselves may have different layouts.                                                                                                                              |
| <b>mount point</b>         | The directory path name at which a file system attaches to the file system hierarchy.                                                                                                                                                                                                                                 |
| <b>multithreaded</b>       | Having multiple concurrent or pseudo-concurrent execution sequences. Used to describe processes in computer systems. Multithreaded processes are one means by which I/O request-intensive applications can use independent access to volumes and disk arrays to increase I/O performance.                             |
| <b>NBU</b>                 | See "Veritas NetBackup (NBU)."                                                                                                                                                                                                                                                                                        |
| <b>node</b>                | One of the hosts in a cluster.                                                                                                                                                                                                                                                                                        |
| <b>object (VxVM)</b>       | An entity that is defined to and recognized internally by the Veritas Volume Manager. The VxVM objects include volumes, plexes, subdisks, disks, and disk groups. There are two types of VxVM disk objects—one for the physical aspect of the disk and the other for the logical aspect of the disk.                  |
| <b>OLTP</b>                | See "Online Transaction Processing."                                                                                                                                                                                                                                                                                  |

|                                      |                                                                                                                                                                                                                                                                                                                                                                                                                      |
|--------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>online administration</b>         | An administrative feature that allows configuration changes without system or database down time.                                                                                                                                                                                                                                                                                                                    |
| <b>Online Transaction Processing</b> | A type of system designed to support transaction-oriented applications. OLTP systems are designed to respond immediately to user requests and each request is considered to be a single transaction. Requests can involve adding, retrieving, updating or removing data.                                                                                                                                             |
| <b>paging</b>                        | The transfer of program segments (pages) into and out of memory. Although paging is the primary mechanism for virtual memory, excessive paging is not desirable.                                                                                                                                                                                                                                                     |
| <b>parity</b>                        | A calculated value that can be used to reconstruct data after a failure. While data is being written to a RAID-5 volume, parity is also calculated by performing an exclusive OR (XOR) procedure on data. The resulting parity is then written to the volume. If a portion of a RAID-5 volume fails, the data that was on that portion of the failed volume can be recreated from the remaining data and the parity. |
| <b>partition</b>                     | The logical areas into which a disk is divided.                                                                                                                                                                                                                                                                                                                                                                      |
| <b>persistence</b>                   | Information or state that will survive a system reboot or crash.                                                                                                                                                                                                                                                                                                                                                     |
| <b>petabyte</b>                      | A measure of memory or storage. A petabyte is approximately 1,000 terabytes (technically, 2 to the 50th power).                                                                                                                                                                                                                                                                                                      |
| <b>plex</b>                          | A duplicate copy of a volume and its data (in the form of an ordered collection of subdisks). Each plex is one copy of a volume with which the plex is associated. The terms mirror and plex can be used synonymously.                                                                                                                                                                                               |
| <b>preallocation</b>                 | Prespecifying space for a file so that disk blocks will physically be part of a file before they are needed. Enabling an application to preallocate space for a file guarantees that a specified amount of space will be available for that file, even if the file system is otherwise out of space.                                                                                                                 |
| <b>RAID</b>                          | A Redundant Array of Independent Disks (RAID) is a disk array set up with part of the combined storage capacity used for storing duplicate information about the data stored in that array. This makes it possible to regenerate the data if a disk failure occurs.                                                                                                                                                  |
| <b>recovery mode</b>                 | The process of recovering the file systems once the file systems have been restored. In a media failure scenario, the backups must be restored before the database can be recovered.                                                                                                                                                                                                                                 |
| <b>redo log files</b>                | Redo log files record transactions pending on a database. If a failure prevents data from being permanently written to datafiles, changes can be obtained from the redo log files. Every Oracle database has a set of two or more redo log files.                                                                                                                                                                    |
| <b>repository</b>                    | A repository holds the name, type, range of values, source, and authorization for access for each data element in a database. The database maintains a repository for administrative and reporting use.                                                                                                                                                                                                              |

Pertinent information, needed to display configuration information and interact with the database, is stored in the repository.

|                             |                                                                                                                                                                                                                                                            |
|-----------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>root disk</b>            | The disk containing the root file system.                                                                                                                                                                                                                  |
| <b>root disk group</b>      | A special private disk group on the system. The root disk group is named rootdg. However, starting with the 4.1 release of Veritas Volume Manager, the root disk group is no longer needed.                                                                |
| <b>root file system</b>     | The initial file system mounted as part of the UNIX kernel startup sequence.                                                                                                                                                                               |
| <b>script</b>               | A file, containing one or more commands that can be run to perform processing.                                                                                                                                                                             |
| <b>shared disk group</b>    | A disk group in which the disks are shared by multiple hosts (also referred to as a cluster-shareable disk group).                                                                                                                                         |
| <b>sector</b>               | A minimal unit of the disk partitioning. The size of a sector can vary between systems.<br><br>A sector is commonly 512 bytes.                                                                                                                             |
| <b>segment</b>              | Any partition, reserved area, partial component, or piece of a larger structure.                                                                                                                                                                           |
| <b>SGA</b>                  | See "System Global Area."                                                                                                                                                                                                                                  |
| <b>single threading</b>     | The processing of one transaction to completion before starting the next.                                                                                                                                                                                  |
| <b>slave node</b>           | A node that is not designated as a master node.                                                                                                                                                                                                            |
| <b>snapped file system</b>  | A file system whose exact image has been used to create a snapshot file system.                                                                                                                                                                            |
| <b>snapped volume</b>       | A volume whose exact image has been used to create a snapshot volume.                                                                                                                                                                                      |
| <b>snapshot</b>             | A point-in-time image of a volume or file system that can be used as a backup.                                                                                                                                                                             |
| <b>snapshot file system</b> | An exact copy of a mounted file system, at a specific point in time, that is used for online backup. A snapshot file system is not persistent and it will not survive a crash or reboot of the system.                                                     |
| <b>snapshot volume</b>      | An exact copy of a volume, at a specific point in time. The snapshot is created based on disk mirroring and is used for online backup purposes.                                                                                                            |
| <b>spanning</b>             | A layout technique that permits a volume (and its file system or database) too large to fit on a single disk to distribute its data across multiple disks or volumes.                                                                                      |
| <b>Storage Checkpoint</b>   | An efficient snapshot technology for creating a point-in-time image of a currently mounted VxFS file system. A Storage Checkpoint presents a consistent, point-in-time view of the file system by identifying and maintaining modified file system blocks. |
| <b>storage class</b>        | Set of volumes with the same volume tag.                                                                                                                                                                                                                   |
| <b>Storage Rollback</b>     | On-disk restore capability for faster recovery from logical errors, such as accidentally deleting a file. Because each Storage Checkpoint is a point-in-time                                                                                               |

image of a file system, Storage Rollback simply restores or rolls back a file or entire file system to a Storage Checkpoint.

|                                                  |                                                                                                                                                                                                                                                                                                   |
|--------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>stripe</b>                                    | A set of stripe units that occupy the same positions across a series of columns in a multi-disk layout.                                                                                                                                                                                           |
| <b>stripe unit</b>                               | Equally sized areas that are allocated alternately on the subdisks (within columns) of each striped plex. In an array, this is a set of logically contiguous blocks that exist on each disk before allocations are made from the next disk in the array.                                          |
| <b>stripe unit size</b>                          | The size of each stripe unit. The default stripe unit size for VxVM is 32 sectors (16K). For RAID 0 stripping, the stripe unit size is 128 sectors (64K). For VxVM RAID 5, the stripe unit size is 32 sectors (16K). A stripe unit size has also historically been referred to as a stripe width. |
| <b>striping</b>                                  | A layout technique that spreads data across several physical disks using stripes. The data is allocated alternately to the stripes within the subdisks of each plex.                                                                                                                              |
| <b>subdisk</b>                                   | A consecutive set of contiguous disk blocks that form a logical disk segment. Subdisks can be associated with plexes to form volumes.                                                                                                                                                             |
| <b>superuser</b>                                 | A user with unlimited access privileges who can perform any and all operations on a computer. In UNIX, this user may also be referred to as the “root” user. On Windows/NT, it is the “Administrator.”                                                                                            |
| <b>System Global Area</b>                        | The area of memory used for database information shared by all database users. Each SGA contains the data and control information for a single Oracle instance.                                                                                                                                   |
| <b>tablespace</b>                                | In an Oracle database, an allocation of space used to hold schema objects (triggers, stored procedures, tables, etc.). A tablespace is associated with one or more datafiles.                                                                                                                     |
| <b>terabyte</b>                                  | A measure of memory or storage. A terabyte is approximately 1,000,000,000,000 bytes (technically, 2 to the 40th power, or 1,000 GB). Also TB.                                                                                                                                                     |
| <b>throughput</b>                                | A measure of work accomplished in a given amount of time. For file systems, this typically refers to the number of I/O operations in a given period of time.                                                                                                                                      |
| <b>unbuffered I/O</b>                            | I/O that bypasses the file system cache for the purpose of increasing I/O performance (also known as direct I/O).                                                                                                                                                                                 |
| <b>Veritas Enterprise Administrator</b>          | Application that is required to access graphical user interface (GUI) functionality.                                                                                                                                                                                                              |
| <b>Veritas Extension for Oracle Disk Manager</b> | A feature of Veritas Storage Foundation for Oracle that lets Oracle create and manage database storage, as well as performing I/Os in a file system without the performance degradation typically associated with running databases on file systems.                                              |
| <b>Veritas NetBackup (NBU)</b>                   | A product that lets you back up, archive, and restore files, directories, or raw partitions that reside on your client system.                                                                                                                                                                    |

|                                        |                                                                                                                                                                                                                                                                      |
|----------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Veritas Volume Replicator (VVR)</b> | A feature of Veritas Volume Manager, VVR is a data replication tool designed to contribute to an effective disaster recovery plan.                                                                                                                                   |
| <b>volume</b>                          | A logical disk device that appears to applications, databases, and file systems as a physical disk partition. A logical disk can encompass multiple or one to many physical volumes.                                                                                 |
| <b>volume layout</b>                   | A variety of layouts that allows you to configure your database to meet performance and availability requirements. This includes spanning, striping (RAID-0), mirroring (RAID-1), mirrored stripe volumes (RAID-0+1), striped mirror volumes (RAID-1+0), and RAID 5. |
| <b>volume manager objects</b>          | Volumes and their virtual components. See “object (VxVM).”                                                                                                                                                                                                           |
| <b>VVR</b>                             | See “Veritas Volume Replicator (VVR).”                                                                                                                                                                                                                               |
| <b>vxfs or VxFS</b>                    | The acronym for Veritas File System.                                                                                                                                                                                                                                 |
| <b>vxvm or VxVM</b>                    | The acronym for Veritas Volume Manager.                                                                                                                                                                                                                              |

# Index

## A

- ALTER DATABASE 131
- ARCHIVELOG mode 122
- archiving
  - using NetBackup 37
- arrays
  - configuring 101
- automatic backups 37
- availability
  - using mirroring for 20

## B

- backing up
  - using NetBackup 37
  - using Storage Checkpoints 122
  - using Storage Checkpoints and Storage Rollback 107
- backing up a database 205
- benefits of Concurrent I/O 69

## C

- Capacity Planning
  - dbed\_ckptplan command 263
  - managing 263
- Checkpoints . *See* Storage Checkpoints
- clone databases
  - creating 125, 209, 264, 284
  - restarting 215
  - shutting down 214, 284
  - unmounting file systems 214
- clone databases, creating 125, 209, 264, 284
- cloning a database. *See* clone databases
- Cluster Volume Manager 26
- command line interface 239
- commands 85
  - dbed\_analyzer 89, 241
  - dbed\_checkconfig 240, 243
  - dbed\_ckptcreate 240, 248
  - dbed\_ckptdisplay 240, 252
  - dbed\_ckptmount 240

- commands (*continued*)
  - dbed\_ckptplan 263
  - dbed\_ckptquota 240
  - dbed\_ckptremove 241, 263
  - dbed\_ckptrollback 240–241, 261
  - dbed\_ckptumount 241, 255
  - dbed\_clonedb 125, 241, 264
  - dbed\_saveconfig 240, 247
  - dbed\_update 240, 242
  - dbed\_vmchecksnap 269, 277, 279
  - dbed\_vmclonedb 284
  - dbed\_vmsnap 279
  - edgetmsg2 241
  - fsadm 29, 57
  - mkfs 30, 49, 51
  - mount 30, 51
  - overview 239
  - qio\_convertdbfiles 241
  - qio\_recreate 292
  - umount 53
  - vxstorage\_stats 241, 293
  - vxupgrade 105
- concatenation 19
- Concurrent I/O
  - benefits 69
  - disabling 71
  - enabling 70
- configuration environment
  - checking 243
- control files
  - Oracle recovery 130
- converting LVM volumes 103
- creating
  - a volume 46
  - Storage Checkpoints 36
- creating a snapplan 189
- cron 230, 250
  - scheduling Storage Checkpoints 251
- crontab file 251
- cross-platform data sharing 29

- ## D
- data change object 24
  - data redundancy 20
  - data warehousing 21
  - database
    - tuning 237
  - Database Dynamic Storage Tiering
    - using 36
  - Database FlashSnap
    - applications 161
    - backing up
      - databases 205
    - cloning a database 209
    - commands 163
    - copying a snapplan 200
    - creating a snapplan 189
    - creating a snapshot 202
    - creating a snapshot mirror 168
    - dbed\_vmchecksnap 189, 197, 200
    - dbed\_vmclonedb 205
    - dbed\_vmsnap 202, 218
    - dbed\_vmsnap -o resync 221
    - displaying a snapplan 200
    - host and storage requirements 167
    - options 164
    - Oracle RAC configuration 166
    - overview 33, 160, 185
    - planning considerations 165
    - removing a snapplan 200
    - removing a snapshot volume 222
    - removing a snapshot is the rest of the text in this index term supposed to be a separate index term?--mb volumesnapshot volumes
      - removing 222
    - resynchronizing 221
    - reverse resynchronizing 218
    - selecting the snapshot mode 165
    - setting up hosts 165
    - single-host configuration 166
    - two-host configuration 166
    - upgrading from Veritas Database Edition 3.5 for Oracle 184
    - validating a snapplan 197
  - database snapshots
    - creating 202
  - databases
    - managing the state of 36
    - resynchronizing to a snapshot 218
  - DB\_FILE\_MULTIBLOCK\_READ\_COUNT 237
  - dbed\_analyzer command 89, 241
  - dbed\_checkconfig command 240, 243
  - dbed\_ckptcreate command 240, 248
  - dbed\_ckptdisplay command 240, 252
  - dbed\_ckptmount command 240
  - dbed\_ckptplan command 263
  - dbed\_ckptquota command 240
  - dbed\_ckptremove command 241, 263
  - dbed\_ckptrollback command 240–241, 261
  - dbed\_ckptumount command 241, 255
  - dbed\_clonedb command 125, 241, 264
  - dbed\_saveconfig command 247
  - dbed\_update command 240, 242
  - dbed\_vmchecksnap command 189, 197, 200, 269, 277, 279
  - dbed\_vmclonedb command 205, 209, 284
  - dbed\_vmsnap -o resync command 221
  - dbed\_vmsnap command 202, 218, 279
    - o reverse\_resync\_abort 220
    - o reverse\_resync\_begin 219
    - o reverse\_resync\_commit 220
  - DBWR processes 237
  - DCO 24
    - log volume 24
  - deep mapping 101
  - defragmentation 28
    - extent 230
    - scheduling 230
    - utility 28
  - device interface 25
  - Dirty Region Logging 22
  - dirty region logging 22, 45
  - dirty volumes 22
  - disabling Concurrent I/O 71
  - discovered\_direct\_iosize tunable parameter 232
  - disk arrays 18
    - DMP-supported 25
  - disk group
    - naming a disk group 41
  - disk groups
    - about 18
    - adding disks 43
    - configuration guidelines 41
    - creating
      - using the command line 42
    - defined 18
    - split and join 24
  - disk space allocation 27

**disks**

- adding to a disk group 43
- failure and hot-relocation 25

**displaying**

- database 36
- datafile 36
- file system and Oracle space usage statistics 36
- file system information 36
- Storage Checkpoints 36
- tablespace 36

**DMP** 25

DMP-supported disk arrays 25

DRL 22, 45. *See* Dirty Region Logging**DSS workloads**

- guidelines 46

dynamic LUN expansion 26

Dynamic Multipathing 25

**E**

edgetmsg2 command 241

enabling Concurrent I/O 70

examining system configuration 37

examining volumes 37

exclusive OR 21

**expansion**

- file system 229

extent-based allocation 27

**F**

fast file system 28

fast recovery 45

**FastResync**

- non-persistent 24
- persistent 24
- use with snapshots 23

FastReysnc 23

**file systems**

- configuration guidelines 48
- increasing the size 57
- mounting 51
- overview 27
- resizing 29, 57
- unmounting 53

fragmentation 28, 54

- controlling 54
- monitoring 54, 229
- reorganization facilities 229
- reporting 229

fragmentation (*continued*)

- types 54

fragmented file system

- characteristics 230

free space 25, 229

- monitoring 229

**fsadm**

- reporting extent fragmentation 230
- scheduling 230

fsadm command 29, 57

- largefiles option 51

fsadm utility 29, 58

fsapadm command 51

fsvoladm command 51

full backups 37

**G****guidelines**

- creating file systems 48
- disk groups 41
- for DSS workloads 46
- for OLTP workloads 45
- striped volumes 45
- volumes 45

**H**

High Availability (HA)

- overview 15

hot-relocation 25

**I****I/O**

Cached Quick I/O 33

displaying Storage Mapping statistics 88

mapping and statistics 293

sequential 27

statistics

- obtaining 228

incremental backups 37

initial\_extent\_size tunable parameter 232

**L**

large file systems 30

- support for 50

large files

- enabling 51
- support for 30, 50

largefiles option 51

LOG\_ARCHIVE\_DEST 131  
LVM volumes 103

## M

managing  
    database state 36  
    Storage Checkpoints 36  
    volume and file movement 36  
max\_direct\_iosize tunable parameter 232  
max\_diskq tunable parameter 233  
max\_seqio\_extent\_size tunable parameter 233  
media recovery 131  
memory  
    persistence of FastResync in 24  
mirrored volume snapshots 23  
mirrored-stripe volumes 20  
mirroring 16, 20  
    choosing 45  
    defined 20  
mirroring and striping data 20  
mkfs command 30, 49, 51  
monitoring fragmentation 229  
mount command 30, 51  
mounting  
    file systems 30  
    Storage Checkpoints 36  
mounting file systems 51  
multi-volume support 29, 51  
    fsvoladm command 51  
mutli-volume support  
    fspadm command 51

## N

NetBackup  
    overview 37  
nolargefiles option 30, 51  
non-persistent FastResync 24

## O

OLTP. *See* online transaction processing  
OLTP workloads  
    guidelines 45  
OMF 76  
    working with Oracle Disk Manager 77  
online relayout 21  
online transaction processing 21  
options  
    largefiles and nolargefiles 30

## Oracle

    media recovery 131  
    recovery 130  
Oracle configuration environment  
    saving 247  
Oracle Disk Manager 73  
    benefits 74  
    disabling 82  
    preparing existing databases for use with 80  
    restoring files using NetBackup 225, 299  
    setting up 79  
Oracle Enterprise Manager 99  
Oracle Managed Files 76  
    working with Oracle Disk Manager 77  
Oracle tempfiles  
    recreating 216

## P

parallel data transfer  
    using striping for 20  
parameters  
    default 231  
    tunable 231  
    tuning 230  
parity 21  
performance  
    obtaining statistics for volumes 228  
    RAID-5 21  
    tuning  
        for databases 237  
performance tuning  
    list of guides 227  
persistent FastResync 24  
persistent snapshot 30

## Q

qio\_convertdbfiles command 241  
qio\_recreate command 292  
QoS. *See* quality of storage service  
quality of storage service 29  
Quick I/O  
    recreating files 292  
quotas 31

## R

RAID 18  
RAID-0 19  
RAID-0+1 20

- RAID-1 20
- RAID-1+0 20
- RAID-5 21, 45
  - choosing 45
  - performance 45
- RAID-5 log 45
- read\_nstream tunable parameter 231
- read\_pref\_io tunable parameter 231
- recovering
  - using Storage Checkpoints 122
- recreating
  - data using RAID-5 21
- redo logs
  - configuration guidelines 49
  - creating a file system 49
  - for Oracle recovery 131
- relayout 21
- reliability
  - using mirroring for 20
- removing
  - Storage Checkpoints 36
- removing snapshot volumes 222
- report
  - extent fragmentation 229
- resizing file systems 57
- resizing utility 28–29
- restoring
  - using NetBackup 37
  - using Storage Checkpoints and Storage Rollback 107
- resynchronization
  - using DRL logs 45
  - using RAID-5 logs 45
- resynchronizing
  - volumes 22
- resynchronizing a snapshot 221
- reverse resynchronizing 218
- Rollback. *See* Storage Rollback

## S

- scheduling Storage Checkpoints 251
- SCSI devices 25
- selecting volume layouts 44
- sequential I/O
  - using extent-based allocation 27
- sequential read/writes
  - using spanning for 19
- SmartSync Recovery Accelerator 22

- snapplans
  - copying 200
  - creating 189, 269, 277, 279
  - displaying 200
  - removing 200, 279
  - validating 197, 269, 277, 279
  - viewing 278
- snapshot volume sets
  - creating
    - using the command line 173
- snapshot volumes
  - backing up a database 205
  - creating
    - using the command line 170
  - mounting 208
  - removing 222
  - resynchronizing 221
- snapshots
  - aborting resynchronization 283
  - aborting reverse resynchronization 283
  - and FastResync 23
  - committing reverse resynchronization changes 283
  - creating 202, 279, 281
  - resynchronizing 279, 282
  - reverse resynchronizing 279, 282
- space usage
  - displaying statistics and monitoring 36
- spanning 16, 19
  - defined 19
- spare disks 25
- statistics
  - volume I/O 228
- Storage Checkpoints 107–108
  - backing up and recovering 122
  - creating 248
  - defined 30
  - displaying 252
  - file system restores 31
  - managing 36
  - operations 132
  - overview 30
  - performance 111
  - removing 263
  - scheduling 251
  - space requirements 109
  - unmounting 255
  - verifying 122
- Storage Expert 26

**Storage Mapping**

- configuring arrays 101
  - dbed\_analyzer command 89
  - displaying I/O statistics 88
  - displaying information 86
  - displaying information for a list of tablespaces 91
  - enabling Oracle file mapping 97
  - mapping components 95
  - Oracle Enterprise Manager 99
  - Oracle file mapping 95
  - verifying Oracle file mapping setup 97
  - verifying setup 85
  - views 96, 98
  - vxstorage\_stats 85
- Storage Mapping, overview 32
- Storage Rollback 107–108, 261
- datafiles 36
  - defined 30
  - guidelines for recovery 130
  - of databases 36
  - overview 30
  - tablespaces 36
- stripe unit sizes
- choosing 44
- stripe units 20
- striped volumes 45
- configuration guidelines 45
- striping 16, 19
- defined 20
- striping and mirroring data 20
- support for large files 30
- system configuration
- examining 37

**T**

- tunable I/O parameters 231
- discovered\_direct\_iosize 232
  - initial\_extent\_size 232
  - max\_direct\_iosize 232
  - max\_diskq 233
  - max\_seqio\_extent\_size 233
  - read\_nstream 231
  - read\_pref\_io 231
  - write\_nstream 232
  - write\_pref\_io 231
  - write\_throttle 234

**Tuning**

- VxFS 229

**Tuning (continued)**

- VxFS I/O parameters 231
- tuning
- for database performance 237
  - vxfs 229
  - VxVM 227
- tuning I/O parameters 230

**U**

- umount command 53
- unattended backups 37
- unmounting
- a file system 53
  - Storage Checkpoints 36
- unmounting file systems 53
- upgrade
- from raw devices 80, 105
  - from UFS 104
- upgrading
- from earlier VxFS layout versions 105
- using Database Dynamic Storage Tiering 36
- utilities
- fsadm 29, 58
  - See also* commands
  - online administration 28
  - vxvmconvert 103

**V**

- V\$ARCHIVE\_DEST 131
- V\$ARCHIVED\_LOG 131
- V\$LOG\_HISTORY 131
- V\$RECOVERY\_LOG 131
- validating a snapplan 197
- Veritas extension for Oracle Disk Manager
- overview 33
- Veritas FastResync. *See* FastResync
- Veritas File System
- cluster functionality 32
  - cross-platfrom data sharing 29
  - defragmentation utility 28
  - fast file system 28
  - multi-volume support 29
  - online administration utilities 28
  - overview 27
  - quality of storage service 29
  - quotas 31
  - resizing utility 28–29
  - support for large file systems 30

Veritas Volume Manager 16  
 and RAID 18  
 objects 18  
 overview 16

Veritas Volume Replicator 26

volume layouts 18  
 changing 21  
 concatenation 19  
 mirrored-stripe 20  
 mirroring 20  
 RAID-5 21  
 selecting 44  
 spanning 19  
 striping 19

volume resynchronization 21

volume snapshots. *See* snapshots

volumes  
 about 18  
 configuration guidelines 45  
 creating 46  
   using the command line 47  
 definition 18  
 examining 37  
 layouts 18  
 marked as dirty 22  
 obtaining performance statistics 228  
 resynchronizing 21–22

vxassist  
 used to remove DCOs from volumes 180

VxFS  
 performance tuning 237  
 resizing utility 28  
 tuning 229

VxFS.. *See* Veritas File System

vxstat  
 used to obtain volume performance  
 statistics 228

vxstorage\_stat command 85

vxstorage\_stats 85

vxstorage\_stats command 241, 293

vxupgrade command 105

VxVM. *See* Veritas Volume Manager  
 overview 16  
 tuning 227

vxvmconvert 103

write\_nstream tunable parameter 232

write\_pref\_io tunable parameter 231

write\_throttle tunable parameter 234

## X

XOR. *See* exclusive OR

## W

workloads  
 write-intensive 45