

# Veritas™ Storage Foundation: Storage and Availability Management for Oracle Databases

AIX, HP-UX, Linux, Solaris

6.0.1

# Veritas Storage Foundation: Storage and Availability Management for Oracle Databases

The software described in this book is furnished under a license agreement and may be used only in accordance with the terms of the agreement.

Product version: 6.0.1

Document version: 6.0.1 Rev 0

## Legal Notice

Copyright © 2012 Symantec Corporation. All rights reserved.

Symantec, the Symantec logo, Veritas, Veritas Storage Foundation, CommandCentral, NetBackup, Enterprise Vault, and LiveUpdate are trademarks or registered trademarks of Symantec corporation or its affiliates in the U.S. and other countries. Other names may be trademarks of their respective owners.

The product described in this document is distributed under licenses restricting its use, copying, distribution, and decompilation/reverse engineering. No part of this document may be reproduced in any form by any means without prior written authorization of Symantec Corporation and its licensors, if any.

THE DOCUMENTATION IS PROVIDED "AS IS" AND ALL EXPRESS OR IMPLIED CONDITIONS, REPRESENTATIONS AND WARRANTIES, INCLUDING ANY IMPLIED WARRANTY OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT, ARE DISCLAIMED, EXCEPT TO THE EXTENT THAT SUCH DISCLAIMERS ARE HELD TO BE LEGALLY INVALID. SYMANTEC CORPORATION SHALL NOT BE LIABLE FOR INCIDENTAL OR CONSEQUENTIAL DAMAGES IN CONNECTION WITH THE FURNISHING, PERFORMANCE, OR USE OF THIS DOCUMENTATION. THE INFORMATION CONTAINED IN THIS DOCUMENTATION IS SUBJECT TO CHANGE WITHOUT NOTICE.

The Licensed Software and Documentation are deemed to be commercial computer software as defined in FAR 12.212 and subject to restricted rights as defined in FAR Section 52.227-19 "Commercial Computer Software - Restricted Rights" and DFARS 227.7202, "Rights in Commercial Computer Software or Commercial Computer Software Documentation", as applicable, and any successor regulations. Any use, modification, reproduction release, performance, display or disclosure of the Licensed Software and Documentation by the U.S. Government shall be solely in accordance with the terms of this Agreement.

Symantec Corporation  
350 Ellis Street  
Mountain View, CA 94043

<http://www.symantec.com>

# Technical Support

Symantec Technical Support maintains support centers globally. Technical Support's primary role is to respond to specific queries about product features and functionality. The Technical Support group also creates content for our online Knowledge Base. The Technical Support group works collaboratively with the other functional areas within Symantec to answer your questions in a timely fashion. For example, the Technical Support group works with Product Engineering and Symantec Security Response to provide alerting services and virus definition updates.

Symantec's support offerings include the following:

- A range of support options that give you the flexibility to select the right amount of service for any size organization
- Telephone and/or Web-based support that provides rapid response and up-to-the-minute information
- Upgrade assurance that delivers software upgrades
- Global support purchased on a regional business hours or 24 hours a day, 7 days a week basis
- Premium service offerings that include Account Management Services

For information about Symantec's support offerings, you can visit our Web site at the following URL:

[www.symantec.com/business/support/index.jsp](http://www.symantec.com/business/support/index.jsp)

All support services will be delivered in accordance with your support agreement and the then-current enterprise technical support policy.

## Contacting Technical Support

Customers with a current support agreement may access Technical Support information at the following URL:

[www.symantec.com/business/support/contact\\_techsupp\\_static.jsp](http://www.symantec.com/business/support/contact_techsupp_static.jsp)

Before contacting Technical Support, make sure you have satisfied the system requirements that are listed in your product documentation. Also, you should be at the computer on which the problem occurred, in case it is necessary to replicate the problem.

When you contact Technical Support, please have the following information available:

- Product release level

- Hardware information
- Available memory, disk space, and NIC information
- Operating system
- Version and patch level
- Network topology
- Router, gateway, and IP address information
- Problem description:
  - Error messages and log files
  - Troubleshooting that was performed before contacting Symantec
  - Recent software configuration changes and network changes

## Licensing and registration

If your Symantec product requires registration or a license key, access our technical support Web page at the following URL:

[www.symantec.com/business/support/](http://www.symantec.com/business/support/)

## Customer service

Customer service information is available at the following URL:

[www.symantec.com/business/support/](http://www.symantec.com/business/support/)

Customer Service is available to assist with non-technical questions, such as the following types of issues:

- Questions regarding product licensing or serialization
- Product registration updates, such as address or name changes
- General product information (features, language availability, local dealers)
- Latest information about product updates and upgrades
- Information about upgrade assurance and support contracts
- Information about the Symantec Buying Programs
- Advice about Symantec's technical support options
- Nontechnical presales questions
- Issues that are related to CD-ROMs or manuals

## Support agreement resources

If you want to contact Symantec regarding an existing support agreement, please contact the support agreement administration team for your region as follows:

Asia-Pacific and Japan [customercare\\_apac@symantec.com](mailto:customercare_apac@symantec.com)

Europe, Middle-East, and Africa [semea@symantec.com](mailto:semea@symantec.com)

North America and Latin America [supportolutions@symantec.com](mailto:supportsolutions@symantec.com)

## Documentation

Product guides are available on the media in PDF format. Make sure that you are using the current version of the documentation. The document version appears on page 2 of each guide. The latest product documentation is available on the Symantec Web site.

<https://sort.symantec.com/documents>

Your feedback on product documentation is important to us. Send suggestions for improvements and reports on errors or omissions. Include the title and document version (located on the second page), and chapter and section titles of the text on which you are reporting. Send feedback to:

[doc\\_feedback@symantec.com](mailto:doc_feedback@symantec.com)

For information regarding the latest HOWTO articles, documentation updates, or to ask a question regarding product documentation, visit the Storage and Clustering Documentation forum on Symantec Connect.

<https://www-secure.symantec.com/connect/storage-management/forums/storage-and-clustering-documentation>

## About Symantec Connect

Symantec Connect is the peer-to-peer technical community site for Symantec's enterprise customers. Participants can connect and share information with other product users, including creating forum posts, articles, videos, downloads, blogs and suggesting ideas, as well as interact with Symantec product teams and Technical Support. Content is rated by the community, and members receive reward points for their contributions.

<http://www.symantec.com/connect/storage-management>

# Contents

Technical Support .....	4
Section 1      Storage Foundation High Availability (SFHA) management solutions for Oracle databases .....	23
Chapter 1      Overview of Storage Foundation for Databases .....	25
Introducing Storage Foundation High Availability (SFHA) Solutions for Oracle .....	25
About Veritas File System .....	26
About the Veritas File System intent log .....	26
About extents .....	27
About file system disk layouts .....	28
About Veritas Volume Manager .....	29
About Veritas Dynamic Multi-Pathing (DMP) .....	29
About Veritas Cluster Server .....	30
About Veritas Cluster Server agents .....	30
About Veritas Operations Manager .....	31
Feature support for Oracle across Veritas Storage Foundation and High Availability Solutions 6.0.1 products .....	31
About Storage Foundation and High Availability Solutions .....	34

Section 2	Deploying Oracle with Veritas Storage Foundation High Availability Solutions products .....	37
Chapter 2	Deployment options for Oracle in a Storage Foundation environment .....	39
	Oracle deployment options in a Storage Foundation environment .....	40
	Oracle single instance in a Veritas Storage Foundation environment .....	40
	Single instance Oracle with off-host in a Veritas Storage Foundation environment .....	41
	Single instance Oracle in a highly available cluster with Veritas Storage Foundation High Availability .....	42
	Single instance Oracle in a parallel cluster with SF Cluster File System HA environment .....	44
	About Oracle RAC in a Storage Foundation for Oracle RAC environment .....	46
	About Oracle in a replicated Storage Foundation environment .....	47
	Deploying Oracle and Storage Foundation in a virtualization environment .....	49
	Deploying Oracle with Storage Foundation SmartMove and Thin Provisioning .....	49
Chapter 3	Deploying Oracle with Veritas Storage Foundation .....	51
	Tasks for deploying Oracle databases .....	51
	Planning your Oracle storage .....	52
	About selecting a volume layout for deploying Oracle .....	53
	Setting up disk group for deploying Oracle .....	53
	Disk group configuration guidelines for deploying Oracle .....	55
	Creating volumes for deploying Oracle .....	55
	Volume configuration guidelines for deploying Oracle .....	56
	Creating VxFS file system for deploying Oracle .....	56
	File system creation guidelines for deploying Oracle .....	58
	Mounting the file system for deploying Oracle .....	58
	Installing Oracle and creating database .....	59



Chapter 4	Deploying Oracle in an off-host configuration with Veritas Storage Foundation .....	61
	Requirements for an off-host database configuration .....	61
Chapter 5	Deploying Oracle with High Availability .....	63
	Tasks for deploying Oracle in an HA configuration .....	63
	Configuring VCS to make the database highly available .....	63
Chapter 6	Deploying Oracle with Veritas Volume Replicator (VVR) for disaster recovery .....	65
	About deploying Oracle with VVR for disaster recovery .....	65
	Tasks for deploying Oracle with VVR for disaster recovery .....	66
	Setting up the primary node for deploying Oracle .....	66
	Setting up the secondary node for deploying Oracle .....	67
	Configuring VVR between primary and secondary nodes for deploying Oracle .....	69
Section 3	Configuring Storage Foundation for Database (SFDB) tools .....	71
Chapter 7	Configuring and managing the Storage Foundation for Databases repository database .....	73
	About the Storage Foundation for Databases (SFDB) repository .....	74
	Requirements for Storage Foundation for Databases (SFDB) tools .....	74
	Storage Foundation for Databases (SFDB) tools availability .....	75
	Configuring the Storage Foundation for Databases (SFDB) tools repository .....	75
	Locations for the SFDB repository .....	75
	Setting up the SFDB repository .....	77
	Backing up and restoring the Storage Foundation for Databases (SFDB) repository .....	78
	Updating the Storage Foundation for Databases (SFDB) repository after adding a node .....	80
	Updating the Storage Foundation for Databases (SFDB) repository after removing a node .....	81
	Removing the Storage Foundation for Databases (SFDB) repository after removing the product .....	81

Chapter 8	Upgrading and migrating Storage Foundation for Databases (SFDB) tools .....	83
	About upgrading Storage Foundation for Databases (SFDB) tools .....	83
	Using SFDB tools after upgrading Oracle to 11.2.0.2 .....	84
Chapter 9	Configuring authentication for Storage Foundation for Databases (SFDB) tools .....	85
	Configuring vxdbd for SFDB tools authentication .....	85
	Adding nodes to a cluster that is using authentication for SFDB tools .....	86
	Authorizing users to run SFDB commands .....	87
Section 4	Improving Oracle database performance .....	89
Chapter 10	About database accelerators .....	91
	About Storage Foundation and High Availability Solutions products database accelerators .....	91
Chapter 11	Improving database performance with Veritas Extension for Oracle Disk Manager .....	93
	About Oracle Disk Manager in SFHA environment .....	93
	How Oracle Disk Manager improves database performance in SFHA environment .....	95
	How Oracle Disk Manager works with Oracle Managed Files .....	97
	Setting up Veritas Extension for Oracle Disk Manager in SFHA environment .....	99
	Linking the Veritas extension for Oracle Disk Manager library into Oracle home in SFHA environment .....	100
	Configuring Veritas Extension for Oracle Disk Manager in SFHA environment .....	103
	How to prepare existing database storage for Oracle Disk Manager in SFHA environment .....	104
	Verifying that Oracle Disk Manager is configured in SFHA environment .....	105
	Disabling the Oracle Disk Manager feature in SFHA environment .....	111

Chapter 12	Improving database performance with Veritas Cached Oracle Disk Manager .....	115
	About Cached ODM in SFHA environment .....	115
	Considerations for using Cached ODM in SFHA environment .....	115
	Cached ODM supported configurations in SFHA environment .....	116
	About Cached ODM Advisor in SFHA environment .....	116
	Configuring Cached ODM in SFHA environment .....	117
	Enabling Cached ODM for file systems in SFHA environment .....	117
	Tuning Cached ODM settings for individual files in SFHA environment .....	117
	Tuning Cached ODM settings via the cachemap in SFHA environment .....	118
	Making the caching settings persistent across mounts in SFHA environment .....	119
	Administering Cached ODM settings with Cached ODM Advisor in SFHA environment .....	120
	Generating reports of candidate datafiles by using Cached ODM Advisor in SFHA environment .....	123
	Enabling and disabling Cached ODM on data files by using Cached ODM Advisor in SFHA environment .....	128
	Display the Cached ODM states of the database files by using Cached ODM Advisor in SFHA environment .....	130
	Show Cached ODM statistics by using Cached ODM Advisor in SFHA environment .....	131
	Displaying ODM I/O statistics by using Cached ODM Advisor in SFHA environment .....	132
Chapter 13	Improving database performance with Veritas Quick I/O .....	135
	About Quick I/O .....	135
	How Quick I/O works .....	135
	How Quick I/O improves database performance .....	136
Chapter 14	Improving database performance with Veritas Cached Quick I/O .....	141
	About Cached Quick I/O .....	141
	Tasks for setting up Cached Quick I/O .....	141
	Enabling Cached Quick I/O on a file system .....	142

Enabling and disabling the <code>qio_cache_enable</code> flag .....	143
Making Cached Quick I/O settings persistent across reboots and mounts .....	144
Using <code>vxtunefs</code> to obtain tuning information .....	145
Determining candidates for Cached Quick I/O .....	147
Collecting I/O statistics .....	148
About I/O statistics for Oracle .....	148
Effects of read-aheads on I/O statistics .....	150
Other tools for analysis .....	150
Enabling and disabling Cached Quick I/O for individual files .....	151
Setting cache advisories for individual files .....	151
Making individual file settings for Cached Quick I/O persistent .....	152
Determining individual file settings for Cached Quick I/O using <code>qioadmin</code> .....	153
 Section 5	
Using point-in-time copies .....	155
 Chapter 15	
Understanding point-in-time copy methods .....	157
About point-in-time copies .....	157
When to use point-in-time copies .....	158
About Storage Foundation point-in-time copy technologies .....	159
Point-in-time copy solutions supported by SFDB tools .....	160
About snapshot modes supported by Storage Foundation for Databases (SFDB) tools .....	161
Volume-level snapshots .....	163
Persistent FastResync of volume snapshots .....	163
Data integrity in volume snapshots .....	164
Third-mirror break-off snapshots .....	164
Space-optimized instant volume snapshots .....	165
Storage Checkpoints .....	166
How Storage Checkpoints differ from snapshots .....	167
How a Storage Checkpoint works .....	168
About Database Rollbacks using Storage Checkpoints .....	172
Storage Checkpoints and Rollback process .....	172
Types of Storage Checkpoints .....	173
Storage Checkpoint space management considerations .....	174
About FileSnaps .....	175
Properties of FileSnaps .....	175
Concurrent I/O to FileSnaps .....	176
Copy-on-write and FileSnaps .....	177
Reading from FileSnaps .....	177

	Block map fragmentation and FileSnaps .....	177
	Backup and FileSnaps .....	178
Chapter 16	Considerations for Oracle point-in-time copies .....	179
	Considerations for database layouts .....	179
	Supported Oracle configurations .....	180
	Behavior of clone databases .....	181
Chapter 17	Administering third-mirror break-off snapshots .....	183
	Database FlashSnap for cloning .....	183
	Database FlashSnap advantages .....	184
	Preparing hosts and storage for Database FlashSnap .....	184
	Setting up hosts .....	184
	Creating a snapshot mirror of a volume or volume set used by the database .....	186
	Creating a clone of a database by using Database FlashSnap .....	189
	Resynchronizing mirror volumes with primary volumes .....	195
	Recovering the database manually .....	197
	Cloning a database on the secondary host .....	198
Chapter 18	Administering space-optimized snapshots .....	201
	Planning to create an instant space-optimized snapshot .....	201
	Preparing a legacy volume for the creation of an instant snapshot .....	202
	Creating a shared cache object .....	203
	Creating a clone of an Oracle database by using space-optimized snapshots .....	205
	Space-optimized snapshots in HA environment .....	208
	Creating multiple clones using FlashSnap snapshots .....	209
	Recovering the clone database manually .....	215
Chapter 19	Administering Storage Checkpoints .....	217
	About Storage Checkpoints .....	217
	Database Storage Checkpoints for recovery .....	218
	Advantages and limitations of Database Storage Checkpoints .....	219
	Creating a Database Storage Checkpoint .....	219
	Deleting a Database Storage Checkpoint .....	220
	Mounting a Database Storage Checkpoint .....	220
	Unmounting a Database Storage Checkpoint .....	221

	Creating a database clone using a Database Storage Checkpoint .....	222
	Restoring database from a Database Storage Checkpoint .....	223
	Gathering data for offline-mode Database Storage Checkpoints .....	224
Chapter 20	Administering FileSnap snapshots .....	227
	Preparing to use FileSnap .....	227
	Creating a clone of an Oracle database by using FileSnap .....	227
	Destroying a database clone created by using FileSnap .....	230
	Destroying a FileSnap snapshot .....	231
	Restoring database files from a FileSnap snapshot .....	232
	Viewing the list of snapshots and clones created by using FileSnap .....	233
Chapter 21	Backing up and restoring with Netbackup in an SFHA environment .....	235
	About Veritas NetBackup .....	235
	How Veritas NetBackup block-level incremental backup works for for Oracle database files .....	236
	About using Veritas NetBackup for backup and restore for Oracle .....	236
	About using Veritas NetBackup to backup and restore Oracle Disk Manager files .....	237
	Using Veritas NetBackup to backup and restore Quick I/O files for Oracle .....	237
	Using NetBackup in an SFHA Solutions product environment .....	239
	Clustering a NetBackup Master Server .....	239
	Backing up and recovering a VxVM volume using NetBackup .....	240
	Recovering a VxVM volume using NetBackup .....	242
	Backing up an Oracle database using NetBackup .....	242
	Recovering an Oracle database using NetBackup .....	243
Section 6	Optimizing storage costs for Oracle .....	245
Chapter 22	Understanding storage tiering with SmartTier .....	247
	About SmartTier .....	247
	About VxFS multi-volume file systems .....	249
	About VxVM volume sets .....	250
	About volume tags .....	250
	SmartTier file management .....	250
	SmartTier sub-file object management .....	251

	How SmartTier for Oracle works .....	251
	How partitions change the way Oracle stores database objects .....	252
	Database extents to file location .....	255
	Statistics in Oracle .....	255
	Optimizing storage for Oracle database objects .....	256
	About Automatic Workload Repository statistics .....	257
	SmartTier in a High Availability (HA) environment .....	258
Chapter 23	Configuring and administering SmartTier .....	259
	Configuring SmartTier for Oracle .....	259
	SmartTier for Oracle command requirements .....	260
	Defining database parameters .....	261
	Configuring storage classes .....	263
	Converting a Veritas File System (VxFS) to a VxFS multi-volume file system .....	265
	Classifying volumes into a storage class .....	266
	Displaying free space on your storage class .....	267
	Adding new volumes to a storage class .....	268
	Removing volumes from a storage class .....	269
	Optimizing database storage using SmartTier for Oracle .....	270
	Relocating files manually using SmartTier for Oracle .....	270
	Relocating tablespaces manually using SmartTier for Oracle .....	271
	Relocating table partitions manually using SmartTier for Oracle .....	272
	Setting policies to automate storage tiering using SmartTier for Oracle .....	273
	Running reports using SmartTier for Oracle .....	274
	Extent balancing in a database environment using SmartTier for Oracle .....	276
	Extent balancing file system to improve database performance .....	277
	Creating an extent balanced file system using SmartTier for Oracle .....	278
	Running sub-file database object reports using SmartTier for Oracle .....	280
	Optimizing sub-file database object placement using SmartTier for Oracle .....	282

Chapter 24	SmartTier use cases for Oracle .....	285
	SmartTier use cases for Oracle .....	285
	SmartTier for Oracle file-based use cases .....	285
	Migrating partitioned data and tablespaces .....	286
	Scheduling the relocation of archive and Flashback logs .....	288
	SmartTier for Oracle sub-file use cases .....	290
	Using AWR statistics to identify sub-file objects for potential relocation .....	291
	Relocating a hot database segment to a higher performance tier .....	293
	Relocating old table data to a lower cost or secondary tier .....	294
Chapter 25	Compressing files and databases to optimize storage costs .....	295
	Compressed files and databases .....	295
	Supported database versions and environment .....	296
	Compressing archive logs .....	296
	Compressing read-only tablespaces .....	297
	Compressing infrequently accessed table partitions .....	298
	Compressing infrequently accessed datafiles .....	299
	Best practices for compressing files in an Oracle database .....	300
Chapter 26	Using the Compression Advisor tool .....	301
	About the Compression Advisor tool .....	301
	Compressing Oracle archive logs using Compression Advisor .....	302
	Displaying compression candidate data files using Compression Advisor .....	303
	Compressing Oracle data files using Compression Advisor .....	304
	Displaying compressed data files using Compression Advisor .....	305
	Uncompressing Oracle data files using Compression Advisor .....	306
	Compression Advisor command reference .....	307
Section 7	Managing Oracle disaster recovery .....	311
Chapter 27	Using Storage Foundation for Databases (SFDB) tools in a replicated environment .....	313
	About deploying SF Databases tools with Veritas Volume Replicator (VVR) .....	313
	Using database accelerators for the Oracle database in a Veritas Volume Replicator (VVR) environment .....	314



	About deploying Storage Foundation for Databases (SFDB) tools with Oracle Data Guard .....	315
Chapter 28	Using volume snapshots in a replicated environment .....	317
	Considerations for using volume snapshots with VVR .....	317
	Creating space-optimized snapshots in a VVR setup .....	318
	Creating third-mirror break-off snapshots in a VVR setup .....	321
	Considerations for using vxsfadm after replication role transfer .....	325
Section 8	Storage Foundation for Databases administrative reference .....	327
Chapter 29	Storage Foundation for Databases command reference .....	329
	vxsfadm command reference .....	329
	FlashSnap reference .....	333
	FlashSnap configuration parameters .....	333
	FlashSnap supported operations .....	335
	Space-optimized snapshots reference .....	336
	Space-optimized snapshots configuration parameters .....	336
	Space-optimized snapshots supported operations .....	338
	FileSnap reference .....	339
	FileSnap configuration parameters .....	339
	FileSnap supported operations .....	341
	Database Storage Checkpoints reference .....	341
	Database Storage Checkpoints configuration parameters .....	341
	Database Storage Checkpoints supported operations .....	344
Chapter 30	Tuning for Storage Foundation for Databases .....	345
	Additional documentation .....	345
	About tuning Veritas Volume Manager (VxVM) .....	346
	About obtaining volume I/O statistics .....	346
	About tuning VxFS .....	347
	How monitoring free space works .....	348
	How tuning VxFS I/O parameters works .....	349
	About tunable VxFS I/O parameters .....	350
	About obtaining file I/O statistics using the Quick I/O interface .....	355
	About I/O statistics data .....	355

Obtaining file I/O statistics using Veritas extension for Oracle	
Disk Manager .....	357
About I/O statistics .....	358
About tuning Oracle databases .....	359
Sequential table scans .....	359
Sequential table scans .....	359
Sequential table scans .....	360
Asynchronous I/O .....	361
Tuning buffer cache .....	361
Tuning buffer cache .....	361
Tuning buffer cache .....	362
Setting Oracle block reads during sequential scans .....	362
Setting slave parameters .....	364
Configuring memory allocation .....	365
About tuning AIX Virtual Memory Manager .....	365
About tuning HP-UX .....	368
max_thread_proc .....	368
asyncdsk, asyncdsk_included, and max_async_ports .....	368
eqmemsize .....	368
nproc .....	369
maxuproc .....	369
semmni .....	369
semmns .....	369
About tuning Solaris for Oracle .....	369
maxuprc .....	370
shmmax .....	370
shmmmin .....	370
shmmni .....	370
shmseg .....	371
semmap .....	371
semmni .....	371
semmns .....	371
semmnu .....	371
semmsl .....	371
Chapter 31	
Troubleshooting SFDB tools .....	373
About troubleshooting Storage Foundation for Databases (SFDB)	
tools .....	373
Running scripts for engineering support analysis for SFDB	
tools .....	374
Storage Foundation for Databases (SFDB) tools log files .....	374
About the vxdbd daemon .....	374

	Starting and stopping vxdbd .....	374
	Configuring listening port for the vxdbd daemon .....	375
	Limiting vxdbd resource usage .....	375
	Configuring encryption ciphers for vxdbd .....	376
	Troubleshooting vxdbd .....	376
	Resources for troubleshooting SFDB tools .....	377
	SFDB logs .....	377
	SFDB error messages .....	378
	SFDB repository and repository files .....	378
	Troubleshooting SmartTier for Oracle .....	379
	Upgrading Veritas Storage Foundation for Databases (SFDB) tools	
	from 5.0MP2 to 6.0.1 (2003131) .....	380
	Workaround .....	381
	Upgrading Veritas Storage Foundation for Databases (SFDB) tools	
	from 5.0x to 6.0.1 (2184482) .....	381
	Workaround .....	382
	Upgrading in an HP Serviceguard environment (2116455) .....	382
Chapter 32	Manual recovery of Oracle database .....	383
	Manual recovery of a clone database .....	383
	Manual recovery after a restore operation .....	384
Chapter 33	Storage Foundation for Databases command	
	reference for the releases prior to 6.0 .....	387
	About SFDB commands backward compatibility .....	387
	Veritas Storage Foundation for Databases (SFDB) tools features which	
	are no longer supported .....	388
	Preparing storage for Database FlashSnap .....	388
	Example procedure to create a snapshot mirror of a volume .....	388
	Upgrading existing volumes to use Veritas Volume Manager	
	6.0.1 .....	393
	Changing the default control file location .....	400
	Updating after structural changes to the database .....	400
	About creating database snapshots .....	400
	Online database snapshots .....	401
	Tasks before creating a snapshot .....	401
	Creating a snapshot .....	403
	Tasks after creating a snapshot .....	404
	FlashSnap commands .....	410
	Creating a snapplan (dbed_vmchecksnap) .....	411
	Validating a snapplan (dbed_vmchecksnap) .....	421

Displaying, copying, and removing a snapplan (dbed_vmchecksnap) .....	426
Creating a snapshot (dbed_vmsnap) .....	428
Backing up the database from snapshot volumes (dbed_vmclonedb) .....	432
Cloning a database (dbed_vmclonedb) .....	435
Resynchronizing the snapshot to your database .....	445
Removing a snapshot volume .....	446
Guidelines for Oracle recovery .....	447
Back up all control files before Storage Rollback .....	447
Ensure that the control files are not rolled back .....	448
Ensure that all archived redo logs are available .....	448
Media recovery procedures .....	449
Database Storage Checkpoint Commands .....	450
Creating or updating the repository using dbed_update .....	451
Creating Storage Checkpoints using dbed_ckptcreate .....	452
Displaying Storage Checkpoints using dbed_ckptdisplay .....	453
Mounting Storage Checkpoints using dbed_ckptmount .....	455
Unmounting Storage Checkpoints using dbed_ckptumount .....	456
Performing Storage Rollback using dbed_ckptrollback .....	456
Removing Storage Checkpoints using dbed_ckptremove .....	458
Cloning the Oracle instance using dbed_clonedb .....	458
 Section 9	
Reference .....	463
 Appendix A	
Integrating Storage Foundation Application Edition with Oracle Enterprise Manager .....	465
About Symantec Plug-ins for Oracle Enterprise Manager .....	465
Requirements for Symantec Plug-ins for Oracle Enterprise Manager .....	466
Hardware requirements for OEM Plug-ins .....	466
Software requirements for OEM Plug-ins .....	466
Prerequisites for Symantec Plug-ins for OEM .....	467
Supported configurations for Symantec Plug-ins for OEM .....	467
Deploying the Storage Foundation Plug-in for Oracle Enterprise Manager .....	468
Deploying the Veritas Cluster Server Plug-in for Oracle Enterprise Manager .....	469
Adding instances for monitoring in the VCS Plug-in for OEM .....	470
Adding instances for monitoring in the Storage Foundation Plug-in for OEM .....	471
Viewing Storage Foundation Plug-in for OEM reports .....	473

	Viewing Veritas Cluster Server Plug-in for OEM reports .....	476
	Troubleshooting the SFHA Plug-ins for OEM .....	479
Appendix B	VCS Oracle agents .....	481
	VCS agents for Oracle .....	481
	Oracle agent functions .....	481
	Resource type definition for the Oracle agent .....	485
	Netlsnr agent functions .....	488
	Resource type definition for the Netlsnr agent .....	489
Appendix C	Sample configuration files for clustered deployments .....	491
	About sample configuration files .....	491
	Sample configuration file for Storage Foundation for High Availability .....	492
	Sample configuration file for Storage Foundation for Clustered File System HA .....	494
	Sample configuration file for Storage Foundation for Oracle RAC .....	500
Appendix D	Database FlashSnap status information .....	507
	About Database FlashSnap status information .....	507
	Database FlashSnap Snapshot status information from the CLI .....	507
	Snapshot status information from the CLI .....	508
	Snapshot database status information from the CLI .....	510
Appendix E	Using third party software to back up files .....	511
	About using third party software to back up files .....	511
	Using third party software to back up files .....	511
	Backing up and restoring Oracle Disk Manager files using Oracle RMAN .....	511
Index .....		513



# Storage Foundation High Availability (SFHA) management solutions for Oracle databases

- [Chapter 1. Overview of Storage Foundation for Databases](#)





# Overview of Storage Foundation for Databases

This chapter includes the following topics:

- [Introducing Storage Foundation High Availability \(SFHA\) Solutions for Oracle](#)
- [About Veritas File System](#)
- [About Veritas Volume Manager](#)
- [About Veritas Dynamic Multi-Pathing \(DMP\)](#)
- [About Veritas Cluster Server](#)
- [About Veritas Cluster Server agents](#)
- [About Veritas Operations Manager](#)
- [Feature support for Oracle across Veritas Storage Foundation and High Availability Solutions 6.0.1 products](#)
- [About Storage Foundation and High Availability Solutions](#)

## Introducing Storage Foundation High Availability (SFHA) Solutions for Oracle

This guide documents the deployment and key use cases of the SFDB tools with Storage Foundation High Availability (SFHA) Solutions products in Oracle database environments. It is a supplemental guide to be used in conjunction with SFHA Solutions product guides.

The Storage Foundation for Databases tools provide enhanced management options for Oracle databases. The SFDB tools provide enhanced ease-of-use

commands which can be run by a database administrator without root privileges to optimize storage for an Oracle database environment. This guide documents the deployment and use of the SFDB tools included with SFHA Solutions enterprise products.

## About Veritas File System

A file system is simply a method for storing and organizing computer files and the data they contain to make it easy to find and access them. More formally, a file system is a set of abstract data types (such as metadata) that are implemented for the storage, hierarchical organization, manipulation, navigation, access, and retrieval of data.

Veritas File System (VxFS) was the first commercial journaling file system. With journaling, metadata changes are first written to a log (or journal) then to disk. Since changes do not need to be written in multiple places, throughput is much faster as the metadata is written asynchronously.

VxFS is also an extent-based, intent logging file system. VxFS is designed for use in operating environments that require high performance and availability and deal with large amounts of data.

VxFS major components include:

File system logging	<a href="#">About the Veritas File System intent log</a>
Extents	<a href="#">About extents</a>
File system disk layouts	<a href="#">About file system disk layouts</a>

## About the Veritas File System intent log

Most file systems rely on full structural verification by the `fsck` utility as the only means to recover from a system failure. For large disk configurations, this involves a time-consuming process of checking the entire structure, verifying that the file system is intact, and correcting any inconsistencies. VxFS provides fast recovery with the VxFS intent log and VxFS intent log resizing features.

VxFS reduces system failure recovery times by tracking file system activity in the VxFS intent log. This feature records pending changes to the file system structure in a circular intent log. The intent log recovery feature is not readily apparent to users or a system administrator except during a system failure. By default, VxFS file systems log file transactions before they are committed to disk, reducing time spent recovering file systems after the system is halted unexpectedly.

During system failure recovery, the VxFS `fsck` utility performs an intent log replay, which scans the intent log and nullifies or completes file system operations that were active when the system failed. The file system can then be mounted without requiring a full structural check of the entire file system. Replaying the intent log might not completely recover the damaged file system structure if there was a disk hardware failure; hardware problems might require a complete system check using the `fsck` utility provided with VxFS.

The `mount` command automatically runs the VxFS `fsck` command to perform an intent log replay if the mount command detects a dirty log in the file system. This functionality is only supported on a file system mounted on a Veritas Volume Manager (VxVM) volume, and is supported on cluster file systems.

See the `fsck_vxfs(1M)` manual page and `mount_vxfs(1M)` manual page.

The VxFS intent log is allocated when the file system is first created. The size of the intent log is based on the size of the file system—the larger the file system, the larger the intent log. You can resize the intent log at a later time by using the `fsadm` command.

See the `fsadm_vxfs(1M)` manual page.

The maximum default intent log size for disk layout Version 7 or later is 256 megabytes.

The maximum default intent log size for disk layout Version 5 is 16 megabytes. The maximum default intent log size for disk layout Version 7 and later is 256 megabytes.

---

**Note:** Inappropriate sizing of the intent log can have a negative impact on system performance.

---

## About extents

An extent is a contiguous area of storage in a computer file system, reserved for a file. When starting to write to a file, a whole extent is allocated. When writing to the file again, the data continues where the previous write left off. This reduces or eliminates file fragmentation. An extent is presented as an address-length pair, which identifies the starting block address and the length of the extent (in file system or logical blocks). Since Veritas File System (VxFS) is an extent-based file system, addressing is done through extents (which can consist of multiple blocks) rather than in single-block segments. Extents can therefore enhance file system throughput.

Extents allow disk I/O to take place in units of multiple blocks if storage is allocated in contiguous blocks. For sequential I/O, multiple block operations are considerably

faster than block-at-a-time operations; almost all disk drives accept I/O operations on multiple blocks.

Extent allocation only slightly alters the interpretation of addressed blocks from the inode structure compared to block-based inodes. A VxFS inode references 10 direct extents, each of which are pairs of starting block addresses and lengths in blocks.

Disk space is allocated in 1024-byte sectors to form logical blocks. VxFS supports logical block sizes of 1024, 2048, 4096, and 8192 bytes. The default block size is 1 KB for file system sizes of up to 2 TB, and 8 KB for file system sizes 2 TB or larger.

Disk space is allocated in 512-byte sectors to form logical blocks. VxFS supports logical block sizes of 1024, 2048, 4096, and 8192 bytes. The default block size is 1 KB for file system sizes of up to 1 TB, and 8 KB for file system sizes 1 TB or larger.

## About file system disk layouts

The disk layout is the way file system information is stored on disk. On Veritas File System (VxFS), several disk layout versions, numbered 1 through 9, were created to support various new features and specific UNIX environments.

[Table 1-1](#) lists the supported disk layout versions.

**Table 1-1** Supported disk layout versions

Operating System	Supported disk layout versions
AIX	7, 8, and 9. Version 4 and 6 disk layouts can be mounted, but only for upgrading to a supported version.
HP-UX	5, 7, 8, and 9. Version 4 and 6 disk layouts can be mounted, but only for upgrading to a supported version.
Linux	7, 8, and 9. Version 4 and 6 disk layouts can be mounted, but only for upgrading to a supported version.
Solaris	7, 8, and 9. Version 4, 5, and 6 disk layouts can be mounted, but only for upgrading to a supported version.

No other disk layout versions can be created or mounted.

## About Veritas Volume Manager

Veritas™ Volume Manager (VxVM) by Symantec is a storage management subsystem that allows you to manage physical disks and logical unit numbers (LUNs) as logical devices called volumes. A VxVM volume appears to applications and the operating system as a physical device on which file systems, databases, and other managed data objects can be configured.

VxVM provides easy-to-use online disk storage management for computing environments and Storage Area Network (SAN) environments. By supporting the Redundant Array of Independent Disks (RAID) model, VxVM can be configured to protect against disk and hardware failure, and to increase I/O throughput. Additionally, VxVM provides features that enhance fault tolerance and fast recovery from disk failure or storage array failure.

VxVM overcomes restrictions imposed by hardware disk devices and by LUNs by providing a logical volume management layer. This allows volumes to span multiple disks and LUNs.

VxVM provides the tools to improve performance and ensure data availability and integrity. You can also use VxVM to dynamically configure storage while the system is active.

## About Veritas Dynamic Multi-Pathing (DMP)

Veritas Dynamic Multi-Pathing (DMP) provides multi-pathing functionality for the operating system native devices configured on the system. DMP creates DMP metadevices (also known as DMP nodes) to represent all the device paths to the same physical LUN.

DMP is also available as a stand-alone product, which extends DMP metadevices to support the OS native logical volume manager (LVM). You can create LVM volumes and volume groups on DMP metadevices.

DMP supports LVM volume devices that are used as the paging devices.

DMP does not support migrating the root LVM volume group onto DMP.

DMP is also available as a stand-alone product, which extends DMP metadevices to support ZFS. You can create ZFS pools on DMP metadevices. DMP supports only non-root ZFS file systems.

Veritas Dynamic Multi-Pathing can be licensed separately from Storage Foundation products. Veritas Volume Manager and Veritas File System functionality is not provided with a DMP license.

DMP functionality is available with a Storage Foundation (SF) Enterprise license, a SF HA Enterprise license, and a Storage Foundation Standard license.

Veritas Volume Manager (VxVM) volumes and disk groups can co-exist with LVM volumes and volume groups, but each device can only support one of the types. If a disk has a VxVM label, then the disk is not available to LVM. Similarly, if a disk is in use by LVM, then the disk is not available to VxVM.

Veritas Volume Manager (VxVM) volumes and disk groups can co-exist with ZFS pools, but each device can only support one of the types. If a disk has a VxVM label, then the disk is not available to ZFS. Similarly, if a disk is in use by ZFS, then the disk is not available to VxVM.

## About Veritas Cluster Server

Veritas Cluster Server (VCS) by Symantec is a clustering solution that provides the following benefits:

- Minimizes downtime.
- Facilitates the consolidation and the failover of servers.
- Effectively manages a wide range of applications in heterogeneous environments.

Before you install the product, read the *Veritas Cluster Server Release Notes*.

To install the product, follow the instructions in the *Veritas Cluster Server Installation Guide*.

## About Veritas Cluster Server agents

Before you install VCS agents, review the configuration guide for the agent.

In addition to the agents that are provided in this release, other agents are available through an independent Symantec offering called the Veritas Cluster Server Agent Pack. The agent pack includes the currently shipping agents and is re-released quarterly to add the new agents that are now under development.

Contact your Symantec sales representative for the following details:

- Agents that are included in the agent pack
- Agents under development
- Agents available through Symantec Consulting Services

You can download the latest agents from the Symantec Operations Readiness Tools website:

[sort.symantec.com/agents](http://sort.symantec.com/agents)

## About Veritas Operations Manager

Veritas Operations Manager provides a centralized management console for Veritas Storage Foundation and High Availability products. You can use Veritas Operations Manager to monitor, visualize, and manage storage resources and generate reports.

Symantec recommends using Veritas Operations Manager (VOM) to manage Storage Foundation and Cluster Server environments.

You can download Veritas Operations Manager at no charge at <http://go.symantec.com/vom>.

Refer to the Veritas Operations Manager documentation for installation, upgrade, and configuration instructions.

The Veritas Enterprise Administrator (VEA) console is no longer packaged with Storage Foundation products. If you want to continue using VEA, a software version is available for download from [http://go.symantec.com/vcsm\\_download](http://go.symantec.com/vcsm_download). Veritas Storage Foundation Management Server is deprecated.

## Feature support for Oracle across Veritas Storage Foundation and High Availability Solutions 6.0.1 products

Storage solutions and use cases for Oracle are based on the shared management features of Veritas Storage Foundation and High Availability (SFHA) Solutions products. Clustering features are available separately through Veritas Cluster Server (VCS) as well as through the SFHA Solutions products.

[Table 1-2](#) lists the features supported across SFHA Solutions products. [Table 1-3](#) lists the high availability and disaster recovery features available in VCS.

**Table 1-2** Storage management features in SFHA Solutions products

Storage management feature	SF Basic	SF Std.	SF Ent.	SF Std. HA	SF Ent. HA	SFCFS HA	SFRAC	SVS
Veritas Extension for Oracle Disk Manager	N	Y	Y	Y	Y	Y	Y	N

**Table 1-2** Storage management features in SFHA Solutions products  
*(continued)*

Storage management feature	SF Basic	SF Std.	SF Ent.	SF Std. HA	SF Ent. HA	SFCFS HA	SFRAC	SVS
Veritas Extension for Cached Oracle Disk Manager <b>Note:</b> Not supported for Oracle RAC.	N	Y	Y	Y	Y	Y	N	N
Quick I/O <b>Note:</b> Not supported on Linux	Y	Y	Y	Y	Y	Y	Y	Y
Cached Quick I/O <b>Note:</b> Not supported on Linux	Y	Y	Y	Y	Y	Y	Y	Y
Compression	N	Y	Y	Y	Y	Y	Y	Y
Deduplication	N	N	Y	N	Y	Y	Y	Y
SmartMove	Y	Y	Y	Y	Y	Y	Y	Y
SmartTier for Oracle	N	N	Y	N	Y	Y	Y	N
Thin Reclamation	Y	Y	Y	Y	Y	Y	Y	Y
Portable Data Containers	Y	Y	Y	Y	Y	Y	Y	Y
Database FlashSnap	N	N	Y	N	Y	Y	Y	N
Database Storage Checkpoints	N	N	Y	N	Y	Y	Y	N
FileSnap	N	N	Y	N	Y	Y	Y	Y
Volume replication	O	O	O	O	O	O	O	O
File replication <b>Note:</b> Supported on Linux only.	O	O	O	O	O	O	O	O
Advanced support for virtual storage	Y	Y	Y	Y	Y	Y	N	N
Clustering features for high availability (HA)	N	N	N	Y	Y	Y	Y	Y
Disaster recovery features (HA/DR)	N	N	N	O	O	O	O	N



**Table 1-3** Availability management features in SFHA Solutions products

Availability management feature	VCS	VCS HA/DR
Clustering for high availability (HA)	Y	Y
Database and application/ISV agents	Y	Y
Advanced failover logic	Y	Y
Data integrity protection with I/O fencing	Y	Y
Advanced virtual machines support	Y	Y
Virtual Business Services	Y	Y
Replication agents	N	Y
Replicated Data Cluster	N	Y
Campus (stretch) cluster	N	Y
Global clustering (GCO)	N	Y
Fire Drill	N	Y

## Notes:

- Y=Feature is included in your license.
- O=Feature is not included in your license but may be licensed separately.
- N=Feature is not supported with your license.

## Notes:

- The Veritas File Replicator license includes file replication.
- The Veritas Replicator license include both file replication and volume replication (previously known as Veritas Volume Replicator, VVR).
- SmartTier for Oracle is an expanded and renamed version of Database Dynamic Storage Tiering (DST).
- Symantec VirtualStore (SVS) is available only for the Linux and Solaris operating systems.
- All features listed in [Table 1-2](#) and [Table 1-3](#) are supported on AIX, HP-UX, Linux, Solaris except as noted. Consult specific product documentation for information on supported operating systems.

# About Storage Foundation and High Availability Solutions

Veritas Storage Foundation and High Availability (SFHA) Solutions product components and features can be used individually and in concert to improve performance, resilience and ease of management for your storage and applications. This guide documents key use cases for the management features of SFHA Solutions products:

**Table 1-4** Key use cases for SFHA Solutions products

Use case	SFHA Solutions feature
Improve Oracle database performance using SFHA Solutions database accelerators to enable your database to achieve the speed of raw disk while retaining the management features and convenience of a file system.	Veritas Extension for Oracle Disk Manager Veritas Extension for Cached Oracle Disk Manager <b>Note:</b> Not supported for Oracle RAC  Quick I/O <b>Note:</b> Not supported on Linux  Cached Quick I/O <b>Note:</b> Not supported on Linux
Protect your data using SFHA Solutions Flashsnap, Storage Checkpoints, and NetBackup point-in-time copy methods to back up and recover your data.	FlashSnap Storage Checkpoints NetBackup with SFHA Solutions
Process your data off-host to avoid performance loss to your production hosts by using SFHA Solutions volume snapshots.	FlashSnap
Optimize copies of your production database for test, decision modeling, and development purposes by using SFHA Solutions point-in-time copy methods.	FlashSnap
Make file level point-in-time snapshots using SFHA Solutions space-optimized FileSnap when you need finer granularity for your point-in-time copies than file systems or volumes. You can use FileSnap for cloning virtual machines.	FileSnap

**Table 1-4** Key use cases for SFHA Solutions products (*continued*)

Use case	SFHA Solutions feature
Maximize your storage utilization using SFHA Solutions SmartTier to move data to storage tiers based on age, priority, and access rate criteria.	SmartTier



# Deploying Oracle with Veritas Storage Foundation High Availability Solutions products

- [Chapter 2. Deployment options for Oracle in a Storage Foundation environment](#)
- [Chapter 3. Deploying Oracle with Veritas Storage Foundation](#)
- [Chapter 4. Deploying Oracle in an off-host configuration with Veritas Storage Foundation](#)
- [Chapter 5. Deploying Oracle with High Availability](#)
- [Chapter 6. Deploying Oracle with Veritas Volume Replicator \(VVR\) for disaster recovery](#)



# Deployment options for Oracle in a Storage Foundation environment

This chapter includes the following topics:

- Oracle deployment options in a Storage Foundation environment
- Oracle single instance in a Veritas Storage Foundation environment
- Single instance Oracle with off-host in a Veritas Storage Foundation environment
- Single instance Oracle in a highly available cluster with Veritas Storage Foundation High Availability
- Single instance Oracle in a parallel cluster with SF Cluster File System HA environment
- About Oracle RAC in a Storage Foundation for Oracle RAC environment
- About Oracle in a replicated Storage Foundation environment
- Deploying Oracle and Storage Foundation in a virtualization environment
- Deploying Oracle with Storage Foundation SmartMove and Thin Provisioning

## Oracle deployment options in a Storage Foundation environment

You can deploy Oracle with Veritas Storage Foundation and High Availability products in the following setups:

- Oracle single instance in a Storage Foundation environment
- Oracle single instance and Oracle RAC with off-host in a Storage Foundation environment
- Oracle single instance with High Availability (HA)
- Oracle RAC with Storage Foundation for Oracle RAC
- Oracle single instance with SFCFSHA
- Oracle single instance with Veritas Volume Replicator (VVR) or Oracle Data Guard for disaster recovery
- Oracle single instance with Storage Foundation in a virtual environment

Storage Foundation for Databases (SFDB) tools support all of these setups.

## Oracle single instance in a Veritas Storage Foundation environment

If you are deploying single instance Oracle with Storage Foundation, your setup configuration will reflect the following conditions:

- A single instance of Oracle is set up on *system1* with SF.
- The database and datafiles are online on *system1*.
- You must run the SFDB tools commands on *system1*.


For information about Storage Foundation for Databases (SFDB) repository or repository database:

See “[About the Storage Foundation for Databases \(SFDB\) repository](#)” on page 74.

[Figure 2-1](#) shows an Oracle single instance deployment in a Storage Foundation environment.



Figure 2-1 Oracle single instance with Storage Foundation

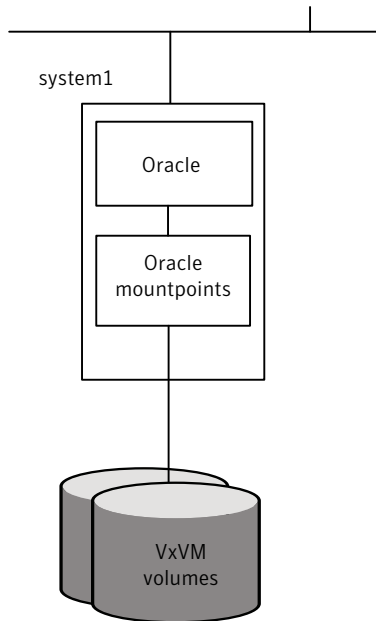


## Single instance Oracle with off-host in a Veritas Storage Foundation environment

For information about Storage Foundation for Databases (SFDB) repository or repository database:

See [“About the Storage Foundation for Databases \(SFDB\) repository”](#) on page 74.

[Figure 2-2](#) shows an Oracle single instance deployment with off-host in a Storage Foundation environment.

**Figure 2-2** Oracle single instance off-host setup with Storage Foundation environment

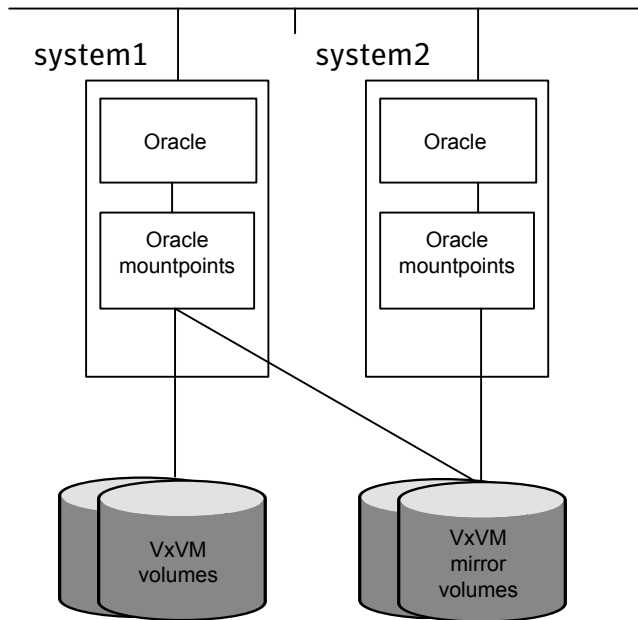

## Single instance Oracle in a highly available cluster with Veritas Storage Foundation High Availability

If you are deploying Oracle with Storage Foundation High Availability (SFHA), your setup configuration will reflect the following conditions:

- A highly available single instance of Oracle is set up on *system1* and *system2* with SFHA.
- The database and datafiles are online on *system1*.
- The database repository is online on *system1*.
- You must run the SFDB tools commands on *system1* where the database is online.
- Some SFDB tools commands may fail on *system2*.

For information about Storage Foundation for Databases (SFDB) repository or repository database:

See “[About the Storage Foundation for Databases \(SFDB\) repository](#)” on page 74.

[Figure 2-3](#) and [Figure 2-4](#) show an Oracle single instance in a Storage Foundation High Availability environment and a failover scenario in such a setup.

**Figure 2-3** Oracle single instance with SFHA


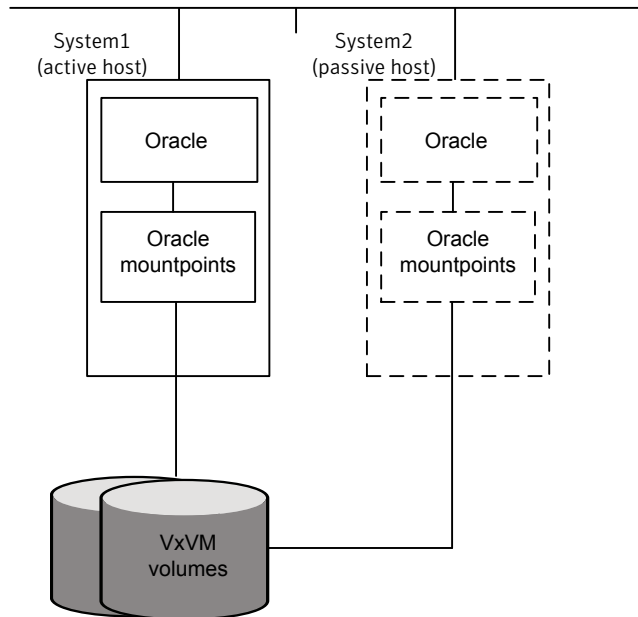


Figure 2-4 Oracle single instance with SFHA failover setup

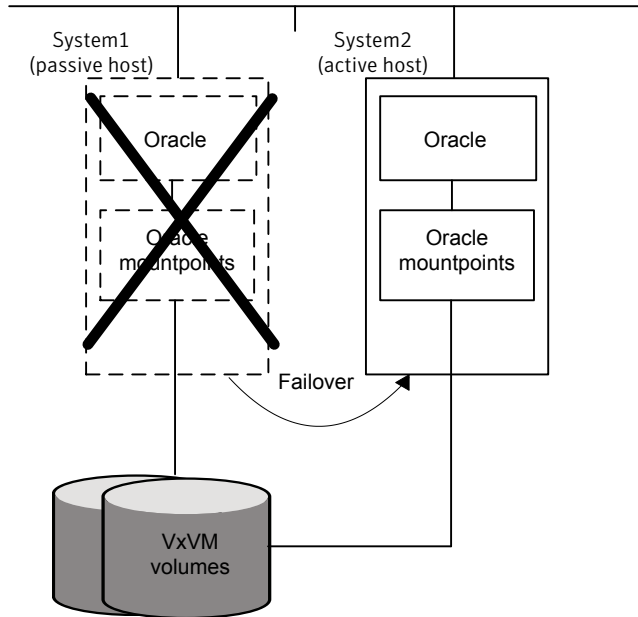

## Single instance Oracle in a parallel cluster with SF Cluster File System HA environment

If you are deploying Oracle single instance with SF Cluster File System HA, your setup configuration will reflect the following conditions:


- A highly available parallel cluster with a Oracle is set up on *system1* and *system2* with SF Cluster File System HA.
- The database is online on *system1*.
- The datafiles are mounted and shared on *system1* and *system2*.
- The database repository is mounted and shared on *system1* and *system2*.
- The SFDB tools commands will fail on *system2*.

For information about Storage Foundation for Databases (SFDB) repository or repository database:

See “[About the Storage Foundation for Databases \(SFDB\) repository](#)” on page 74.


In the figures below the repository directory resides in the Oracle mount points.

**Figure 2-5** SF Cluster File System HA setup example

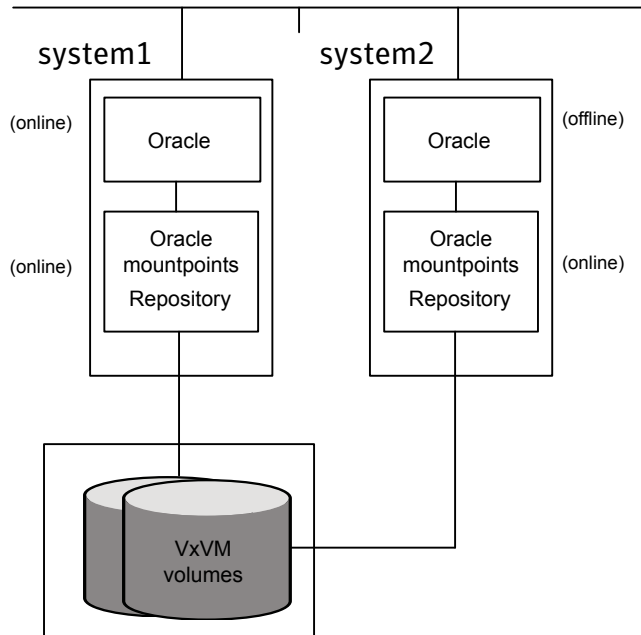

The failover to the backup system is automatic rather than manual for SF Cluster File System HA.

Figure 2-6 SFCFS HA failover example

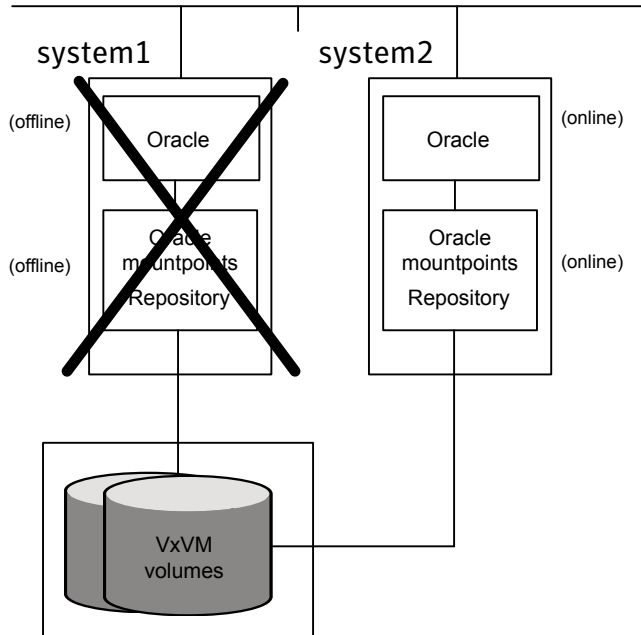

## About Oracle RAC in a Storage Foundation for Oracle RAC environment

If you are deploying Oracle RAC with Storage Foundation for Oracle RAC, your setup configuration will reflect the following conditions:


- A highly available parallel cluster with a multiple instances of Oracle is set up on *system1*, *system2*, and *system3* with SF for Oracle RAC.
- The database is online on *system1*, *system2*, and *system3*.
- The datafiles are mounted and shared on *system1*, *system2*, and *system3*.
- The SFDB tools is mounted and shared on *system1*, *system2*, and *system3*.
- Clustered ODM is supported for this configuration.

For information about Storage Foundation for Databases (SFDB) repository or repository database:

See “[About the Storage Foundation for Databases \(SFDB\) repository](#)” on page 74.

In the figure below the repository directory resides in the Oracle mount points.

**Figure 2-7** Oracle RAC in a Storage Foundation for Oracle RAC environment

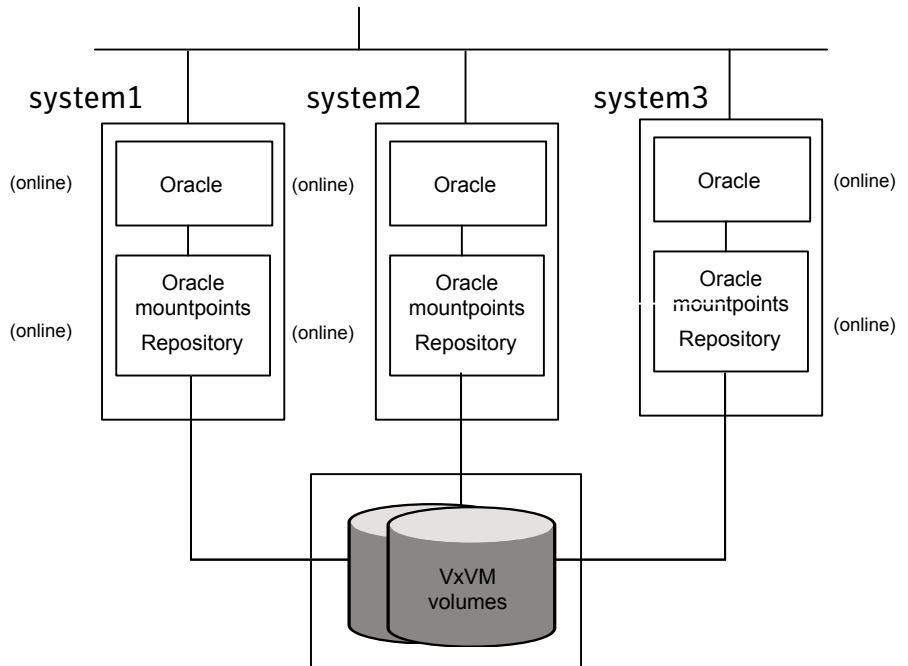

For an SF Oracle RAC configuration, the systems are online in parallel and do not use failover mechanisms within the cluster.

See the *Veritas Storage Foundation for Oracle RAC Administrator's Guide*.

## About Oracle in a replicated Storage Foundation environment

In an Oracle environment, there are two supported replication options: Veritas Volume Replicator (VVR) and Oracle Data Guard.

Storage Foundation for Databases (SFDB) tools support these replication tools in the single instance mode on the secondary site.

If you are deploying Oracle single instance in a Storage Foundation environment with VVR for disaster recovery, your setup configuration will reflect the following conditions:


- A single instance of Oracle is set up on *system1*.
- The database and datafiles are online on *system1*.
- `ORACLE_HOME` is set up on *system2*.
- The data volumes on *system1* are set up for replication to *system2*.
- A consistent copy of the application data on the *system1* volumes is available on *system2*.

For information about Storage Foundation for Databases (SFDB) repository or repository database:

See “[About the Storage Foundation for Databases \(SFDB\) repository](#)” on page 74.

[Figure 2-8](#) shows an Oracle single instance deployment in a Storage Foundation environment with VVR.

**Figure 2-8** Oracle single instance - Storage Foundation with VVR

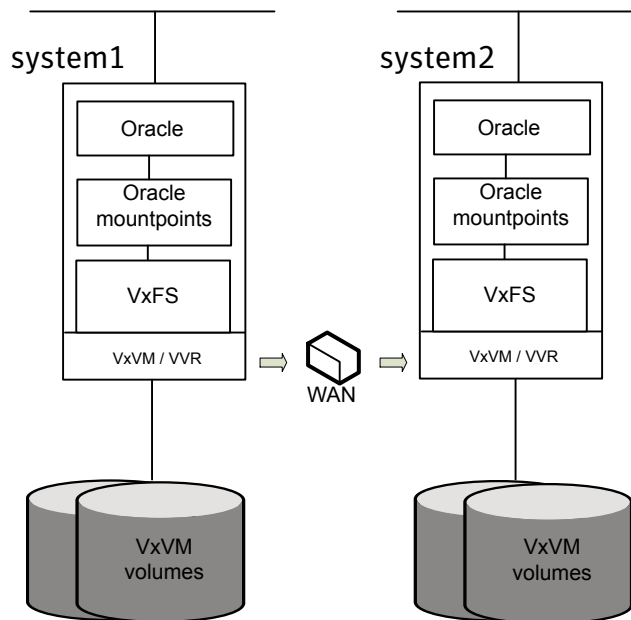



## Deploying Oracle and Storage Foundation in a virtualization environment

If you are deploying the Storage Foundation for Databases (SFDB) tools in a virtual machine environment, the following are supported:

- WPARs on AIX
- HP IVM on HP-UX
- VMware on Linux
- Oracle VM Server for SPARC on Solaris

## Deploying Oracle with Storage Foundation SmartMove and Thin Provisioning

You can use SmartMove and Thin Provisioning with Storage Foundation products and your Oracle database.

When data files are deleted, you can reclaim the storage space used by these files if the underlying devices are thin reclaimable LUNs. For this purpose, use the Storage Foundation Thin Reclamation feature.

See the *Veritas Storage Foundation Administrator's Guide*.



# Deploying Oracle with Veritas Storage Foundation

This chapter includes the following topics:

- [Tasks for deploying Oracle databases](#)
- [Planning your Oracle storage](#)
- [About selecting a volume layout for deploying Oracle](#)
- [Setting up disk group for deploying Oracle](#)
- [Creating volumes for deploying Oracle](#)
- [Creating VxFS file system for deploying Oracle](#)
- [Mounting the file system for deploying Oracle](#)
- [Installing Oracle and creating database](#)

## Tasks for deploying Oracle databases

If you are deploying an Oracle single instance database in a Storage Foundation environment, complete these tasks in the order listed below:

Determine the number and sizes of file systems you need for the database you want to create. See [“Planning your Oracle storage”](#) on page 52.

Create a volume layout.

See [“About selecting a volume layout for deploying Oracle”](#) on page 53.

See [“Setting up disk group for deploying Oracle”](#) on page 53.

See [“Disk group configuration guidelines for deploying Oracle”](#) on page 55.

See [“Creating volumes for deploying Oracle”](#) on page 55.

See [“Volume configuration guidelines for deploying Oracle”](#) on page 56.

Create and mount file systems.

See [“Creating VxFS file system for deploying Oracle”](#) on page 56.

See [“File system creation guidelines for deploying Oracle”](#) on page 58.

See [“Mounting the file system for deploying Oracle”](#) on page 58.

Install Oracle and create database.

See [“Installing Oracle and creating database”](#) on page 59.

## Planning your Oracle storage

Determine the number of file systems and size of each file system depending upon the size of your database. Symantec recommends creating the following file systems for your Oracle database.

- **File system for Oracle Home**  
Oracle binaries are installed on this file system.
- **File system for data files**  
Data files are stored on this file system. The size of the file system depends upon the size of your database. You need to create volumes to meet your file system needs. Disk mirrors can be used to safeguard against disk failures and striping can be used for better performance.  
Depending upon factors such as database types, I/O patterns, indexes, and temp files, you can create one or more file systems for storing data files.
- **File system for redo logs**  
Redo logs are stored on this file system. It is preferable to create the file system for redo logs on fast storage devices for better performance.
- **File system for archived redo logs**

Archived redo logs are stored on this file system.

## About selecting a volume layout for deploying Oracle

Veritas Volume Manager (VxVM) offers a variety of layouts that enables you to configure your database to meet performance and availability requirements. The proper selection of volume layouts provides optimal performance for the database workload.

An important factor in database performance is the tablespace placement on the disks.

Disk I/O is one of the most important determining factors of database performance. Having a balanced I/O load usually means optimal performance. Designing a disk layout for the database objects to achieve balanced I/O is a crucial step in configuring a database. When deciding where to place tablespaces, it is often difficult to anticipate future usage patterns. VxVM provides flexibility in configuring storage for the initial database set up and for continual database performance improvement as needs change. VxVM can split volumes across multiple drives to provide a finer level of granularity in data placement. By using striped volumes, I/O can be balanced across multiple disk drives. For most databases, ensuring that different containers or tablespaces, depending on database, are distributed across the available disks may be sufficient.

Striping also helps sequential table scan performance. When a table is striped across multiple devices, a high transfer bandwidth can be achieved by setting the Oracle parameter `DB_FILE_MULTIBLOCK_READ_COUNT` to a multiple of full stripe size divided by `DB_BLOCK_SIZE`.

If you plan to use the Database FlashSnap feature (point-in-time copy) for your Oracle database and use it on either the same host or for off-host processing or backup, the layout of volumes should meet the FlashSnap requirements.

## Setting up disk group for deploying Oracle

Before creating volumes and filesystem for a database, you must set up a disk group for each database.

Review the disk group configuration guidelines before creating disk groups.

See [“Disk group configuration guidelines for deploying Oracle”](#) on page 55.

### To create a disk group

- ◆ Use the `vxvg` command as follows.

```
# /opt/VRTS/bin/vxvg init disk_group disk_name=disk_device
```

For example, to create a disk group named *PRODDg* on a raw disk partition, where the disk name *PRODDg01* references the disk within the disk group:

AIX

```
# /opt/VRTS/bin/vxvg init PRODDg PRODDg01=Disk_0
```

HP-UX

```
# /opt/VRTS/bin/vxvg init PRODDg PRODDg01=c1t2d0
```

Linux

```
# /opt/VRTS/bin/vxvg init PRODDg PRODDg01=sda
```

Solaris

```
# /opt/VRTS/bin/vxvg init PRODDg PRODDg01=c1t1d0s2
```

### To add disks to a disk group

- ◆ Use the `vxvg` command as follows.

```
# /opt/VRTS/bin/vxvg -g disk_group adddisk disk_name=disk_device
```

For example, to add a disk named *PRODDg02* to the disk group *PRODDg*:

AIX

```
# /opt/VRTS/bin/vxvg -g PRODDg adddisk PRODDg02=Disk_0
```

```
# /opt/VRTS/bin/vxvg -g PRODDg adddisk PRODDg03=Disk_1
```

```
# /opt/VRTS/bin/vxvg -g PRODDg adddisk PRODDg04=Disk_2
```

HP-UX

```
# /opt/VRTS/bin/vxvg -g PRODDg adddisk PRODDg02=c4t0d0
```

```
# /opt/VRTS/bin/vxvg -g PRODDg adddisk PRODDg03=c4t0d1
```

```
# /opt/VRTS/bin/vxvg -g PRODDg adddisk PRODDg04=c4t0d2
```

Linux

```
# /opt/VRTS/bin/vxdg -g PRODdg adddisk PRODdg02=sda
# /opt/VRTS/bin/vxdg -g PRODdg adddisk PRODdg03=sdb
# /opt/VRTS/bin/vxdg -g PRODdg adddisk PRODdg04=sdc

Solaris

# /opt/VRTS/bin/vxdg -g PRODdg adddisk PRODdg02=c1t2d0s2
# /opt/VRTS/bin/vxdg -g PRODdg adddisk PRODdg03=c1t3d0s2
# /opt/VRTS/bin/vxdg -g PRODdg adddisk PRODdg04=c1t4d0s2
```

## Disk group configuration guidelines for deploying Oracle

Follow these guidelines when setting up disk groups.

- Only disks that are online and do not already belong to a disk group can be used to create a new disk group.
- Create one disk group for each database.
- The disk group name must be unique. Name each disk group using the Oracle database instance name specified by the environment variable `ORACLE_SID` and a `dg` suffix. The `dg` suffix helps identify the object as a disk group.
- Each disk name must be unique within the disk group.
- In a VVR environment, do not create database files using file systems or volumes that are not in the same disk group.

---

**Note:** You must have root privileges to execute all the disk group related VxVM commands.

---

See the *Veritas Storage Foundation Administrator's Guide*.

## Creating volumes for deploying Oracle

Veritas Volume Manager (VxVM) uses logical volumes to organize and manage disk space. A volume is made up of portions of one or more physical disks, so it does not have the limitations of a physical disk.

Review the volume configuration guidelines before creating volumes.

See [“Volume configuration guidelines for deploying Oracle”](#) on page 56.

#### To create a volume

- ◆ Use the `vxassist` command as follows.

```
# /opt/VRTS/bin/vxassist -g disk_group make volume_name volume_size disk_na
```

The following is an example of creating a volume using the `vxassist` command:

To create a 1 GB volume called `db01` on the `PRODDg` disk group:

```
#/opt/VRTS/bin/vxassist -g PRODDg make db01 1g PRODDg01
```

## Volume configuration guidelines for deploying Oracle

Follow these guidelines when selecting volume layouts.

- Put the database log files on a file system created on a striped and mirrored (RAID-0+1) volume separate from the index or data tablespaces. Stripe multiple devices to create larger volumes if needed. Use mirroring to improve reliability. Do not use VxVM RAID-5 for redo logs.
- When normal system availability is acceptable, put the tablespaces on filesystems created on striped volumes for most OLTP workloads.
- Create striped volumes across at least four disks. Try to stripe across disk controllers.  
For sequential scans, do not stripe across too many disks or controllers. The single thread that processes sequential scans may not be able to keep up with the disk speed.
- For most workloads, use the default 64 K stripe-unit size for striped volumes.
- When system availability is critical, use mirroring for most write-intensive OLTP workloads. Turn on Dirty Region Logging (DRL) to allow fast volume resynchronization in the event of a system crash.
- For most decision support system (DSS) workloads, where sequential scans are common, experiment with different striping strategies and stripe-unit sizes. Put the most frequently accessed tables or tables that are accessed together on separate striped volumes to improve the bandwidth of data transfer.

## Creating VxFS file system for deploying Oracle

To create a Veritas File System (VxFS) file system, use the `mkfs` or the `mkfs_vxfs` commands.

Review the file system creation guidelines before creating VxFS file systems.

See [“File system creation guidelines for deploying Oracle”](#) on page 58.



### To create a VxFS file system on an existing volume

- ◆ Use the `mkfs` command as follows:

- AIX

```
# /usr/sbin/mkfs -V vxfs generic_options\  
-o specific_options special size
```

- Solaris, HP-UX

```
# /usr/sbin/mkfs -F vxfs generic_options\  
-o specific_options special size
```

- Linux

```
# /usr/sbin/mkfs -t vxfs generic_options\  
-o specific_options special size
```

Where:

- `vxfs` is the file system type
- `generic_options` are the options common to most file systems
- `specific_options` are options specific to the VxFS file system
- `special` is the full path name of the raw character device or the VxVM volume on which to create the file system
- (optional) `size` is the size of the new file system

If you do not specify `size`, the file system will be as large as the underlying volume.

For example, to create a VxFS file system that has an 8 KB block size and supports files larger than 2 GB on the newly created `db01` volume:

```
■ # /usr/sbin/mkfs -V vxfs -o largefiles,bsize=8192,logsize=2000 \  
/dev/vx/rdisk/PRODDg/db01
```

The `-o largefiles` option allows you to create files larger than 2GB.

---

**Note:** Because `size` is not specified in this example, the size of the file system will be calculated automatically to be the same size as the volume on which the file system is created.

---

## File system creation guidelines for deploying Oracle

Follow these guidelines when creating VxFS file systems.

- Specify the maximum block size and log size when creating file systems for databases.
- Do not disable the intent logging feature of the file system.
- Create separate file systems for redo logs, control files, data files, tmp files, and archive redo logs.
- When using the command line, use the mount points to name the underlying volumes. For example, if a file system named /db01 is to be created on a mirrored volume, name the volume db01 and the mirrors db01-01 and db01-02 to relate to the configuration objects. If you are using the vxassist command or the GUI, this is transparent.
- The block size of your Oracle database should be a multiple of the file system block size. If possible, keep them of the same size.

See the *Veritas Storage Foundation Administrator's Guide*.

## Mounting the file system for deploying Oracle

After creating a VxFS file system, as a root user, mount the file system using the `mount` command.

See the man pages for the `mount` and the `mount_vxfs` commands for more information.

### To mount a file system

- ◆ Use the `mount` command as follows:

- AIX

```
# /usr/sbin/mount -V vxfs special /mount_point
```

- Solaris, HP-UX

```
# /usr/sbin/mount -F vxfs special /mount_point
```

- Linux

```
# /usr/sbin/mount -t vxfs special /mount_point
```

Where:

- `vxfs` is the file system type

- `special` is a block special device
- `/mount_point` is the directory where the file system will be mounted

For example, to mount a file system named `/db01` that supports large files on volume `/dev/vx/dsk/PRODDg/db01`

- ```
# /usr/sbin/mount -V vxfs -o largefiles /dev/vx/dsk/PRODDg/db01 \  
/db01
```

## Installing Oracle and creating database

Use tools such as `runInstaller` and `dbca` to install Oracle and create database. While installing Oracle and creating database, use the various file systems that are created for specific purposes.

See [“Planning your Oracle storage”](#) on page 52.

Review database layouts considerations and supported configurations for deploying Oracle.

See [“Considerations for database layouts”](#) on page 179.

See [“Supported Oracle configurations”](#) on page 180.

For information on installing the Oracle software and creating Oracle databases, refer to Oracle documentation.



# Deploying Oracle in an off-host configuration with Veritas Storage Foundation

This chapter includes the following topics:

- [Requirements for an off-host database configuration](#)

## Requirements for an off-host database configuration

If you are using Storage Foundation Database (SFDB) tools to set up an Oracle single instance database in an off-host configuration, ensure the following.

- All the tasks for deploying a single instance Oracle database in a Veritas Storage Foundation environment are completed.  
See [“Tasks for deploying Oracle databases”](#) on page 51.
- The following requirements are met.
  - All files are on VxFS file systems over VxVM volumes. Raw devices are not supported.
  - There are no symbolic links to database files.
  - ORACLE\_HOME is on a separate file system.
  - Archive logs are on a separate VxFS file system and are separate from the VxFS file system containing Oracle data files or ORACLE\_HOME.
  - The database does not contain BFILES and external tables.
  - Oracle datafiles, archive logs, redo logs, and control files are in a single or multiple disk groups.

- The flash recovery area must be on a separate file system from ORACLE\_HOME.
- The product versions installed on the primary and secondary hosts are the same.
- The same version of Oracle is installed on both hosts, the Oracle binaries and data files are on different volumes and disks.
- The UNIX login for the database user and group must be the same on both hosts. The UNIX UID and GID must also be the same.
- You must have an Enterprise license on both hosts.

# Deploying Oracle with High Availability

This chapter includes the following topics:

- [Tasks for deploying Oracle in an HA configuration](#)
- [Configuring VCS to make the database highly available](#)

## Tasks for deploying Oracle in an HA configuration

If you are deploying an Oracle single instance database in a Storage Foundation High Availability (SFHA) environment, complete the following tasks.

Complete the tasks for deploying an Oracle single instance database in a Storage Foundation environment. See [“Tasks for deploying Oracle databases”](#) on page 51.

Configure VCS to make the database highly available. See [“Configuring VCS to make the database highly available”](#) on page 63.

## Configuring VCS to make the database highly available

To make your Oracle database highly available, you need to bring your database configuration under Veritas Cluster Server (VCS) control.

See the *Veritas Cluster Server Administrator's Guide*.





# Deploying Oracle with Veritas Volume Replicator (VVR) for disaster recovery

This chapter includes the following topics:

- [About deploying Oracle with VVR for disaster recovery](#)
- [Tasks for deploying Oracle with VVR for disaster recovery](#)
- [Setting up the primary node for deploying Oracle](#)
- [Setting up the secondary node for deploying Oracle](#)
- [Configuring VVR between primary and secondary nodes for deploying Oracle](#)

## About deploying Oracle with VVR for disaster recovery

Veritas Volume Replicator (VVR) is a data-replication software designed to contribute to an effective disaster recovery plan for your Oracle environment. VVR enables you to maintain a consistent copy of the Oracle data at one or more remote locations. VVR replicates the application writes on the volumes at the source location to one or more remote locations across any distance. If a disaster occurs at the source location, you can use the copy of the Oracle data at the remote location and restart the application at the remote location.

See the *Veritas Storage Foundation and High Availability Solutions Replication Administrator's Guide*.

## Tasks for deploying Oracle with VVR for disaster recovery

If you are setting up an Oracle database in a Storage Foundation environment with Veritas Volume Replicator (VVR) for disaster recovery, complete these tasks in the following order:

Set up the primary node in a VVR environment.

See [“Setting up the primary node for deploying Oracle”](#) on page 66.

Set up the secondary node in a VVR environment.

See [“Setting up the secondary node for deploying Oracle”](#) on page 67.

Configure VVR between primary and secondary nodes.

See [“Configuring VVR between primary and secondary nodes for deploying Oracle”](#) on page 69.

## Setting up the primary node for deploying Oracle

The following example procedures are for the Linux platform.

### To set up the primary node

- 1 Create a disk group on the primary node.

```
# vxdg init vvrldg sdag sdah sdai sdaj
```

- 2 Create a data volume on the primary node.

```
# vxassist -g vvrldg make datavol 4500M sdag
```

- 3 Create an archive log volume on the primary node.

```
# vxassist -g vvrldg make archvol 4500M sdah
```

- 4 Create and mount file systems for the data volume and the archive log volume.

```
# mkfs -t vxfs /dev/vx/rdisk/vvrldg/datavol  
# mkdir /data  
# mount -t vxfs /dev/vx/dsk/vvrldg/datavol /data  
# mkfs -t vxfs /dev/vx/rdisk/vvrldg/archvol  
# mkdir /arch  
# mount -t vxfs /dev/vx/dsk/vvrldg/archvol /arch
```

- 5 Assign the ownership of the data volume and the archive log volume to the Oracle user.

```
# chown ora11gr2:dba /data /arch
```

- 6 Create SRLs (Storage Replicator Logs) for the data volume and the archive log volume on disks that do not have other volumes on them.

```
# vxassist -g vvr dg make datavol_srl 4500M sdai  
# vxassist -g vvr dg make archvol_srl 4500M sdaj
```

## Setting up the secondary node for deploying Oracle

To set up the secondary node

- 1 Create a disk group with the same name as the primary node disk group.

```
# vxdg init vvr dg sdag sdah sdai sdaj
```

- 2 Create directories for the data volume and the archive log volume, and assign their ownership to the Oracle user.

```
# mkdir -p /data  
# mkdir -p /arch  
# chown -R ora11gr2:dba /data  
# chown -R ora11gr2:dba /arch
```

- 3 Create a data volume and an archive log volume of the same names and lengths as the primary node volumes.

```
# vxassist -g vvr dg make datavol 4500m alloc=sdj, sdk  
# vxassist -g vvr dg make archvol 4500m alloc=sdl, sdm
```

- 4 Add a DCM (Data Change Map) log to the data volume and the archive log volume.

```
# vxassist -g vvr dg addlog datavol logtype=dcn nlog=2 logdisk=sdj, sdk  
# vxassist -g vvr dg addlog archvol logtype=dcn nlog=2 logdisk=sdl, sdm
```

- 5 Change the ownership and permission of the directories that contain data volumes and archive log volumes.

```
# chown -R ora11gr2:dba /data*  
# chown -R ora11gr2:dba /arch*
```

- 6 Prepare the data volume and the archive log volume for snapshot operations with DRL (Dirty Region Logging) disabled.

```
# vxsnap -g vvr dg prepare datavol drl=no alloc=sdn,sdo  
# vxsnap -g vvr dg prepare archvol drl=no alloc=sdp,sdq
```

---

**Note:** To use the data on the secondary host to perform off-host processing operations, use snapshots of the secondary data volumes. Do not mount the secondary RVG volumes directly, even in read-only mode.

A snapshot is an image of the online data volumes at a specific point-in-time. The data on the original volumes may change but the data on the snapshot can still be used as a stable and independent copy for various purposes.

---

- 7 Verify that the data volume and the archive log volume are prepared for instant snapshots.

```
# vxprint -g vvr dg -F%instant datavol  
# vxprint -g vvr dg -F%instant archvol
```

---

**Note:** VVR provides two methods of creating snapshots: instant snapshots and traditional snapshots. The instant snapshot feature is a separately licensed feature of VxVM.

---

- 8 Add mirrors to the data volume and the archive log volume for use in creating third-mirror break-off snapshots.

```
# vxsnap -g vvr dg addmir datavol alloc=sdr  
# vxsnap -g vvr dg addmir archvol alloc=sds
```

- 9 Set the `dbed_flashsnap` tag on the break-off data plexes for the data volume and the archive log volume.

```
# vxedit -g vvr dg set putil2=dbed_flashsnap datavol-04  
# vxedit -g vvr dg set putil2=dbed_flashsnap archvol-04
```

- 10 Create SRLs (Storage Replicator Logs) for data volumes and archive log volumes on the secondary node.

```
# vxassist -g vvr dg make datavol_srl 4500M alloc=sdt  
# vxassist -g vvr dg make archvol_srl 4500M alloc=sdu
```

---

**Note:** Create an SRL of the same name as the primary SRL. Please note that the SRL cannot be a volume set or a component volume of a volume set.

If the Primary RVG (Replicated Volume Group) includes a volume set, make sure that the component volumes on the secondary to be added have identical names, lengths, and indices as the component volumes on the primary.

---

## Configuring VVR between primary and secondary nodes for deploying Oracle

To configure VVR between primary and secondary nodes

- 1 Obtain the primary disk group ID.

```
# vxprint -l vvr dg
```

- 2 Open the `/etc/vx/vras/.rdg` file on the primary node.
- 3 Append the disk group ID in the `/etc/vx/vras/.rdg` file.

---

**Note:** Ensure that each disk group ID entry in the `.rdg` file is on a separate line.

---

- 4 Open the `/etc/vx/vras/.rdg` file on the secondary node.
- 5 Append the disk group ID in the `/etc/vx/vras/.rdg` file.

---

**Note:** Ensure that each disk group ID entry in the `.rdg` file is on a separate line.

---

- 6 From the primary node, plumb for any random IP address on a network interface.
- 7 From the secondary node, plumb for any random IP address on a network interface.
- 8 Verify that you can ping these IP addresses from both the nodes.

```
# ifconfig network_interface inet primary_IP netmask \  
  subnet_mask up  
# ifconfig network_interface inet secondary_IP netmask \  
  subnet_mask up
```

- 9 Create the primary RVGs (Replicated Volume Group) of the RDS (Replicated Data Set) by using the following command for all the volumes that you want to replicate.

```
# vradmin -g vvr dg createpri vvr dg_datavol_rvg datavol datavol_srl  
# vradmin -g vvr dg createpri vvr dg_archvol_rvg archvol archvol_srl
```

- 10 Create secondary RVGs of the same name as the primary RVGs and add them to the RDS.

```
# vradmin -g vvr dg addsec vvr dg_datavol_rvg primary_IP \  
  secondary_IP  
# vradmin -g vvr dg addsec vvr dg_archvol_rvg primary_IP \  
  secondary_IP
```

- 11 Start replication to the secondary node.

```
# vradmin -g vvr dg -a startrep vvr dg_datavol_rvg secondary_IP  
# vradmin -g vvr dg -a startrep vvr dg_archvol_rvg secondary_IP
```

- 12 Stop replication.

```
# vradmin -g vvr dg -f -s stoprep vvr dg_datavol_rvg secondary_IP  
# vradmin -g vvr dg -f -s stoprep vvr dg_archvol_rvg secondary_IP
```

See the *Veritas Storage Foundation and High Availability Solutions Replication Administrator's Guide*.

# Configuring Storage Foundation for Database (SFDB) tools

- [Chapter 7. Configuring and managing the Storage Foundation for Databases repository database](#)
- [Chapter 8. Upgrading and migrating Storage Foundation for Databases \(SFDB\) tools](#)
- [Chapter 9. Configuring authentication for Storage Foundation for Databases \(SFDB\) tools](#)





# Configuring and managing the Storage Foundation for Databases repository database

This chapter includes the following topics:

- [About the Storage Foundation for Databases \(SFDB\) repository](#)
- [Requirements for Storage Foundation for Databases \(SFDB\) tools](#)
- [Storage Foundation for Databases \(SFDB\) tools availability](#)
- [Configuring the Storage Foundation for Databases \(SFDB\) tools repository](#)
- [Backing up and restoring the Storage Foundation for Databases \(SFDB\) repository](#)
- [Updating the Storage Foundation for Databases \(SFDB\) repository after adding a node](#)
- [Updating the Storage Foundation for Databases \(SFDB\) repository after removing a node](#)
- [Removing the Storage Foundation for Databases \(SFDB\) repository after removing the product](#)

# About the Storage Foundation for Databases (SFDB) repository

The Storage Foundation for Databases (SFDB) repository or repository database stores metadata information required by the Storage Foundation for Databases tools.

---

**Note:** The repository database requires only occasional interaction outside of the initial installation and configuration of Storage Foundation Enterprise products.

---

In this release of Storage Foundation products, the SFDB repository is stored in a relational database and is managed by SQLite3.

## Requirements for Storage Foundation for Databases (SFDB) tools

Product requirements are included in:

- *Veritas Storage Foundation™ Release Notes*
- *Veritas Storage Foundation™ Cluster File System High Availability Release Notes*
- *Veritas Storage Foundation™ for Oracle RAC Release Notes*

The hardware compatibility list contains information about supported hardware and is updated regularly. For the latest information on supported hardware visit the following URL:

<http://www.symantec.com/docs/TECH170013>

For the most current information on Storage Foundation products and single instance Oracle versions supported, see:

<http://www.symantec.com/docs/DOC5081>

For the most current information on Storage Foundation for Oracle RAC and Oracle RAC versions supported, see:

<http://www.symantec.com/docs/DOC5081>

Review the current Oracle documentation to confirm the compatibility of your hardware and software.

## Storage Foundation for Databases (SFDB) tools availability

SFDB tools for Oracle databases are included for the following products:

- Storage Foundation, which supports host systems with single-instance Oracle

---

**Note:** Enterprise licensing required.

---

- Storage Foundation for Cluster File System HA, which supports clustered host systems with automatic failover and single-instance Oracle
- Storage Foundation for Oracle RAC, which supports clustered host systems with automatic failover and multiple-instance Oracle

For information on SFDB tools feature changes and issues for this release, see the product Release Notes for the most current and complete information.

## Configuring the Storage Foundation for Databases (SFDB) tools repository

The Storage Foundation for Databases (SFDB) repository stores information used by SFDB tools. The repository contains Storage Checkpoint information, tablespace and datafile information, Database FlashSnap information, and SmartTier for Oracle parameters.

The SFDB repository is automatically created when you run `dbed_update` for the first time.

---

**Note:** During upgrade you need to migrate the repository to the new format. If you are upgrading from release 5.1 onwards, this step is not required.

---

If the repository already exists, the command will refresh it. To use `dbed_update`:

- The database must be up and running.
- The `ORACLE_SID` and the `ORACLE_HOME` variables must be specified with and `-S` and `-H` options.


## Locations for the SFDB repository

Locations for the repository:

- The default is the directory where the first data file of the SYSTEM tablespace resides.
- You can specify an alternate location using `-R` option of `dbed_update`.

In the figure below the repository directory resides in the Oracle mount points.

**Figure 7-1** Locations for the SFDB repository

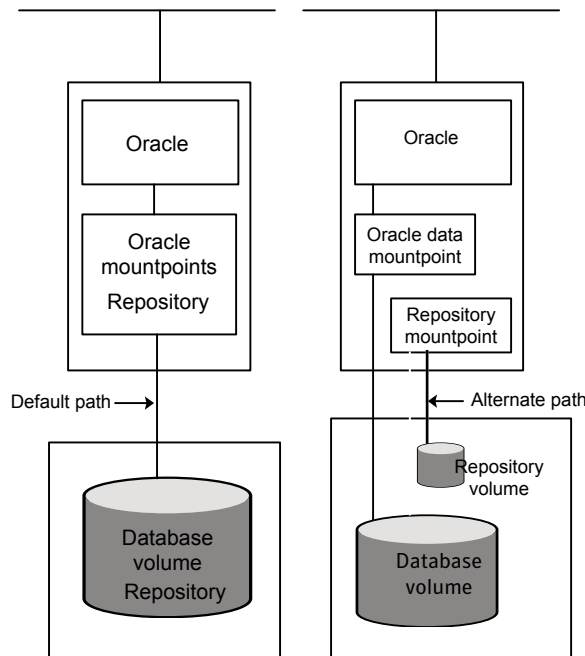

The alternate location must be:

- For Storage Foundation: on the local file system
- For Storage Foundation HA: on shared storage. The administrator must:
  - Configure a failover resource
  - Make sure that the repository and the Oracle database are failed over together to the same host
- For Storage Foundation Cluster File System (HA): on shared storage. The administrator must:
  - Configure Cluster File System or a failover resource

- Make sure that the repository and the Oracle database are failed over together to the same host
- For Storage Foundation for Oracle RAC: on shared storage. CFS must be mounted on all nodes.

---

**Note:** Using the same alternate path for several databases is not supported.

---

## Setting up the SFDB repository

The usage for `dbed_update` is as follows:

```
dbed_update -S ORACLE_SID -H ORACLE_HOME
           [ -P ORACLE_PFILE ]
           [ -R REPOSITORY_PATH ] [ -I ]
```

Options you can use:

| Option | Sample value    | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                |
|--------|-----------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| -S     | ORACLE_SID      | Specifies the name of the Oracle database whose information will be retrieved.                                                                                                                                                                                                                                                                                                                                                                             |
| -H     | ORACLE_HOME     | The ORACLE_HOME setting for the ORACLE_SID database.                                                                                                                                                                                                                                                                                                                                                                                                       |
| -P     | ORACLE_PFILE    | Specifies the fully qualify path of the Oracle pfile if it is not located under ORACLE_HOME/dbs directory.                                                                                                                                                                                                                                                                                                                                                 |
| -R     | REPOSITORY_PATH | Specifies a user-defined location for the repository. In a RAC or HA situation, it should be located on shared storage. The default location is on the mount point of the SYSTEM tablespace of the Oracle database. This way it is shared easily among cluster nodes.<br><br>If <code>REPOSITORY_PATH</code> is "/" the repository is not created in "/". It is created in the default path, since SFDB tools do not support creating repositories in "/". |

| Option | Sample value | Description                                                                                                                                                                                                                                                                                                                       |
|--------|--------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| -I     | N/A          | An integrity check of the SFDB repository is performed, without refreshing from the Oracle database . If successful, the string "ok" is printed to <code>stdout</code> . In addition, the full path of the repository file is shown.<br><br>Whenever refreshing from the database, an integrity check is automatically performed. |
| -h     | N/A          | Displays the help page.                                                                                                                                                                                                                                                                                                           |

**To set up the SFDB repository**

- ◆ As Oracle DBA user, run the following to create or update the SFDB repository for the database.

```
$ /opt/VRTS/bin/dbed_update -S $ORACLE_SID -H $ORACLE_HOME
```

## Backing up and restoring the Storage Foundation for Databases (SFDB) repository

The SFDB repository should be backed up after significant changes such as creating a new Flashsnap configuration or creating Storage Checkpoints.

For the SFDB backup repository:

- The same default location is used as for the SFDB repository.
- The location can be specified by using the `-d directory` option.
- SFDB repositories for different databases must not share same backup location.
- The disk space at backup location is automatically managed.
- Each SFDB repository backup file has a timestamp in its file name.
- The backup command preserves only last seven backups.

For high availability environments:

- Make sure the backup location is accessible by all nodes.
- The backup command can be run from any node.

Usage for `sfua_rept_util`:

```
sfua_rept_util -S ORACLE_SID -o backup [-d <directory>]
sfua_rept_util -S ORACLE_SID -o list [-d <directory>]
sfua_rept_util -S ORACLE_SID -o restore -f <backupfile> \
[-d <directory>]
```

**Table 7-1** Options for `sfua_rept_util`

| Option | Value             | Description                                                                                                                                                                                                  |
|--------|-------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| -S     | <i>ORACLE_SID</i> | Specifies the SID of the database for which the repository is being backed up.                                                                                                                               |
| -o     | backup            | Specifies that the operation is to make a backup.                                                                                                                                                            |
| -o     | list              | Specifies that the operation is to list the backup files.                                                                                                                                                    |
| -o     | restore           | Specifies that the operation is a restoration of the selected backup file.                                                                                                                                   |
| -d     | <i>directory</i>  | Specifies the directory location for the backup or restore of the file. This option is not mandatory. If you use this option for backup, you must use this option for listing available backups and restore. |
| -f     | <i>filename</i>   | Specifies the file name for the repository backup which will be restored. This option is required for restoring a backup file.                                                                               |

### To back up an SFDB repository

- 1 Verify that the database is online and that the backup location directory has write permission enabled for the DBA Oracle user.
- 2 Verify the SFDB repository is up to date:

```
$ dbed_update -S $ORACLE_SID -H $ORACLE_HOME
```

- 3 As Oracle DBA user, run the backup command with the appropriate options.

For example:

```
$ /opt/VRTSdbed/bin/sfua_rept_util -S Prod -o backup
Backing up Repository for SID='Prod'
Target directory='/etc/vx/vxdba/logs/oragrid/backup'
Copying repository for SID=Prod to '/etc/vx/vxdba/logs/oragrid/backup'
Backup Repository for SID='Prod' Completed
```

Where oragrid is ORACLE\_USER .

### To list SFDB repository backups

- ◆ As Oracle DBA user, run the list command.

```
$ /opt/VRTSdbed/bin/sfua_rept_util -S Prod -o list
Listing Repository Backups for SID='Prod'
TIME                SIZE                NAME
2012-06-12-19-43-55 14824 rept_Prod_2012-06-12-19-43-55.tgz
```

### To restore an SFDB repository

- ◆ As Oracle user, run the restore command with the appropriate options.

For example:

```
$ /opt/VRTSdbed/bin/sfua_rept_util -S Prod -o restore -f rept_Prod_2012-06-12-19-43-55.tgz
Restoring Repository for SID='Prod'
Target directory='/etc/vx/vxdba/logs/oragrid/backup'
Restore Repository for SID='Prod' Completed
```

Where oragrid is ORACLE\_USER.

## Updating the Storage Foundation for Databases (SFDB) repository after adding a node

After adding a node to a cluster, update the SFDB repository to enable access for the new node.



### To update the SFDB repository after adding a node

- 1 Copy the `/var/vx/vxdba/rep_loc` file from one of the nodes in the cluster to the new node.
- 2 If the `/var/vx/vxdba/auth/user-authorizations` file exists on the existing cluster nodes, copy it to the new node.

If the `/var/vx/vxdba/auth/user-authorizations` file does not exist on any of the existing cluster nodes, no action is required.

This completes the addition of the new node to the SFDB repository.

## Updating the Storage Foundation for Databases (SFDB) repository after removing a node

After removing a node from a cluster, you do not need to perform any steps to update the SFDB repository.

For information on removing the SFDB repository after removing the product:

See [“Removing the Storage Foundation for Databases \(SFDB\) repository after removing the product”](#) on page 81.

## Removing the Storage Foundation for Databases (SFDB) repository after removing the product

After removing the product, you can remove the SFDB repository file and any backups.

Removing the SFDB repository file disables the SFDB tools.

### To remove the SFDB repository

- 1 Identify the SFDB repositories created on the host.

```
# cat /var/vx/vxdba/rep_loc

{
  "sfae_rept_version" : 1,
  "oracle" : {
    "SFAEDB" : {
      "location" : "/data/sfaedb/.sfae",
      "old_location" : "",
      "alias" : [
        "sfaedb"
      ]
    }
  }
}
```

- 2 Remove the directory identified by the `location` key.

```
# rm -rf /data/sfaedb/.sfae
```

- 3 Remove the repository location file.

```
# rm -rf /var/vx/vxdba/rep_loc
```

This completes the removal of the SFDB repository.

# Upgrading and migrating Storage Foundation for Databases (SFDB) tools

This chapter includes the following topics:

- [About upgrading Storage Foundation for Databases \(SFDB\) tools](#)
- [Using SFDB tools after upgrading Oracle to 11.2.0.2](#)

## About upgrading Storage Foundation for Databases (SFDB) tools

If you are upgrading from 5.1 or 5.1 SP1, no upgrade steps are required for the SFDB tools. Follow the normal upgrade procedures for your Storage Foundation Enterprise product.

If you are currently using a 5.0x or earlier version of a Storage Foundation database product, you must migrate the SFDB repository contents to the new format to continue using these tools with your current Storage Foundation 6.0.1 Enterprise product.

For details about the pre-upgrade and post upgrade tasks related to the SFDB tools, refer to the installation guide of your Storage Foundation Enterprise product.

---

**Caution:** If you are running Oracle version 11.1.0.6 and upgrading a Storage Foundation product to 6.0.1: upgrade the Oracle binaries and database to version 11.1.0.7 before moving to 6.0.1.

---

## Using SFDB tools after upgrading Oracle to 11.2.0.2

The procedure which Oracle recommends for upgrading to Oracle 11.2.0.2 causes the database home to change. After you upgrade to Oracle 11.2.0.2, you must run the `dbed_update` command with the new Oracle home provided as an argument to the `-H` option before using any SFDB utilities. After this step, the SFDB utilities can be used normally.

# Configuring authentication for Storage Foundation for Databases (SFDB) tools

This chapter includes the following topics:

- [Configuring vxdbd for SFDB tools authentication](#)
- [Adding nodes to a cluster that is using authentication for SFDB tools](#)
- [Authorizing users to run SFDB commands](#)

## Configuring vxdbd for SFDB tools authentication

To configure vxdbd, perform the following steps as the root user

- 1 Run the `sfae_auth_op` command to set up the authentication services.

```
# /opt/VRTS/bin/sfae_auth_op -o setup
Setting up AT
Starting SFAE AT broker
Creating SFAE private domain
Backing up AT configuration
Creating principal for vxdbd
```

- 2 Stop the vxdbd daemon.

```
# /opt/VRTS/bin/vxdbdctrl stop
Stopping Veritas vxdbd
vxdbd stop succeeded
```

- 3 Enable authentication by setting the `AUTHENTICATION` key to `yes` in the `/etc/vx/vxdbed/admin.properties` configuration file.

If `/etc/vx/vxdbed/admin.properties` does not exist, then use `cp /opt/VRTSdbed/bin/admin.properties.example /etc/vx/vxdbed/admin.properties`.

- 4 Start the `vxdbd` daemon.

```
# /opt/VRTS/bin/vxdbdctl start
Starting Veritas vxdbd
/opt/VRTSdbed/bin/vxdbd start SUCCESS
```

The `vxdbd` daemon is now configured to require authentication.

## Adding nodes to a cluster that is using authentication for SFDB tools

To add a node to a cluster that is using authentication for SFDB tools, perform the following steps as the root user

- 1 Export authentication data from a node in the cluster that has already been authorized, by using the `-o export_broker_config` option of the `sfae_auth_op` command.

Use the `-f` option to provide a file name in which the exported data is to be stored.

```
# /opt/VRTS/bin/sfae_auth_op \
-o export_broker_config -f exported-data
```

- 2 Copy the exported file to the new node by using any available copy mechanism such as `scp` or `rcp`.
- 3 Import the authentication data on the new node by using the `-o import_broker_config` option of the `sfae_auth_op` command.

Use the `-f` option to provide the name of the file copied in Step 2.

```
# /opt/VRTS/bin/sfae_auth_op \
-o import_broker_config -f exported-data
Setting up AT
Importing broker configuration
Starting SFAE AT broker
```

**4 Stop the vxdbd daemon on the new node.**

```
# /opt/VRTS/bin/vxdbdctrl stop
Stopping Veritas vxdbd
vxdbd stop succeeded
```

**5 Enable authentication by setting the AUTHENTICATION key to yes in the /etc/vx/vxdbed/admin.properties configuration file.**

If /etc/vx/vxdbed/admin.properties does not exist, then use cp /opt/VRTSdbed/bin/admin.properties.example /etc/vx/vxdbed/admin.properties.

**6 Start the vxdbd daemon.**

```
# /opt/VRTS/bin/vxdbdctrl start
Starting Veritas vxdbd
/opt/VRTSdbed/bin/vxdbd start SUCCESS
```

The new node is now authenticated to interact with the cluster to run SFDB commands.

## Authorizing users to run SFDB commands

To authorize users to run SFDB commands, perform the following step as the root user

- ◆ Use the `-o auth_user` option of the `sfac_auth_op` command and provide the user name as an argument to the `-u` option.

```
# /opt/VRTS/bin/sfac_auth_op \  
-o auth_user -u oragrid  
Creating principal oragrid@system1.example.com
```





# Improving Oracle database performance

- [Chapter 10. About database accelerators](#)
- [Chapter 11. Improving database performance with Veritas Extension for Oracle Disk Manager](#)
- [Chapter 12. Improving database performance with Veritas Cached Oracle Disk Manager](#)
- [Chapter 13. Improving database performance with Veritas Quick I/O](#)
- [Chapter 14. Improving database performance with Veritas Cached Quick I/O](#)



# About database accelerators

This chapter includes the following topics:

- [About Storage Foundation and High Availability Solutions products database accelerators](#)

## About Storage Foundation and High Availability Solutions products database accelerators

The major concern in any environment is maintaining respectable performance or meeting performance service level agreements (SLAs). Veritas Storage Foundation and High Availability Solutions products improve the overall performance of database environments in a variety of ways.

**Table 10-1** Storage Foundation and High Availability Solutions database accelerators

| SFHA Solutions database accelerator     | Supported databases | Use cases and considerations                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
|-----------------------------------------|---------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Oracle Disk Manager (ODM)               | Oracle              | <ul style="list-style-type: none"> <li>■ To improve Oracle performance and manage system bandwidth through an improved Application Programming Interface (API) that contains advanced kernel support for file I/O.</li> <li>■ To use Oracle Resilvering and turn off Veritas Volume Manager Dirty Region Logging (DRL) to increase performance, use ODM.</li> <li>■ To reduce the time required to restore consistency, freeing more I/O bandwidth for business-critical applications, use SmartSync recovery accelerator.</li> </ul> |
| Cached Oracle Disk Manager (Cached ODM) | Oracle              | To enable selected I/O to use caching to improve ODM I/O performance, use Cached ODM.                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| Quick I/O (QIO)                         | Oracle              | <p>To achieve raw device performance for databases run on VxFS file systems, use Veritas Quick I/O.</p> <p><b>Note:</b> Not supported on Linux.</p>                                                                                                                                                                                                                                                                                                                                                                                   |
| Cached Quick I/O (Cached QIO)           | Oracle              | <p>To further enhance database performance by leveraging large system memory to selectively buffer the frequently accessed data, use Cached QIO.</p> <p><b>Note:</b> Not supported on Linux.</p>                                                                                                                                                                                                                                                                                                                                      |

These database accelerator technologies enable database performance equal to raw disk partitions, but with the manageability benefits of a file system. With the Dynamic Multi-pathing (DMP) feature of Storage Foundation, performance is maximized by load-balancing I/O activity across all available paths from server to array. DMP supports all major hardware RAID vendors, hence there is no need for third-party multi-pathing software, reducing the total cost of ownership.

Storage Foundation database accelerators enable you to manage performance for your database with more precision.

# Improving database performance with Veritas Extension for Oracle Disk Manager

This chapter includes the following topics:

- [About Oracle Disk Manager in SFHA environment](#)
- [Setting up Veritas Extension for Oracle Disk Manager in SFHA environment](#)
- [Configuring Veritas Extension for Oracle Disk Manager in SFHA environment](#)
- [How to prepare existing database storage for Oracle Disk Manager in SFHA environment](#)
- [Verifying that Oracle Disk Manager is configured in SFHA environment](#)
- [Disabling the Oracle Disk Manager feature in SFHA environment](#)

## About Oracle Disk Manager in SFHA environment

Veritas Extension for Oracle Disk Manager enhances file management and disk I/O throughput. The features of Oracle Disk Manager are optimized for Oracle 10g or later databases in a Veritas File System environment. Oracle Disk Manager enables you to improve database throughput for I/O intensive workloads with special I/O optimization.

Veritas Extension for Oracle Disk Manager supports Oracle Resilvering. With Oracle Resilvering, the storage layer receives information from the Oracle database

as to which regions or blocks of a mirrored datafile to resync after a system crash. Oracle Resilvering avoids overhead from the Volume Manager Dirty Region Logging (DRL) for files which Oracle itself can recover, which increases performance.

Oracle Disk Manager reduces administrative overhead by providing enhanced support for Oracle Managed Files. Veritas Extension for Oracle Disk Manager has Quick I/O-like capabilities, but is transparent to the user. Unlike Veritas Quick I/O, files managed using Veritas Extension for Oracle Disk Manager do not require special file naming conventions. The Oracle Disk Manager interface uses regular database files. If you are upgrading to Oracle10g or later, you should convert from Quick I/O to Oracle Disk Manager.

Oracle Disk Manager reduces administrative overhead by providing enhanced support for Oracle Managed Files. Veritas Extension for Oracle Disk Manager is transparent to the user. The Oracle Disk Manager interface uses regular database files.

---

**Note:** Quick I/O is not supported on Linux.

---

Database administrators can choose the datafile type used with the Oracle product. Historically, choosing between file system files and raw devices was based on manageability and performance. The exception to this is a database intended for use with Oracle Parallel Server, which requires raw devices on most platforms. If performance is not as important as administrative ease, file system files are typically the preferred file type. However, while an application may not have substantial I/O requirements when it is first implemented, I/O requirements may change. If an application becomes dependent upon I/O throughput, converting datafiles from file system to raw devices is often necessary.

Oracle Disk Manager was designed to work with Oracle10g or later to provide both performance and manageability. Oracle Disk Manager provides support for Oracle's file management and I/O calls for database storage on VxFS file systems and on raw volumes or partitions. This feature is provided as a dynamically-loaded shared library with which Oracle binds when it is loaded. The Oracle Disk Manager library works with an Oracle Disk Manager driver that is loaded in the kernel to perform its functions.

---

**Note:** Raw devices are not supported on Linux.

---

Oracle Disk Manager was designed to work with Oracle10g or later to provide both performance and manageability. Oracle Disk Manager provides support for Oracle's file management and I/O calls for database storage on VxFS file systems.

This feature is provided as a dynamically-loaded shared library with which Oracle binds when it is loaded. The Oracle Disk Manager library works with an Oracle Disk Manager driver that is loaded in the kernel to perform its functions.

If you are upgrading to Oracle10g or later, you should convert from Quick I/O to Oracle Disk Manager.

The benefits of using Oracle Disk Manager are as follows:

- True kernel asynchronous I/O for files and raw devices
- True kernel asynchronous I/O for files
- Reduced system call overhead
- Improved file system layout by preallocating contiguous files on a VxFS file system
- Performance on file system files that is equivalent to raw devices
- Transparency to users

## How Oracle Disk Manager improves database performance in SFHA environment

Oracle Disk Manager improves database I/O performance to VxFS file systems by:

- Supporting kernel asynchronous I/O
- Supporting direct I/O and avoiding double buffering
- Avoiding kernel write locks on database files
- Supporting many concurrent I/Os in one system call
- Avoiding duplicate opening of files per Oracle instance
- Allocating contiguous datafiles

### **About kernel asynchronous I/O support in SFHA environment**

Asynchronous I/O performs non-blocking system level reads and writes, allowing the system to perform multiple I/O requests simultaneously. Kernel asynchronous I/O is better than library asynchronous I/O because the I/O is queued to the disk device drivers in the kernel, minimizing context switches to accomplish the work.

## About direct I/O support and avoiding double buffering in SFHA environment

I/O on files using `read()` and `write()` system calls typically results in data being copied twice: once between the user and kernel space, and the other between kernel space and the disk. In contrast, I/O on raw devices is copied directly between user space and disk, saving one level of copying. As with I/O on raw devices, Oracle Disk Manager I/O avoids the extra copying. Oracle Disk Manager bypasses the system cache and accesses the files with the same efficiency as raw devices. Avoiding double buffering reduces the memory overhead on the system. Eliminating the copies from kernel to user address space significantly reduces kernel mode processor utilization freeing more processor cycles to execute the application code.

## About avoiding kernel write locks on database files in SFHA environment

When database I/O is performed by way of the `write()` system call, each system call acquires and releases a kernel write lock on the file. This lock blocks reads during the write and prevents simultaneous write operations on the same file. Because database systems usually implement their own locks for managing concurrent access to files, write locks unnecessarily serialize I/O. Oracle Disk Manager bypasses file system locking and lets the database server control data access.

## About supporting many concurrent I/Os in one system call in SFHA environment

When performing asynchronous I/O, an Oracle process may try to issue additional I/O requests while collecting completed I/Os, or it may try to wait for particular I/O requests synchronously, as it can do no other work until the I/O is completed. The Oracle process may also try to issue requests to different files. All this activity can be accomplished with one system call when Oracle uses the Oracle Disk Manager I/O interface. This interface reduces the number of system calls performed to accomplish the same work, reducing the number of user space/kernel space context switches.

---

**Note:** With Oracle10g Release 2 or later, you can use the `FILESYSTEMIO_OPTIONS` initialization parameter to enable or disable asynchronous I/O, direct I/O, or Concurrent I/O on file system files. This parameter is applicable to JFS and JFS2 files only. This parameter is not applicable to VxFS files, ODM files, or QIO files. For further information, please refer to Oracle Disk Manager documentation provided by Oracle.

---



## About avoiding duplicate file opens in SFHA environment

Oracle Disk Manager allows files to be opened once, providing a “file identifier.” This is called “identifying” the files. The same file identifiers can be used by any other processes in the Oracle instance. The file status is maintained by the Oracle Disk Manager driver in the kernel. The reduction in file open calls reduces processing overhead at process initialization and termination, and it reduces the number of file status structures required in the kernel.

## About allocating contiguous datafiles in SFHA environment

Oracle Disk Manager can improve performance for queries, such as sort and parallel queries, that use temporary tablespaces. Without Oracle Disk Manager, Oracle does not initialize the datafiles for the temporary tablespaces. Therefore, the datafiles become sparse files and are generally fragmented. Sparse or fragmented files lead to poor query performance. When using Oracle Disk Manager, the datafiles are initialized for the temporary tablespaces and are allocated in a contiguous fashion, so that they are not sparse.

## About SmartSync in SFHA environment

SmartSync recovery accelerator increases the availability of mirrored volumes by only resynchronizing changed data. SmartSync reduces the time required to restore consistency, freeing more I/O bandwidth for business-critical applications.

SmartSync is applicable only to Oracle databases that are configured on raw volumes. SmartSync uses an extended interface between VxVM volumes and Oracle to avoid unnecessary work during mirror resynchronization. Oracle automatically takes advantage of SmartSync to perform database resynchronization when it is available.

ODM has been enhanced to make use of file-level SmartSync, which is called ODM Resilvering. No configuration is needed. This is available by default.

## How Oracle Disk Manager works with Oracle Managed Files

The following example illustrates the relationship between Oracle Disk Manager and Oracle Managed Files (OMF). The example shows the `init.ora` contents and the command for starting the database instance. To simplify Oracle UNDO management, the new Oracle10g or later `init.ora` parameter `UNDO_MANAGEMENT` is set to `AUTO`. This is known as System-Managed Undo.

---

**Note:** Before building an OMF database, you need the appropriate `init.ora` default values. These values control the location of the `SYSTEM` tablespace, online redo logs, and control files after the `CREATE DATABASE` statement is executed.

---

```
$ cat initPROD.ora
UNDO_MANAGEMENT = AUTO
DB_CREATE_FILE_DEST = '/PROD'
DB_CREATE_ONLINE_LOG_DEST_1 = '/PROD'
db_block_size = 4096
db_name = PROD
$ sqlplus /nolog
SQL> connect / as sysdba
SQL> startup nomount pfile= initPROD.ora
```

The Oracle instance starts.

```
Total System Global Area 93094616 bytes
Fixed Size 279256 bytes
Variable Size 41943040 bytes
Database Buffers 50331648 bytes
Redo Buffers 540672 bytes
```

To implement a layout that places files associated with the `EMP_TABLE` tablespace in a directory separate from the `EMP_INDEX` tablespace, use the `ALTER SYSTEM` statement. This example shows how OMF handles file names and storage clauses and paths. The layout allows you to think of the tablespaces as objects in a file system as opposed to a collection of datafiles. Since OMF uses the Oracle Disk Manager file resize function, the tablespace files are initially created with the default size of 100MB and grow as needed. Use the `MAXSIZE` attribute to limit growth.

The following example shows the commands for creating an OMF database and for creating the `EMP_TABLE` and `EMP_INDEX` tablespaces in their own locale.

---

**Note:** The directory must exist for OMF to work, so the `SQL*Plus HOST` command is used to create the directories:

---

```
SQL> create database PROD;
```

The database is created.

```
SQL> HOST mkdir /PROD/EMP_TABLE;
SQL> ALTER SYSTEM SET DB_CREATE_FILE_DEST = '/PROD/EMP_TABLE';
```

The system is altered.

```
SQL> create tablespace EMP_TABLE DATAFILE AUTOEXTEND ON MAXSIZE \
500M;
```

A tablespace is created.

```
SQL> ALTER SYSTEM SET DB_CREATE_FILE_DEST = '/PROD/EMP_INDEX';
```

The system is altered.

```
SQL> create tablespace EMP_INDEX DATAFILE AUTOEXTEND ON MAXSIZE \
100M;
```

A tablespace is created.

Use the `ls` command to show the newly created database:

```
$ ls -lFR
total 638062
drwxr-xr-x 2 oracle10g dba 96 May  3 15:43 EMP_INDEX/
drwxr-xr-x 2 oracle10g dba 96 May  3 15:43 EMP_TABLE/
-rw-r--r-- 1 oracle10g dba 104858112 May 3 17:28 ora_1_BEhYgc0m.log
-rw-r--r-- 1 oracle10g dba 104858112 May 3 17:27 ora_2_BEhYu4NA.log
-rw-r--r-- 1 oracle10g dba 806912 May 3 15:43 ora_BEahlfUX.ctl
-rw-r--r-- 1 oracle10g dba 10489856 May 3 15:43 ora_sys_undo_BEajPSVq.dbf
-rw-r--r-- 1 oracle10g dba 104861696 May 3 15:4 ora_system_BEaiFE8v.dbf
-rw-r--r-- 1 oracle10g dba 186 May 3 15:03 PROD.ora

./EMP_INDEX:
total 204808
-rw-r--r-- 1 oracle10g dba 104861696 May 3 15:43
ora_emp_inde_BEakGfun.dbf

./EMP_TABLE:
total 204808
-rw-r--r-- 1 oracle10g dba 104861696 May 3 15:43
ora_emp_tabl_BEaklLqK.dbf
```

## Setting up Veritas Extension for Oracle Disk Manager in SFHA environment

Before setting up Veritas Extension for Oracle Disk Manager, the following conditions must be met:

- |               |                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
|---------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Prerequisites | <ul style="list-style-type: none"><li>■ A Veritas Storage Foundation Enterprise or Standard product must be installed on your system.</li><li>■ Oracle10g, or later, must be installed on your system.</li><li>■ If Cached Quick I/O is available, do not enable Oracle Disk Manager when Cached Quick I/O is enabled for datafiles.</li></ul>                                                                                                        |
| Usage Notes   | <ul style="list-style-type: none"><li>■ When the Quick I/O feature is available, Oracle Disk Manager uses the Quick I/O driver to perform asynchronous I/O. Do not turn off the Quick I/O mount option, which is the default.</li><li>■ Oracle uses default file access methods if Oracle10g or later or a Veritas Storage Foundation Standard or Enterprise product is not installed, or VxFS 5.0 or later is not available in the kernel.</li></ul> |

## Linking the Veritas extension for Oracle Disk Manager library into Oracle home in SFHA environment

You must use the following procedures to link the Veritas extension for Oracle Disk Manager library into Oracle home for Oracle 11g and Oracle 10g.

## To link the Veritas extension for Oracle Disk Manager library into Oracle home for Oracle 11g

- 1 Shut down the database instance before linking the Oracle Disk Manager library.
- 2 Use the following commands.

For Solaris SPARC, enter:

```
# rm ${ORACLE_HOME}/lib/libodm11.so
# ln -s /opt/VRTSodm/lib/sparcv9/libodm.so \
${ORACLE_HOME}/lib/libodm11.so
```

For Solaris Opteron, enter:

```
# rm ${ORACLE_HOME}/lib/libodm11.so
# ln -s -f /opt/VRTSodm/lib/amd64/libodm.so \
${ORACLE_HOME}/lib/libodm11.so
```

For Linux, enter:

```
# rm ${ORACLE_HOME}/lib/libodm11.so
# ln -s /opt/VRTSodm/lib64/libodm.so \
${ORACLE_HOME}/lib/libodm11.so
```

For AIX, enter:

```
# rm ${ORACLE_HOME}/lib/libodm11.so
# ln -s /opt/VRTSodm/lib/libodm64.so \
${ORACLE_HOME}/lib/libodm11.so
```

For HP-UX PA, enter:

```
# mv ${ORACLE_HOME}/lib/libodm11.sl \
${ORACLE_HOME}/lib/libodm11.sl.orig
# ln -s /opt/VRTSodm/lib/libodm.sl \
${ORACLE_HOME}/lib/libodm11.sl
```

For HP-UX IA, enter:

```
# mv ${ORACLE_HOME}/lib/libodm11.so \
${ORACLE_HOME}/lib/libodm11.so.orig
# ln -s /opt/VRTSodm/lib/libodm.sl \
${ORACLE_HOME}/lib/libodm11.so
```

- 3 Start the database instance after linking the Oracle Disk Manager library.

### To link the Veritas extension for Oracle Disk Manager library into Oracle home for Oracle 10g

- 1 Shut down the database instance before linking the Oracle Disk Manager library.
- 2 Use the following commands.

For Solaris SPARC, enter:

```
# rm ${ORACLE_HOME}/lib/libodm10.so
# ln -s /opt/VRTSodm/lib/sparcv9/libodm.so \
${ORACLE_HOME}/lib/libodm10.so
```

For Solaris Opteron, enter:

```
# rm ${ORACLE_HOME}/lib/libodm10.so
# ln -s /opt/VRTSodm/lib/amd64/libodm.so \
${ORACLE_HOME}/lib/libodm10.so
```

For AIX, enter:

```
# rm ${ORACLE_HOME}/lib/libodm10.so
# ln -s /opt/VRTSodm/lib/libodm64.so \
${ORACLE_HOME}/lib/libodm10.so
```

For Linux, enter:

```
# rm ${ORACLE_HOME}/lib/libodm10.so
# ln -s /opt/VRTSodm/lib64/libodm.so \
${ORACLE_HOME}/lib/libodm10.so
```

For HP-UX PA, enter:

```
# mv ${ORACLE_HOME}/lib/libodm10.sl \
${ORACLE_HOME}/lib/libodm10.sl.orig
# ln -s /opt/VRTSodm/lib/libodm.sl \
${ORACLE_HOME}/lib/libodm10.sl
```

For HP-UX IA, enter:

```
# mv ${ORACLE_HOME}/lib/libodm10.so \
${ORACLE_HOME}/lib/libodm10.so.orig
# ln -s /opt/VRTSodm/lib/libodm.sl \
${ORACLE_HOME}/lib/libodm10.so
```

- 3 Start the database instance after linking the Oracle Disk Manager library.

# Configuring Veritas Extension for Oracle Disk Manager in SFHA environment

If `ORACLE_HOME` is on a shared file system, run the following commands from any node, otherwise run them on each node.

where `ORACLE_HOME` is the location where Oracle database binaries have been installed.

## To configure Veritas Extension for Oracle Disk Manager

- 1 Log in as `oracle`.
- 2 If the Oracle database is running, then shut down the Oracle database.
- 3 After shutting down the Oracle database, disable the ODM module.

For HP-UX, enter:

```
# /sbin/init.d/odm stop
```

For Linux, enter:

```
# /etc/init.d/vxodm stop
```

- 4 Verify that `/opt/VRTSodm/lib64/libodm.so` exists.
- 5 Verify that `/opt/VRTSodm/lib64/libodm.so` exists.
- 6 Link Oracle's ODM library present in `ORACLE_HOME` with Veritas Extension for Oracle Disk Manager library:

For Oracle10g:

- Change to the `$ORACLE_HOME/lib` directory, enter:

```
# cd $ORACLE_HOME/lib
```

- Take backup of `libodm10.so`, enter.

```
# mv libodm10.so libodm10.so.oracle-`date +%m_%d_%y-%H_%M_%S`
```

- Link `libodm10.so` with Veritas ODM library, enter:

```
# ln -s /opt/VRTSodm/lib/libodm64.so libodm10.so
```

```
# ln -s /opt/VRTSodm/lib64/libodm.so libodm10.so
```

For Oracle11g:

- Change to the `$ORACLE_HOME/lib` directory, enter:

```
# cd $ORACLE_HOME/lib
```

- Take backup of `libodm11.so`, enter.

```
# mv libodm11.so libodm11.so.oracle-`date +%m_%d_%y-%H_%M_%S`
```

- Link `libodm11.so` with Veritas ODM library, enter:

```
# ln -s /opt/VRTSodm/lib/libodm64.so libodm11.so
```

```
# ln -s /opt/VRTSodm/lib64/libodm.so libodm11.so
```

- 7 Load the ODM module.

For HP-UX, enter:

```
# /sbin/init.d/odm start
```

For Linux, enter:

```
# /etc/init.d/vxodm start
```

- 8 Start the Oracle database.
- 9 To confirm that the Oracle database starts with Veritas Extension for ODM, the alert log will contain the following text:

```
Oracle instance running with ODM:  
Veritas 6.0.100.000 ODM Library, Version 2.0
```

## How to prepare existing database storage for Oracle Disk Manager in SFHA environment

Non-Quick I/O files in a VxFS file system work with Oracle Disk Manager without any changes. The files are found and identified for Oracle Disk Manager I/O by default. To take full advantage of Oracle Disk Manager datafiles, files should not be fragmented.

If you are using Quick I/O files in a VxFS file system and you want to move to Oracle Disk Manager, convert the Quick I/O files to normal files.

---

**Note:** Quick I/O is not supported on Linux.

---



Files in a VxFS file system work with Oracle Disk Manager without any changes. The files are found and identified for Oracle Disk Manager I/O by default. To take full advantage of Oracle Disk Manager datafiles, files should not be fragmented.

You must be running Oracle10g or later to use Oracle Disk Manager.

## Verifying that Oracle Disk Manager is configured in SFHA environment

Before verifying that Oracle Disk Manager is configured, make sure that the following conditions are met:

- |               |                                                                                                                                                                                                                                                                                                         |
|---------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| AIX           | ■ /opt/VRTSodm/lib/libodm64.so must exist.                                                                                                                                                                                                                                                              |
| Prerequisites | ■ If you are using Oracle 10g, \$ORACLE_HOME/lib/libodm10.so is linked to /opt/VRTSodm/lib/libodm64.so.<br>■ If you are using Oracle 11g, \$ORACLE_HOME/lib/libodm11.so is linked to /opt/VRTSodm/lib/libodm64.so.<br>■ The VRTSdbed license must be valid.<br>■ The VRTSodm package must be installed. |
| Linux         | ■ /opt/VRTSodm/lib64/libodm.so must exist.                                                                                                                                                                                                                                                              |
| Prerequisites | ■ If you are using Oracle 10g, \$ORACLE_HOME/lib/libodm10.so is linked to /opt/VRTSodm/lib64/libodm.so.<br>■ If you are using Oracle 11g, \$ORACLE_HOME/lib/libodm11.so is linked to /opt/VRTSodm/lib64/libodm.so.<br>■ The VRTSdbed license must be valid.<br>■ The VRTSodm package must be installed. |
| HP-UX         | ■ /opt/VRTSodm/lib/libodm.sl must exist.                                                                                                                                                                                                                                                                |
| Prerequisites | ■ The VRTSdbed license must be valid.<br>■ The VRTSodm package must be installed.                                                                                                                                                                                                                       |

Solaris

Prerequisites

- `/opt/VRTSodm/lib/libodm.so` must exist.
- If you are using Oracle 10g on SPARC, `$ORACLE_HOME/lib/libodm10.so` is linked to `/opt/VRTSodm/lib/sparcv9/libodm.so`.
- If you are using Oracle 11g on SPARC, `$ORACLE_HOME/lib/libodm11.so` is linked to `/opt/VRTSodm/lib/sparcv9/libodm.so`.
- If you are using Oracle 10g on Opteron, `$ORACLE_HOME/lib/libodm10.so` is linked to `/opt/VRTSodm/lib/amd64/libodm.so`.
- If you are using Oracle 11g on Opteron, `$ORACLE_HOME/lib/libodm11.so` is linked to `/opt/VRTSodm/lib/amd64/libodm.so`.

### To verify that Oracle Disk Manager is configured

- 1 Verify that the ODM feature is included in the license:

```
# /opt/VRTS/bin/vxlicrep | grep ODM
```

```
QLOGODM                = Enabled  
    ODM                  = Enabled
```

The output verifies that ODM is enabled.

---

**Note:** Verify that the license key containing the ODM feature is not expired. If the license key has expired, you will not be able to use the ODM feature.

---

## 2 Check that the `VRTSodm` package is installed:

Solaris:

```
# pkginfo VRTSodm
system VRTSodm Veritas Oracle Disk Manager by Symantec
```

HP-UX:

```
# swlist VRTSodm
# Initializing...
# Contacting target "hpslia48"...
#
# Target: hpslia48:/
#
# VRTSodm          6.0.100.000.%20110801 Veritas Oracle Disk Manager
VRTSodm.ODM-KRN    6.0.100.000.%20110801 Veritas ODM kernel files
VRTSodm.ODM-MAN    6.0.100.000.%20110801 Veritas ODM manual pages
VRTSodm.ODM-RUN    6.0.100.000.%20110801 Veritas ODM commands
```

AIX:

```
# lslpp -L VRTSodm
Fileset              Level  State  Type  Description (Uninstaller)
-----
VRTSodm              6.0.100.000  C      F      Veritas Extension for Oracle
                                   Disk Manager by Symantec 6.0
                                   Pinnacle - Sun Aug 21
                                   17:30:48 PDT 2011
```

State codes:

```
A -- Applied.
B -- Broken.
C -- Committed.
E -- EFIX Locked.
O -- Obsolete. (partially migrated to newer version)
? -- Inconsistent State...Run lppchk -v.
```

Type codes:

```
F -- Installp Fileset
P -- Product
C -- Component
T -- Feature
R -- RPM Package
E -- Interim Fix
```

Linux:

```
# rpm -qa | grep VRTSodm
VRTSodm-6.0.100.000-Axx_RHEL5

# rpm -qa | grep VRTSodm
VRTSodm-6.0.100.000-Axx_SLES11

# rpm -qa | grep VRTSodm
VRTSodm-6.0.100.000-Axx_SLES10
```

**3** Check that `libodm64.so` is present.

```
# ls -lL /opt/VRTSodm/lib/libodm64.so
-rw-r--r-- 1 root sys 14336 Apr 25 18:42
/opt/VRTSodm/lib/libodm64.so
```

**4** Check that `libodm.sl` is present.

```
# ls -lL /opt/VRTSodm/lib/libodm.sl
-rw-r--r-- 1 root sys 14336 Apr 25 18:42
/opt/VRTSodm/lib/libodm.sl
```

**5** Check that `libodm.so` is present.

```
# ls -lL /opt/VRTSodm/lib64/libodm.so
-rwxr-xr-x 1 bin bin 49808 Sep 1 18:42
/opt/VRTSodm/lib64/libodm.so
```

**6** Check that `libodm.so` is present.

If you are running 32-bit Oracle9i, use the following command:

```
# ls -lL /opt/VRTSodm/lib/libodm.so
-rw-r--r-- 1 root sys 14336 Apr 25 18:42
/opt/VRTSodm/lib/libodm.so
```

If you are running 64-bit Oracle9i, use the following command:

```
# ls -lL /opt/VRTSodm/lib/sparcv9/libodm.so
-rw-r--r-- 1 root sys 14336 Apr 25 18:42
/opt/VRTSodm/lib/sparcv9/libodm.so
```

### To verify that Oracle Disk Manager is running

- 1 Start the Oracle database.
- 2 Check that the instance is using the Oracle Disk Manager function:

```
# cat /dev/odm/stats  
# echo $?  
0
```

- 3 Verify that the Oracle Disk Manager is loaded:

Solaris:

```
# modinfo | grep ODM | grep VRTS  
292 ffffffff0ccb538 19118 26 1 odm (VRTS ODM 6.0.100.000,REV=6.0.100)
```

HP-UX:

```
# /usr/sbin/kcmodule -P state odm  
state loaded
```

Linux:

```
# lsmod | grep odm  
vxodm 164480 1  
fdd 78976 1 vxodm
```

AIX:

You can use the `genkld` or the `genkex` commands:

```
# genkld | grep odm  
or  
# genkex | grep odm
```

- 4 In the alert log, verify the Oracle instance is running. The log should contain output similar to the following:

Oracle instance running with ODM: Veritas 6.0.100.000 ODM Library, Version 2.0

# Disabling the Oracle Disk Manager feature in SFHA environment

Since the Oracle Disk Manager feature uses regular files, you can access these files as regular VxFS files as soon as the feature is disabled.

The steps for disabling the Oracle Disk Manager feature are the same for both 32- and 64-bit Oracle10g.

---

**Note:** Quick I/O is not supported on Linux.

---

**Note:** To convert to VxFS with Quick I/O, disable Oracle Disk Manager using the following procedure, then convert the files to Quick I/O files.

Before disabling the Oracle Disk Manager feature, you may want to back up your files.

---

## To disable the Oracle Disk Manager feature in an Oracle instance

- 1 Shut down the database instance.
- 2 On AIX, use the `rm` and `ln` commands to remove the link to the Oracle Disk Manager Library.

For Oracle 11g, enter:

```
# rm ${ORACLE_HOME}/lib/libodm11.so
$ ln -s ${ORACLE_HOME}/lib/libodm.so \
${ORACLE_HOME}/lib/libodm11.so
```

For Oracle 10g, enter:

```
# rm ${ORACLE_HOME}/lib/libodm10.so
$ ln -s ${ORACLE_HOME}/lib/libodm.so \
${ORACLE_HOME}/lib/libodm10.so
```

- 3 On HP-UX, use the `rm` and `ln` commands to remove the link to the Oracle Disk Manager Library.

For Oracle 11g, enter:

```
# rm ${ORACLE_HOME}/lib/libodm11.so
$ ln -s ${ORACLE_HOME}/lib/libodmd11.so \
${ORACLE_HOME}/lib/libodm11.so
```

For Oracle 10g, enter:

```
# rm ${ORACLE_HOME}/lib/libodm10.so
$ ln -s ${ORACLE_HOME}/lib/libodmd10.so \
${ORACLE_HOME}/lib/libodm10.so
```

- 4 On Linux, use the `rm` and `ln` commands to remove the link to the Oracle Disk Manager Library.

For Oracle 11g, enter:

```
# rm ${ORACLE_HOME}/lib/libodm11.so
$ ln -s ${ORACLE_HOME}/lib/libodmd11.so \
${ORACLE_HOME}/lib/libodm11.so
```

For Oracle 10g, enter:

```
# rm ${ORACLE_HOME}/lib/libodm10.so
$ ln -s ${ORACLE_HOME}/lib/libodmd10.so \
${ORACLE_HOME}/lib/libodm10.so
```



- 5 On Solaris, use the `rm` and `ln` commands to remove the link to the Oracle Disk Manager Library.

For Oracle 11g on SPARC, enter:

```
# rm ${ORACLE_HOME}/lib/libodm11.so
$ ln -s ${ORACLE_HOME}/lib/libodmd11.so \
${ORACLE_HOME}/lib/libodm11.so
```

For Oracle 11g on Opteron

```
# rm ${ORACLE_HOME}/lib/libodm11.so
$ ln -s ${ORACLE_HOME}/lib/libodmd11.so \
${ORACLE_HOME}/lib/libodm11.so
```

For Oracle 10g on SPARC, enter:

```
# rm ${ORACLE_HOME}/lib/libodm10.so
$ ln -s ${ORACLE_HOME}/lib/libodmd10.so \
${ORACLE_HOME}/lib/libodm10.so
```

For Oracle 10g on Opteron, enter:

```
# rm ${ORACLE_HOME}/lib/libodm10.so
$ ln -s ${ORACLE_HOME}/lib/libodmd10.so \
${ORACLE_HOME}/lib/libodm10.so
```

- 6 Restart the database instance.



# Improving database performance with Veritas Cached Oracle Disk Manager

This chapter includes the following topics:

- [About Cached ODM in SFHA environment](#)
- [Configuring Cached ODM in SFHA environment](#)
- [Administering Cached ODM settings with Cached ODM Advisor in SFHA environment](#)

## About Cached ODM in SFHA environment

ODM I/O normally bypasses the file system cache and directly reads from and writes to disk. Cached ODM enables some I/O to use caching and read ahead, which can improve ODM I/O performance for certain workloads. Cached ODM can perform a conditional form of caching that is based on per-I/O hints from Oracle. The hints indicate what Oracle will do with the data. ODM uses these hints to perform caching and read ahead for some reads, but ODM avoids caching other reads, even for the same file.

## Considerations for using Cached ODM in SFHA environment

Cached ODM is most useful for read-intensive workloads. For write-intensive workloads or low memory environments, Cached ODM is not advised.

Cached ODM advantages over ODM:

- ODM does direct I/O
  - Oracle can use larger System Global Area (SGA).
  - Read-aheads are not supported.
- Some read-intensive Oracle workloads can perform poorly when ODM is used.
- Oracle SGA is not good enough for some cases where a host may have more than one database.
  - Host may have more than one database. (Pagecache can serve multiple databases.)
  - Parallel Query processes many times do not use SGA

See [“Enabling Cached ODM for file systems in SFHA environment”](#) on page 117.

## Cached ODM supported configurations in SFHA environment

Cached ODM is supported for:

- Storage Foundation (HA)
- Storage Foundation Cluster File System (HA)
- Local and cluster mounts

Storage Foundation for Oracle RAC is not currently supported.

Cached ODM does not affect the performance of files and file systems for which you did not enable caching.

## About Cached ODM Advisor in SFHA environment

The Cached ODM Advisor is a tool for database administrators which provides the following:

- Cached ODM Advisor enables you to manage and configure cached ODM on database files without requiring root privileges.
- The settings applied with the Cached ODM Advisor are automatically persistent and common across all the cluster nodes.

---

**Note:** Cached ODM Advisor does not provide an interface to the ODM cachemap.

---

## Configuring Cached ODM in SFHA environment

Configuring Cached ODM requires first enabling Cached ODM for a file system. After enabling Cached ODM, it can be configured in two ways:

- The primary configuration method: turn caching on or off for all I/O on a per-file basis.
- The secondary configuration method: adjust the ODM cachemap. The cachemap maps file type and I/O type combinations into caching advisories.

See [“Tuning Cached ODM settings for individual files in SFHA environment”](#) on page 117.

See [“Tuning Cached ODM settings via the cachemap in SFHA environment”](#) on page 118.

## Enabling Cached ODM for file systems in SFHA environment

Cached ODM is initially disabled on a file system. You can enable Cached ODM for a file system by setting the `odm_cache_enable` option of the `vxtunefs` command after the file system is mounted.

See the `vxtunefs(1M)` manual page.

---

**Note:** The `vxtunefs` command enables conditional caching for all of the ODM files on the file system.

---

### To enable Cached ODM for a file system

- 1 Enable Cached ODM on the VxFS file system `/database01`:

```
# vxtunefs -o odm_cache_enable=1 /database01
```

- 2 Optionally, you can make this setting persistent across mounts by adding a file system entry in the file `/etc/vx/tunefstab`:

```
/dev/vx/dsk/datadg/database01 odm_cache_enable=1
```

See the `tunefstab(4)` manual page.

- 3 For Cluster File System, you must modify `/etc/vx/tunefstab` on all nodes.

## Tuning Cached ODM settings for individual files in SFHA environment

You can use the `odmadm setcachefile` command to override the cachemap for a specific file so that ODM caches either all or none of the I/O to the file. The caching

state can be ON, OFF, or DEF (default). The DEF caching state is conditional caching, meaning that for each I/O, ODM consults the cachemap and determines whether the specified file type and I/O type combination should be cached. The ON caching state causes the specified file always to be cached, while the OFF caching state causes the specified file never to be cached.

See the `odmadm(1M)` manual page.

---

**Note:** The cache advisories operate only if Cached ODM is enabled for the file system. If the `odm_cache_enable` flag is zero, Cached ODM is OFF for all of the files in that file system, even if the individual file cache advisory for a file is ON.

---

#### To enable unconditional caching on a file

- ◆ Enable unconditional caching on the file `/mnt1/file1`:

```
# /opt/VRTS/bin/odmadm setcachefile /mnt1/file1=on
```

With this command, ODM caches all reads from `file1`.

#### To disable caching on a file

- ◆ Disable caching on the file `/mnt1/file1`:

```
# /opt/VRTS/bin/odmadm setcachefile /mnt1/file1=off
```

With this command, ODM does not cache reads from `file1`.

#### To check on the current cache advisory settings for a file

- ◆ Check the current cache advisory settings of the files `/mnt1/file1` and `/mnt2/file2`:

```
# /opt/VRTS/bin/odmadm getcachefile /mnt1/file1 /mnt2/file2
/mnt1/file1,ON
/mnt2/file2,OFF
```

#### To reset all files to the default cache advisory

- ◆ Reset all files to the default cache advisory:

```
# /opt/VRTS/bin/odmadm resetcachefiles mountpoint
```

## Tuning Cached ODM settings via the cachemap in SFHA environment

You can use the `odmadm setcachemap` command to configure the cachemap. The cachemap maps file type and I/O type combinations to caching advisories. ODM

uses the cachemap for all files that have the default conditional cache setting. Such files are those for which caching has not been turned on or off by the `odmadm setcachefile` command.

See the `odmadm(1M)` manual page.

By default, the cachemap is empty, but you can add caching advisories by using the `odmadm setcachemap` command.

### To add caching advisories to the cachemap

- 1 Add a caching advisory to the cachemap:

```
# /opt/VRTS/bin/odmadm setcachemap \  
data/data_read_seq=cache,readahead
```

With this example command, ODM uses caching and readahead for I/O to online log files (`data`) that have the `data_read_seq` I/O type. You can view the valid file type and I/O type values from the output of the `odmadm getcachemap` command.

See the `odmadm(1M)` manual page.

- 2 The cachemap is local on each node. To make the same caching decisions on each node in a cluster, keep the cachemap settings consistent by running the same `/opt/VRTS/bin/odmadm setcachemap` commands on each node in a cluster.

## Making the caching settings persistent across mounts in SFHA environment

By default, the Cached ODM settings are not persistent across mounts. You can make the settings persistent by adding them to `odmadm` configuration files.

### To make the caching setting persistent across mounts

- 1 Cachemap settings can be added to `/etc/vx/odmadm`:

```
setcachemap data/read_data_header=cache  
setcachemap all/datapump=cache,readahead
```

- 2 The cachemap is local on each node. To keep the cachemap consistent in a cluster, the contents of `/etc/vx/odmadm` must be the same on each node.
- 3 Per-file settings can be manually added to the `lost+found/odmadm` file in the file system.

For example, to disable caching for `oradata/file1` each time the filesystem is mounted, enter the following in the `lost+found/odmadm` file in the file system.

```
setcachefile oradata/file1=off
```

The per-file settings in `lost+found/odmadm` file may also be managed using Cached ODM Manager. The file should not be edited manually while using the Cached ODM Manager.

See [“Enabling and disabling Cached ODM on data files by using Cached ODM Advisor in SFHA environment”](#) on page 128.

## Administering Cached ODM settings with Cached ODM Advisor in SFHA environment

The Cached ODM Advisor simplifies the task of managing the cached ODM settings for database administrators:

- Cached ODM Advisor enables you to manage and configure cached ODM on database files without requiring root privileges.
- The settings applied with the Cached ODM Advisor are automatically persistent and common across all the cluster nodes.
- While the Cached ODM Advisor does not provide an interface to the ODM cachemap, it enables setting the cached ODM setting to ON/ OFF (and not to DEF).
- ODM Advisor lets you generate a variety of reports that help you determine which datafiles are suitable for enabling Cached ODM.

The Cached ODM Advisor command `dbed_codm_adm` should be run by the DBA user.



---

**Note:** If you are using Cached ODM Advisor for clone databases, a clone database will not have the cached ODM settings enabled when it is enabled for the primary database. You must manually enable cached ODM by setting `odm_cache_enable = 1` for the clone database.

---

The Cached ODM Advisor command `dbed_codm_adm` syntax is illustrated below and its options are listed in [Table 12-1](#).

```

Cached ODM Administration
dbed_codm_adm
Usage:
-S ORACLE_SID -H ORACLE_HOME -o display [ -n num -c col -t tbs ]
-S ORACLE_SID -H ORACLE_HOME -o display [ -n num ] [ -t tbs ] [-p] [-a]
    [ -d start_date end_date
      -m start_time end_time ]
    [ -b blacklist_file ]
    [ datafile ]
-S ORACLE_SID -H ORACLE_HOME -o display [ -n num ] [ -t tbs ] [-p] [-a]
    [ -u snapshot_range [ -u snapshot_range ] ]
    [ -b blacklist_file ]
    [ datafile ]
-S ORACLE_SID -H ORACLE_HOME -o display [ -n num ] [ -u num_snapshots]
    [ -t tbs ]
    [ -b blacklist_file ]
    [ datafile ]
-S ORACLE_SID -H ORACLE_HOME -o [ on | off | odmstats ] datafile | -f filelist
-S ORACLE_SID -H ORACLE_HOME -o add-to-blacklist { datafile | -f filelist }
-S ORACLE_SID -H ORACLE_HOME -o remove-from-blacklist { datafile | -f filelist }
-S ORACLE_SID -H ORACLE_HOME -o print-blacklist
-S ORACLE_SID -H ORACLE_HOME -o filestate [ datafile | -f filelist ]
-o iostats
    
```

**Table 12-1**      Cached ODM Advisor command options

| Option         | Use                                                                                 |
|----------------|-------------------------------------------------------------------------------------|
| -S ORACLE_SID  | Specify the ORACLE_SID. ORACLE_SID is the SID of the Oracle database to be used.    |
| -H ORACLE_HOME | Specify the ORACLE_HOME. ORACLE_HOME is the HOME of the Oracle instance to be used. |
| -o display     | Generate a report of read activity on datafiles.                                    |

**Table 12-1**      Cached ODM Advisor command options (*continued*)

| Option                    | Use                                                                                                                                                                                                                                                |
|---------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| -o filestate              | Diaplay whether datafiles have Cached ODM turned on or not.                                                                                                                                                                                        |
| -o on                     | Enable Cached ODM.                                                                                                                                                                                                                                 |
| -o off                    | Disable Cached ODM.                                                                                                                                                                                                                                |
| -o odmstats               | Displays Cached ODM I/O statistics for datafiles.                                                                                                                                                                                                  |
| -o iostats                | Displays cumulative I/O statistics for file-type and I/O-type combinations.                                                                                                                                                                        |
| -c column_index           | Specify the column on which the basic report is sorted. This is an optional field. By default I/O statistics would be sorted on number of physical reads (PHYRDS).                                                                                 |
| -n num                    | Change the default number of files included in the report. Use this option together with <code>-o display</code> to show the top num files which are candidates for enabling Cached ODM.                                                           |
| -f filelist               | Specify a filename that has the list of datafiles to operate on with one file name on each line. If you do not provide a list, all of the datafiles will be processed, except in the case of the <code>-o on</code> or <code>-o off</code> option. |
| -t tbs                    | Specify the tablespace name for which the report is to be generated.                                                                                                                                                                               |
| filename                  | Specify a single file name to be processed.                                                                                                                                                                                                        |
| -d start_date end_date    | Specify a date range for which the report is to be generated. The dates are inclusive and they must be specified in yyyy/mm/dd format.                                                                                                             |
| -m start_time end_time    | Specify a time range for which the report is to be generated. The start time and end time must be specified as the hour of day in 24-hour format.                                                                                                  |
| -u snapshot_specification | Specify the range of AWR (Automatic Workload Repository) snapshots to consider for the report.                                                                                                                                                     |
| -b blacklist_file         | Specify an alternate file to use as a blacklist.                                                                                                                                                                                                   |
| -o add-to-blacklist       | Add a file to the default blacklist.                                                                                                                                                                                                               |
| -o remove-from-blacklist  | Remove a file from the default blacklist.                                                                                                                                                                                                          |

**Table 12-1**      Cached ODM Advisor command options (*continued*)

| Option             | Use                                                                                  |
|--------------------|--------------------------------------------------------------------------------------|
| -o print-blacklist | Display the blacklisted files.                                                       |
| -a                 | Include files that have Cached ODM enabled in generated reports.                     |
| -p                 | Suppress tabular formatting to generate output suitable for programmatic processing. |

## Generating reports of candidate datafiles by using Cached ODM Advisor in SFHA environment

You can use the `dbed_codm_adm` command to generate a number of reports that help you determine which datafiles are suitable for enabling Cached ODM. These reports are generated by using the `-o display` option of the `dbed_codm_adm` command. Most of these reports require that the database have periodic AWR (Automatic Workload Repository) snapshots enabled.

### Generating a basic report of the current read activity by using Cached ODM Advisor in SFHA environment

This basic report summarizes the read activity that has occurred since the instance started. The report summarizes the information available in the `V$FILESTAT` view provided by Oracle. By default, it shows the 10 files that have had the maximum number of physical reads (PHYRDS). You can change the number of files shown by using the `-n` option and the sort column by using the `-c` option. You can restrict the report to a specific tablespace by using the `-t` option.

---

**Note:** The `dbed_codm_adm` command generates a warning if the system free memory is less than 25% of the total system memory. Enabling Cached ODM in the absence of sufficient free memory can have an adverse impact on performance.

---

This report is the only kind that can be generated if the database does not have periodic AWR snapshots enabled.

The following is an example of generating a report of datafiles with the maximum read activity since the database instance started.

```
$ dbed_codm_adm -S sfaedb -H /u01/app/11gr2 -o display
```

```
File I/O statistics from Oracle V$FILESTAT view sorted on PHYRDS in descending order:
FILENAME                PHYRDS  PHYWRTS  PHYBLKRD  PHYBLKWRT  READTIM  WRITETIM
```

```
/data/sfaedb/data02.dbf 2225795 1453298 2291527 2087071 5371446 521421  
/data/sfaedb/data03.dbf 2225697 1368342 2291338 2135174 9070509 552163  
/data/sfaedb/data04.dbf 2156475 1327998 2221101 2054575 9036635 584703  
/data/sfaedb/data05.dbf 2127539 1343213 2187749 2060534 8854222 626665  
/data/sfaedb/data06.dbf 2076911 1306907 2135606 1972178 8600763 659874  
/data/sfaedb/data07.dbf 2025810 1265414 2084207 1910216 8434117 667847  
/data/sfaedb/data08.dbf 1937825 1171931 1996027 1779837 7991536 673212  
/data/sfaedb/data09.dbf 1875733 1154502 1934094 1786911 7777172 692082  
/data/sfaedb/data10.dbf 1819224 1114452 1877443 1721618 7521514 690706  
/data/sfaedb/data01.dbf 1750829 1086044 1805138 1691258 7267005 357762
```

## Generating summary reports of historical activity by using Cached ODM Advisor in SFHA environment

The Cached ODM Advisor can generate reports that summarize historical read activity on the datafiles. These reports use data from the AWR snapshots periodically taken by the database. You can use several options to fine-tune the report.

Reports generated using either of the following options have the following columns:

- Tablespace name
- File name
- Average physical reads per snapshot
- Average physical blocks read per snapshot
- Read time (in seconds)

The reports can be restricted to a specific tablespace by using the `-t` option.

Datafiles which have Cached ODM enabled are not displayed in the report. If you would like to include those datafiles in the report as well, use the `-a` option. By default, the top 10 datafiles are displayed in the report. This default can be changed by using the `-n` option. The `-p` option generates a programmatically parseable report by disabling of the table formatting performed by default.

## Using the Cached ODM Advisor blacklist to ignore files in SFHA environment

If tuning and measurement indicates that enabling Cached ODM on certain datafiles does not improve performance, you can add the files to a blacklist. Files added to the blacklist are not included in any of the reports generated by using the `-o display` option of `dbed_codm_adm`.

The blacklist file is stored in the file system at `lost+found/odmadm-blacklist`. You can also provide an alternate blacklist location using the `-b` option.

You can use the `-o add-to-blacklist` and `-o remove-from-blacklist` options to manage the default blacklist. These options can be used with either a single file name or with a list of files using the `-f filelist` option. The `-o print-blacklist` option displays the list of blacklisted files. The blacklist is consulted only when generating a report. It has no effect on enabling or disabling Cached ODM on datafiles.

### Average metric values during a time interval by using Cached ODM Advisor in SFHA environment

You can use the `-d start_date end_date` and `-m start_hour end_hour` options to restrict the report to activities that were recorded during the specified time interval. The `start_date` and `end_date` parameters are inclusive. Therefore, activities occurring on these dates are also included in the generated report. The `start_hour` and `end_hour` parameters specify the time interval bounding the AWR snapshots on each day. This report is useful when you start using the Cached ODM Advisor utility for the first time and need a list of datafiles that see the most read activity during workload hours.

The following is an example of generating a report of read activity on the DATA tablespace between 9 am and 5 pm, from 2011/07/09 to 2011/07/11.

```
$ dbed_codm_adm -S sfaedb -H /u01/app/11gr2 -o display \
  -d 2011/07/09 2011/07/11 -m 9 17 -t DATA
```

| Tablespace | Filename                | Average<br>Physical<br>Reads per<br>Snapshot | Average<br>Physical<br>Blocks<br>Read per<br>Snapshot | Read<br>Time (s) |
|------------|-------------------------|----------------------------------------------|-------------------------------------------------------|------------------|
| DATA       | /data/sfaedb/data03.dbf | 13848                                        | 13848                                                 | 497.16           |
| DATA       | /data/sfaedb/data04.dbf | 13103                                        | 13104                                                 | 472.68           |
| DATA       | /data/sfaedb/data05.dbf | 12656                                        | 12656                                                 | 451.79           |
| DATA       | /data/sfaedb/data06.dbf | 12154                                        | 12154                                                 | 430.81           |
| DATA       | /data/sfaedb/data07.dbf | 11937                                        | 11937                                                 | 423.87           |
| DATA       | /data/sfaedb/data08.dbf | 11853                                        | 11853                                                 | 417.74           |
| DATA       | /data/sfaedb/data09.dbf | 11720                                        | 11720                                                 | 415.45           |
| DATA       | /data/sfaedb/data10.dbf | 11298                                        | 11299                                                 | 400.59           |
| DATA       | /data/sfaedb/data01.dbf | 10610                                        | 10611                                                 | 390.25           |

Average per-block read time: 33.539 ms

### Average metric values during an interval specified as a range of AWR snapshots by using Cached ODM Advisor in SFHA environment

You can use the `-u snapshot_specification` option of the `dbed codm_adm` command to restrict the report to activities that were recorded in a specific range of AWR snapshots. The `snapshot_specification` can be a single integer, in which case the report considers that many snapshots starting from the latest, in a reverse order. This allows you to generate a report on the recent read activity. Alternatively, the `snapshot_specification` can be used to specify a range of AWR snapshot ids, in the format `starting_snapshot_id-ending_snapshot_id`. This makes the report consider the snapshots in the specified range of snapshot ids.

The following is an example of generating a report of read activity during the interval specified by the last 10 AWR snapshots.

```
$ dbed_codm_adm -S sfaedb -H /u01/app/11gr2 -o display -u 10 -t DATA
Tablespace  Filename                                     Average   Average   Read
            File                               Physical Physical   Time (s)
            File                               Reads per Blocks
            File                               Snapshot  Read per
            File                               Snapshot
DATA        /data/sfaedb/data06.dbf                    31188    31188    1547.12
DATA        /data/sfaedb/data05.dbf                    31131    31131    1542.57
DATA        /data/sfaedb/data03.dbf                    30757    30757    1500.78
DATA        /data/sfaedb/data04.dbf                    30687    30687    1525.45
DATA        /data/sfaedb/data07.dbf                    30569    30569    1522.47
DATA        /data/sfaedb/data08.dbf                    28781    28781    1422.77
DATA        /data/sfaedb/data09.dbf                    27789    27789    1372.41
DATA        /data/sfaedb/data10.dbf                   26828    26828    1317.54
DATA        /data/sfaedb/data01.dbf                    24978    24978    1223.66
Average per-block read time: 46.449 ms
```

The following is an example of generating a report of read activity during the interval specified by AWR snapshot id 80 to 90.

```
$ dbed_codm_adm -S sfaedb -H /u01/app/11gr2 -o display -u 80-90 -t DATA
Tablespace  Filename                                     Average   Average   Read
            File                               Physical Physical   Time (s)
            File                               Reads per Blocks
            File                               Snapshot  Read per
            File                               Snapshot
DATA        /data/sfaedb/data03.dbf                    38896    38896    1544.60
DATA        /data/sfaedb/data04.dbf                    37649    37649    1586.97
DATA        /data/sfaedb/data05.dbf                    37139    37139    1532.11
```

|      |                         |       |       |         |
|------|-------------------------|-------|-------|---------|
| DATA | /data/sfaedb/data06.dbf | 35875 | 35875 | 1462.15 |
| DATA | /data/sfaedb/data07.dbf | 34451 | 34451 | 1404.10 |
| DATA | /data/sfaedb/data08.dbf | 32219 | 32219 | 1284.36 |
| DATA | /data/sfaedb/data10.dbf | 31451 | 31451 | 1247.67 |
| DATA | /data/sfaedb/data01.dbf | 31377 | 31377 | 1254.35 |
| DATA | /data/sfaedb/data09.dbf | 31320 | 31320 | 1243.18 |

Average per-block read time: 37.691 ms

## Generating historical activity reports on individual datafiles by using Cached ODM Advisor in SFHA environment

When considering datafiles as candidates for enabling Cached ODM, it is useful to be able to get more detailed reports for individual datafiles. You can generate such a report by specifying a datafile with the `-o display` option of the `dbed_codm_adm` command.

This report has the following columns:

- Snapshot ID
- Interval end time
- Physical reads
- Physical block reads
- Read time (in seconds)

You can use the date and time range options (`-d` and `-m`) and the snapshot range option (`-u`) of the `dbed_codm_adm` command to control the activity considered for these reports. In addition, when generating report on an individual datafile, you can generate a comparative report by using multiple snapshot id ranges. You can provide the `-u starting_snapshot_id-ending_snapshot_id` option a second time with a different range of snapshot ids and then generate a report comparing the read performance on the datafile during the two intervals. You can use this report to compare the read performance before and after enabling Cached ODM.

The following is an example of generating a report comparing the read performance on a datafile before and after enabling Cached ODM on that datafile.

```
$ dbed_codm_adm -S sfaedb -H /u01/app/11gr2 -o display \
  -u 58-69 -u 70-80 /data/sfaedb/data02.dbf
Filename: /data/sfaedb/data02.dbf
Current ODM caching status: ON
Currently blacklisted: no
```

```
from AWR snapshot id 58 to 69
Snapshot Interval End Time Physical Physical Read Time
```

| Id |                     | Reads | Blocks | (s)     |
|----|---------------------|-------|--------|---------|
|    |                     |       | Read   |         |
| 58 | 2011/07/11 01:30:22 | 33026 | 33026  | 1188.13 |
| 59 | 2011/07/11 02:30:35 | 39158 | 39158  | 1358.33 |
| 60 | 2011/07/11 03:30:43 | 49186 | 49186  | 1694.08 |
| 61 | 2011/07/11 04:30:53 | 46941 | 46941  | 1652.38 |
| 62 | 2011/07/11 05:30:00 | 44090 | 44090  | 1519.78 |
| 63 | 2011/07/11 06:30:09 | 43095 | 43095  | 1511.17 |
| 64 | 2011/07/11 07:30:19 | 41272 | 41272  | 1430.41 |
| 65 | 2011/07/11 08:30:26 | 39869 | 39869  | 1379.52 |
| 66 | 2011/07/11 09:30:33 | 38540 | 38540  | 1362.99 |
| 67 | 2011/07/11 10:30:45 | 37157 | 37157  | 1309.31 |
| 68 | 2011/07/11 11:30:01 | 36034 | 36034  | 1250.8  |
| 69 | 2011/07/11 12:30:10 | 46344 | 46344  | 934.87  |

Average per-block read time: 33.538 ms

from AWR snapshot id 70 to 80

| Snapshot Id | Interval End Time   | Physical Reads | Physical Blocks | Read Time (s) |
|-------------|---------------------|----------------|-----------------|---------------|
|             |                     |                | Read            |               |
| 70          | 2011/07/11 13:30:16 | 48041          | 48041           | 951.42        |
| 71          | 2011/07/11 14:30:24 | 46978          | 46978           | 809.31        |
| 72          | 2011/07/11 15:30:36 | 47077          | 47077           | 127.41        |
| 73          | 2011/07/11 16:30:47 | 44140          | 44140           | 370.01        |
| 74          | 2011/07/11 17:30:56 | 41467          | 41467           | 993.7         |
| 75          | 2011/07/11 18:30:10 | 39998          | 39998           | 867.62        |
| 76          | 2011/07/11 19:30:18 | 40812          | 40812           | 517.06        |
| 77          | 2011/07/11 20:30:29 | 38918          | 38918           | 706.19        |
| 78          | 2011/07/11 21:30:38 | 37572          | 37572           | 856.43        |
| 79          | 2011/07/11 22:30:53 | 37694          | 61675           | 594.25        |
| 80          | 2011/07/11 23:30:04 | 38048          | 38048           | 151.29        |

Average per-block read time: 14.327 ms

## Enabling and disabling Cached ODM on data files by using Cached ODM Advisor in SFHA environment

Using the Cached ODM Advisor to manage the Cached ODM settings of datafiles provides a greater degree of control and ease of use than manually adding each file to the odmadm configuration file. Cached ODM Advisor makes the Cached ODM settings persistent by making an entry for each datafile that gets configured with the tool in the *mountpoint/lost+found/odmadm* configuration file, creating it the first time if necessary.



If you are using Cached ODM Advisor to manage the Cached ODM settings of datafiles, the `odmadm` configuration file should not be edited manually. The settings applied with Cached ODM Advisor for a data file take precedence over any configuration for the same file specified in the `/etc/vx/odmadm` configuration file. Both are read by the `odmadm` utility command during the VxFS mount process and the `/etc/vx/odmadm` file is processed first, followed by the `lost+found/odmadm` file on the file system on which the datafile resides.

You can use Cached ODM Advisor to enable and disable Cached ODM settings on database datafiles.

```
dbed_codm_adm -S ORACLE_SID -H ORACLE_HOME -o [ on | off ] datafile | \
-f list_file
```

For enabling or disabling Cached ODM on database data files:

- Values for `datafile` and `list_file` should contain absolute pathnames.
- The `dbed_codm_adm` command only turns on Cached ODM on a file level.

**Prerequisites**

- Specified files must be database datafile, or an error is returned.
- Specified files must be on a VxFS filesystem, or an error is returned.

**Notes**

- The `dbed_codm_adm` does not enable Cached ODM based on I/O hint, it only displays I/O hint information.
- You must supply either a datafile name or the `-f list_file` option.

**To enable Cached ODM**

- ◆ To enable Cached ODM on the datafile `/oradata/tb1.dbf`, run:

```
$ dbed_codm_adm -S prod -H /orahome -o on /oradata/tb1.dbf
```

**To disable Cached ODM on a list of datafiles**

- ◆ To disable Cached ODM on a list of datafiles where `/tmp/list_file` contains a list of datafiles name, run

```
$ dbed_codm_adm -S prod -H /orahome -o off -f /tmp/list_file
```

If user wants to turn on Cache ODM on a file and the per file system flag `odm_cache_enable` is not set, `dbed_codm_adm` will automatically turn it on for the filesystem. This flag needs to be turned on first so that file level caching can

be turned on. Since this requires root access, it will be done through the DBED daemon.

Flow of control for enabling/disabling caching examples:

If you want to enable Cached ODM for file abc:

- The Cached ODM Advisor will enable filesystem `odm_cache_enable` flag if it has not been enabled yet.
- The Cached ODM Advisor will execute the `odmadm setcachefile abc=on` command and also add or update the entry into the configuration file.

If you want to disable caching for abc:

- The Cached ODM Advisor will only execute the command `odmadm setcachefile abc=off` and also update the entry in the configuration file.
- Cached ODM Advisor will not disable filesystem `odm_cache_enable` flag, since there may be other files that is still cached ODM enabled. The SFDB tools do not provide the command to disable filesystem `odm_cache_enable` flag. If the filesystem `odm_cache_enable` flag is disabled by other means, the per file caching will still be there just that caching will not be in effect.

## Display the Cached ODM states of the database files by using Cached ODM Advisor in SFHA environment

Following is the command option to display all the database files and their states. The `datafile | -f list_file` parameter is optional. If no `datafile` or `-f list_file` parameter is supplied, all the files in the database will be displayed.

```
dbed_codm_adm -S ORACLE_SID -H ORACLE_HOME -o filestate \  
[ datafile | -f list_file ]
```

Cached ODM is configured at two levels:

- File System level  
For the file system level, there are two states: ON or OFF.
- File level  
For the file level, there are three states: ON, OFF or DEF (default).

[Table 12-2](#) illustrates how to determine the most effective Cached ODM setting.

**Table 12-2**

|                   |     | File Level |     |
|-------------------|-----|------------|-----|
| File system level | DEF | ON         | OFF |

**Table 12-2** (continued)

|     |     | File Level |     |
|-----|-----|------------|-----|
| ON  | DEF | ON         | OFF |
| OFF | OFF | OFF        | OFF |

The `dbed_codm_adm` command displays the effective state for the Cached ODM configuration. In the case of non-existent or non-File System files, a special state called error state (ERR) is displayed.

Output is sorted from files with Cached ODM set to ON first then the files with cached ODM set to OFF for ease in finding all the files with Cached ODM ON. If there are thousands of files to display,

**To display CODM states for files**

- ◆ To display CODM states for files listed in `/tmp/list` run:

```
$ dbed_codm_adm -S prod -H /orahome -o filestate -f /tmp/list
```

Effective Cached ODM Status For Datafiles

(State value 'ERR' implies non-vxfs or non-existent file.)

| FILENAME                 | STATE |
|--------------------------|-------|
| /data/CODM/system01.dbf  | DEF   |
| /data/CODM/undotbs01.dbf | DEF   |
| /data/CODM/sysaux01.dbf  | DEF   |
| /data/CODM/users01.dbf   | OFF   |
| /data/CODM/example01.dbf | ON    |

## Show Cached ODM statistics by using Cached ODM Advisor in SFHA environment

After Cached ODM is enabled on the database files, one can show the effectiveness of turning on cached ODM by displaying the ODM statistics – includes information such as number of read operations, write operations, number of block read, block write, cache hit ratio, etc. User can get some hint on how effective is turning on the Cached ODM by reviewing the hit ratio.

- |               |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
|---------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Prerequisites | <ul style="list-style-type: none"> <li>■ Specified files must be database datafile, or an error is returned.</li> <li>■ Specified files must be on a VXFS filesystem, or an error is returned.</li> </ul>                                                                                                                                                                                                                                                                                                                                                  |
| Notes         | <ul style="list-style-type: none"> <li>■ If a datafile or a list of datafiles is not supplied, it will display odmstats of all the files that are being cached ODM enabled for the specified ORACLE_SID.</li> <li>■ Statistics are reset to zero when the file is no longer opened by anyone.</li> <li>■ ODM statistics are only collected for filesystems where odm_cache_enable has been set. If odm_cache_enable is not set for the filesystem which contain the datafile, information such as CACHE STATISTICS, HIT RATIO will be set to 0.</li> </ul> |

Following is the command option to display the ODM statistics of one database file. It is mandatory to supply either a datafile name or use the `-f list_file` option.

```
dbed_codm_adm -S ORACLE_SID -H ORACLE_HOME -o odmstats [ datafile | -f list_file ]
```

For example, to show odm statistics for the datafile `/oradata/tb1.dbf`, use

```
$ dbed_codm_adm -S prod -H /orahome -o odmstats /oradata/tb1.dbf
```

| FILENAME         | NREADS | NWRITES | RBLOCKS | WBLOCKS | RTIME | WTIME | NREQUESTIO | NDISKIO | HIT-RATIO |
|------------------|--------|---------|---------|---------|-------|-------|------------|---------|-----------|
| -----            |        |         |         |         |       |       |            |         |           |
| /oradata/tb1.dbf | 1262   | 10617   | 51040   | 287056  | 11.0  | 1.0   | 4728       | 5918    | 22.0      |

## Displaying ODM I/O statistics by using Cached ODM Advisor in SFHA environment

You can display the ODM I/O statistics. I/O statistics include information such as I/O requests, amount of data processed, for each file type and I/O type combination.

To show ODM I/O statistics for the local host, use:

```
$ dbed_codm_adm -o iostats
```

For displaying ODM I/Statistics:

- `-S ORACLE_SID, -H ORACLE_HOME, datafile, -f list_file` options are not required as the I/O statistics that is shown is specific to the local node, and it spans all filesystems.

- The statistics shown is not aggregated statistics from all nodes if used on an Oracle RAC cluster.
- Use VxFS command `odmadm getiostats` internally and filter the data.
- The I/O statistics provide only counts of operations and do not indicate whether the operations were cached or not.
- ODM I/O statistics are only collected for filesystems where `odm_cache_enable` has been set.

To display ODM I/O statistics, use

```
$ dbed_codm_adm -o iostats
```

| FILE-TYPE/IO-TYPE     | OPERATIONS | BYTES    |
|-----------------------|------------|----------|
| data/data_cache_load  | 33         | 270336   |
| data/read_data_header | 104        | 851968   |
| data/data_read_seq    | 2          | 16384    |
| olg/redolog_read      | 98         | 98283008 |



# Improving database performance with Veritas Quick I/O

This chapter includes the following topics:

- [About Quick I/O](#)

## About Quick I/O

Veritas Quick I/O is a VxFS feature included in Veritas Storage Foundation Standard and Enterprise products that enables applications access preallocated VxFS files as raw character devices. Quick I/O provides the administrative benefits of running databases on file systems without the typically associated degradation in performance.

---

**Note:** Quick I/O is not supported on Linux.

---

## How Quick I/O works

---

**Note:** Quick I/O is not supported on Linux.

---

For AIX:

Veritas Quick I/O supports direct I/O and AIX Fastpath asynchronous I/O and enables databases to access regular files on a VxFS file system as raw character devices.

For HP-UX and Solaris:

Veritas Quick I/O supports direct I/O and kernel asynchronous I/O and enables datasersvers to access regular files on a VxFS file system as raw character devices.

The benefits of using Quick I/O are:

- Improved performance and processing throughput by having Quick I/O files act as raw devices.
- Ability to manage Quick I/O files as regular files, which simplifies administrative tasks such as allocating, moving, copying, resizing, and backing up Oracle datafiles.

---

**Note:** Veritas recommends using Oracle Disk Manager.

---

## How Quick I/O improves database performance

The benefits of using Quick I/O are:

- Improved performance and processing throughput by having Quick I/O files act as raw devices.
- Ability to manage Quick I/O files as regular files, which simplifies administrative tasks such as allocating, moving, copying, resizing, and backing up Oracle datafiles.

---

**Note:** Veritas recommends using Oracle Disk Manager.

---

---

**Note:** Quick I/O is not supported on Linux.

---

Quick I/O's ability to access regular files as raw devices improves database performance by:



Table 13-1

| Quick I/O feature                             | Advantage                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
|-----------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Supporting direct I/O                         | I/O on files using <code>read()</code> and <code>write()</code> system calls typically results in data being copied twice: once between user and kernel space, and later between kernel space and disk. In contrast, I/O on raw devices is direct. That is, data is copied directly between user space and disk, saving one level of copying. As with I/O on raw devices, Quick I/O avoids extra copying.                                                                                                                                                                                         |
| Avoiding kernel write locks on database files | When database I/O is performed using the <code>write()</code> system call, each system call acquires and releases a write lock inside the kernel. This lock prevents multiple simultaneous write operations on the same file. Because database systems usually implement their own locking to manage concurrent access to files, per file writer locks unnecessarily serialize I/O operations. Quick I/O bypasses file system per file locking and lets the database server control data access.                                                                                                  |
| Avoiding double buffering                     | Most database servers maintain their own buffer cache and do not need the file system buffer cache. Database data cached in the file system buffer is therefore redundant and results in wasted memory and extra system CPU utilization to manage the buffer. By supporting direct I/O, Quick I/O eliminates double buffering. Data is copied directly between the relational database management system (RDBMS) cache and disk, which lowers CPU utilization and frees up memory that can then be used by the database server buffer cache to further improve transaction processing throughput. |

**Table 13-1** (continued)

| Quick I/O feature                                             | Advantage                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
|---------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <p>For AIX:<br/> Supporting AIX Fastpath asynchronous I/O</p> | <p>AIX Fastpath asynchronous I/O is a form of I/O that performs non-blocking system level reads and writes, allowing the system to handle multiple I/O requests simultaneously. Operating systems such as AIX provide support for asynchronous I/O on raw devices, but not on regular files. As a result, even if the database server is capable of using asynchronous I/O, it cannot issue asynchronous I/O requests when the database runs on file systems. Lack of asynchronous I/O significantly degrades performance. Quick I/O lets the database server take advantage of kernel-supported asynchronous I/O on file system files accessed using the Quick I/O interface.</p>         |
| <p>For HP-UX:<br/> Supporting asynchronous I/O</p>            | <p>HP-UX asynchronous I/O is a form of I/O that performs non-blocking system level reads and writes, allowing the system to handle multiple I/O requests simultaneously. Operating systems such as HP-UX provide kernel support for asynchronous I/O on raw devices, but not on regular files. As a result, even if the database server is capable of using asynchronous I/O, it cannot issue asynchronous I/O requests when the database runs on file systems. Lack of asynchronous I/O significantly degrades performance. Quick I/O enables the database server to take advantage of kernel-supported asynchronous I/O on file system files accessed using the Quick I/O interface.</p> |

**Table 13-1** (continued)

| Quick I/O feature                                                               | Advantage                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
|---------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <p>For Solaris:<br/>                     Supporting kernel asynchronous I/O</p> | <p>Solaris kernel asynchronous I/O is a form of I/O that performs non-blocking system level reads and writes, allowing the system to handle multiple I/O requests simultaneously. Operating systems such as Solaris provide kernel support for asynchronous I/O on raw devices, but not on regular files. As a result, even if the database server is capable of using asynchronous I/O, it cannot issue asynchronous I/O requests when the database runs on file systems. Lack of asynchronous I/O significantly degrades performance. Quick I/O enables the database server to take advantage of kernel-supported asynchronous I/O on file system files accessed using the Quick I/O interface.</p> |



# Improving database performance with Veritas Cached Quick I/O

This chapter includes the following topics:

- [About Cached Quick I/O](#)
- [Tasks for setting up Cached Quick I/O](#)
- [Enabling Cached Quick I/O on a file system](#)
- [Determining candidates for Cached Quick I/O](#)
- [Enabling and disabling Cached Quick I/O for individual files](#)

## About Cached Quick I/O

Veritas Cached Quick I/O maintains and extends the database performance benefits of Veritas Quick I/O by making more efficient use of large, unused system memory through a selective buffering mechanism. Cached Quick I/O also supports features that support buffering behavior, such as file system read-ahead.

---

**Note:** Cached Quick I/O is not supported on Linux.

---

## Tasks for setting up Cached Quick I/O

To set up and use Cached Quick I/O, you should do the following in the order in which they are listed:

- Enable Cached Quick I/O on the underlying file systems used for your database.
- Exercise the system in your production environment to generate file I/O statistics.
- Collect the file I/O statistics while the files are in use.
- Analyze the file I/O statistics to determine which files benefit from Cached Quick I/O.
- Disable Cached Quick I/O on files that do not benefit from caching.

---

**Note:** Cached Quick I/O is not supported on Linux.

---

## Enabling Cached Quick I/O on a file system

Cached Quick I/O depends on Veritas Quick I/O running as an underlying system enhancement in order to function correctly. Follow the procedures listed here to ensure that you have the correct setup to use Cached Quick I/O successfully.

### Prerequisites

- You must have permission to change file system behavior using the `vxtunefs` command to enable or disable Cached Quick I/O. By default, you need superuser (`root`) permissions to run the `vxtunefs` command, but other system users do not. Superuser (`root`) must specifically grant database administrators permission to use this command as follows:  
For AIX and Solaris:

```
# chown root:dba opt/VRTS/bin/vxtunefs
```

```
# chmod 4550 /opt/VRTS/bin/vxtunefs
```

For HP-UX

```
# chown root:dba /sbin/fs/vxfs5.0/vxtunefs
```

```
# chmod 4550 /sbin/fs/vxfs5.0/vxtunefs
```

where users belonging to the `dba` group are granted permission to run the `vxtunefs` command. Symantec recommends this selective, more secure approach for granting access to powerful commands.

- You must enable Quick I/O on the file system. Quick I/O is enabled automatically at file system mount time.

- Usage notes
- If Cached Quick I/O is enabled, it is recommended that you monitor any paging activity to the swap device on your database servers. You can use the `vmstat -I` command to monitor swap device paging. If swap device paging is observed, proper AIX Virtual Memory Manager (VMM) tuning is required to improve database performance.
- Usage notes
- For AIX:
- If Cached Quick I/O is enabled, it is recommended that you monitor any paging activity to the swap device on your database servers. You can use the `vmstat -I` command to monitor swap device paging. If swap device paging is observed, proper AIX Virtual Memory Manager (VMM) tuning is required to improve database performance.

## Enabling and disabling the `qio_cache_enable` flag

As superuser (`root`), set the `qio_cache_enable` flag using the `vxtunefs` command after you mount the file system.

### To enable the `qio_cache_enable` flag for a file system

- ◆ Use the `vxtunefs` command as follows:

For AIX and Solaris:

```
# /opt/VRTS/bin/vxtunefs -s -o qio_cache_enable=1 /mount_point
```

For HP-UX:

```
# /sbin/fs/vxfs5.0/vxtunefs -s -o qio_cache_enable=1 /  
mount_point
```

For example:

For AIX and Solaris:

```
# /opt/VRTS/bin/vxtunefs -s -o qio_cache_enable=1 /db02
```

For HP-UX:

```
# /sbin/fs/vxfs5.0/vxtunefs -s -o qio_cache_enable=1 /db02
```

where `/db02` is a VxFS file system containing the Quick I/O files and setting the `qio_cache_enable` flag to “1” enables Cached Quick I/O. This command enables caching for all the Quick I/O files on this file system.

### To disable the flag on the same file system

- ◆ Use the `vxtunefs` command as follows:

For AIX and Solaris:

```
# /opt/VRTS/bin/vxtunefs -s -o qio_cache_enable=0 /mount_point
```

For HP-UX:

```
# /sbin/fs/vxfs5.0/vxtunefs -s -o qio_cache_enable=0 /mount_point
```

For example:

For AIX and Solaris:

```
# /opt/VRTS/bin/vxtunefs -s -o qio_cache_enable=0 /db02
```

For HP-UX:

```
# /sbin/fs/vxfs5.0/vxtunefs -s -o qio_cache_enable=0 /db02
```

where `/db02` is a VxFS file system containing the Quick I/O files and setting the `qio_cache_enable` flag to “0” disables Cached Quick I/O. This command disables caching for all the Quick I/O files on this file system.

## Making Cached Quick I/O settings persistent across reboots and mounts

You can make the Cached Quick I/O system setting persistent across reboots and mounts by adding a file system entry in the `/etc/vx/tunefstab` file.

---

**Note:** The `tunefstab` file is a user-created file. For information on how to create the file and add tuning parameters, see the `tunefstab(4)` manual page.

---

### To enable a file system after rebooting

- ◆ Put the file system in the `/etc/vx/tunefstab` file and set the flag entry:

```
/dev/vx/dsk/dgname/volname qio_cache_enable=1
```

where:

- `/dev/vx/dsk/dgname/volname` is the name of a block device
- `dgname` is the name of the disk group
- `volname` is the name of the volume

For example:



```
/dev/vx/dsk/PRODDg/db01 qio_cache_enable=1  
/dev/vx/dsk/PRODDg/db02 qio_cache_enable=1
```

where `/dev/vx/dsk/PRODDg/db01` is the block device on which the file system resides.

The `tunefstab (4)` manual pages contain information on how to add tuning parameters.

See the `tunefstab (4)` manual page.

---

**Note:** `vxtunefs` can specify a mount point or a block device; `tunefstab` must always specify a block device only.

---

## Using `vxtunefs` to obtain tuning information

Check the setting of the `qio_cache_enable` flag for each file system using the `vxtunefs` command.

### To obtain information on only the `qio_cache_enable` flag setting

- ◆ Use the `grep` command with `vxtunefs`:

For AIX and Solaris:

```
# /opt/VRTS/bin/vxtunefs /mount_point | grep qio_cache_enable
```

For HP-UX:

```
# /sbin/fs/vxfs6.0/vxtunefs /mount_point | grep qio_cache_enable
```

For example:

For AIX and Solaris:

```
# /opt/VRTS/bin/vxtunefs /db01 | grep qio_cache_enable
```

For HP-UX:

```
# /sbin/fs/vxfs6.0/vxtunefs /db01 | grep qio_cache_enable
```

where `/db01` is the name of the file system. This command displays only the `qio_cache_enable` setting as follows:

```
qio_cache_enable = 0
```

You can also use the `vxtunefs` command to obtain a more complete list of I/O characteristics and tuning statistics.

See the `vxtunefs (1)` manual page.

### To obtain information on all `vxtunefs` system parameters

- ◆ Use the `vxtunefs` command without `grep`:

```
# /opt/VRTS/bin/vxtunefs /mount_point
```

For example:

```
# /opt/VRTS/bin/vxtunefs /db01
```

The `vxtunefs` command displays output similar to the following:

```
Filesystem i/o parameters for /db01
read_pref_io = 65536
read_nstream = 1
read_unit_io = 65536
write_pref_io = 65536
write_nstream = 1
```

```
write_unit_io = 65536
pref_strength = 10
buf_breakup_size = 131072
discovered_direct_iosz = 262144
max_direct_iosz = 1048576
default_indir_size = 8192
qio_cache_enable = 0
odm_cache_enable = 0
write_throttle = 0
max_diskq = 1048576
initial_extent_size = 1
max_seqio_extent_size = 2048
max_buf_data_size = 8192
hsm_write_prealloc = 0
read_ahead = 1
inode_aging_size = 0
inode_aging_count = 0
fcl_maxalloc = 887660544
fcl_keeptime = 0
fcl_winterval = 3600
fcl_ointerval = 600
oltp_load = 0
delicache_enable = 1
thin_friendly_alloc = 0
dalloc_enable = 1
dalloc_limit = 90
```

The `vxtunefs(1)` manual pages contain a complete description of `vxtunefs` parameters and the tuning instructions.

See the `vxtunefs(1)` manual page.

## Determining candidates for Cached Quick I/O

Determining which files can benefit from Cached Quick I/O is an iterative process that varies with each application. For this reason, you may need to complete the following steps more than once to determine the best possible candidates for Cached Quick I/O.

Before determining candidate files for Quick I/O, make sure the following conditions have been met:

Prerequisites ■ You must enable Cached Quick I/O for the file systems.

Usage notes ■ See the `qiostat` (1M) manual page for more information.

## Collecting I/O statistics

Once you have enabled Cached Quick I/O on a file system, you need to collect statistics to determine and designate the files that can best take advantage of its benefits.

To collect statistics needed to determine files that benefit from Cached Quick I/O

- 1 Reset the `qiostat` counters by entering:

```
$ /opt/VRTS/bin/qiostat -r /mount_point/filenames
```

- 2 Run the database under full normal load and through a complete cycle (24 to 48 hours in most cases) to determine your system I/O patterns and database traffic in different usage categories (for example, OLTP, reports, and backups) at different times of the day.

- 3 While the database is running, run `qiostat -l` to report the caching statistics as follows:

```
$ /opt/VRTS/bin/qiostat -l /mount_point/filenames
```

or, use the `-i` option to see statistic reports at specified intervals:

```
$ /opt/VRTS/bin/qiostat -i n /mount_point/filenames
```

where `n` is time in seconds

For example:

To collect I/O statistics from all database files on file system `/db01`:

```
$ /opt/VRTS/bin/qiostat -l /db01/*.dbf
```

## About I/O statistics for Oracle

The output of the `qiostat` command is the primary source of information to use in deciding whether to enable or disable Cached Quick I/O on specific files. Statistics are printed in two lines per object.

The second line of information is defined as follows:

- `CREAD` is the number of reads from the VxFS cache (or total number of reads to Quick I/O files with cache advisory on)

- **PREADS** is the number of reads going to the disk for Quick I/O files with the cache advisory on
- **HIT RATIO** is displayed as a percentage and is the number of **CREADS** minus the number of **PREADS** times 100 divided by the total number of **CREADS**. The formula looks like this:

$$(\text{CREADS} - \text{PREADS}) * 100 / \text{CREADS}$$

The `qiostat -l` command output looks similar to the following:

```

                                OPERATIONS  FILE BLOCKS  AVG TIME(ms)
CACHE_STATISTICS

FILE NAME          READ  WRITE   READ WRITE   READ WRITE
CREAD  PREAD  HIT RATIO
/db01/cust.dbf    17128 9634   68509 38536   24.8  0.4
17124  15728  8.2

```

```

/db01/system.dbf  6      1      21     4      10.0  0.0
6          6      0.0
/db01/stk.dbf    62552 38498  250213 153992  21.9  0.4
62567  49060  21.6

```

```

                                OPERATIONS  FILE BLOCKS  AVG TIME(ms)
CACHE_STATISTICS

FILE NAME          READ  WRITE   READ WRITE   READ WRITE
CREAD  PREAD  HIT RATIO

```

```

                                OPERATIONS  FILE BLOCKS  AVG TIME(ms)
CACHE_STATISTICS

FILE NAME          READ  WRITE   READ WRITE   READ WRITE
CREAD  PREAD  HIT RATIO

```

Analyze the output to find out where the cache-hit ratio is above a given threshold. A cache-hit ratio above 20 percent on a file for a given application may be sufficient to justify caching on that file. For systems with larger loads, the acceptable ratio may be 30 percent or above. Cache-hit-ratio thresholds vary according to the database type and load.

Using the sample output above as an example, the file `/db01/system.dbf` does not benefit from the caching because the cache-hit ratio is zero. In addition, the file receives very little I/O during the sampling duration.

However, the file `/db01/stk.dbf` has a cache-hit ratio of 21.6 percent. If you have determined that, for your system and load, this figure is above the acceptable threshold, it means the database can benefit from caching. Also, study the numbers reported for the read and write operations. When you compare the number of reads and writes for the `/db01/stk.dbf` file, you see that the number of reads is roughly twice the number of writes. You can achieve the greatest performance gains with Cached Quick I/O when using it for files that have higher read than write activity.

Based on these two factors, `/db01/stk.dbf` is a prime candidate for Cached Quick I/O.

See [“Enabling and disabling Cached Quick I/O for individual files”](#) on page 151.

## Effects of read-aheads on I/O statistics

The number of `CREADS` in the `qiostat` output is the total number of reads performed, including Cached Quick I/O, and the number of `PREADS` is the number of physical reads. The difference between `CREADS` and `PREADS` (`CREADS - PREADS`) is the number of reads satisfied from the data in the file system cache. Thus, you expect that the number of `PREADS` would always be equal to or lower than the number of `CREADS`.

However, the `PREADS` counter also increases when the file system performs read-aheads. These read-aheads occur when the file system detects sequential reads. In isolated cases where cache hits are extremely low, the output from `qiostat` could show that the number of `CREADS` is lower than the number of `PREADS`. The cache-hit ratio calculated against these `CREAD/PREAD` values is misleading when used to determine whether Cached Quick I/O should be enabled or disabled.

Under these circumstances, you can make a more accurate decision based on a collective set of statistics by gathering multiple sets of data points. Consequently, you might want to enable Cached Quick I/O for all the data files in a given tablespace, even if just one of the files exhibited a high cache-hit ratio.

## Other tools for analysis

While the output of the `qiostat` command is the primary source of information to use in deciding whether to enable Cached Quick I/O on specific files, we also recommend using other tools in conjunction with `qiostat`. For example, benchmarking software that measures database throughput is also helpful. If a benchmark test in which Cached Quick I/O was enabled for a certain set of data files resulted in improved performance, you can also use those results as the basis for enabling Cached Quick I/O.

# Enabling and disabling Cached Quick I/O for individual files

After using `qiostat` or other analysis tools to determine the appropriate files for Cached Quick I/O, you need to disable Cached Quick I/O for those individual files that do not benefit from caching using the `qioadmin` command.

- |               |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
|---------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Prerequisites | ■ Enable Cached Quick I/O for the file system before enabling or disabling Cached Quick I/O at the individual file level.                                                                                                                                                                                                                                                                                                                                                                |
| Usage notes   | ■ You can enable or disable Cached Quick I/O for individual files while the database is online.<br>■ You should monitor files regularly using <code>qiostat</code> to ensure that a file's cache-hit ratio has not changed enough to reconsider enabling or disabling Cached Quick I/O for the file.<br>■ Enabling or disabling Cached Quick I/O for an individual file is also referred to as setting the cache advisory on or off.<br>■ See the <code>qioadmin (1)</code> manual page. |

## Setting cache advisories for individual files

You can enable and disable Cached Quick I/O for individual files by changing the cache advisory settings for those files.

### To disable Cached Quick I/O for an individual file

- ◆ Use the `qioadmin` command to set the cache advisory to `OFF` as follows:

```
$ /opt/VRTS/bin/qioadmin -S filename=OFF /mount_point
```

For example, to disable Cached Quick I/O for the file `/db01/system.dbf`, set the cache advisory to `OFF`:

```
$ /opt/VRTS/bin/qioadmin -S system.dbf=OFF /db01
```

### To enable Cached Quick I/O for an individual file

- ◆ Use the `qioadmin` command to set the cache advisory to `ON` as follows:

```
$ /opt/VRTS/bin/qioadmin -S filename=ON /mount_point
```

For example, running `qiostat` shows the cache hit ratio for the file `/db01/system.dbf` reaches a level that would benefit from caching. To enable Cached Quick I/O for the file `/db01/system.dbf`, set the cache advisory to `ON`:

```
$ /opt/VRTS/bin/qioadmin -S system.dbf=ON /db01
```

## Making individual file settings for Cached Quick I/O persistent

You can make the enable or disable individual file settings for Cached Quick I/O persistent across reboots and mounts by adding cache advisory entries in the `/etc/vx/qioadmin` file.

Cache advisories set using the `qioadmin` command are stored as extended attributes of the file in the inode. These settings persist across file system remounts and system reboots, but these attributes are not backed up by the usual backup methods, so they cannot be restored. Therefore, always be sure to reset cache advisories after each file restore. This is not necessary if you maintain the cache advisories for Quick I/O files in the `/etc/vx/qioadmin` file.



### To enable or disable individual file settings for Cached Quick I/O automatically after a reboot or mount

- ◆ Add cache advisory entries in the `/etc/vx/qioadmin` file as follows:

```
device=/dev/vx/dsk/<diskgroup>/<volume>

filename1,OFF

filename2,OFF

filename3,OFF

filename4,ON
```

For example, to make the Cached Quick I/O settings for individual files in the `/db01` file system persistent, edit the `/etc/vx/qioadmin` file similar to the following:

```
#
# List of files to cache in /db01 file system
#
device=/dev/vx/dsk/PRODDg/db01

cust.dbf,OFF
system.dbf,OFF
stk.dbf,ON
```

## Determining individual file settings for Cached Quick I/O using `qioadmin`

You can determine whether Cached Quick I/O is enabled or disabled for individual files by displaying the file's cache advisory setting using the `qioadmin` command.

---

**Note:** To verify caching, always check the setting of the flag `qio_cache_enable` using `vxtunefs`, along with the individual cache advisories for each file.

---

**To display the current cache advisory settings for a file**

- ◆ Use the `qioadmin` command with the `-P` option as follows:

```
$ /opt/VRTS/bin/qioadmin -P filename /mount_point
```

For example, to display the current cache advisory setting for the file `cust.dbf` in the `/db01` file system:

```
$ /opt/VRTS/bin/qioadmin -P cust.dbf /db01
```

```
cust.dbf,OFF
```

# Using point-in-time copies

- [Chapter 15. Understanding point-in-time copy methods](#)
- [Chapter 16. Considerations for Oracle point-in-time copies](#)
- [Chapter 17. Administering third-mirror break-off snapshots](#)
- [Chapter 18. Administering space-optimized snapshots](#)
- [Chapter 19. Administering Storage Checkpoints](#)
- [Chapter 20. Administering FileSnap snapshots](#)
- [Chapter 21. Backing up and restoring with Netbackup in an SFHA environment](#)



# Understanding point-in-time copy methods

This chapter includes the following topics:

- [About point-in-time copies](#)
- [When to use point-in-time copies](#)
- [About Storage Foundation point-in-time copy technologies](#)
- [Point-in-time copy solutions supported by SFDB tools](#)
- [About snapshot modes supported by Storage Foundation for Databases \(SFDB\) tools](#)
- [Volume-level snapshots](#)
- [Storage Checkpoints](#)
- [About FileSnaps](#)

## About point-in-time copies

Veritas Storage Foundation offers a flexible and efficient means of managing business-critical data. Storage Foundation lets you capture an online image of an actively changing database at a given instant, called a point-in-time copy.

More and more, the expectation is that the data must be continuously available (24x7) for transaction processing, decision making, intellectual property creation, and so forth. Protecting the data from loss or destruction is also increasingly important. Formerly, data was taken out of service so that the data did not change while data backups occurred; however, this option does not meet the need for minimal down time.

A point-in-time copy enables you to maximize the online availability of the data. You can perform system backup, upgrade, or perform other maintenance tasks on the point-in-time copies. The point-in-time copies can be processed on the same host as the active data, or a different host. If required, you can offload processing of the point-in-time copies onto another host to avoid contention for system resources on your production server. This method is called off-host processing. If implemented correctly, off-host processing solutions have almost no impact on the performance of the primary production system.

## When to use point-in-time copies

The following typical activities are suitable for point-in-time copy solutions implemented using Veritas FlashSnap:

- **Data backup**—Many enterprises require 24 x 7 data availability. They cannot afford the downtime involved in backing up critical data offline. By taking snapshots of your data, and backing up from these snapshots, your business-critical applications can continue to run without extended downtime or impacted performance.
- **Providing data continuity**—To provide continuity of service in the event of primary storage failure, you can use point-in-time copy solutions to recover application data. In the event of server failure, you can use point-in-time copy solutions in conjunction with the high availability cluster functionality of Veritas Storage Foundation™ for Cluster File System HA or Veritas Storage Foundation HA.
- **Decision support analysis and reporting**—Operations such as decision support analysis and business reporting may not require access to real-time information. You can direct such operations to use a replica database that you have created from snapshots, rather than allow them to compete for access to the primary database. When required, you can quickly resynchronize the database copy with the data in the primary database.
- **Testing and training**—Development or service groups can use snapshots as test data for new applications. Snapshot data provides developers, system testers and QA groups with a realistic basis for testing the robustness, integrity and performance of new applications.
- **Database error recovery**—Logic errors caused by an administrator or an application program can compromise the integrity of a database. You can recover a database more quickly by restoring the database files by using Storage Checkpoints or a snapshot copy than by full restoration from tape or other backup media.

Use Storage Checkpoints to quickly roll back a database instance to an earlier point in time.

- Cloning data—You can clone your file system or application data. This functionality enable you to quickly and efficiently provision virtual desktops.

All of the snapshot solutions mentioned above are also available on the disaster recovery site, in conjunction with Veritas Volume Replicator.

For more information about snapshots with replication, see the *Veritas Storage Foundation and High Availability Solutions Replication Administrator's Guide*.

Veritas Storage Foundation provides several point-in-time copy solutions that support your needs, including the following use cases:

- Creating a replica database for decision support.
- Backing up and recovering a database with snapshots.
- Backing up and recovering an off-host cluster file system
- Backing up and recovering an online database.

## About Storage Foundation point-in-time copy technologies

This topic introduces the point-in-time copy solutions that you can implement using the Veritas FlashSnap™ technology. Veritas FlashSnap technology requires a license.

Veritas FlashSnap offers a flexible and efficient means of managing business critical data. It allows you to capture an online image of actively changing data at a given instant: a point-in-time copy. You can perform system backup, upgrade and other maintenance tasks on point-in-time copies while providing continuous availability of your critical data. If required, you can offload processing of the point-in-time copies onto another host to avoid contention for system resources on your production server.

The following kinds of point-in-time copy solution are supported by the FlashSnap license:

- Volume-level solutions. There are several types of volume-level snapshots. These features are suitable for solutions where separate storage is desirable to create the snapshot. For example, lower-tier storage. Some of these techniques provided exceptional offhost processing capabilities.
- File system-level solutions use the Storage Checkpoint feature of Veritas File System. Storage Checkpoints are suitable for implementing solutions where storage space is critical for:

- File systems that contain a small number of mostly large files.
- Application workloads that change a relatively small proportion of file system data blocks (for example, web server content and some databases).
- Applications where multiple writable copies of a file system are required for testing or versioning.

See “[Storage Checkpoints](#)” on page 166.

- File level snapshots.  
 The FileSnap feature provides snapshots at the level of individual files.

## Point-in-time copy solutions supported by SFDB tools

Storage Foundation for Databases (SFDB) tools provide a database-specific command line to create point-in-time copies of your Oracle database. SFDB tools use the underlying features of Storage Foundation to perform these operations.. For ease of use, the SFDB command line enables you to perform the point-in-time copy operations on the Oracle database with fewer steps. Also, the SFDB command line enables you to perform functions specific to Oracle databases.

[Table 15-1](#) provides a comparison of the point-in-time copy solutions supported by SFDB tools.

**Table 15-1** Comparison of Point-in-time Copy Solutions

|                                                        | FlashSnap                                                                           | Space-optimized snapshots                              | Database Storage Checkpoints       | FileSnap                             |
|--------------------------------------------------------|-------------------------------------------------------------------------------------|--------------------------------------------------------|------------------------------------|--------------------------------------|
| Underlying technology                                  | Volume snapshots (third-mirror break-off snapshots)                                 | Volume snapshots (space-optimized instant snapshots)   | File system checkpoints            | File-level snapshots (VxFS FileSnap) |
| Possibility of off-host processing                     | Yes                                                                                 | Yes (requires Cluster Volume Manager)                  | Yes (requires Cluster File System) | Yes (requires Cluster File System)   |
| Additional storage requirements                        | Additional mirror plexes are required. Plexes are full copies of the original data. | Minimal (uses copy-on-write and requires cache volume) | Minimal (uses copy-on-write)       | Minimal (uses shared extents)        |
| Performance impact after taking the point-in-time copy | None                                                                                | Copy-on-write penalty                                  | Copy-on-write penalty              | Writes cause allocation.             |



**Table 15-1** Comparison of Point-in-time Copy Solutions (*continued*)

|                                                               | FlashSnap                                                                                      | Space-optimized snapshots                                              | Database Storage Checkpoints | FileSnap |
|---------------------------------------------------------------|------------------------------------------------------------------------------------------------|------------------------------------------------------------------------|------------------------------|----------|
| Support for multiple clones from a single point-in-time copy  | No. However, different mirrors with different snapshots can be used to create multiple clones. | No. However, multiple snapshots can be used to create multiple clones. | Yes                          | Yes      |
| Supported snapshot modes                                      | Online, Offline, Instant                                                                       | Online, Offline, Instant                                               | Online, Offline, Instant     | Online   |
| Support for replication environment (with Veritas Replicator) | No                                                                                             | Yes (Instant snapshot mode only)                                       | No                           | No       |

## About snapshot modes supported by Storage Foundation for Databases (SFDB) tools

The following are the snapshot modes supported by SFDB tools:

- Online
- Instant
- Offline

Review the following information about the supported snapshot modes.

- FlashSnap, Storage Checkpoint, and SOS support all three modes.
- FileSnap supports the Online mode only.
- When using SOS on a Veritas Volume Replicator (VVR) secondary site, only the Instant mode is supported.
- The Online mode is the default and recommended snapshot mode for all of the snapshot methods, except when SOS is used on a VVR secondary site.

---

**Note:** The validation of the snapshot configuration requires the application to be online.

---

[Table 15-2](#) describes the three snapshot modes.

**Table 15-2** Description of Snapshot Modes

| Snapshot mode  | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
|----------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Online</b>  | <p>The online snapshot mode:</p> <ul style="list-style-type: none"> <li>■ Is like an online or a hot backup of the application or the database and it is suitable as a backup image.</li> <li>■ Requires the application to support online or hot backup mode. The Oracle database is put in the hot backup mode until the snapshot is taken.</li> <li>■ Requires the database to be open.</li> <li>■ Requires the database to be in the archivelog mode.</li> </ul> <p><b>Note:</b> Most production databases are in the archivelog mode.</p> <ul style="list-style-type: none"> <li>■ Has the least performance impact on the application or the database, although the snapshot process itself may take longer than an instant mode snapshot.</li> <li>■ Allows restore of the primary application data from the snapshot image.</li> <li>■ Allows the user to perform manual point-in-time recovery of a clone based on the snapshot or of the primary application after a restore operation.</li> </ul>                                                        |
| <b>Instant</b> | <p>The instant snapshot mode:</p> <ul style="list-style-type: none"> <li>■ Is like a crash-consistent image of the application or the database and is not suitable as a backup image.</li> <li>■ Freezes the application I/O so that a crash-consistent snapshot can be taken. Application I/O is frozen by freezing all the file systems holding the application files or data. Application I/O is frozen for the duration of the snapshot process.</li> <li>■ Does not require the database to be in the archivelog mode.</li> <li>■ Has some performance impact on the application or the database, since application I/O is frozen while the snapshot is being taken. However, the snapshot process itself may be faster, especially under heavy transactional load on the database.</li> <li>■ Is not supported for Oracle RAC databases. It is only supported for Oracle single instance databases.</li> <li>■ Is not supported for standby databases.</li> <li>■ Is supported on Oracle 10g Release 2 patch level 5, or on the Oracle 11g series.</li> </ul> |

**Table 15-2** Description of Snapshot Modes (*continued*)

| Snapshot mode  | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
|----------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Offline</b> | <p>The offline snapshot mode:</p> <ul style="list-style-type: none"> <li>■ Is like a cold backup of the application or the database and it is suitable as a backup image.</li> <li>■ Requires the application to be offline.</li> <li>■ Requires the snapshot configuration to be validated when the application is online.</li> <li>■ Is fastest amongst the snapshot modes.</li> <li>■ Does not require the database to be in the archivelog mode.</li> <li>■ Requires that database instance(s) should not be running, in case of Oracle.</li> </ul> |

## Volume-level snapshots

A volume snapshot is an image of a Veritas Volume Manager (VxVM) volume at a given point in time. You can also take a snapshot of a volume set.

Volume snapshots allow you to make backup copies of your volumes online with minimal interruption to users. You can then use the backup copies to restore data that has been lost due to disk failure, software errors or human mistakes, or to create replica volumes for the purposes of report generation, application development, or testing.

Volume snapshots can also be used to implement off-host online backup.

Physically, a snapshot may be a full (complete bit-for-bit) copy of the data set, or it may contain only those elements of the data set that have been updated since snapshot creation. The latter are sometimes referred to as allocate-on-first-write snapshots, because space for data elements is added to the snapshot image only when the elements are updated (overwritten) for the first time in the original data set. Storage Foundation allocate-on-first-write snapshots are called space-optimized snapshots.

## Persistent FastResync of volume snapshots

If persistent FastResync is enabled on a volume, VxVM uses a FastResync map to keep track of which blocks are updated in the volume and in the snapshot.

When snapshot volumes are reattached to their original volumes, persistent FastResync allows the snapshot data to be quickly refreshed and re-used. Persistent FastResync uses disk storage to ensure that FastResync maps survive both system

and cluster crashes. If persistent FastResync is enabled on a volume in a private disk group, incremental resynchronization can take place even if the host is rebooted.

Persistent FastResync can track the association between volumes and their snapshot volumes after they are moved into different disk groups. After the disk groups are rejoined, persistent FastResync allows the snapshot plexes to be quickly resynchronized.

## Data integrity in volume snapshots

A volume snapshot captures the data that exists in a volume at a given point in time. As such, VxVM does not have any knowledge of data that is cached in memory by the overlying file system, or by applications such as databases that have files open in the file system. Snapshots are always crash consistent, that is, the snapshot can be put to use by letting the application perform its recovery. This is similar to how the application recovery occurs after a server crash. If the `fsген` volume usage type is set on a volume that contains a mounted Veritas File System (VxFS), VxVM coordinates with VxFS to flush data that is in the cache to the volume. Therefore, these snapshots are always VxFS consistent and require no VxFS recovery while mounting.

For databases, a suitable mechanism must additionally be used to ensure the integrity of tablespace data when the volume snapshot is taken. The facility to temporarily suspend file system I/O is provided by most modern database software. The examples provided in this document illustrate how to perform this operation. For ordinary files in a file system, which may be open to a wide variety of different applications, there may be no way to ensure the complete integrity of the file data other than by shutting down the applications and temporarily unmounting the file system. In many cases, it may only be important to ensure the integrity of file data that is not in active use at the time that you take the snapshot. However, in all scenarios where application coordinate, snapshots are crash-recoverable.

## Third-mirror break-off snapshots

A plex break-off snapshot uses an additional mirror to create the snapshot. Although you can create a plex break-off snapshot for a single plex volume, typically you take a snapshot of a mirrored volume. A mirrored volume has more than one plex or mirror, each of which is a copy of the data. The snapshot operation "breaks off" the plex, which becomes the snapshot volume. You can break off an existing plex or add a new plex specifically to serve as the snapshot mirror. Generally, you want to maintain redundancy for the original volume. If the original volume is a mirrored volume with two plexes, you add a third mirror for the snapshot. Hence, this type of snapshot is also known as a third-mirror snapshot.

The snapshot plex must be on a different disk from the existing plexes in the volume, within the same disk group. The disk must have enough disk space to contain the contents of the existing volume. If you have a one terabyte volume, you must have an additional one terabyte of disk space.

When you create the snapshot, the plexes are separated into two volumes. The original volume retains its original plex or plexes. The snapshot volume contains the snapshot plex. The original volume continues to take on I/O. The snapshot volume retains the data at the point of time when the snapshot was created, until you choose to perform processing on that volume.

You can make multiple snapshots, so you can have multiple copies of the original data.

Third-mirror break-off snapshots are suitable for write-intensive volumes (such as for database redo logs) where the copy-on-write mechanism of space-optimized or full-sized instant snapshots might degrade performance.

## Space-optimized instant volume snapshots

Space-optimized snapshots do not contain complete physical images of the original data objects they represent. Space-optimized instant snapshots record changed regions in the original volume to a storage cache. As the original volume is written to, VxVM preserves its data in the cache before the write is committed. As the storage cache typically requires much less storage than the original volume, it is referred to as space-optimized. Space-optimized snapshots consume storage and I/O bandwidth in proportion to how much data on the original volume is updated during the life of the snapshot.

The benefits of space-optimized instant snapshots include immediate availability for use, quick refreshment, and easier configuration and administration. Because space-optimized snapshots consume less storage and I/O bandwidth than full-copy snapshots, you can take the snapshots much more frequently. This makes them well-suited for recovering from data corruption.

Space-optimized snapshots naturally tend to grow with age, as more of the data in the original objects changes, so they are inherently better-suited for shorter lifetimes.

Space-optimized snapshots cannot be taken off-host for auxiliary processing.

### How space-optimized instant snapshots work

Space-optimized snapshots use a copy-on-write mechanism to make them immediately available for use when they are first created, or when their data is refreshed.


You can configure a single storage cache in a disk group that can be shared by all the volumes in that disk group. If so, the name of the cache that is declared must be the same for each volume's space-optimized snapshot. The cache is stored on disk and is persistent.

If the cache approaches full, configure VxVM to grow the cache automatically using any available free space in the disk group.

See “[Creating a shared cache object](#)” on page 203.

Figure 15-1 shows the instant space-optimized snapshot model.

**Figure 15-1** Space-optimized instant snapshot creation and usage in a backup cycle

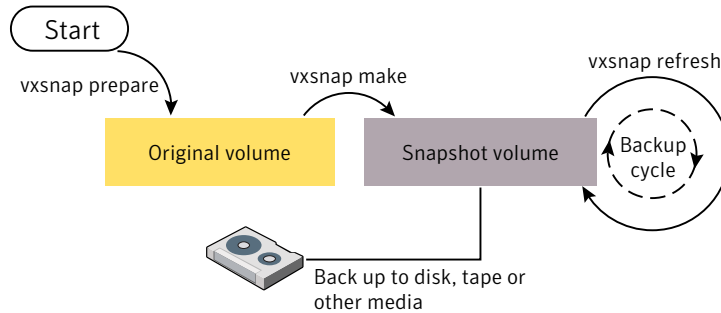

## Storage Checkpoints

A Storage Checkpoint is a persistent image of a file system at a given instance in time. Storage Checkpoints use a copy-on-write technique to reduce I/O overhead by identifying and maintaining only those file system blocks that have changed since a previous Storage Checkpoint was taken. Storage Checkpoints have the following important features:

- Storage Checkpoints persist across system reboots and crashes.
- A Storage Checkpoint can preserve not only file system metadata and the directory hierarchy of the file system, but also user data as it existed when the Storage Checkpoint was taken.
- After creating a Storage Checkpoint of a mounted file system, you can continue to create, remove, and update files on the file system without affecting the image of the Storage Checkpoint.
- Unlike file system snapshots, Storage Checkpoints are writable.
- To minimize disk space usage, Storage Checkpoints use free space in the file system.

Storage Checkpoints and the Storage Rollback feature of Veritas Storage Foundation for Databases enable rapid recovery of databases from logical errors such as database corruption, missing files and dropped table spaces. You can mount successive Storage Checkpoints of a database to locate the error, and then roll back the database to a Storage Checkpoint before the problem occurred.

Symantec NetBackup for Oracle Advanced BLI Agent uses Storage Checkpoints to enhance the speed of backing up Oracle databases.

See the *Symantec NetBackup for Oracle Advanced BLI Agent System Administrator's Guide*.

## How Storage Checkpoints differ from snapshots

Storage Checkpoints differ from Veritas File System snapshots in the following ways because they:

- Allow write operations to the Storage Checkpoint itself.
- Persist after a system reboot or failure.
- Share the same pool of free space as the file system.
- Maintain a relationship with other Storage Checkpoints by identifying changed file blocks since the last Storage Checkpoint.
- Can have multiple, read-only Storage Checkpoints that reduce I/O operations and required storage space because the most recent Storage Checkpoint is the only one that accumulates updates from the primary file system.
- Can restore the file system to its state at the time that the Storage Checkpoint was taken.

Various backup and replication solutions can take advantage of Storage Checkpoints. The ability of Storage Checkpoints to track the file system blocks that have changed since the last Storage Checkpoint facilitates backup and replication applications that only need to retrieve the changed data. Storage Checkpoints significantly minimize data movement and may promote higher availability and data integrity by increasing the frequency of backup and replication solutions.

Storage Checkpoints can be taken in environments with a large number of files, such as file servers with millions of files, with little adverse impact on performance. Because the file system does not remain frozen during Storage Checkpoint creation, applications can access the file system even while the Storage Checkpoint is taken. However, Storage Checkpoint creation may take several minutes to complete depending on the number of files in the file system.

## How a Storage Checkpoint works

The Storage Checkpoint facility freezes the mounted file system (known as the primary fileset), initializes the Storage Checkpoint, and thaws the file system. Specifically, the file system is first brought to a stable state where all of its data is written to disk, and the freezing process momentarily blocks all I/O operations to the file system. A Storage Checkpoint is then created without any actual data; the Storage Checkpoint instead points to the block map of the primary fileset. The thawing process that follows restarts I/O operations to the file system.

You can create a Storage Checkpoint on a single file system or a list of file systems. A Storage Checkpoint of multiple file systems simultaneously freezes the file systems, creates a Storage Checkpoint on all of the file systems, and thaws the file systems. As a result, the Storage Checkpoints for multiple file systems have the same creation timestamp. The Storage Checkpoint facility guarantees that multiple file system Storage Checkpoints are created on all or none of the specified file systems, unless there is a system crash while the operation is in progress.

---


**Note:** The calling application is responsible for cleaning up Storage Checkpoints after a system crash.

---

A Storage Checkpoint of the primary fileset initially contains only pointers to the existing data blocks in the primary fileset, and does not contain any allocated data blocks of its own.

Figure 15-2 shows the file system `/database` and its Storage Checkpoint. The Storage Checkpoint is logically identical to the primary fileset when the Storage Checkpoint is created, but it does not contain any actual data blocks.


**Figure 15-2** Primary fileset and its Storage Checkpoint

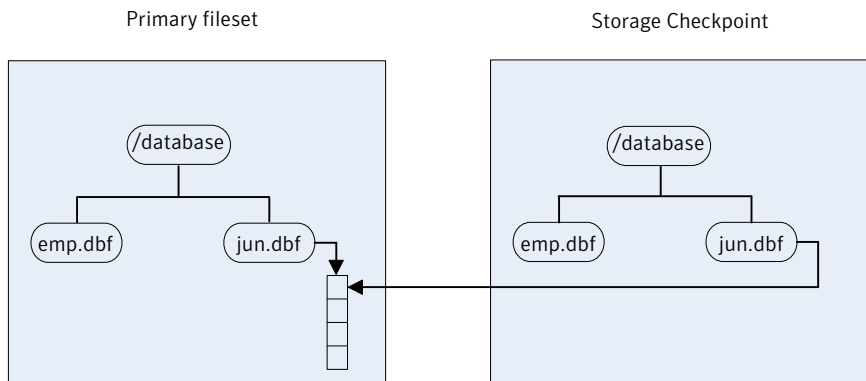



In [Figure 15-3](#), a square represents each block of the file system. This figure shows a Storage Checkpoint containing pointers to the primary fileset at the time the Storage Checkpoint is taken, as in [Figure 15-2](#).

**Figure 15-3** Initializing a Storage Checkpoint

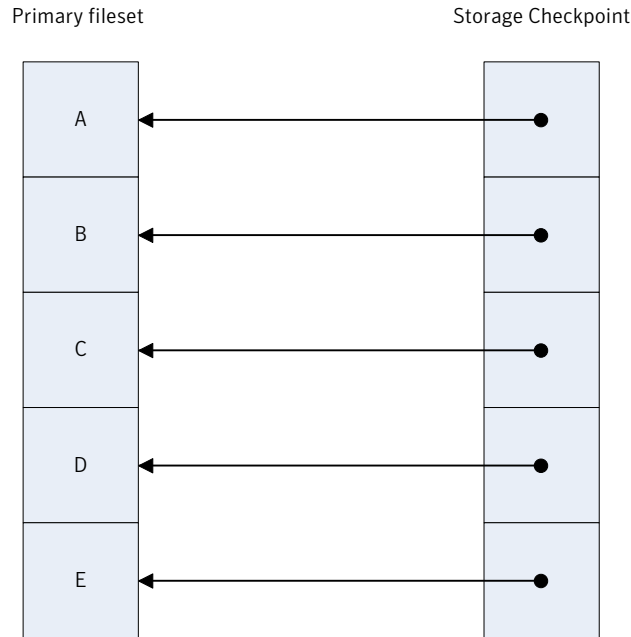

The Storage Checkpoint presents the exact image of the file system by finding the data from the primary fileset. VxFS updates a Storage Checkpoint by using the copy-on-write technique.

See “[Copy-on-write](#)” on page 169.

### Copy-on-write


In [Figure 15-4](#), the third data block in the primary fileset originally containing C is updated.

Before the data block is updated with new data, the original data is copied to the Storage Checkpoint. This is called the copy-on-write technique, which allows the Storage Checkpoint to preserve the image of the primary fileset when the Storage Checkpoint is taken.

Every update or write operation does not necessarily result in the process of copying data to the Storage Checkpoint because the old data needs to be saved only once. As blocks in the primary fileset continue to change, the Storage

Checkpoint accumulates the original data blocks. In this example, subsequent updates to the third data block, now containing C', are not copied to the Storage Checkpoint because the original image of the block containing C is already saved.

**Figure 15-4** Updates to the primary fileset

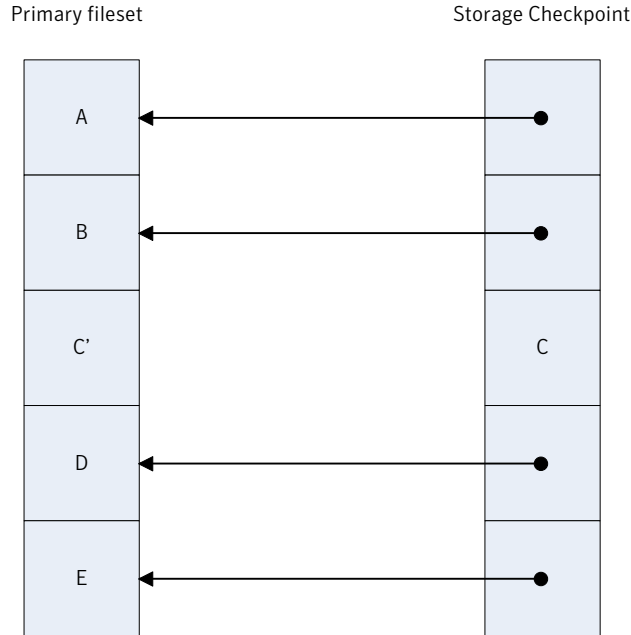

## Storage Checkpoint visibility

With the `ckptautomnt` mount option, all Storage Checkpoints are made accessible automatically through a directory in the root directory of the file system that has the special name `.checkpoint`, which does not appear in directory listings. Inside this directory is a directory for each Storage Checkpoint in the file system. Each of these directories behave as a mount of the corresponding Storage Checkpoint, with the following exceptions:

- External applications, such as NFS, see the files as part of the original mount point. Thus, no additional NFS exports are necessary.
- Inode numbers exposed to applications can be made unique, depending on a mount option.

The Storage Checkpoints are automounted internally, but the operating system does not know about the automounting. This means that Storage Checkpoints cannot be mounted manually, and they do not appear in the list of mounted file

systems. When Storage Checkpoints are created or deleted, entries in the Storage Checkpoint directory are automatically updated. If a Storage Checkpoint is removed with the `-f` option while a file in the Storage Checkpoint is still in use, the Storage Checkpoint is force unmounted, and all operations on the file fail with the EIO error.

If there is already a file or directory named `.checkpoint` in the root directory of the file system, such as a directory created with an older version of Veritas File System (VxFS) or when Storage Checkpoint visibility feature was disabled, the fake directory providing access to the Storage Checkpoints is not accessible. With this feature enabled, attempting to create a file or directory in the root directory with the name `.checkpoint` fails with the EEXIST error.

---

**Note:** The `.checkpoint` directory is not accessible over NFS.

If an auto-mounted Storage Checkpoint is in use by an NFS mount, removing the Storage Checkpoint might succeed even without the forced (`-f`) option.

---

### Storage Checkpoints and 64-bit inode numbers

The inode number of a file is the same across Storage Checkpoints. For example, if the file `file1` exists in a file system and a Storage Checkpoint is taken of that file system, running the `stat` command on `file1` in the original file system and in the Storage Checkpoint returns the same value in `st_ino`. The combination of `st_ino` and `st_dev` should uniquely identify every file in a system. This is usually not a problem because Storage Checkpoints get mounted separately, so `st_dev` is different. When accessing files in a Storage Checkpoint through the Storage Checkpoint visibility extension, `st_dev` is the same for all Storage Checkpoints as well as for the original file system. This means files can no longer be identified uniquely by `st_ino` and `st_dev`.

In general, uniquely identifying all files in a system is not necessary. However, there can be some applications that rely on unique identification to function properly. For example, a backup application might check if a file is hard-linked to another file by calling `stat` on both and checking if `st_ino` and `st_dev` are the same. If a backup application were told to back up two clones through the Storage Checkpoint visibility extension at the same time, the application can erroneously deduce that two files are the same even though the files contain different data.

By default, Veritas Storage Foundation (SF) does not make inode numbers unique. However, you can specify the `uniqueino` mount option to enable the use of unique 64-bit inode numbers. You cannot change this option during a remount.

## About Database Rollbacks using Storage Checkpoints

Each Storage Checkpoint is a consistent, point-in-time image of a file system, and Storage Rollback is the restore facility for these on-disk backups. Storage Rollback rolls back changed blocks contained in a Storage Checkpoint into the primary file system for faster database restoration.

## Storage Checkpoints and Rollback process

A Storage Checkpoint is a disk and I/O efficient snapshot technology for creating a "clone" of a currently mounted file system (the primary file system). Like a snapshot file system, a Storage Checkpoint appears as an exact image of the snapped file system at the time the Storage Checkpoint was made. However, unlike a snapshot file system that uses separate disk space, all Storage Checkpoints share the same free space pool where the primary file system resides.

---

**Note:** A database Storage Checkpoint can be mounted as read only or read-write, allowing access to the files as if it were a regular file system.

---

Initially, a Storage Checkpoint contains no data. The Storage Checkpoint only contains the inode list and the block map of the primary fileset. This block map points to the actual data on the primary file system. Because only the inode list and block map are required and no data is copied, creating a Storage Checkpoint takes only a few seconds and very little space.

A Storage Checkpoint initially satisfies read requests by finding the data on the primary file system, using its block map copy, and returning the data to the requesting process. When a write operation changes a data block in the primary file system, the old data is first copied to the Storage Checkpoint, and then the primary file system is updated with the new data. The Storage Checkpoint maintains the exact view of the primary file system at the time the Storage Checkpoint was taken. Subsequent writes to block n on the primary file system do not result in additional copies to the Storage Checkpoint because the old data only needs to be saved once. As data blocks are changed on the primary file system, the Storage Checkpoint gradually fills with the original data copied from the primary file system, and less and less of the block map in the Storage Checkpoint points back to blocks on the primary file system.

Database Storage Rollback restores a database, a tablespace, or datafiles on the primary file systems to the point-in-time image created during a Storage Checkpoint.

Database Storage Rollback is accomplished by copying the "before" images from the appropriate Storage Checkpoint back to the primary file system. As with

Storage Checkpoints, Database Storage Rollback restores at the block level, rather than at the file level. Database Storage Rollback is executed using the `vxsfdadm` command with the `-o restore` operation.

For example:

```
$ $ /opt/VRTSdbed/bin/vxsfdadm -s checkpoint -a oracle -o restore --checkpoi
```

Mountable Storage Checkpoints can be used for a wide range of application solutions including the following:

- Backups
- Investigations into data integrity
- Staging upgrades
- Database modifications
- Data replication solutions

If you mount a Storage Checkpoint as read-write, the command will not allow you to roll back to this Storage Checkpoint. This ensures that any Storage Checkpoint data that has been modified incorrectly cannot be a source of any database corruption. When a Storage Checkpoint is mounted as read-write, then a "shadow" Storage Checkpoint of the original Storage Checkpoint gets created, and this "shadow" Storage Checkpoint is mounted as read-write. This allows the database to still be rolled back to the original Storage Checkpoint.

## Types of Storage Checkpoints

You can create the following types of Storage Checkpoints:

- [Data Storage Checkpoints](#)
- [Removable Storage Checkpoints](#)
- [Non-mountable Storage Checkpoints](#)

### Data Storage Checkpoints

A data Storage Checkpoint is a complete image of the file system at the time the Storage Checkpoint is created. This type of Storage Checkpoint contains the file system metadata and file data blocks. You can mount, access, and write to a data Storage Checkpoint just as you would to a file system. Data Storage Checkpoints are useful for backup applications that require a consistent and stable image of an active file system. Data Storage Checkpoints introduce some overhead to the system and to the application performing the write operation. For best results,

limit the life of data Storage Checkpoints to minimize the impact on system resources.

## Removable Storage Checkpoints

A removable Storage Checkpoint can self-destruct under certain conditions when the file system runs out of space.

See “[Storage Checkpoint space management considerations](#)” on page 174.

During user operations such as `create` or `mkdir`, if the file system runs out of space, removable Storage Checkpoints are deleted, even if the Storage Checkpoints are mounted. This ensures that applications can continue without interruptions due to lack of disk space. Non-removable Storage Checkpoints are not automatically removed under such `ENOSPC` conditions. Symantec recommends that you create only removable Storage Checkpoints. However, during certain administrative operations, such as `fsadm`, even if the file system runs out of space, removable Storage Checkpoints are not deleted.

Storage Checkpoints are created as non-removable by default. The default behavior can be changed so that VxFS creates removable Storage Checkpoints by using the `vxtunefs -D ckpt_removable=1` command. With the default set to create removable Storage Checkpoints, non-removable Storage Checkpoints can be created using `fsckptadm -R create ckpt_name mount_point` command.

See the `vxtunefs(1M)` and `fsckptadm(1M)` manual pages.

## Non-mountable Storage Checkpoints

Use non-mountable Storage Checkpoints as a security feature. This prevents other applications from accessing and modifying the Storage Checkpoint.

## Storage Checkpoint space management considerations

Several operations, such as removing or overwriting a file, can fail when a file system containing Storage Checkpoints runs out of space. If the system cannot allocate sufficient space, the operation will fail.

Database applications usually preallocate storage for their files and may not expect a write operation to fail. During user operations such as `create` or `mkdir`, if the file system runs out of space, removable Storage Checkpoints are deleted. This ensures that applications can continue without interruptions due to lack of disk space. Non-removable Storage Checkpoints are not automatically removed under such `ENOSPC` conditions. Symantec recommends that you create only removable Storage Checkpoints. However, during certain administrative operations, such as using the `fsadm` command, using the `qiomkfile` command,

and creating a Storage Checkpoint with the `fscckptadm` command, even if the file system runs out of space, removable Storage Checkpoints are not deleted.

When the kernel automatically removes the Storage Checkpoints, it applies the following policies:

- Remove as few Storage Checkpoints as possible to complete the operation.
- Never select a non-removable Storage Checkpoint.
- Select a nodata Storage Checkpoint only when data Storage Checkpoints no longer exist.
- Remove the oldest Storage Checkpoint first.
- Remove a Storage Checkpoint even if it is mounted. New operations on such a removed Storage Checkpoint fail with the appropriate error codes.
- If the oldest Storage Checkpoint is non-removable, then the oldest removable Storage Checkpoint is selected for removal. In such a case, data might be required to be pushed to a non-removable Storage Checkpoint, which might fail and result in the file system getting marked for a FULLFSCK. To prevent this occurrence, Symantec recommends that you only create removable Storage Checkpoints.

## About FileSnaps

A FileSnap is an atomic space-optimized copy of a file in the same name space, stored in the same file system. Veritas File System (VxFS) supports snapshots on file system disk layout Version 8 and later.

FileSnaps provide an ability to snapshot objects that are smaller in granularity than a file system or a volume. The ability to snapshot parts of a file system name space is required for application-based or user-based management of data stored in a file system. This is useful when a file system is shared by a set of users or applications or the data is classified into different levels of importance in the same file system.

All regular file operations are supported on the FileSnap, and VxFS does not distinguish the FileSnap in any way.

## Properties of FileSnaps

FileSnaps provide non-root users the ability to snapshot data that they own, without requiring administrator privileges. This enables users and applications to version, backup, and restore their data by scheduling snapshots at appropriate points of their application cycle. Restoring from a FileSnap is as simple as

specifying a snapshot as the source file and the original file as the destination file as the arguments for the `vxfilesnap` command.

FileSnap creation locks the source file as read-only and locks the destination file exclusively for the duration of the operation, thus creating the snapshots atomically. The rest of the files in the file system can be accessed with no I/O pause while FileSnap creation is in progress. Read access to the source file is also uninterrupted while the snapshot creation is in progress. This allows for true sharing of a file system by multiple users and applications in a non-intrusive fashion.

The name space relationship between source file and destination file is defined by the user-issued `vxfilesnap` command by specifying the destination file path. Veritas File System (VxFS) neither differentiates between the source file and the destination file, nor does it maintain any internal relationships between these two files. Once the snapshot is completed, the only shared property between the source file and destination file are the data blocks and block map shared by them.

The number of FileSnaps of a file is practically unlimited. The technical limit is the maximum number of files supported by the VxFS file system, which is one billion files per file set. When thousands of FileSnaps are created from the same file and each of these snapshot files is simultaneously read and written to by thousands of threads, FileSnaps scale very well due to the design that results in no contention of the shared blocks when unsharing happens due to an overwrite. The performance seen for the case of unsharing shared blocks due to an overwrite with FileSnaps is closer to that of an allocating write than that of a traditional copy-on-write.

In disk layout Version 8, to support block or extent sharing between the files, reference counts are tracked for each shared extent. VxFS processes reference count updates due to sharing and unsharing of extents in a delayed fashion. Also, an extent that is marked shared once will not go back to unshared until all the references are gone. This is to improve the FileSnap creation performance and performance of data extent unsharing. However, this in effect results in the shared block statistics for the file system to be only accurate to the point of the processing of delayed reclamation. In other words, the shared extent statistics on the file system and a file could be stale, depending on the state of the file system.

## Concurrent I/O to FileSnaps

FileSnaps design and implementation ensures that concurrent reads or writes to different snapshots of the same file perform as if these were independent files. Even though the extents are shared between snapshots of the same file, the sharing has no negative impact on concurrent I/O.



## Copy-on-write and FileSnaps

Veritas File System (VxFS) supports an option to do lazy copy-on-write when a region of a file referred to by a shared extent is overwritten. A typical copy-on-write implementation involves reading the old data, allocating a new block, copying or writing the old data to the new block synchronously, and writing the new data to the new block. This results in a worst case possibility of one or more allocating transactions, followed by a read, followed by a synchronous write and another write that conforms to the I/O behavior requested for the overwrite. This sequence makes typical copy-on-write a costly operation. The VxFS lazy copy-on-write implementation does not copy the old data to the newly allocated block and hence does not have to read the old data either, as long as the new data covers the entire block. This behavior combined with delayed processing of shared extent accounting makes the lazy copy-on-write complete in times comparable to that of an allocating write. However, in the event of a server crash, when the server has not flushed the new data to the newly allocated blocks, the data seen on the overwritten region would be similar to what you would find in the case of an allocating write where the server has crashed before the data is flushed. This is not the default behavior and with the default behavior the data that you find in the overwritten region will be either the new data or the old data.

## Reading from FileSnaps

For regular read requests, Veritas File System (VxFS) only caches a single copy of a data page in the page cache for a given shared data block, even though the shared data block could be accessed from any of the FileSnaps or the source file. Once the shared data page is cached, any subsequent requests via any of the FileSnaps or the source file is serviced from the page cache. This eliminates duplicate read requests to the disk, which results in lower I/O load on the array. This also reduces the page cache duplication, which results in efficient usage of system page cache with very little cache churning when thousands of FileSnaps are accessed.

## Block map fragmentation and FileSnaps

The block map of the source file is shared by the snapshot file. When data is overwritten on a previously shared region, the block map of the file to which the write happens gets changed. In cases where the shared data extent of a source file is larger than the size of the overwrite request to the same region, the block map of the file that is written to becomes more fragmented.

## Backup and FileSnaps

A full backup of a VxFS file system that has shared blocks may require as much space in the target as the number of total logical references to the physical blocks in the source file system. For example, if you have a 20 GB file from which one thousand FileSnaps were created, the total number of logical block references is approximately 20 TB. While the VxFS file system only requires a little over 20 GB of physical blocks to store the file and the file's one thousand snapshots, the file system requires over 20 TB of space on the backup target to back up the file system, assuming the backup target does not have deduplication support.

# Considerations for Oracle point-in-time copies

This chapter includes the following topics:

- [Considerations for database layouts](#)
- [Supported Oracle configurations](#)
- [Behavior of clone databases](#)

## Considerations for database layouts

The following considerations for database layouts apply if you are using Storage Foundation for Databases (SFDB) tools:

- All database files must be on VxFS file systems. These include all copies of control files, data files, temp files, and all copies of online redo log files. All the underlying volumes must be VxVM volumes.
- At least one archive log destination must be on VxFS on a VxVM volume.
- For the online snapshot mode, the archive log destination must not contain any control files, data files, temp files, or online redo log files.
- The database PFILE or SPFILE can reside anywhere. If your database is using a pfile and the pfile resides in a non-default location (other than \$ORACLE\_HOME/dbs), then you must specify the pfile location explicitly using the PFILE parameter.
- The Oracle home directory can reside anywhere.
- Databases using OMF naming conventions are fully supported.
- Databases on Oracle ASM storage are not supported.

## Supported Oracle configurations

For information on supported Oracle versions, refer to the database support matrix:

<http://www.symantec.com/docs/DOC4039>

SFDB tools fully support Oracle single instance and Oracle RAC databases except for the following restrictions:

- If you are using Storage Foundation for Databases (SFDB) tools with physical standby databases, the following restrictions apply:
  - Oracle RAC standby databases are not supported.
  - Instant snapshots are not supported. Only offline and online snapshots are supported for standby databases.
  - The standby database must be open either in the read-only mode (active standby) or it must be activated in the read-write mode.

---

**Note:** You might need an active Oracle Data Guard license for this requirement.

---

- If the standby database is opened in the read-only mode, then redo apply services must be stopped temporarily before SFDB tools can be used to perform operations, such as cloning or taking a snapshot, on a physical standby database.
- Logical standby databases are not supported. Snapshot or cloning operations cannot be performed on a database functioning as a logical standby.
- Oracle databases using Oracle ASM storage are not supported.
- Oracle RAC databases are not supported for taking space-optimized snapshots on a Veritas Volume Replicator (VVR) secondary site.  
Oracle disaster recovery configuration with VVR is supported. You can use SFDB tools to take space-optimized snapshots on the secondary site also.
- SFDB tools do not support taking point-in-time copies while structural changes to the database are in progress, such as adding or dropping tablespaces and adding or dropping data files. However, once a point-in-time copy is taken, a clone can be created at any time, regardless of the status of the database.

## Behavior of clone databases

For clone databases, the following considerations apply for tablespaces and data files.

- In a clone database, if some data files are offline, but their associated tablespaces are online, the data files normally appear in the RECOVER status. Therefore, an additional, manual recovery might be required for such files to bring them online in the clone database.
- If some tablespaces or data files are under recovery, the snapshot process fails.
- Tablespaces that are offline are retained offline in a clone database.
- Tablespaces that are read-only are retained read-only in a clone database.
- Tablespaces that are online are retained online in a clone database.



# Administering third-mirror break-off snapshots

This chapter includes the following topics:

- [Database FlashSnap for cloning](#)
- [Preparing hosts and storage for Database FlashSnap](#)
- [Creating a clone of a database by using Database FlashSnap](#)
- [Resynchronizing mirror volumes with primary volumes](#)
- [Recovering the database manually](#)
- [Cloning a database on the secondary host](#)

## Database FlashSnap for cloning

Veritas Database FlashSnap helps to create a point-in-time copy of a database for backup and off-host processing. Database FlashSnap lets you make backup copies of your volumes online and with minimal interruption to users.

Database FlashSnap lets you capture an online image of an actively changing database at a given instant that is known as a snapshot. A snapshot copy of the database is referred to as a database snapshot. You can use a database snapshot on the same host as the production database or on a secondary host sharing the same storage. A database snapshot can be used for off-host processing applications, such as backup, data warehousing, and decision-support queries. When the snapshot is no longer needed, the database administrator can import the original snapshot back to the primary host and resynchronize the snapshot to the original database volumes. Database FlashSnap commands are executed from the command line interface.

## Database FlashSnap advantages

Database FlashSnap provides the following advantages:

- The database snapshot can be used on the same host as the production database or on a secondary host sharing the same storage.
- In many companies, there is a clear separation between the roles of system administrators and database administrators. Creating database snapshots typically requires superuser (root) privileges, the privileges that database administrators do not usually have. Because superuser privileges are not required, Database FlashSnap overcomes these obstacles by enabling database administrators to easily create consistent snapshots of the database.

## Preparing hosts and storage for Database FlashSnap

Review the following details to prepare the hosts and storage for Database FlashSnap.

### Setting up hosts

Database FlashSnap requires sufficient disk space in the disk group to add a mirror of equal size of the existing database.


Setting up a storage configuration for Database FlashSnap operations is a system administrator's responsibility and requires superuser (root) privileges. Database FlashSnap utilities do not address setting up an appropriate storage configuration.

### Same-node configuration

[Figure 17-1](#) shows the suggested arrangement for implementing Database FlashSnap solutions on the primary host to avoid disk contention.



**Figure 17-1** Example of a Database FlashSnap solution on a primary host

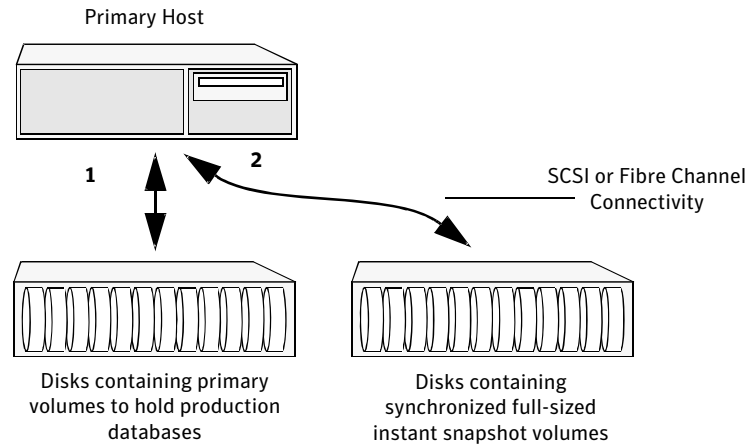


### Database FlashSnap off-host configuration

A Database FlashSnap off-host configuration allows CPU- and I/O-intensive operations to be performed for online backup and decision support without degrading the performance of the primary host running the production database. Both the primary and secondary hosts share the storage in which the snapshot database is created. Both the primary and secondary hosts have access to the disks containing the snapshot volumes.

[Figure 17-2](#) shows a Database FlashSnap off-host configuration.

**Figure 17-2** Example of an off-host Database FlashSnap solution

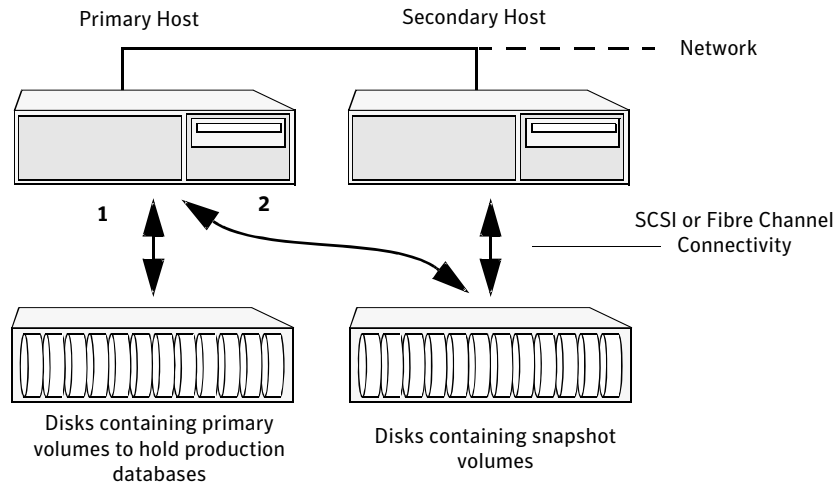

For information on host and storage requirements for an off-host configuration:  
See [“Requirements for an off-host database configuration”](#) on page 61.

## Creating a snapshot mirror of a volume or volume set used by the database

With Database FlashSnap, you can mirror the volumes used by the database to a separate set of disks, and those mirrors can be used to create a snapshot of the database. These snapshot volumes can be split and placed in a separate disk group. This snapshot disk group can be imported on a separate host, which shares the same storage with the primary host. The snapshot volumes can be resynchronized periodically with the primary volumes to get recent changes of the datafiles. If the primary datafiles become corrupted, you can quickly restore them from the snapshot volumes. Snapshot volumes can be used for a variety of purposes, including backup and recovery, and creating a clone database.

You must create snapshot mirrors for all of the volumes used by the database datafiles before you can create a snapshot of the database. This section describes the procedure used to create snapshot mirrors of volumes.

Use the `vxsnap` command to create a snapshot mirror or synchronize a snapshot mirror.

## Prerequisites

- You must be logged in as superuser (root).
- The disk group must be version 110 or later.  
For more information on disk group versions, see the vxvg(1M) online manual page.
- Be sure that a data change object (DCO) and a DCO log volume are associated with the volume for which you are creating the snapshot.
- Persistent FastResync must be enabled on the existing database volumes and disks must be assigned for the snapshot volumes.  
FastResync optimizes mirror resynchronization by tracking updates to stored data that have been missed by a mirror. When a snapshot mirror is reattached to its primary volumes, only the updates that were missed need to be re-applied to resynchronize it. FastResync increases the efficiency of the volume snapshot mechanism to better support operations such as backup and decision support.  
For detailed information about FastResync, see the *Veritas Storage Foundation Administrator's Guide*.
- Snapshot mirrors and their associated DCO logs should be on different disks than the original mirror plexes, and should be configured correctly for creating snapshots by the system administrator.
- When creating a snapshot mirror, create the snapshot on a separate controller and separate disks from the primary volume.
- Allocate separate volumes for archive logs.
- Do not place any datafiles, including control files, in the \$ORACLE\_HOME/dbs directory.

## Usage Notes

- Create a separate disk group for Oracle database-related files.
- Do not share volumes between Oracle database files and other software.
- ORACLE\_HOME cannot be included in the snapshot mirror.
- Resynchronization speed varies based on the amount of data changed in both the primary and snapshot volumes during the break-off time.
- Do not share any disks between the original mirror and the snapshot mirror.
- Snapshot mirrors for datafiles and archive logs should be created so that they do not share any disks with the data of the original volumes. If they are not created in this way, the VxVM disk group cannot be split and, as a result, Database FlashSnap will not work.

**Note:** Database FlashSnap commands support third-mirror break-off snapshots only. The snapshot mirror must be in the SNAPDONE state.

The following sample procedure is for existing volumes without existing snapshot plexes or associated snapshot volumes. In this procedure, *volume\_name* is the name of either a volume or a volume set.

---

**Note:** You must be logged in as superuser (root) to issue the commands in the following procedure.

---

#### To create a snapshot mirror of a volume or volume set

- 1 To prepare the volume for being snapshot, use the `vxsnap prepare` command:

```
# vxsnap -g diskgroup prepare volume \  
alloc="storage_attribute ..."
```

The `vxsnap prepare` command automatically creates a DCO and DCO volumes and associates them with the volume, and enables Persistent FastResync on the volume. Persistent FastResync is also set automatically on any snapshots that are generated from a volume on which this feature is enabled.

For enabling persistent FastResync on a volume in VxVM 4.1 or 5.0, either from the command line or from within a script, use the `vxsnap prepare` command as described above.

- 2 To verify that FastResync is enabled on the volume, use the `vxprint` command:

```
# vxprint -g diskgroup -F%fastresync volume_name
```

This returns on if FastResync is on. Otherwise, it returns off.

- 3 To verify that a DCO and DCO log volume are attached to the volume, use the `vxprint` command:

```
# vxprint -g diskgroup -F%hasdcolog volume_name
```

This returns on if a DCO and DCO log volume are attached to the volume. Otherwise, it returns off.

- 4 Create a mirror of a volume:

```
# vxsnap -g diskgroup addmir volume_name alloc=diskname
```

Example of creating 3 mirrors for a particular volume:

```
# vxsnap -g diskgroup addmir datavol \  
nmirror=3 alloc=disk1,disk2,disk3
```

- List the available mirrors:

```
# vxprint -g diskgroup -F%name -e"pl_v_name in \"volume_name\""
```

- Enable database FlashSnap to locate the correct mirror plexes when creating snapshots:

- Set the `dbed_flashsnap` tag for the data plex you want to use for breaking off the mirror. You can choose any tag name you like, but it needs to match the tag name specified in the `snapplan`.

```
# vxedit -g diskgroup set putil2=dbed_flashsnap plex_name
```

- Verify that the `dbed_flashsnap` tag has been set to the desired data plex:


```
# vxprint -g diskgroup -F%name -e"pl_v_name in \  
\"volume_name\" && p2 in \"dbed_flashsnap\""
```

If you require a backup of the data in the snapshot, use an appropriate utility or operating system command to copy the contents of the snapshot to tape or to some other backup medium.

## Creating a clone of a database by using Database FlashSnap

You can use Database FlashSnap to create a clone of a database by performing the steps outlined in [Figure 17-3](#).

**Figure 17-3** Creating a Clone - Workflow

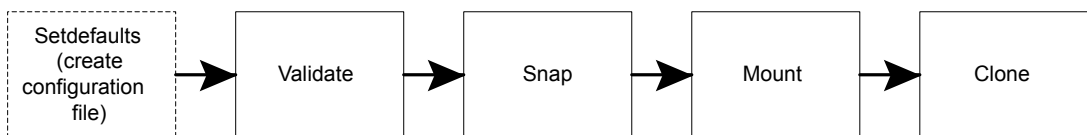

See [“vxsfadm command reference”](#) on page 329.

See [“FlashSnap configuration parameters”](#) on page 333.

See [“FlashSnap supported operations”](#) on page 335.

For details, refer to `vxsfadm-flashsnap(1M)` and `vxsfadm-oracle-flashsnap(1M)` man pages.

## To create a clone of an Oracle database by using FlashSnap

### 1 Create a configuration file.

```
$ /opt/VRTS/bin/vxsfadm -s flashsnap \  
-o setdefaults -a oracle --oracle_sid sfaedb \  
--oracle_home /ora_base/db_home -c TEST1  
Written config file TEST1
```

This command creates a default configuration file with all the parameters and default values. You can change the parameters, if required.

---

**Note:** If you have exported in environment the `ORACLE_SID` and the `ORACLE_HOME` parameters, you do not need to include them on the command line. After the `setdefaults` operation, the configuration file is populated with all the mandatory parameters along with the optional ones.

---

## 2 Validate the setup.

```
$ /opt/VRTS/bin/vxsfadm -s flashsnap \  
-o validate -a oracle --oracle_sid sfaedb \  
--oracle_home /ora_base/db_home --flashsnap_name \  
TEST1 --app_mode online  
Validating database configuration for third-mirror-break-off  
snapshot:  
ORACLE_SID      = sfaedb  
ORACLE_HOME     = /ora_base/db_home  
APP_MODE        = online  
ARCHIVELOG_DEST = /arch/sfaedb  
SNAPSHOT_ARCHIVE_LOG = yes  
Database validation successful.  
Validating database volume layout for third-mirror-break-off snapshot:  
Data volumes ready for snapshot:  
Volume/volume-set datavol of diskgroup datadg mounted on /data.  
Storage units to be used for snapshot from diskgroup datadg:  
disk_4  
Archivelog volume ready for snapshot:  
Volume/volume-set archvol of diskgroup datadg mounted on /arch.  
Storage units to be used for snapshot from diskgroup datadg:  
disk_6  
SNAPSHOT_VOL_PREFIX = SNAP_  
SNAPSHOT_DG_PREFIX  = SNAP_  
Database volume layout validated successfully.
```

**This command validates the configuration file and the database environment. In case of any problem, appropriate error messages are displayed that you can use to correct the problem and then retry.**

### 3 Create a snapshot of the database.

```
$ /opt/VRTS/bin/vxsfadm -s flashsnap \  
-o snap -a oracle --oracle_sid sfaedb --oracle_home \  
/ora_base/db_home --flashsnap_name TEST1 \  
--app_mode online  
Validating database configuration for third-mirror-break-off snapshot:  
ORACLE_SID = sfaedb  
ORACLE_HOME = /ora_base/db_home  
APP_MODE = online  
ARCHIVELOG_DEST = /arch/sfaedb  
SNAPSHOT_ARCHIVE_LOG = yes  
Database validation successful.  
snapshot started at Sun Sep 18 14:48:37 2011.  
Putting database in backup mode ... Done  
Validating database volume layout for third-mirror-break-off snapshot:  
Data volumes ready for snapshot:  
Volume/volume-set datavol of diskgroup datadg mounted on /data.  
Storage units to be used for snapshot from diskgroup datadg:  
disk_4  
Archivelog volume ready for snapshot:  
Volume/volume-set archvol of diskgroup datadg mounted on /arch.  
Storage units to be used for snapshot from diskgroup datadg:  
disk_6  
SNAPSHOT_VOL_PREFIX = SNAP_  
SNAPSHOT_DG_PREFIX = SNAP_  
Database volume layout validated successfully.  
Creating snapshot volumes for data volumes ... Done  
Taking database out of backup mode ... Done  
Flushing online redo logs ... Done  
Creating snapshot volume for archivelog volume ... Done  
Copying snapshot information to snapshot volume ... Done  
Creating snapshot diskgroups ... Done  
Deporting snapshot diskgroups ... Done  
Snapshot of database sfaedb is in diskgroups:  
SNAP_datadg  
snapshot ended at Sun Sep 18 14:48:48 2011.
```

This command breaks the user-specified mirror ( parameter `SNAPSHOT_PLEX_TAG` ) from the primary volumes and creates a new disk group with the name starting with the string defined in the `snap_dg_prefix` parameter. The default value of this parameter is `SNAP_.`



When you create a snapshot, the broken-off mirrors are split off into a different disk group that is referred to as the snapshot disk group. The mirrors are the only components that are present in the snapshot disk group. If additional objects, such as cache objects, must be moved from the original disk group to the snapshot disk group, you can use the `EXTRA_OBJECTS` parameter to specify these additional objects.

See “[FlashSnap configuration parameters](#)” on page 333.

---

**Note:** At the validation stage, all the parameters, including the mandatory parameters `--oracle_sid` and `--flashsnap_name`, are read and stored in the repository.

---

If you need to change any parameter, change the configuration file and specify it with the `-c` option.

#### 4 Mount the snapshot.

```
$ /opt/VRTS/bin/vxsfadm -s flashsnap \  
-o mount -a oracle --oracle_sid sfaedb \  
--oracle_home /ora_base/db_home --flashsnap_name TEST1  
Retrieving snapshot information ... Done  
Importing snapshot diskgroups ... Done  
Mounting snapshot volumes ... Done
```

---

**Note:** This command mounts the snapshot on the host to which storage is attached. The secondary host is the system defined in the `SECONDARY_HOST` parameter of the configuration file.

---

By default, volumes are mounted under the `/var/tmp` file system.

If you need to specify an alternate location for mounting snapshot volumes, either provide `CLONE_PATH` on the command line or from the configuration file.

For performing off-host operations, you can specify the host of the SFDB repository by using the `-r` option of the `vxsfadm` command.

```
$ vxsfadm -s flashsnap -a oracle -o mount \  
--oracle_sid sfaedb --flashsnap_name TEST1 --clone_path /cloneoracle
```

---

**Note:** Ensure that the Oracle user has the required permissions to create the `/cloneoracle` directory, if it does not exist.

---

## 5 Clone the database based on the snapshot.

```
$ /opt/VRTS/bin/vxsfadm -s flashsnap -o clone \  
-a oracle --oracle_sid sfaedb --oracle_home /ora_base/db_home \  
--flashsnap_name TEST1 --clone_name clone1  
Retrieving snapshot information ... Done  
Importing snapshot diskgroups ... Done  
Mounting snapshot volumes ... Done  
Preparing parameter file for clone database ... Done  
Mounting clone database ... Done  
Starting database recovery ...  
Clone database clone1 is open.
```

If you have not specified *clone\_name*, it is automatically generated.

---

**Note:** If you have already specified the *clone\_name* and the *clone\_path* parameters in the configuration file that was used during the validate operation, the *clone\_name* parameter is not required on the command line.


---

If you need to change a memory tuning parameter of the database clone such as *memory\_target*, you can specify a modified *pfile* during the clone operation.

# Resynchronizing mirror volumes with primary volumes

After creating a clone of your database, you can refresh mirror volumes with primary volumes by using the steps outlined in [Figure 17-4](#).

**Figure 17-4** Resynchronizing Mirror Volumes

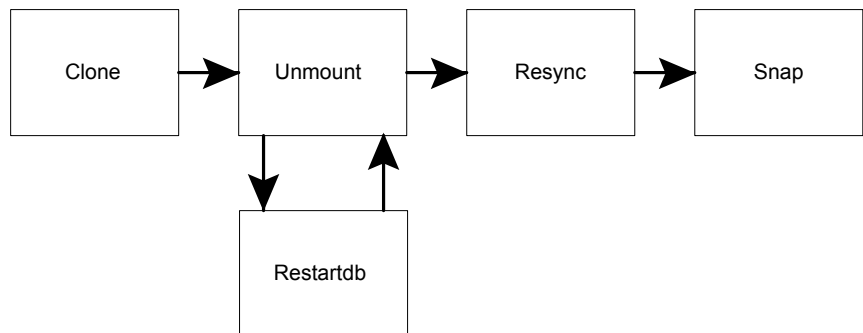

## To resynchronize mirror volumes with primary volumes

### 1 Unmount the clone database.

```
$ /opt/VRTS/bin/vxsfadm -s flashsnap -o umount \  
  -a oracle --oracle_sid sfaedb --oracle_home /ora_base/db_home \  
  --flashsnap_name TEST1 --clone_name clone1  
Shutting down clone database clone1 ...  
Database shut down.  
Retrieving snapshot information ... Done  
Unmounting snapshot volumes ... Done  
Deporting snapshot diskgroups ... Done
```

This command stops the clone database gracefully and unmounts the file systems. The unmounted database can be restarted by using the clone operation.

## 2 Refresh mirror volumes with primary volumes.

```
$ /opt/VRTS/bin/vxsfadm -s flashsnap -o resync \  
-a oracle --oracle_sid sfaedb --oracle_home /ora_base/db_home \  
--flashsnap_name TEST1  
resync started at Sun Sep 18 14:53:17 2011.  
Importing snapshot diskgroups ... Done  
Joining snapshot diskgroups to original diskgroups ... Done  
Reattaching snapshot volumes to original volumes ... Done  
resync ended at Sun Sep 18 14:53:30 2011.
```

This command resynchronizes all mirror volumes that were broken during snapshot state with primary volumes. After the resync operation is complete and mirror volumes are in the SNAPDONE state, you can take fresh snapshots.

You can use the `vxprint` command to view the state of the volumes.

You can use the `-o clone` option to restart a clone database after it is unmounted.


```
$ /opt/VRTS/bin/vxsfadm -s flashsnap -o clone \  
-a oracle --oracle_sid sfaedb --oracle_home /ora_base/db_home \  
--flashsnap_name TEST1 --clone_name clone1  
Retrieving snapshot information ... Done  
Importing snapshot diskgroups ... Done  
Mounting snapshot volumes ... Done  
Starting clone database clone1 ...  
Clone database started.
```

This command mounts the snapshot file systems and restarts the cloned database.

# Recovering the database manually

For Oracle databases, you can perform some special operations such as recovering the database to a System Change Number (SCN) or a particular time. You can use the `mountdb` operation to perform the database recovery. This operation can be performed after completing the `mount` or the `snap` operations. The steps required to recover a database manually are outlined in [Figure 17-5](#).

Figure 17-5 Recovering Database Manually

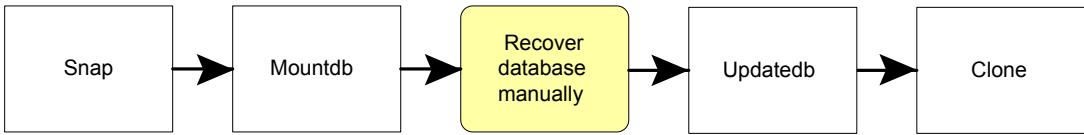

**To recover the database manually**

- 1 Mount the database without recovering or applying the logs.

```
$ /opt/VRTS/bin/vxsfadm -s flashsnap -o mountdb \  
-a oracle --oracle_sid sfaedb --oracle_home /ora_base/db_home \  
--flashsnap_name TEST1 --clone_name clone1  
Retrieving snapshot information ... Done  
Importing snapshot diskgroups ... Done  
Mounting snapshot volumes ... Done  
Preparing parameter file for clone database ... Done  
Mounting clone database ... Done
```

If you execute this command after the snap operation, it mounts the file systems and the clone database. Note that archive logs are not applied and the database is not open for read write operations. You can recover the database by using basic Oracle recovery commands.

See “[Manual recovery of a clone database](#)” on page 383.

See “[Manual recovery after a restore operation](#)” on page 384.

- 2 Update the repository to change the database state to clone.

```
$ /opt/VRTS/bin/vxsfadm -s flashsnap -o update_status \  
-a oracle --oracle_sid sfaedb --oracle_home /ora_base/db_home \  
--flashsnap_name TEST1
```

This step is for bookkeeping that needs to be performed to update the state of the FlashSnap service in repository to clone state after manual recovery.

## Cloning a database on the secondary host


You can use the `vxsfadm` command to perform end operations without performing the intermediate operations. For example, you need to perform the steps outlined in [Figure 17-6](#).

**Figure 17-6** Creating a Clone - Basic Workflow



However, you can use `vxsfadm` to go directly from Validate to Clone for cloning a database on the secondary host. [Figure 17-7](#) outlines the steps for doing this operation.

**Figure 17-7** Creating a Clone - Without Intermediate Operations

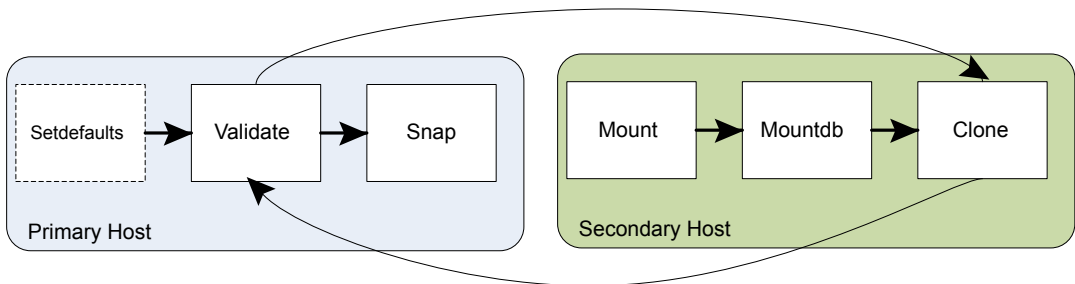

### To clone a database on the secondary host

- ◆ Enter the following command.

```
$ vxsfadm -s flashsnap -a oracle -o clone \  
--oracle_sid sfaedb --oracle_home /ora_base/db_home \  
--flashsnap_name TEST1 --secondary_host host2  
Retrieving snapshot information ... Done  
Importing snapshot diskgroups ... Done  
Mounting snapshot volumes ... Done  
Preparing parameter file for clone database ... Done  
Mounting clone database ... Done  
Starting database recovery ...  
Clone database clon1 is open.
```

In a 2-host setup with the primary host host1 and the secondary host host2, this command creates a clone database on host2.

The SID of the clone database is clone1 and it is mounted under the `/var/tmp` directory.

---

**Note:** ORACLE\_HOME and User ID of the Oracle user are same on both the nodes. Default values are assigned to all of the other parameters.

---

As a DBA, if you need to mount the clone database on the secondary host to some other location with a different SID, use the following command.

```
$ vxsfadm - s flashsnap -a oracle -o clone --oracle_sid sfaedb \  
--oracle_home /ora_base/db_home -flashsnap_name TEST1 \  
--secondary_host host2 --clone_path /home/newclonepath \  
--clone_name newsid
```



# Administering space-optimized snapshots

This chapter includes the following topics:

- [Planning to create an instant space-optimized snapshot](#)
- [Preparing a legacy volume for the creation of an instant snapshot](#)
- [Creating a shared cache object](#)
- [Creating a clone of an Oracle database by using space-optimized snapshots](#)
- [Creating multiple clones using FlashSnap snapshots](#)
- [Recovering the clone database manually](#)

## Planning to create an instant space-optimized snapshot

The following considerations apply to creating an instant space-optimized snapshot:

- A space-optimized instant snapshot of a volume requires enough storage to record the original contents of the parent volume as they are changed during the life of the snapshot.
- The original volume must have a DCO (version 20 or above) and a DCO volume. Persistent FastResync must be enabled.  
In this release, these requirements are the defaults. If you changed these settings or if the original volume was created with an earlier version of Storage Foundation, you can still create an instant snapshot.

See [“Preparing a legacy volume for the creation of an instant snapshot”](#) on page 202.

- If you need several space-optimized instant snapshots for the volumes in a disk group, you may find it convenient to create a single shared cache object in the disk group rather than a separate cache object for each snapshot.

## Preparing a legacy volume for the creation of an instant snapshot

An instant snapshot requires that the original volume has a DCO volume. Persistent FastResync must be enabled, which is the default for Storage Foundation 6.0 and later. If the original volume was created with an earlier release of Storage Foundation, prepare the volume for an instant snapshot with the following procedure. This procedure may also be required if you previously disabled Persistent FastResync, or if you used the `vxsnap unprepare` command on the volume.

### To prepare a legacy volume for the creation of an instant snapshot

- 1 Verify that the volume has a DCO volume that allows instant snapshots, and that FastResync is enabled on the volume:

```
# vxprint -g volumedg -F%instant volume
# vxprint -g volumedg -F%fastresync volume
```

If both commands return a value of `on`, proceed to creating the snapshot.

If one of the commands returns the value of `off`, continue with the next step.

- 2 Prepare the volume for instant snapshots:

```
# vxsnap [-g diskgroup] prepare volume [regionsize=size] \  
[ndcomirs=number] [alloc=storage_attributes]
```

For example, to prepare the volume `myvol` in the disk group `mydg`, use the following command:

```
# vxsnap -g mydg prepare myvol regionsize=128k ndcomirs=2 \  
alloc=mydg10,mydg11
```

This example creates a DCO object and redundant DCO volume with two plexes located on disks `mydg10` and `mydg11`, and associates them with `myvol`. The region size is also increased to 128KB from the default size of 64KB. The region size must be a power of 2, and be greater than or equal to 16KB. A smaller value requires more disk space for the change maps, but the finer granularity provides faster resynchronization.

## Creating a shared cache object

If you need to create several instant space-optimized snapshots for the volumes in a disk group, you may find it more convenient to create a single shared cache object in the disk group rather than a separate cache object for each snapshot.

### To create a shared cache object

- 1 Decide on the following characteristics that you want to allocate to the cache volume that underlies the cache object:
  - The size of the cache volume should be sufficient to record changes to the parent volumes during the interval between snapshot refreshes. A suggested value is 10% of the total size of the parent volumes for a refresh interval of 24 hours.

- If redundancy is a desired characteristic of the cache volume, it should be mirrored. This increases the space that is required for the cache volume in proportion to the number of mirrors that it has.
  - If the cache volume is mirrored, space is required on at least as many disks as it has mirrors. These disks should not be shared with the disks used for the parent volumes. The disks should also be chosen to avoid impacting I/O performance for critical volumes, or hindering disk group split and join operations.
- 2 Having decided on its characteristics, use the `vxassist` command to create the volume that is to be used for the cache volume. The following example creates a mirrored cache volume, `cachevol`, with size 1GB in the disk group, `mydg`, on the disks `disk16` and `disk17`:

```
# vxassist -g mydg make cachevol 1g layout=mirror \  
  init=active disk16 disk17
```

The attribute `init=active` is specified to make the cache volume immediately available for use.

- 3 Use the `vxmake cache` command to create a cache object on top of the cache volume that you created in the previous step:

```
# vxmake [-g diskgroup] cache cache_object \  
cachevolname=volume [regionsize=size] [autogrow=on] \  
[highwatermark=hwmk] [autogrowby=agbvalue] \  
[maxautogrow=maxagbvalue]
```

If you specify the region size, it must be a power of 2, and be greater than or equal to 16KB (16k). If not specified, the region size of the cache is set to 64KB.

---

**Note:** All space-optimized snapshots that share the cache must have a region size that is equal to or an integer multiple of the region size set on the cache. Snapshot creation also fails if the original volume's region size is smaller than the cache's region size.

---

If the cache is not allowed to grow in size as required, specify `autogrow=off`. By default, the ability to automatically grow the cache is turned on.

In the following example, the cache object, `cobjmydg`, is created over the cache volume, `cachevol`, the region size of the cache is set to 32KB, and the `autogrow` feature is enabled:

```
# vxmake -g mydg cache cobjmydg cachevolname=cachevol \  
regionsize=32k autogrow=on
```

- 4 Having created the cache object, use the following command to enable it:

```
# vxcache [-g diskgroup] start cache_object
```

For example to start the cache object, `cobjmydg`:

```
# vxcache -g mydg start cobjmydg
```

## Creating a clone of an Oracle database by using space-optimized snapshots

You can use space-optimized snapshots to create a clone of an Oracle database by performing the following procedure.

See “[vxsfadm command reference](#)” on page 329.

See “[Space-optimized snapshots configuration parameters](#)” on page 336.

See “[Space-optimized snapshots supported operations](#)” on page 338.

For details, refer to `vxsfadm-sos(1M)` and `vxsfadm-oracle-sos(1M)` man pages.

### To create a clone of an Oracle database by using space-optimized snapshots

#### 1 Create a configuration file.

```
$ /opt/VRTSdbed/bin/vxsfadm -s sos -a oracle \  
-o setdefaults --oracle_sid sfaedb --oracle_home /ora_base/db_home \  
--sos_name TEST1 -c dailyconfig  
Written config file dailyconfig
```

This command creates a default configuration file with all the parameters and default values. You can change the parameters, if required.

---

**Note:** If you have exported in environment the `ORACLE_SID` and the `ORACLE_HOME` parameters, you do not need to include them on the command line. After the `setdefaults` operation, the configuration file is populated with all the mandatory parameters along with the optional ones.

---

#### 2 Validate the setup.

```
$ /opt/VRTSdbed/bin/vxsfadm -s sos -a oracle -o validate --oracle_sid \  
sfaedb --oracle_home /ora_base/db_home --sos_name TEST1  
Validating database configuration for space-optimized snapshot:  
ORACLE_SID = sfaedb  
ORACLE_HOME = /ora_base/db_home  
APP_MODE = online  
ARCHIVELOG_DEST = /arch/sfaedb  
SNAPSHOT_ARCHIVE_LOG = yes  
Database validation successful.  
Validating database volume layout for space-optimized snapshot:  
Data volumes ready for snapshot:  
Volume/volume-set datavol of diskgroup datadg mounted on /data.  
Archivelog volume ready for snapshot:  
Volume/volume-set archvol of diskgroup datadg mounted on /arch.  
CACHE_OBJECT = datadg:cacheobj  
SNAPSHOT_VOL_PREFIX = SNAP_  
Database volume layout validated successfully.
```

This command validates the configuration file and the database environment. In case of any problem, appropriate error messages are displayed that you can use to correct the problem and then retry.

### 3 Create a space-optimized snapshot of the database.

```
$ /opt/VRTSdbed/bin/vxsfadm -s sos -a oracle \  
-o snap --oracle_sid sfaedb --oracle_home /ora_base/db_home \  
--sos_name TEST1  
Validating database configuration for space-optimized snapshot:  
ORACLE_SID = sfaedb  
ORACLE_HOME = /ora_base/db_home  
APP_MODE = online  
ARCHIVELOG_DEST = /arch/sfaedb  
SNAPSHOT_ARCHIVE_LOG = yes  
Database validation successful.  
Putting database in backup mode ... Done  
Validating database volume layout for space-optimized snapshot:  
Data volumes ready for snapshot:  
Volume/volume-set datavol of diskgroup datadg mounted on /data.  
Archivelog volume ready for snapshot:  
Volume/volume-set archvol of diskgroup datadg mounted on /arch.  
CACHE_OBJECT = datadg:cacheobj  
SNAPSHOT_VOL_PREFIX = SNAP_  
Database volume layout validated successfully.  
Creating snapshot volumes for data volumes ... Done  
Taking database out of backup mode ... Done  
Flushing online redo logs ... Done  
Creating snapshot volume for archivelog volume ... Done
```

This command creates space-optimized snapshot volumes from the primary volumes by using the specified cache objects.

---

**Note:** At the validation stage, all the parameters, including the mandatory parameters `--oracle_sid` and `--sos_name`, are read and stored in the repository.

---

#### 4 Mount the snapshot.

```
$ /opt/VRTSdbed/bin/vxsfadm -s sos -a oracle \  
-o mount --oracle_sid sfaedb --oracle_home /ora_base/db_home \  
--sos_name TEST1  
Mounting snapshot volumes ... Done
```

If you need to specify the clone path, use the `CLONE_PATH` variable. If this variable is not specified, the snapshot is mounted under the `/var/tmp` directory, by default.

```
$ vxsfadm -s sos -a oracle -o mount --oracle_sid sfaedb \  
--sos_name TEST1 --clone_path /cloneoracle
```

---

**Note:** Ensure that the Oracle user has the required permissions to create the `/cloneoracle` directory, if it does not exist.

---

#### 5 Clone the database based on the snapshot.

```
$ /opt/VRTSdbed/bin/vxsfadm -s sos -a oracle -o clone \  
--oracle_sid sfaedb --oracle_home /ora_base/db_home \  
--sos_name TEST1  
Preparing parameter file for clone database ... Done  
Mounting clone database ... Done  
Starting database recovery ...  
Clone database sfaOjqwF is open.
```

If you have not specified `clone_name`, it is automatically generated.

If you need to change a memory tuning parameter of the database clone such as `memory_target`, you can specify a modified pfile during the clone operation.

You can also use space-optimized snapshots in a replicated environment.

See [“Considerations for using volume snapshots with VVR”](#) on page 317.

See [“Creating space-optimized snapshots in a VVR setup”](#) on page 318.

## Space-optimized snapshots in HA environment

If you are using space-optimized snapshots to clone an Oracle database in a VCS cluster, ensure the following before a switchover:

- If you are using volume agents, unmount and destroy the clone, and then disable the cache object. After the switchover, you can take a snapshot of the database and recreate the clone database.



- If you do not want to destroy the clone and then recreate it, remove volume agents for database volumes, if there are any. Use diskgroup and mount agents instead.

## Creating multiple clones using FlashSnap snapshots

Online mode, third-mirror-break-off type snapshot i.e. online FlashSnap snapshot of a database instance contains all the information needed to create a clone of the database instance. It can act as a template for creating the clone database instances. You can thus allocate a FlashSnap snapshot that can be used as a master copy for creating one or more clone instances.

The clone instances created from a FlashSnap image, termed as the 'golden image', are incremental copies of the master or the golden image. These depend on the FlashSnap image for their operations.

You can create multiple database instance clones from a single backup image using the staggering technique. Here you create a space-optimized snapshot of a FlashSnap snapshot, and bring up a clone database instance.

Two new configurations parameters are used to support this particular use case.

- EXTRA\_OBJECTS [short form --extra]
- SOURCE\_SNAPSHOT [short form --source]

You need a cache object to create a space-optimized snapshot. This object can either be included in the FlashSnap snapshot, or be created upon snapshot. EXTRA\_OBJECTS is used to specify a cache object to be included in the FlashSnap snapshot. This parameter is not needed if you create a cache object after the creation of a FlashSnap snapshot.

**To create database clones using space-optimized snapshots from a FlashSnap golden image**

## 1 Create an online FlashSnap snapshot (golden image) to be used as the source snapshot.

```

$ vxsfadm -s flashsnap -a oracle --name friday -o snapshot \
--oracle_sid sfaedb --oracle_home /ora_base/db_home \
--extra_objects datadg:cacheobj --extra_objects datadg2:cacheobj2
Validating database configuration for third-mirror-break-off snapshot:
ORACLE_SID                = sfaedb
ORACLE_HOME                = /ora_base/db_home
APP_MODE                   = online
ARCHIVELOG_DEST            = /arch/sfaedb
SNAPSHOT_ARCHIVE_LOG      = yes
Database validation successful.
snapshot started at Mon Jan 30 15:05:15 2012.
Putting database in backup mode ...                               Done
Validating database volume layout for third-mirror-break-off snapshot:
Data volumes ready for snapshot:
Volume/volume-set datavol2 of diskgroup datadg2 mounted on /data2.
Storage units to be used for snapshot from diskgroup datadg2:
disk_6 Volume/volume-set datavol of diskgroup datadg mounted on /data.
Storage units to be used for snapshot from diskgroup datadg:
disk_3
Archivelog volume ready for snapshot:
Volume/volume-set archvol of diskgroup datadg mounted on /arch.
Storage units to be used for snapshot from diskgroup datadg:
disk_4
SNAPSHOT_VOL_PREFIX       = SNAP_
SNAPSHOT_DG_PREFIX        = SNAP_
Database volume layout validated successfully.
Creating snapshot volumes for data volumes ...                   Done
Taking database out of backup mode ...                           Done
Flushing online redo logs ...                                    Done
Creating snapshot volume for archivelog volume ...              Done
Copying snapshot information to snapshot volume ...              Done
Creating snapshot diskgroups ...                                  Done
Deporting snapshot diskgroups ...                                Done
SNAP_datadg2 SNAP_datadg
snaphot ended at Mon Jan 30 15:05:28 2012.

```

You can use the `--extra_objects` option to include cache objects from the original disk group in the snapshot disk groups. In the example procedure, cache objects `cacheobj` and `cacheobj2` from `datadg` and `datadg2` disk groups are included in the snapshot disk groups `SNAP_datadg` and `SNAP_datadg2`.

If you do not use this option, you must manually create cache objects in the snapshot disk groups.

See [“FlashSnap configuration parameters”](#) on page 333.

## 2 Create clones using space-optimized snapshots.

```
$ vxsfadm -s sos -a oracle --name reporting --source-snapshot \  
friday --prefix RPT -o clone -r primary-host  
Validating database configuration for space-optimized snapshot:  
ORACLE_SID = sfaedb  
ORACLE_HOME = /ora_base/db_home  
APP_MODE = online  
ARCHIVELOG_DEST = /arch/sfaedb  
SNAPSHOT_ARCHIVE_LOG = yes  
Database validation successful.  
Validating source snapshot friday ... Done  
Validating database volume layout for space-optimized snapshot:  
CACHE_OBJECT = SNAP_datadg2:cacheobj2,SNAP_datadg:cacheobj  
SNAPSHOT_VOL_PREFIX = RPT  
Database volume layout validated successfully.  
Creating snapshot volumes for data volumes ... Done  
Generated mount path: /var/tmp/IKrlBXRcZ_  
Mounting snapshot volumes ... Done  
Cloning using autogenerated SID ( sfaxwYXY )  
Preparing parameter file for clone database ... Done  
Mounting clone database ... Done  
Starting database recovery ...  
Clone database sfaxwYXY is open.
```

This command creates a clone database using the FlashSnap snapshot `friday` as the golden image. You can create multiple space-optimized snapshots using the same golden image.

The golden image snapshot, like any other FlashSnap snapshot, can be imported on a host sharing storage with the host running production database. You can create database clones using space-optimized snapshots from a FlashSnap golden image in such off-host scenarios as well. Note that you must use `vxsfadm -r` option in such cases.

You can create the clones on a host different from the host on which the production database is running. In this scenario, you must specify the primary host using the `-r` option of `vxsfadm`. When the clone is no longer required, you can delete it by using the `-o delete` option of `vxsfadm`.

---

**Note:** You cannot resynchronize the FlashSnap snapshot while there exist space-optimized snapshots created by using that FlashSnap snapshot as a golden image.

---

See [“vxsfadm command reference”](#) on page 329.

See [“Space-optimized snapshots configuration parameters”](#) on page 336.

See [“Space-optimized snapshots supported operations”](#) on page 338.

## Recovering the clone database manually

For Oracle databases, you can perform some special operations such as recovering the database to a System Change Number (SCN) or a particular time. You can use the mountdb operation to perform the database recovery. This operation can be performed after completing the mount or the snap operations.

### To recover the database manually

- 1 Mount the database without recovering or applying the logs.

```
$ /opt/VRTSdbed/bin/vxsfadm -s sos -a oracle \  
-o mountdb --oracle_sid sfaedb --oracle_home /ora_base/db_home \  
--sos_name TEST1  
Mounting snapshot volumes ... Done
```

If you execute this command after the snap operation, it mounts the file systems and the clone database. Please note that archive logs are not applied and the database is not open for read write operations. You can recover the database by using basic Oracle recovery commands.

See [“Manual recovery of a clone database”](#) on page 383.

See [“Manual recovery after a restore operation”](#) on page 384.

- 2 Update the repository to change the database state to clone.

```
$ /opt/VRTSdbed/bin/vxsfadm -s sos -a oracle \  
-o update_status --oracle_sid sfaedb \  
--oracle_home /ora_base/db_home --sos_name TEST1
```

This step is for bookkeeping that needs to be performed to update the state of the space-optimized snapshots service in repository to clone state after manual recovery.





# Administering Storage Checkpoints

This chapter includes the following topics:

- [About Storage Checkpoints](#)
- [Database Storage Checkpoints for recovery](#)
- [Creating a Database Storage Checkpoint](#)
- [Deleting a Database Storage Checkpoint](#)
- [Mounting a Database Storage Checkpoint](#)
- [Unmounting a Database Storage Checkpoint](#)
- [Creating a database clone using a Database Storage Checkpoint](#)
- [Restoring database from a Database Storage Checkpoint](#)
- [Gathering data for offline-mode Database Storage Checkpoints](#)

## About Storage Checkpoints

Veritas File System (VxFS) provides a Storage Checkpoint feature that quickly creates a persistent image of a file system at an exact point in time. Storage Checkpoints significantly reduce I/O overhead by identifying and maintaining only the file system blocks that have changed since the last Storage Checkpoint or backup via a copy-on-write technique.

See [“Copy-on-write”](#) on page 169.

Storage Checkpoints provide:

- Persistence through reboots and crashes.

- The ability for data to be immediately writeable by preserving the file system metadata, the directory hierarchy, and user data.

Storage Checkpoints are actually data objects that are managed and controlled by the file system. You can create, remove, and rename Storage Checkpoints because they are data objects with associated names.

See [“How a Storage Checkpoint works”](#) on page 168.

Unlike a disk-based mirroring technology that requires a separate storage space, Storage Checkpoints minimize the use of disk space by using a Storage Checkpoint within the same free space available to the file system.

After you create a Storage Checkpoint of a mounted file system, you can also continue to create, remove, and update files on the file system without affecting the logical image of the Storage Checkpoint. A Storage Checkpoint preserves not only the name space (directory hierarchy) of the file system, but also the user data as it existed at the moment the file system image was captured.

You can use a Storage Checkpoint in many ways. For example, you can use them to:

- Create a stable image of the file system that can be backed up to tape.
- Provide a mounted, on-disk backup of the file system so that end users can restore their own files in the event of accidental deletion. This is especially useful in a home directory, engineering, or email environment.
- Create a copy of an application's binaries before installing a patch to allow for rollback in case of problems.
- Create an on-disk backup of the file system in that can be used in addition to a traditional tape-based backup to provide faster backup and restore capabilities.
- Test new software on a point-in-time image of the primary fileset without jeopardizing the live data in the current primary fileset by mounting the Storage Checkpoints as writable.

## Database Storage Checkpoints for recovery

A Database Storage Checkpoint creates an exact image of a database instantly and provides a consistent image of the database from the point in time the Database Storage Checkpoint was created. The Database Storage Checkpoint image is managed and available through the command line interface (CLI).

Because each Database Storage Checkpoint is a consistent, point-in-time image of a file system, Storage Rollback is the restore facility for these on-disk backups.

Storage Rollback rolls back the changed blocks that are contained in a Database Storage Checkpoint into the primary file system for faster database restoration.

The combination of data redundancy (disk mirroring) and Database Storage Checkpoints is recommended for highly critical data to protect them from both physical media failure and logical errors.

## Advantages and limitations of Database Storage Checkpoints

Database Storage Checkpoints and rollback provides the following advantages:

- Initially, a Database Storage Checkpoint contains no data—it contains only the inode list and the block map of the primary fileset. The block map points to the actual data on the primary file system.
- Because only the inode list and block map are needed and no data is copied, creating a Database Storage Checkpoint takes only a few seconds and very little space.
- A Database Storage Checkpoint keeps track of block change information and thereby enables incremental database backup at the block level.
- A Database Storage Checkpoint helps recover data from incorrectly modified files.
- A Database Storage Checkpoint can be mounted, allowing regular file system operations to be performed. Mountable Database Storage Checkpoints can be used for a wide range of application solutions that include backup, investigations into data integrity, staging upgrades or database modifications, and data replication solutions.

The limitations of Database Storage Checkpoints are as follows:

- Database Storage Checkpoints can only be used to restore from logical errors (for example, a human error).
- Because all the data blocks are on the same physical device, Database Storage Checkpoints cannot be used to restore files due to a media failure. A media failure requires a database restore from a tape backup or a copy of the database files that are kept on a separate medium.

## Creating a Database Storage Checkpoint

You can use the Storage Checkpoint feature of Veritas Storage Foundation to create a Database Storage Checkpoint of a database by performing the following procedure.

See “[vxsfadm command reference](#)” on page 329.

See “Database Storage Checkpoints configuration parameters” on page 341.

See “Database Storage Checkpoints supported operations” on page 344.

For details, refer to `vxsfadm-checkpoint(1M)` and `vxsfadm-oracle-checkpoint(1M)` man pages.

### To create a Database Storage Checkpoint

- ◆ Use the following command.

```
$ /opt/VRTSdbed/bin/vxsfadm -s checkpoint -o create -a oracle \  
--oracle_sid=sfaedb --oracle_home=/ora_base/db_home \  
--checkpoint_name=XYZ  
Putting database in backup mode... Done  
Creating Storage Checkpoint XYZ ... Done  
Storage Checkpoint XYZ created  
Removing the database from backup mode... Done
```

This command creates a read-only Database Storage Checkpoint of the Oracle database of the specified name. If the `checkpoint_name` parameter is not specified, a name is automatically generated.

## Deleting a Database Storage Checkpoint

You can delete a Database Storage Checkpoint as follows.

### To delete a Database Storage Checkpoint

- ◆ Use the following command.

```
$ /opt/VRTSdbed/bin/vxsfadm -s checkpoint -o delete -a oracle \  
--oracle_sid=sfaedb --oracle_home=/ora_base/db_home \  
--checkpoint_name=XYZ  
Deleting the Checkpoint XYZ...  
Deleting Checkpoint from /data... Done
```

This command deletes the Database Storage Checkpoint XYZ.

## Mounting a Database Storage Checkpoint

You can mount a Database Storage Checkpoint as follows.

### To mount a Database Storage Checkpoint

- ◆ Do one of the following.

- Use the following command to mount the Database Storage Checkpoint in the read-only mode.

```
$ /opt/VRTSdbed/bin/vxsfadm -s checkpoint -o mount -a oracle \  
--oracle_sid=sfaedb --oracle_home=/ora_base/db_home \  
--checkpoint_name=XYZ --mount_path=/tmp/abcd  
Mounting Checkpoint to /tmp/abcd... Done
```

This command mounts the Database Storage Checkpoint to the specified mount point.

If the *checkpoint\_name* parameter is not specified, a name is automatically generated.

- Use the following command to mount the Database Storage Checkpoint in the read-write mode.

```
$ /opt/VRTSdbed/bin/vxsfadm -s checkpoint -o mountrw -a oracle \  
--oracle_sid=sfaedb --oracle_home=/ora_base/db_home \  
--checkpoint_name=XYZ --clone_path=/tmp/abcd  
Creating Storage Checkpoint XYZ_rw_1316516805 ... Done  
Mounting Checkpoint to /tmp/abcd... Done
```

This command creates a Storage Checkpoint of the Database Storage Checkpoint XYZ and then mounts the newly created Database Storage Checkpoint to the specified mount point in the read-write mode.

If the *checkpoint\_name* parameter is not specified, a name is automatically generated.

---

**Note:** This command maintains the point-in-time copy of the original Database Storage Checkpoint.

---

## Unmounting a Database Storage Checkpoint

You can unmount a Database Storage Checkpoint as follows.

### To unmount a Database Storage Checkpoint

- ◆ Use the following command.

```
$ /opt/VRTSdbed/bin/vxsfadm -s checkpoint -o umount -a oracle \  
--oracle_sid=sfaedb --oracle_home=/ora_base/db_home \  
--checkpoint_name=XYZ  
Unmounting the checkpoint... Done
```

This command unmounts the Database Storage Checkpoint XYZ.

## Creating a database clone using a Database Storage Checkpoint

You can create a database clone by using a Database Storage Checkpoint as follows.

### To create a clone of a Database Storage Checkpoint

- ◆ Use the following command.

```
$ /opt/VRTSdbed/bin/vxsfadm -s checkpoint -o clone -a oracle \  
--oracle_sid=sfaedb --oracle_home=/ora_base/db_home \  
--checkpoint_name=XYZ --clone_path=/tmp/abcd --clone_name clone1  
Creating Storage Checkpoint XYZ_rw_1316523411 ... Done  
Storage Checkpoint XYZ_rw_1316523411 created  
Mounting Checkpoint to /tmp/abcd... Done  
Cloning the Pfile ... Done  
Mounting the database... Done  
Recovering the clone database... Done
```

This command creates a Storage Checkpoint of the Database Storage Checkpoint XYZ and then mounts the newly created Database Storage Checkpoint to the the specified mount point in the read-write mode.

If you do not specify *checkpoint\_name* and *clone\_name*, they are automatically generated.

---

**Note:** This command maintains the point-in-time copy of the original Database Storage Checkpoint.

---

# Restoring database from a Database Storage Checkpoint

You can restore your database from a Database Storage Checkpoint as follows.

---

**Note:** The following operation requires your primary database to be shut down.

---

## To restore the database from a Database Storage Checkpoint

- ◆ Use the following command.

```
$ /opt/VRTSdbed/bin/vxsfadm -s checkpoint -o restore -a oracle \  
--oracle_sid=sfaedb --oracle_home=/ora_base/db_home \  
--checkpoint_name=XYZ  
Rolling back the application files... Done  
You may want to use the following file(s) for application recovery  
/var/tmp/M3UGw9pgiC/control01.ctl
```

This command restores all the data files of the application to the point-in-time when the Storage Checkpoint was created.

---

**Note:** Rollback of Database Storage Checkpoints that are mounted in the read-write mode is not supported.

---

After the restore operation, you can bring up the database by using standard recovery techniques. The control file provided is the one present at the time the Storage Checkpoint was created. This control file can be used if there have been some structural changes to the database after the Storage Checkpoint was created.

---

**Note:** The following operation requires the tablespace and all data files in the tablespace to be offline.

---

### To restore the data files in a tablespace from a Database Storage Checkpoint

- ◆ Use the following command.

```
$ /opt/VRTSdbed/bin/vxsfadm -s checkpoint -o restore -a oracle \  
--oracle_sid=sfaedb --oracle_home=/ora_base/db_home \  
--checkpoint_name=XYZ --tablespace_rollback newtbs  
Rolling back the application files... Done
```

This command restores all the data files in the specified tablespace to the point-in-time when the Database Storage Checkpoint was created.

After the restore operation, you must recover the tablespace by using standard recovery techniques.

---

**Note:** The following operation requires the data files that need to be restored to be offline.

---

### To restore specified data files from a Database Storage Checkpoint

- ◆ Use the following command.

```
$ /opt/VRTSdbed/bin/vxsfadm -s checkpoint -o restore -a oracle \  
--oracle_sid=sfaedb --oracle_home=/ora_base/db_home \  
--checkpoint_name=XYZ \  
--datafile_rollback /data/sfaedb/newf01.dbf,/data/sfaedb/newf02.dbf  
Rolling back the application files... Done
```

This command restores all the specified data files to the point-in-time when the Database Storage Checkpoint was created.

You can specify the data files to restore by using one of the following options:

- `datafile_rollback`: A list of data files separated by comma.
- `datafile_list_rollback`: A file that contains a list of data files separated by newlines.

After the restore operation, you must recover the data files by using the standard recovery procedures.

## Gathering data for offline-mode Database Storage Checkpoints

You can gather data for offline-mode Database Storage Checkpoints as follows.



---

**Note:** You can perform the following operation only when the database is up.

---

**To gather information necessary to create a Checkpoint when the database is offline**

- ◆ Use the following command.

```
$ /opt/VRTS/bin/vxsfdm -s checkpoint -a oracle -o getappdata  
Gathering offline data... Done
```

---

**Note:** If you attempt to create an offline Database Storage Checkpoint without performing the data gathering operation, the Checkpoint creation fails.

---



# Administering FileSnap snapshots

This chapter includes the following topics:

- [Preparing to use FileSnap](#)
- [Creating a clone of an Oracle database by using FileSnap](#)
- [Destroying a database clone created by using FileSnap](#)
- [Destroying a FileSnap snapshot](#)
- [Restoring database files from a FileSnap snapshot](#)
- [Viewing the list of snapshots and clones created by using FileSnap](#)

## Preparing to use FileSnap

To use FileSnap, ensure the following:


- The underlying VxFS file systems are using disk layout Version 8 or later.
- The Enterprise license is available.

If some of the file systems are using layout Version 7 or earlier, use the `vxupgrade` utility to upgrade to Version 8 or later while the file systems are online.

## Creating a clone of an Oracle database by using FileSnap

You can use FileSnap to create a clone of an Oracle database by performing the steps outlined in [Figure 20-1](#).

**Figure 20-1** Creating a Clone - FileSnap

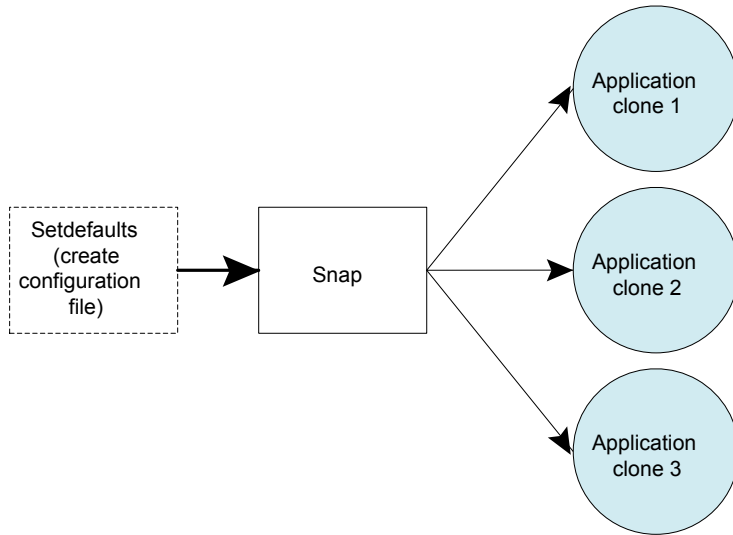

See [“vxsfadm command reference”](#) on page 329.

See [“FileSnap configuration parameters”](#) on page 339.

See [“FileSnap supported operations”](#) on page 341.

For details, refer to `vxsfadm-filesnap(1M)` and `vxsfadm-oracle-filesnap(1M)` man pages.

## To create a clone of an Oracle database by using FileSnap

### 1 Create a configuration file.

```
$ vxsfadm -s filesnap -a oracle --oracle_sid sfaedb -oracle_home \  
  '/ora_base/db_home' --filesnap_name 'daily_snap' \  
  -c dailyconfig -o setdefaults
```

Written config file dailyconfig

This command creates a default configuration file with all the parameters and default values. You can change the parameters, if required.

---

**Note:** If you plan to provide the parameters and their values on the command line, this step is not required.

---

---

**Note:** If you have exported in environment the `oracle_sid` and the `oracle_home` parameters, you do not need to include them on the command line. After the `setdefaults` operation, the configuration file is populated with all the mandatory parameters along with the optional ones.

---

### 2 Create a snapshot of the database.

```
$ vxsfadm -s filesnap -a oracle --oracle_sid sfaedb -oracle_home \  
  '/ora_base/db_home' --filesnap_name 'daily_snap' -o snap  
Validating database configuration for filesnap...  
Database validation successful.  
ORACLE_SID = sfaedb  
ORACLE_HOME = /ora_base/db_home  
APP_MODE = online  
Validating filesystem configuration for filesnap...  
Database filesystem configuration validated successfully.  
Starting database online backup mode... Done  
Snapshotting files... Done  
Stopping database online backup mode... Done
```

This command creates a FileSnap snapshot of all the data files. All the temp files, archive logs, and redo logs are excluded.

- 3 Create a clone of the primary database based on the snapshots of the data files.

```
$ vxsfadm -s filesnap -a oracle --oracle_sid sfaedb -oracle_home \  
'/ora_base/db_home' --filesnap_name 'daily_snap' \  
--clone_name clone1 -o clone  
Cloning files... Done  
Preparing parameter file for clone database... Done  
Mounting clone database... Done  
Starting clone database recovery... Done  
Clone database clone1 is open.
```

FileSnap provides the flexibility to create multiple database clones by using one FileSnap snapshot. To create another clone from the FileSnap snapshot, use the following command:

```
$ vxsfadm -s filesnap -a oracle --oracle_sid sfaedb -oracle_home \  
'/ora_base/db_home' --filesnap_name 'daily_snap' \  
--clone_name clone2 -o clone  
Cloning files... Done  
Preparing parameter file for clone database... Done  
Mounting clone database... Done  
Starting clone database recovery... Done  
Clone database clone2 is open.
```


---

**Note:** You must specify the *clone\_name* parameter. It is not automatically generated in case it is not specified on the command line or in the configuration file.

---

## Destroying a database clone created by using FileSnap

You can destroy a clone of a database that is created by using a FileSnap snapshot. [Figure 20-2](#) provides an overview of this operation.

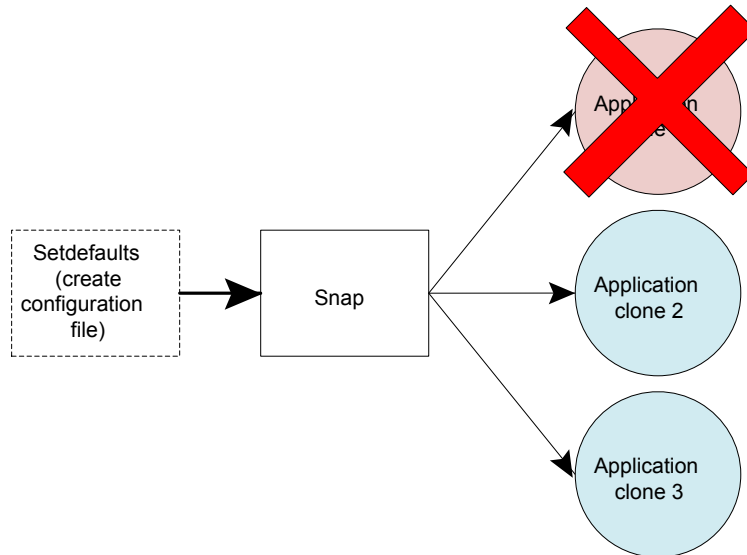**Figure 20-2** Destroying a Clone - FileSnap**To destroy a database clone**

- ◆ Use the following command.


```
$ vxsfadm -s filesnap -a oracle --oracle_sid sfaedb -oracle_home \  
'/ora_base/db_home' --filesnap_name 'daily_snap' \  
--clone_name clone1 -o destroyclone  
Shutting down clone database... Done  
Destroying clone... Done
```

This command shuts down the Oracle database clone and destroys the files that are associated with the clone. This operation does not destroy the original snapshot.

## Destroying a FileSnap snapshot

You can destroy the FileSnap snapshots of your data files by using the procedure outlined in [Figure 20-3](#).

Figure 20-3 Destroying a Snapshot - FileSnap

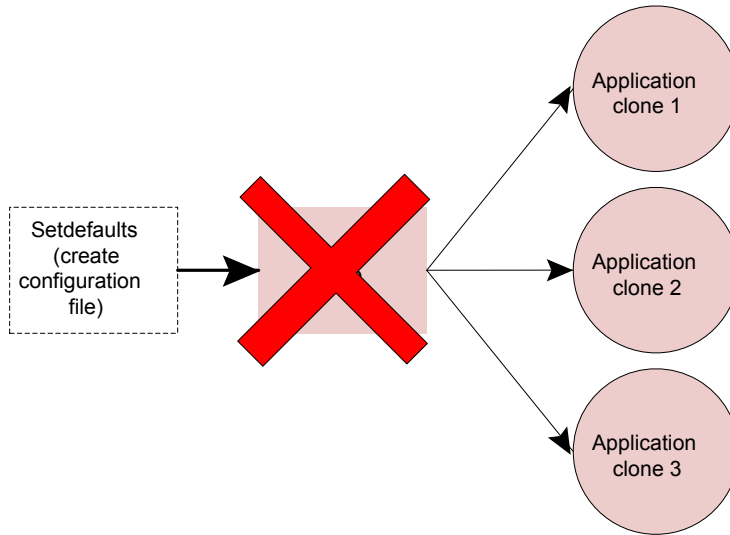

---

**Note:** Before destroying a snapshot, you must destroy all database clones that were created by using the snapshot.

---

#### To destroy a FileSnap snapshot

- ◆ Use the following command.

```
$ vxsfadm -s filesnap -a oracle --oracle_sid sfaedb \  
-oracle_home '/ora_base/db_home' --filesnap_name 'daily_snap' \  
-o destroysnap
```

## Restoring database files from a FileSnap snapshot

You can restore the database files from a FileSnap snapshot that was taken at an earlier point of time, with the current data files. This operation is useful in case of data corruption, logical errors, and other scenarios in which you want to restore data files from a snapshot.

---

**Note:** This operation requires the primary database to be shut down.

---

---

**Note:** This operation does not recover the database.

---



### To restore a FileSnap snapshot

- ◆ Use the following command.

```
$ vxsfadm -s filesnap -a oracle -o restore --oracle_sid \  
sfaedb -oracle_home '/ora_base/db_home' --filesnap_name 'daily_snap'  
Restoring files... Done
```

## Viewing the list of snapshots and clones created by using FileSnap

You can use the following procedure to view the list of snapshots that were created by using FileSnap and the clones that were created by using those snapshots.

### To view the list of snapshots and clones created on a database instance

- ◆ Use the following command.

```
$ vxsfadm -s filesnap -a oracle -o list --oracle_sid sfaedb  
The following snapshot(s)/clone(s) are available:  
SNAPSHOT NAME      CLONE NAME      STATUS  
daily_snap  
                  clone1           Done  
                  clone2           Done
```



# Backing up and restoring with Netbackup in an SFHA environment

This chapter includes the following topics:

- [About Veritas NetBackup](#)
- [About using Veritas NetBackup for backup and restore for Oracle](#)
- [About using Veritas NetBackup to backup and restore Oracle Disk Manager files](#)
- [Using Veritas NetBackup to backup and restore Quick I/O files for Oracle](#)
- [Using NetBackup in an SFHA Solutions product environment](#)

## About Veritas NetBackup

Veritas NetBackup provides backup, archive, and restore capabilities for database files and directories contained on client systems in a client-server network. NetBackup server software resides on platforms that manage physical backup storage devices. The NetBackup server provides robotic control, media management, error handling, scheduling, and a repository of all client backup images.

Administrators can set up schedules for automatic, unattended full and incremental backups. These backups are managed entirely by the NetBackup server. The administrator can also manually back up clients. Client users can perform backups, archives, and restores from their client system, and once started, these operations also run under the control of the NetBackup server.

Veritas NetBackup, while not a shipped component of Veritas Storage Foundation Enterprise products, can be purchased separately.

## How Veritas NetBackup block-level incremental backup works for for Oracle database files

Block-Level Incremental (BLI) Backup extends the capabilities of NetBackup to back up only changed data blocks of Oracle database files. BLI Backup accomplishes this backup methodology using the Storage Checkpoint facility in the Veritas File System (VxFS) available through Storage Foundation for Databases tools. BLI Backup reduces both the time required to complete a database backup and the amount of data transferred during backups. It also allows more frequent backups, resulting in more up-to-date backup images. When restoring from backups, the restore time is increased only by the extra time needed for NetBackup to apply the incremental backups after a full restore completes. However, frequent incremental backups can speed up the database recovery by reducing the number of redo logs to apply.

BLI Backup is particularly useful in a database environment where a database can be hundreds of gigabytes or terabytes. Using traditional backup methods for an offline database backup, any change in the database file—no matter how small—requires backing up the entire database file. Using BLI Backup, only modified data blocks need to be backed up.

---

**Note:** To allow BLI Backups, the database must be on VxFS file systems using the Version 4, 5, 6, or 7 layout, and you must have a valid Veritas Storage Foundation Enterprise license. Use the `fstyp -v device` command to determine the layout version of your file system. See the `vxupgrade(1M)` manual page for more information.

---

For information on how to install, configure, and use Veritas NetBackup for Oracle Advanced BLI Agent to perform Oracle database backups, see the *Veritas NetBackup for Oracle Advanced BLI Agent System Administrator's Guide*.

## About using Veritas NetBackup for backup and restore for Oracle

Veritas NetBackup provides for high performance, online (hot) backups of databases that must be available on a 24x7 basis, as well as offline (cold) database backups. Veritas NetBackup enables you to back up and restore database files and directories. You can set up schedules for automatic, unattended, online, and offline

database backup, as well as full or incremental backup. These backups are managed entirely by the NetBackup server. You can also manually back up database files from any of the NetBackup clients. Client users can perform database backups and restores from their client systems on demand.

## About using Veritas NetBackup to backup and restore Oracle Disk Manager files

Oracle allocates Oracle Disk Manager files with contiguous extent layouts for good database performance. When you back up your database using Veritas NetBackup, extent attributes are backed up automatically. When you restore database files they are allocated using these extent attributes. If you are using Oracle RMAN's conventional backup method with any backup software, datafiles are also restored with the proper extent layouts.

If you are not using NetBackup or you are using RMAN's "proxy copy" backup method with a backup software other than NetBackup, the extent attributes may not be backed up. To ensure the restored datafiles have proper extent layouts, preallocate the lost datafiles using the `odmmkfile` command. This command preallocates contiguous space for files prior to restoring them.

See the `odmmkfile(1M)` manual page.

For example, to preallocate an Oracle datafile with size 100 M, assuming the Oracle database block size is 8K, use the `odmmkfile` command and enter:

```
$ /opt/VRTS/bin/odmmkfile -h 8k -s 100m filename
```

## Using Veritas NetBackup to backup and restore Quick I/O files for Oracle

If you are using NetBackup for Oracle, then you should use Oracle RMAN to backup and restore Quick I/O files.

Veritas NetBackup does not follow symbolic links when backing up files. Typical backup management applications are designed this way to avoid backing up the same data twice. This would happen if both the link and the file it points to were included in the list of files to be backed up.

A Quick I/O file consists of two components: a hidden file with the space allocated for it, and a link that points to the Quick I/O interface of the hidden file. Because NetBackup does not follow symbolic links, you must specify both the Quick I/O link and its hidden file in the list of files to be backed up.

To view all files and their attributes in the `db01` directory:

```
$ ls -la /db01

total 2192

drwxr-xr-x  2 root  root   96  Oct 20 17:39 .
drwxr-xr-x  9 root  root 8192  Oct 20 17:39 ..
-rw-r--r--  1 oracle dba 1048576  Oct 20 17:39
.dbfile

lrwxrwxrwx  1 oracle dba  22  Oct 20 17:39
dbfile ->\
.dbfile::cdev:vxfs:
```

In the example above, you must include both the symbolic link `dbfile` and the hidden file `.dbfile` in the file list of the backup class.

If you want to back up all Quick I/O files in a directory, you can simplify the process by just specifying the directory to be backed up. In this case, both components of each Quick I/O file will be properly backed up. In general, you should specify directories to be backed up unless you only want to back up some, but not all files, in those directories.

Because Veritas NetBackup is integrated with Veritas Storage Foundation, Veritas NetBackup backs up extent attributes of a Quick I/O file and restores them accordingly. Quick I/O files can then be backed up and restored as regular files using Veritas NetBackup, while preserving the Quick I/O file's extent reservation. Without this feature, restoring the file could cause the loss of contiguous reservation, which can degrade performance.

When restoring a Quick I/O file, if both the symbolic link and the hidden file already exist, Veritas NetBackup will restore both components from the backup image. If either one or both of the two components are missing, Veritas NetBackup creates or overwrites as needed.

---

**Note:** The Oracle backup and restore utility cannot be used to back up and restore Quick I/O files.

Some back up software may not be able to back up and restore VxFS extent attributes. See the `qio_recreate(1M)` online manual page for information on how to restore missing Quick I/O files.

---

# Using NetBackup in an SFHA Solutions product environment

You can enhance the ease of use and efficiency of your SFHA Solutions product and NetBackup by integrating them as follows:

- Clustering a NetBackup Master Server
- Backing up and recovering a VxVM volume using NetBackup
- Backing up and recovering an Oracle database using NetBackup

## Clustering a NetBackup Master Server

To enable your NetBackup Master Server to be highly available in a cluster environment, use the following procedure.

### To make a NetBackup Master Server, media, and processes highly available

- 1 Verify that your versions of NetBackup and Veritas Cluster Server are compatible. Detailed combination information is included in the NetBackup cluster compatibility list:
  - For NetBackup 7.x cluster compatibility:  
See <http://www.symantec.com/business/support/index?page=content&id=TECH126902>
  - For NetBackup 6.x cluster compatibility:  
See <http://www.symantec.com/business/support/index?page=content&id=TECH43619>
  - For NetBackup 5.x cluster compatibility:  
See <http://www.symantec.com/business/support/index?page=content&id=TECH29272>
  - For more on NetBackup compatibility, see <http://www.symantec.com/business/support/index?page=landing&key=15145>
- 2 The steps to cluster a Master Server are different for different versions of NetBackup. See the applicable NetBackup guide for directions.
  - For NetBackup 7.x:  
See *Symantec NetBackup Clustered Master Server Administrator's Guide*  
See <http://www.symantec.com/docs/DOC3679>
  - For NetBackup 7.0.1:  
See *Symantec NetBackup Clustered Master Server Administrator's Guide 7.0.1*

See <http://www.symantec.com/docs/DOC135520>

- For NetBackup 7.0:

See *NetBackup High Availability Guide 7.0*

See <http://www.symantec.com/docs/DOC127045>

- For NetBackup 6.5:

See *NetBackup High Availability Guide 6.5*

See <http://www.symantec.com/docs/DOC52835>

- For more on NetBackup documentation, see

<http://www.symantec.com/business/support/index?page=landing&key=15145>

**To verify the robustness of the VCS resources and NetBackup processes**

- 1 Verify that you can online the Netbackup master.
- 2 Verify that you can offline the Netbackup master.
- 3 Verify that you can monitor all the NetBackup resources.

## Backing up and recovering a VxVM volume using NetBackup

To enable NetBackup to backup objects on a VxVM volume, use the following procedure. This procedure enables an Instant Recovery (IR) using a VxVM volume.



### To back up objects in a VxVM volume using NetBackup

- 1 Create a VxVM disk group with six disks. The number of disks may vary depending on the volume size, disk size, volume layout, and snapshot method.

If the system this test is running on is a clustered system, create a shared disk group using the `-s` option.

```
# vxvxdg -s init database_dg disk1 disk2 disk3 \
disk4 disk5 disk6
```

- 2 Create a "mirror-striped" VxVM volume with a size of 10 Gbytes or the maximum size of the disk, whichever is larger.

```
# vxassist -g database_dg make vol_name 10G \
layout=mirror-stripe init=active
# vxvol -g database_dg set fastresync=on vol_name
# vxassist -g database_dg snapstart nmirror=1 vol_name
```

---

**Note:** There are three types of snapshot: mirror, full-size instant, and space-optimized instant snapshots. The example uses an Instant Recovery (IR) snapshot. For snapshot creation details:

See pages 104-107 of the *NetBackup Snapshot Client Administrator's Guide* for 7.1.

See <http://www.symantec.com/docs/DOC3661>

---

- 3 Make the file system on the volume.
- 4 Mount a VxFS file system on the volume.  
 If the VxVM volume is a clustered volume, mount the VxFS file system with the `"-o cluster"` option.
- 5 Fill up the VxFS file system up to the desired level. For example, you can fill to 95% full, or to whatever level is appropriate for your file system.
- 6 Store the `cksum(1)` for these files.
- 7 Un-mount the VxFS file system.
- 8 Enable the following Advanced Client option:
  - Perform Snapshot Backup.
  - Set **Advanced Snapshot Options** to `vxvm`.

- Enable **Retain snapshots for instant recovery**.
- 9 Back up the VxVM volume with the NetBackup policy.  
See pages 98-101 of the *NetBackup Snapshot Client Administrator's Guide* for 7.1.  
See <http://www.symantec.com/docs/DOC3661>

## Recovering a VxVM volume using NetBackup

To enable NetBackup to recover objects on a VxVM volume, use the following procedure. This procedure performs an Instant Recovery (IR) using a VxVM volume.

### To recover objects in a VxVM volume using NetBackup

- 1 Initialize the VxVM volume to zeros.
- 2 Recover the VxVM volume to the newly initialized VxVM volume.
- 3 Mount the VxFS file system on the empty VxVM volume.
- 4 Verify the cksum(1) values against the files recovered.

## Backing up an Oracle database using NetBackup

To backup an Oracle tablespace using NetBackup, use the following procedure.

### To backup an Oracle tablespace using NetBackup's Oracle policy

- 1 Install and configure NetBackup HA or a single NetBackup server.
- 2 Configure Oracle RAC based on different layouts  
Create an Oracle database, using any number of volumes and any volume layout. Make sure your Oracle datafiles are reside on a VxFS file system.
- 3 Install the NetBackup client on all Oracle nodes.
- 4 Create a backup policy. For example, the policy might be for performing Oracle tablespace backup using Flashsnap.
  - Policy type: Oracle
  - Snapshot method: Flashsnap

---

**Note:** Snapshot method is optional for Oracle backup.

---

- Alternate client: a host sharing data with oracle host

---

**Note:** Alternate client is optional for Oracle backup.

If you use the alternate client option, you must have a host that is sharing storage with the Oracle host.

---

- Schedules: Default-Application-Backup and Automatic Full Backup
  - Clients : Oracle host
  - Selections: using RMAN shell scripts to backup tablespace
  - To configure an Oracle backup policy:  
See the *NetBackup for Oracle Administrator's Guide for UNIX, Windows, and Linux* for 7.1.  
See <http://www.symantec.com/docs/DOC3672>
- 5 To prepare your volumes for snapshots:  
See the *NetBackup Snapshot Client Administrator's Guide* for 7.1.  
See <http://www.symantec.com/docs/DOC3661>
  - 6 Use the policy to back up the database during a database insert operation.

## Recovering an Oracle database using NetBackup

To recover an Oracle tablespace using NetBackup, use the following procedure.

### To backup and recover an Oracle tablespace using NetBackup's Oracle policy

- 1 Fail over the NetBackup cluster and restore it.
- 2 Recover the tablespace to the original node using RMAN scripts.  
To write the rman script for the Oracle restore:  
See the *NetBackup for Oracle Administrator's Guide for UNIX, Windows, and Linux* for 7.1.  
See <http://www.symantec.com/docs/DOC3672>
- 3 Take the tablespace online.
- 4 Verify the restored database.
- 5 Verify the number of rows in the table.



# Optimizing storage costs for Oracle

- [Chapter 22. Understanding storage tiering with SmartTier](#)
- [Chapter 23. Configuring and administering SmartTier](#)
- [Chapter 24. SmartTier use cases for Oracle](#)
- [Chapter 25. Compressing files and databases to optimize storage costs](#)
- [Chapter 26. Using the Compression Advisor tool](#)



# Understanding storage tiering with SmartTier

This chapter includes the following topics:

- [About SmartTier](#)
- [How SmartTier for Oracle works](#)
- [SmartTier in a High Availability \(HA\) environment](#)

## About SmartTier

SmartTier matches data storage with data usage requirements. After data matching, the data can then be relocated based upon data usage and other requirements determined by the storage or database administrator (DBA).

As more and more data is retained over a period of time, eventually, some of that data is needed less frequently. The data that is needed less frequently still requires a large amount of disk space. SmartTier enables the database administrator to manage data so that less frequently used data can be moved to slower, less expensive disks. This also permits the frequently accessed data to be stored on faster disks for quicker retrieval.

Tiered storage is the assignment of different types of data to different storage types to improve performance and reduce costs. With SmartTier, storage classes are used to designate which disks make up a particular tier. There are two common ways of defining storage classes:

- Performance, or storage, cost class: The most-used class consists of fast, expensive disks. When data is no longer needed on a regular basis, the data can be moved to a different class that is made up of slower, less expensive disks.

- Resilience class: Each class consists of non-mirrored volumes, mirrored volumes, and n-way mirrored volumes.

For example, a database is usually made up of data, an index, and logs. The data could be set up with a three-way mirror because data is critical. The index could be set up with a two-way mirror because the index is important, but can be recreated. The redo and archive logs are not required on a daily basis but are vital to database recovery and should also be mirrored.

SmartTier is a VxFS feature that enables you to allocate file storage space from different storage tiers according to rules you create. SmartTier provides a more flexible alternative compared to current approaches for tiered storage. Static storage tiering involves a manual one-time assignment of application files to a storage class, which is inflexible over a long term. Hierarchical Storage Management solutions typically require files to be migrated back into a file system name space before an application access request can be fulfilled, leading to latency and run-time overhead. In contrast, SmartTier allows organizations to:

- Optimize storage assets by dynamically moving a file to its optimal storage tier as the value of the file changes over time
- Automate the movement of data between storage tiers without changing the way users or applications access the files
- Migrate data automatically based on policies set up by administrators, eliminating operational requirements for tiered storage and downtime commonly associated with data movement

---

**Note:** SmartTier is the expanded and renamed feature previously known as Dynamic Storage Tiering (DST).

---

SmartTier policies control initial file location and the circumstances under which existing files are relocated. These policies cause the files to which they apply to be created and extended on specific subsets of a file systems's volume set, known as placement classes. The files are relocated to volumes in other placement classes when they meet specified naming, timing, access rate, and storage capacity-related conditions.

In addition to preset policies, you can manually move files to faster or slower storage with SmartTier, when necessary. You can also run reports that list active policies, display file activity, display volume usage, or show file statistics.

SmartTier leverages two key technologies included with Veritas Storage Foundation Enterprise products: support for multi-volume file systems and automatic policy-based placement of files within the storage managed by a file system. A multi-volume file system occupies two or more virtual storage volumes and thereby enables a single file system to span across multiple, possibly



heterogeneous, physical storage devices. For example the first volume could reside on EMC Symmetrix DMX spindles, and the second volume could reside on EMC CLARiiON spindles. By presenting a single name space, multi-volumes are transparent to users and applications. This multi-volume file system remains aware of each volume's identity, making it possible to control the locations at which individual files are stored. When combined with the automatic policy-based placement of files, the multi-volume file system provides an ideal storage tiering facility, which moves data automatically without any downtime requirements for applications and users alike.

In a database environment, the access age rule can be applied to some files. However, some data files, for instance are updated every time they are accessed and hence access age rules cannot be used. SmartTier provides mechanisms to relocate portions of files as well as entire files to a secondary tier.

To use SmartTier, your storage must be managed using the following features:

- VxFS multi-volume file system
- VxVM volume set
- Volume tags
- SmartTier management at the file level
- SmartTier management at the sub-file level

## About VxFS multi-volume file systems

Multi-volume file systems are file systems that occupy two or more virtual volumes. The collection of volumes is known as a volume set, and is made up of disks or disk array LUNs belonging to a single Veritas Volume Manager (VxVM) disk group. A multi-volume file system presents a single name space, making the existence of multiple volumes transparent to users and applications. Each volume retains a separate identity for administrative purposes, making it possible to control the locations to which individual files are directed.

This feature is available only on file systems meeting the following requirements:

- The minimum disk group version is 140.
- The minimum file system layout version is 7 for file level SmartTier.
- The minimum file system layout version is 8 for sub-file level SmartTier.

To convert your existing VxFS system to a VxFS multi-volume file system, you must convert a single volume to a volume set.

See [“Configuring SmartTier for Oracle”](#) on page 259.

The VxFS volume administration utility (fsvoladm utility) can be used to administer VxFS volumes. The fsvoladm utility performs administrative tasks, such as adding, removing, resizing, encapsulating volumes, and setting, clearing, or querying flags on volumes in a specified Veritas File System.

See the `fsvoladm (1M)` manual page for additional information about using this utility.

## About VxVM volume sets

Volume sets allow several volumes to be represented by a single logical object. Volume sets cannot be empty. All I/O from and to the underlying volumes is directed via the I/O interfaces of the volume set. The volume set feature supports the multi-volume enhancement to Veritas File System (VxFS). This feature allows file systems to make best use of the different performance and availability characteristics of the underlying volumes. For example, file system metadata could be stored on volumes with higher redundancy, and user data on volumes with better performance.

## About volume tags

You make a VxVM volume part of a placement class by associating a volume tag with it. For file placement purposes, VxFS treats all of the volumes in a placement class as equivalent, and balances space allocation across them. A volume may have more than one tag associated with it. If a volume has multiple tags, the volume belongs to multiple placement classes and is subject to allocation and relocation policies that relate to any of the placement classes.

---

**Warning:** Multiple tagging should be used carefully.

---

A placement class is a SmartTier attribute of a given volume in a volume set of a multi-volume file system. This attribute is a character string, and is known as a volume tag.

## SmartTier file management

SmartTier enables administrators of multi-volume VxFS file systems to manage the placement of files on individual volumes in a volume set by defining placement policies that control both initial file location and the circumstances under which existing files are relocated. These placement policies cause the files to which they apply to be created and extended on specific subsets of a file system's volume set, known as placement classes. The files are relocated to volumes in other placement

classes when they meet the specified naming, timing, access rate, and storage capacity-related conditions.

File-based movement:

- The administrator can create a file allocation policy based on filename extension before new files are created, which will create the datafiles on the appropriate tier during database creation.
- The administrator can also create a file relocation policy for database files or any types of files, which would relocate files based on how frequently a file is used.

## SmartTier sub-file object management

SmartTier enables administrators of multi-volume VxFS file systems to manage the placement of file objects as well as entire files on individual volumes.

Using sub-file based movement you can:

- Move a set of ranges of a specified set of files of a specified set of mounts to a desired set of tiers on command.
- Move segments of files using automation to:
  - Monitor a set of files for collecting I/O statistics
  - Periodically collect and persist the statistics, cluster-wide if applicable
  - Periodically enforce the ranges of the registered sets of files based on their relative frequency of access to a desired set of tiers
  - Track the historical movements of those ranges


## How SmartTier for Oracle works

In an Oracle database environment, the access age rule can be applied to archivelog files and Flashback files. Oracle updates the header of each datafile at every database checkpoint and hence access age rules cannot be used for datafiles. For a partitioned table, we can use the name base rule to relocate files belonging to a given partition, for instance last year, to the secondary storage tier. However if a database does not have partitioned tables, current methods for relocation do not fit to the Oracle database environment. To understand how to optimize file relocation for Oracle databases, we need to study how Oracle stores objects in the database.

## How partitions change the way Oracle stores database objects


Oracle Database stores data logically in tablespaces and physically in datafiles associated with the corresponding tablespace. A database is divided into one or more logical storage units called tablespaces. A tablespace in an Oracle database consists of one or more physical datafiles. A datafile can be associated with only one tablespace and only one database. Tablespaces are divided into logical units of storage called segments, which are further divided into extents. Extents are a collection of contiguous blocks in a datafile. Tables are the basic unit of data storage in an Oracle database. Data is stored in rows and columns. Tables are defined with a table name (such as employees) and set of columns. Usually a table resides within a single tablespace except for partitioned tables. A partitioned table is a table which has one or more partitions, and each partition may reside on a different tablespace.

Figure 22-1 How Oracle stores database objects

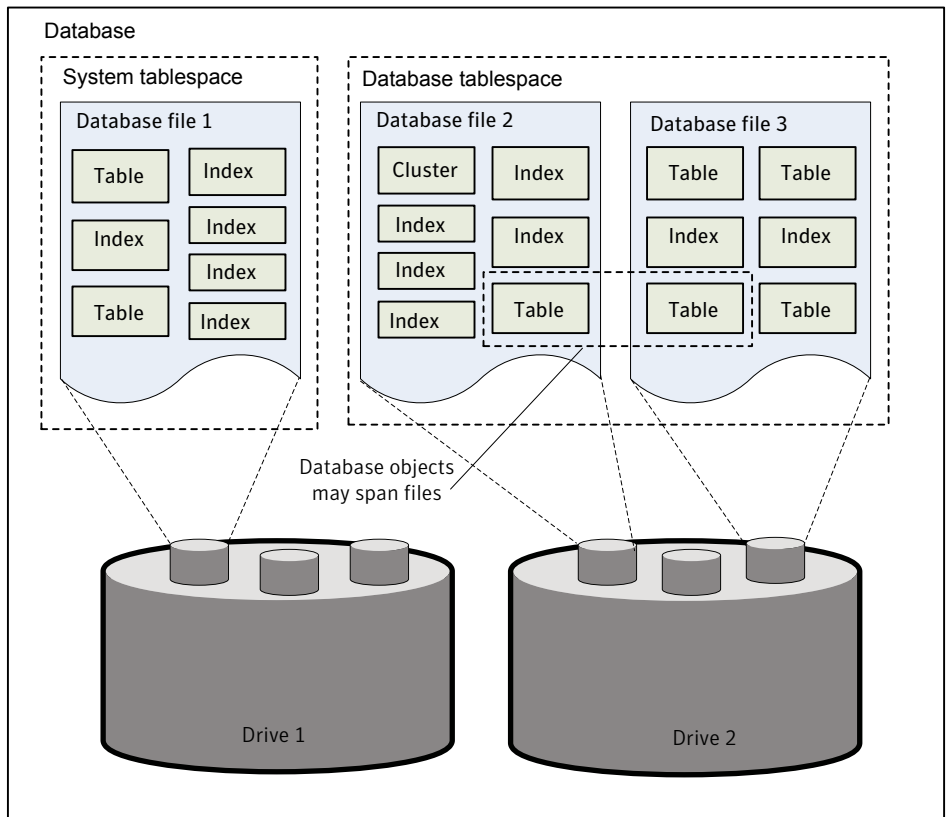

At the finest level of granularity, an Oracle database stores data in data blocks (also called logical blocks, Oracle blocks, or pages). One data block corresponds to a specific number of bytes of physical database space on disk. The next level of logical database space is an extent. An extent is a specific number of contiguous data blocks allocated for storing a specific type of information from a given datafile in a tablespace. The level of logical database storage greater than an extent is called a segment. A segment is a set of extents, each of which has been allocated for a specific data structure and all of which are stored in the same tablespace. For example, each table's data is stored in its own data segment, while each index's data is stored in its own index segment. If the table or index is partitioned, each partition is stored in its own segment. An Oracle database allocates space for segments in units of one extent. When the existing extents of a segment are full, an Oracle database allocates another extent for that segment. Because extents are allocated as needed, the extents of a segment may or may not be contiguous on disk. A segment and all its extents are stored in one tablespace. Within a tablespace, a segment can include extents from more than one file; that is, the segment can span datafiles. However, each extent can contain data from only one datafile. When a new extent is allocated for a segment, Oracle tries to spread (or stripe) extents among all datafiles in the tablespace at that time. When you run out of free data blocks in a tablespace, you can add additional datafiles. Here is a pictorial representation of logical objects and physical storage.

Figure 22-2 Logical objects on storage

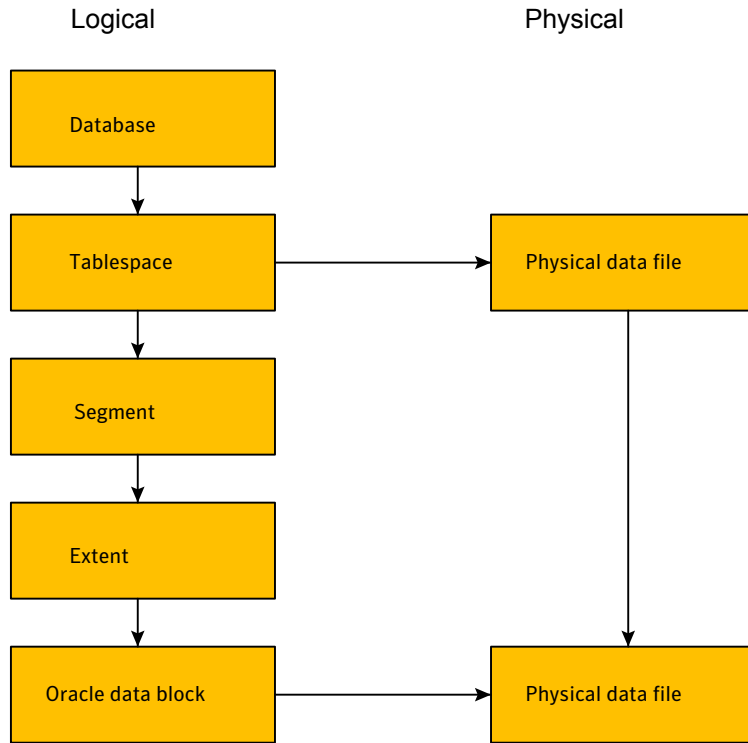

Oracle has several types of segments. Depending on the type, the usage pattern of the data within the segment varies. For Storage Tiering relocation, it is important to know what kind of segments is suitable for relocation. Here is a list of segment types.

- **Data segments:** contain data blocks where table rows are stored. Data segments/extents are prime candidates for relocation to a secondary storage tier. The old extents contain rows inserted earlier than new extents. Segment and extent properties are available by querying dictionary table `dba_segments` and `dba_extents`.
- **Index segments:** contain blocks for table indexes. It is important to database performance that I/O to these blocks are read/written at highest rate and hence should always be in the primary storage tier. Index segments move from one location to other in a tablespace/datafile and are not good candidates for relocating to secondary tier.
- **Rollback segment:** contain UNDO data which is critical for database recovery and should always be in on primary storage.

- Temp segment: the temporary workspace for intermediate stages of sort operations required by Oracle. Performance depends on I/O time of the temp segments and hence these segments must always be in primary storage.

## Database extents to file location

Logical objects like tables are stored as database extents. These database extents are contiguous file system blocks within a given file. Dividing a file into an equal number of objects does not cleanly match database extents. This is the reason why the statistics feature of Veritas File System may not work for an Oracle database. A file object may span more than one database extent. Oracle has catalog entries which will help to convert a database extent to (file, offset, length) set. If we get (file, offset, length) set, we could use our relocation API to relocate that extent to a secondary tier.

Oracle Catalog tables `dba_extents` and `dba_segments` can be used to compute (file, offset, length) set for a given extent.

For a given `dba_segment`, we could join `dba_segments` and `dba_extents` to list the (extent-id, file\_id, starting\_bloc/offset, length) set. This will tell, the exact location in the file of a database extent.

## Statistics in Oracle

For versions starting with Oracle 10g, Oracle collects various statistics and stores them inside a database repository called the Automatic Workload Repository (AWR). The statistics collected include CPU, memory, file IO, and disk statistics. AWR is useful to find out usage trends, bottlenecks and improve performance. By default, the statistics snapshot is taken every 60 minutes and stored in AWR. AWR keeps the snapshot for seven days by default. Both statistics interval and retention period can be changed via `init.ora`. Oracle recommends a retention period of 30 days for statistics. Oracle provides tools to collect extra statistics on demand. There are various scripts and tools available to query the AWR and generate trend reports. AWR can be used to get file usage trends that will identify least-used files that can then be relocated to secondary storage.

Advantages of using file statistics from AWR:

- AWR file stats are available by default. No extra configuration is needed.
- AWR file stats are the statistics generated by the database only. File stats from Veritas File System include both database transaction and other IO like backup/restore.
- In a clustered Oracle RAC environment, AWR file stats include I/O from all the nodes. There is no need collect from each node and sum it up.

- AWR file statistics provides history and hence it is easy to get the usage trends.

AWR also provides Oracle object level statistics like segment statistics. These can be used to find out the least used table segments.

One large disadvantage of Oracle file statistics is that they do not provide statistics at less than the file level.

## Optimizing storage for Oracle database objects

To adopt a successful SmartTier policy and save storage costs, a method is needed for relocating Oracle objects which are accessed infrequently to the secondary tier. Relocating the entire file is not useful in all cases.

Only data segments are suitable for relocation, and they may be spread among several datafiles. When new rows are inserted in a table, Oracle allocates space for the table on demand. Oracle allocates space through one or more extents. Because of this allocation scheme a given datafile will have:

- Multiple extents belonging to more than one table.
- The extents belonging to a table may not be contiguous in the file.
- Each datafile will have a header and headers are updated at every database checkpoint.
- Relocating a file to a secondary storage tier means relocating rows/data belonging to one or more tables.
- If an entire datafile is relocated to a secondary storage tier, the Oracle checkpoint performance may suffer and there will be some performance loss.

Oracle introduced locally managed tablespaces in Oracle 9i. When a tablespace is locally managed:

- The free space in a datafile is managed using a bitmap which is kept right next to datafile header.
- Each bit in the bitmap represents 1MB of storage in the file.
- Free space management using bitmaps is far superior to dictionary managed datafiles.
- Several extents are allocated from the same file such that 1MB of the datafile is used by extents. In other words, each table will have 1MB of storage allocated from a given datafile and all these extents are contiguous in the datafile.

This makes using SmartTier for Oracle to tier storage at the file portion level practical.



**Table 22-1** Recommended SmartTier option for Oracle use cases

| Oracle file type | Recommended SmartTier option   |
|------------------|--------------------------------|
| Archive logs     | File-based storage tiering     |
| Flashback logs   | File-based storage tiering     |
| Partitions       | File-based storage tiering     |
| Table relocation | Sub-file based storage tiering |
| Hot datafile     | Sub-file based storage tiering |
| Portions to SSD  | Sub-file based storage tiering |

## About Automatic Workload Repository statistics

Starting with Oracle 10g, Oracle collects various statistics and stores it inside a database repository called Automatic Workload Repository (AWR).

Statistics include:

- CPU
- Memory
- File I/O
- disk statistics

AWR is useful for finding usage trends, bottlenecks and improve performance.

By default, AWR snapshots are:

- Taken every 60 minutes
- Stored in AWR
- Kept for seven days

Statistics interval and retention period can be changed via `init.ora`. Oracle recommends a retention period of 30 days for statistics and provides tools to collect extra statistics on demand. There are various scripts and tools available to query the AWR and generate trend reports. You can use AWR to get file usage trends and relocate least used files to secondary storage tier.

Advantages of using file statistics from AWR:

- AWR file stats are available by default. No extra configuration is needed.
- In a clustered environment, AWR file stats include IO from all the nodes. There is no need collect from each node and sum it up.

- AWR file statistics provides history and hence it is easy to get the usage trends.

AWR also provides Oracle Object level statistics like segment statistics. These can be used find out the least used table segments.

See [“Using AWR statistics to identify sub-file objects for potential relocation”](#) on page 291.

## SmartTier in a High Availability (HA) environment

Veritas Cluster Server does not provide a bundled agent for volume sets. If issues arise with volumes or volume sets, the issues can only be detected at the DiskGroup and Mount resource levels.

The DiskGroup agent brings online, takes offline, and monitors a Veritas Volume Manager (VxVM) disk group. This agent uses VxVM commands. When the value of the StartVolumes and StopVolumes attributes are both 1, the DiskGroup agent onlines and offlines the volumes during the import and deport operations of the disk group. When using volume sets, set StartVolumes and StopVolumes attributes of the DiskGroup resource that contains the volume are set to 1. If a file system is created on the volume set, use a Mount resource to mount the volume set.

The Mount agent brings online, takes offline, and monitors a file system or NFS client mount point.

If you are using any of the SmartTier for Oracle commands in a high availability (HA) environment, the time on each system in the cluster must be synchronized. Otherwise, the scheduled task may not be executed at the expected time after a service group failover.

For additional information, see the *Veritas Cluster Server Bundled Agents Reference Guide*.

# Configuring and administering SmartTier

This chapter includes the following topics:

- [Configuring SmartTier for Oracle](#)
- [Optimizing database storage using SmartTier for Oracle](#)
- [Running reports using SmartTier for Oracle](#)
- [Extent balancing in a database environment using SmartTier for Oracle](#)
- [Running sub-file database object reports using SmartTier for Oracle](#)
- [Optimizing sub-file database object placement using SmartTier for Oracle](#)

## Configuring SmartTier for Oracle

To use SmartTier for Oracle, the following requirements must be met:

- An Oracle database must be up and running.
- Only the Oracle database administrator can run SmartTier for Oracle commands.

To configure SmartTier for Oracle, the following tasks must be performed:

- Review the SmartTier for Oracle command requirements.
- Define the database parameters.
- Set up storage classes.
- Convert an existing Veritas File System database file system to a Veritas File System multi-volume file system for use with SmartTier for Oracle.

- Classify, or tag, volumes so that the tags indicate the quality of the underlying disk.
- Display the free space on each class.
- Add or remove volumes as necessary.

---

**Note:** SmartTier for Oracle is the expanded and renamed feature known as Database Dynamic Storage Tiering (DBDST) in previous releases.

---

## SmartTier for Oracle command requirements

Before defining your database parameters, review the following command requirements:

- Run the `dbed_update` command before running any of the SmartTier for Oracle commands. You should also run the `dbed_update` command if any of the database files change.

The repository must be up to date, since the SmartTier for Oracle commands retrieve database information from the repository.

- You do not need to set the environment variable `LD_LIBRARY_PATH` to use the SFDB commands. However, if you set this environment variable for another reason, Symantec recommends including the library path `/opt/VRTSdbed/common/lib` before other library paths so the SFDB commands do not mistakenly link with libraries with same name in the other library paths. You do not need to set the environment variable `LIBPATH` to use the SFDB commands. However, if you set this environment variable for another reason, Symantec recommends including the library path `/opt/VRTSdbed/common/lib` before other library paths so the SFDB commands do not mistakenly link with libraries with same name in the other library paths.
- If you are using any of the SmartTier for Oracle commands in a high availability (HA) environment, the time on each system in the cluster must be synchronized.
- Create the volumes that you want to add to the multi-volume file system in the same disk group as the file system volume. As root, use the following command to change the owner of each volume:  

```
# /opt/VRTS/bin/vxedit -g disk_group \  
set user=oracle volume
```
- Change the owner of the mount point on which you want to implement SmartTier for Oracle to oracle.

## Defining database parameters

Running the `dbdst_admin` command defines parameters for the entire database. You must run this command at least once to define the database parameters for SmartTier for Oracle. Three pre-defined storage classes will be created (PRIMARY, SECONDARY, and BALANCE). Parameter values are stored in the SFDB repository.

Set at least one of the parameters in `maxclass`, `minclass`, `statinterval`, `sweeptime`, `sweepinterval`, `purgetime`, or `purgeinterval`, to enable default values. Add at least one class to enable the default classes.

Table 23-1 lists the options for the `dbdst_admin` command:

**Table 23-1** dbdst\_admin command options

| Command option               | Description                                                                                                                                                                                                                         |
|------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <code>-S \$ORACLE_SID</code> | Specifies the <code>ORACLE_SID</code> , which is the name of the Oracle instance.                                                                                                                                                   |
| <code>list</code>            | Lists all of the SmartTier for Oracle parameters of the database, including class name and description.<br><br>This option should be used exclusively from the other options.                                                       |
| <code>maxclass</code>        | Maximum number of storage classes allowed in the database. The default value is 4.                                                                                                                                                  |
| <code>minclass</code>        | Minimum number of storage classes allowed in the database. The default value is 2.                                                                                                                                                  |
| <code>sweepinterval</code>   | Interval for file sweeping for file relocation.<br><br>Default value is 1, which means one per day. If this value is set to 0, all scheduled sweep tasks will become unscheduled.                                                   |
| <code>sweeptime</code>       | Time per day for the file sweep to take place.<br><br>Times are entered in 24-hour periods and should list hour: minute. For example, 8:30 AM is represented as 08:30 and 10:00 PM is represented as 22:00. Default value is 22:00. |
| <code>statinterval</code>    | Interval in minutes for gathering file statistics.<br><br>Default value is 30, which represents every 30 minutes. If this value is set to 0, all scheduled tasks will become unscheduled.                                           |

**Table 23-1** dbdst\_admin command options (*continued*)

| Command option                                      | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
|-----------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| purgeinterval                                       | <p>Number of days after which the file statistics in the repository will be summarized and purged.</p> <p>Default value is 30. It is recommended that you set your purge interval sooner because you will not be able to view any statistics until the first 30-day interval is over, if you use the default.</p>                                                                                                                                                                                                                                                                         |
| purgetime                                           | <p>Time per day for the file purge to take place.</p> <p>Times are entered in 24-hour periods and should list hour: minute. For example, 8:30 AM is represented as 08:30 and 8:00 PM is represented as 20:00. Default value is 20:00.</p>                                                                                                                                                                                                                                                                                                                                                 |
| addclass                                            | <p>Parameter that allows you to add a class to a database.</p> <p>The information should be entered as class:"description", where the class represents the class name and description is a string of up to 64 characters enclosed by double quotes used to describe the class.</p>                                                                                                                                                                                                                                                                                                        |
| rmclass                                             | <p>Parameter that allows you to remove a class from a database. Enter the class name as it appears in the database.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| -o definechunk<br>classname:<br>{128k 256k 512k 1m} | <p>Defines a chunksize in bytes for the given storage class. Valid chunksizes are 128k, 256k, 512k or 1m bytes. When a chunksize is specified for a storage class, the files in this storage class will be extent-balanced. Each chunk of the file will be in a separate volume of the storage class. A given file will have approximately equal number of chunks on each component volumes of the storage class. When a new volume is added or an existing volume is removed from the storage class (using dbdst_addvol or dbdst_rmvol), the files are automatically balanced again.</p> |

**Note:** If you do not want to change specific default values, you can omit those parameters when you run the dbdst\_admin command. You only need to enter the parameters that need to be changed.

## To define database parameters

- ◆ Use the `dbdst_admin` command as follows:

```
dbdst_admin -S ORACLE_SID -o setup-parameters\  
[,storage_class operations]  
    setup-parameters  
        maxclass=number,minclass=number,\  
            statinterval=minutes  
        sweeptime=HH:MM,sweepinterval=days  
        purgetime=HH:MM,purgeinterval=days  
storage_class operations  
    addclass=classname:"description"  
    rmclass=classname  
    definechunk=classname:128k | 256k | 512k | 1m
```

For example, to add a class called `tier1` for database `PROD`, and to set up a purge interval of one, meaning that the file statistics will be gathered for one day and then summarized and purged, use the `dbdst_admin` command as follows:

```
$ /opt/VRTS/bin/dbdst_admin -S PROD -o addclass=tier1:"Fast Storage",\  
purgeinterval=1
```

## Configuring storage classes

When you define your database parameters, three pre-defined storage classes are created. You must add or remove storage classes to meet your needs.

In addition to the default storage classes, you can add storage classes to better manage your data. Before adding a storage class, review the following information:

### To add storage classes

- ◆ Use the `dbdst_admin` command as follows:

```
$ /opt/VRTS/bin/dbdst_admin -S $ORACLE_SID -o addclass=classname:\  
"description"
```

For example, to create a storage class named `"FAST"` for an EMC array, use the `dbdst_admin` command as follows:

```
$ /opt/VRTS/bin/dbdst_admin -S $ORACLE_SID -o addclass=FAST:\  
"fast EMC array"
```

If you no longer require a specific storage class, you can remove it. Before removing a storage class, review the following information:

---

**Note:** You cannot remove the pre-defined storage classes (PRIMARY, SECONDARY, and BALANCE).

---

#### To remove a storage class

- ◆ Use the `dbdst_admin` command as follows:

```
$ /opt/VRTS/bin/dbdst_admin -S $ORACLE_SID rmclass=classname
```

For example, to remove a storage class called "SLOW," use the `dbdst_admin` command as follows:

```
$ /opt/VRTS/bin/dbdst_admin -S $ORACLE_SID rmclass=SLOW
```

You can display a list of SmartTier for Oracle properties and storage classes using the `dbdst_admin` command.

Before displaying your storage classes, review the following information:

#### To display storage classes

- ◆ Use the `dbdst_admin` command as follows:

```
$ /opt/VRTS/bin/dbdst_admin -S $ORACLE_SID -o list
```

For example:

```
$ /opt/VRTS/bin/dbdst_admin -S VRTS11r2 -o list
```

```
TSDB Parameters for VRTS11r2
```

```
-----  
Maxclass           = 4  
Minclass           = 2  
Stat-Interval      = 30  
Sweep Information  = 22HH:0MM, Frequency = 1  
Purge Information  = 20HH:0MM, Frequency = 1
```

```
TSDB Storage Classes for VRTS11r2
```

```
-----  
Name = BALANCE : Description = BALANCE Storage Class  
Name = PRIMARY : Description = PRIMARY Storage Class  
Name = SECONDARY : Description = SECONDARY Storage Class  
Name = TIER1 : Description = Fast Storage
```



## Converting a Veritas File System (VxFS) to a VxFS multi-volume file system

To convert your existing VxFS file system to a VxFS multi-volume file system, you must convert a single volume to a volume set.

When you convert to a volume set using the `dbdst_convert` command, the original volume will be renamed to a new volume name. The mount device name will become the new volume set name. Creating the new volume set name with the mount device name nullifies the need to rename the mount device in various locations.

### To convert a single volume to a volume set

- 1 Before converting to a volume set, make sure the following conditions have been met:

#### Prerequisites

- The Oracle database must not be active.
- Create at least one additional volume.
- You must unmount the source filesystem hence database must be shutdown.

#### Usage Notes

- You must convert the single-volume file system on which you plan to implement SmartTier for Oracle.
- The file system has to be unmounted when you run the `dbdst_convert` command.
- If the file system has *n* volumes, volumes 1 through *n*-1 will be placed in the storage class "PRIMARY" and volume *n* will be placed in the storage class "SECONDARY."
- The volumes specified when running the conversion must be in the same disk group as the mount device.
- The file system must be unmounted on all nodes.

- 2 Use the `dbdst_convert` command as follows:

```
$ /opt/VRTS/bin/dbdst_convert -S $ORACLE_SID -M mount_device -v \  
volume_name, volume_name
```

- 3 Bring the database objects online.

For example, to convert the volume-based file system `oradata` to a SmartTier for Oracle-ready volume set file system on mount device `/dev/vx/dsk/oradg/oradata`, use the `dbdst_convert` command as follows:

```
$ /opt/VRTS/bin/dbdst_convert -S PROD -M \  
/dev/vx/dsk/oradg/oradata -v new_vol1,new_vol2
```

After conversion, you will have a volume set named `oradata` containing three volumes (`oradata_b4vset`, `new_vol1`, and `new_vol2`). The file system will have two storage classes defined as `PRIMARY` and `SECONDARY`. The volumes will be assigned as follows:

- `PRIMARY` storage class will contain volumes `oradata_b4vset` and `new_vol1`.
- `SECONDARY` storage class will contain volume `new_vol2`.

## Classifying volumes into a storage class

Before creating a SmartTier policy or manually moving data, assign classes to your volumes.

### To classify a volume

- 1 Before assigning classes to volumes, review the following information:

#### Usage notes

- You must convert your Veritas File System file system to a multi-volume file system first.
- Storage classes must be registered using the `dbdst_admin` command before assigning classes to volumes.
- The database can be online or offline.

- 2 Use the `dbdst_classify` command as follows:

```
$ /opt/VRTS/bin/dbdst_classify -S $ORACLE_SID -M mount_device \  
-v volume_name:class[,volume_name:class]
```

For example, to assign the class "FAST" to volume `new_vol1`, use the `dbdst_classify` command as follows:

```
$ /opt/VRTS/bin/dbdst_classify -S $ORACLE_SID \  
-M /dev/vx/dsk/oradg/oradata -v new_vol1:FAST
```

## Displaying free space on your storage class

To see the free space, class information, and volume information on your storage classes, use the `dbdst_show_fs` command.

[Table 23-2](#) shows the `dbdst_show_fs` command options.

**Table 23-2** `dbdst_show_fs` command options

| Command options              | Description                                                                       |
|------------------------------|-----------------------------------------------------------------------------------|
| <code>-s \$ORACLE_SID</code> | Specifies the <code>ORACLE_SID</code> , which is the name of the Oracle instance. |
| <code>-o volume</code>       | Displays the free space on volumes in each class.                                 |
| <code>-m</code>              | Specifies the mount point.                                                        |

### To display the free space on a storage class

- 1 Before displaying the free space on a storage class, review the following information:

Prerequisites

- Make sure the file system is mounted.
- See the `dbdst_show_fs (1M)` manual page.

**2** Use the `dbdst_show_fs` command as follows:

```
dbdst_show_fs -S $ORACLE_SID -m mount_point
```

For example:

```
$ dbdst_show_fs -S VRTS11r2 -m /data11r2
```

```
MAXCLASS=4
MINCLASS=2
TOTAL CLASS=3
```

| VOLUME NAME    | SIZE     | USED    | AVAILABLE |
|----------------|----------|---------|-----------|
| CLASS=FAST     |          |         |           |
| datavol1       | 1024000  | 1024000 | 0         |
| CLASS=MEDIUM   |          |         |           |
| datavol2       | 4608000  | 2347872 | 2260128   |
| CLASS=PRIMARY  |          |         |           |
| datavol-b4vset | 10240000 | 3585514 | 6654486   |

```
dbdst_show_fs -S $ORACLE_SID -m mount_point -o volume
```

For example:

```
$ dbdst_show_fs -S VRTS11r2 -m /data11r2 -o volume
```

| VOLUME NAME    | SIZE     | USED    | AVAILABLE | TAG     |
|----------------|----------|---------|-----------|---------|
| datavol-b4vset | 10240000 | 3585514 | 6654486   | PRIMARY |
| datavol1       | 1024000  | 1024000 | 0         | FAST    |
| datavol2       | 4608000  | 2347872 | 2260128   | MEDIUM  |

## Adding new volumes to a storage class

Use the `dbdst_addvol` command to add volumes to a volume set.

### To add a volume to a volume set

#### 1 Before adding a volume, review the following information:

- |             |                                                                                                                                                                               |
|-------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Usage notes | <ul style="list-style-type: none"><li>■ The database must be inactive when adding volumes to a storage class.</li><li>■ The database file system has to be mounted.</li></ul> |
|-------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|

#### 2 Use the `dbdst_addvol` command as follows:

```
$ /opt/VRTS/bin/dbdst_addvol -S $ORACLE_SID -M mount_device \  
-v volume_name:class[,volume_name:class]
```

For example:

```
$ /opt/VRTS/bin/dbdst_addvol -S VRTS11r2 \  
-M /dev/vx/dsk/dstdataadgot/datavol -v datavol4:FAST
```

## Removing volumes from a storage class

You may need to remove a volume from a volume set. To remove a volume, use the `dbdst_rmvol` command.

#### 1 Before removing a volume, review the following information:

- |             |                                                                                                                                                                                                                |
|-------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Usage notes | <ul style="list-style-type: none"><li>■ The database must be inactive when removing volumes from a storage class.</li><li>■ Only a volume that does not contain any file system data can be removed.</li></ul> |
|-------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|

#### 2 Use the `dbdst_rmvol` command as follows:

```
$ /opt/VRTS/bin/dbdst_rmvol -S $ORACLE_SID -M mount_device \  
-v volume_name[,volume_name]
```

For example:

```
$/opt/VRTS/bin/dbdst_rmvol -S VRTS11r2 \  
-M /dev/vx/dsk/dstdataadgot/datavol -v datavol6
```

# Optimizing database storage using SmartTier for Oracle

SmartTier for Oracle provides multiple tools to optimize your storage. For instance, you can choose to manually relocate files or tablespaces, or you can use a preset SmartTier policy.

---

**Note:** You must issue commands as an Oracle database administrator in the following procedures.

---

## SmartTier for Oracle options for improving storage performance

- Relocating files manually
- Relocating tablespaces manually
- Relocating table partitions manually
- Setting policies to automate storage tiering
- Running reports
- Extent balancing
- Running sub-file database database object reports
- Optimizing sub-file database object placement

## Relocating files manually using SmartTier for Oracle

[Table 23-3](#) shows the `dbdst_file_move` command options.

**Table 23-3** `dbdst_file_move` command options

| Command options                        | Description                                                                                                     |
|----------------------------------------|-----------------------------------------------------------------------------------------------------------------|
| <code>-o archive[n]   flashback</code> | Specifies which archive logs or Flashback logs to move. Do not use this option with the <code>-f</code> option. |
| <code>-o external   datafile</code>    | Specifies whether to move external files or datafiles. Use this option with the <code>-f</code> option.         |
| <code>-f listfile</code>               | Specifies a listfile that contains a list of files or directories to be moved.                                  |

**Table 23-3** dbdst\_file\_move command options (*continued*)

| Command options                | Description                                                                                                                                                                                                                                                             |
|--------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| -c<br>storage_class<br>[:days] | Specifies the storage class to which the files should be moved. If the days option is used, the files will be moved to the class specified if they have not been accessed in the number of days specified. Do not specify days if you are using the -o datafile option. |
| -R                             | Removes the policy for the specified object.                                                                                                                                                                                                                            |

**To relocate a file manually**

- 1 Before relocating a file, review the following information:

Usage notes            Multiple partitions cannot reside on the same tablespace.

- 2 Use the dbdst\_file\_move command as follows:

```
$ /opt/VRTS/bin/dbdst_file_move -S $ORACLE_SID -o datafile \  
-f listfile -c storage_class:days \  
[-c storage_class:days]
```

For example:

```
$ /opt/VRTS/bin/dbdst_file_move -S VRTS11r2 -o datafile \  
-f /tmp/external.spec -c MEDIUM
```

```
Assign placement policy file successful on filesystem /data11r2  
Begin enforcing filesystem /data11r2 ...  
Enforce placement policy successful on filesystem /data11r2
```

## Relocating tablespaces manually using SmartTier for Oracle

Use the dbdst\_tbs\_move command to move tablespaces to the desired storage class. The command queries the SFDB repository for the tablespace file names, then performs a one-time move based on your immediate requirements.

**To relocate a tablespace**

- ◆ Use the dbdst\_tbs\_move command as follows:

```
$ /opt/VRTS/bin/dbdst_tbs_move -S $ORACLE_SID -t tablespace \  
-c storage_class
```

where

- *tablespace* indicates which tablespace to move.
- *storage\_class* indicates to which class the tablespace should be moved.

For example:

```
$ /opt/VRTS/bin/dbdst_tbs_move -S VRTS11r2 -t MYTBS -c MEDIUM
```

```
Assign placement policy file successful on filesystem /data11r2
```

```
Begin enforcing filesystem /data11r2 ...
```

```
Enforce placement policy successful on filesystem /data11r2
```

## Relocating table partitions manually using SmartTier for Oracle

Use the `dbdst_partition_move` to move table partitions. The command queries the database to validate the names of the table and partition. From this information, a list of datafiles is derived and a one-time move of the files to the desired class is executed.

Before relocating table partitions, review the following information:

Prerequisites

The database must be up when you run the `dbdst_partition_move` command.

### To relocate a table partition

- ◆ Use the `dbdst_partition_move` command as follows:

```
$ /opt/VRTS/bin/dbdst_partition_move -S $ORACLE_SID -T table_name \  
-p partition_name -c storage_class
```

where

- `-T` indicates the table name.
- `-p` indicates the partition name.
- `-c` indicates the class to which the table partition is to be moved.

For example, to move the `SALES_Q1` partition of the `SALES` table to storage class `SLOW`, use the `dbdst_partition_move` as follows:

```
$ /opt/VRTS/bin/dbdst_partition_move -S $ORACLE_SID -T SALES \  
-p SALES_Q1 -c SLOW
```

Another example:



```
$ /opt/VRTS/bin/dbdst_partition_move -S VRTS11r2 -T EMP1 -p P3 \
-c MEDIUM
```

```
Assign placement policy file successful on filesystem /data11r2
Begin enforcing filesystem /data11r2 ...
Enforce placement policy successful on filesystem /data11r2
```

## Setting policies to automate storage tiering using SmartTier for Oracle

Use the `dbdst_preset_policy` command to set a policy based on file name patterns before the files are created.

[Table 23-4](#) shows the preset policies command options.

**Table 23-4** dbdst\_preset\_policy command options

| Command option  | Description                                                                                                                                                                                                                         |
|-----------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| -d directory    | Indicates the directory on which the placement policy will be applied.                                                                                                                                                              |
| -e              | Enforces the file system of the specified directory. Use this option if there was an error in the previous enforcement that has been corrected and needs to be enforced again.                                                      |
| -R              | Removes all pattern-based placement policies related to this directory.                                                                                                                                                             |
| -l              | Lists the existing file placement that is set to the specified directory.                                                                                                                                                           |
| -P pattern_spec | Specifies file patterns and class assignment. This option will automatically place files in the desired class as soon as they are created. Existing files and newly created files will be moved immediately to the class specified. |
| -f pattern file | Specifies a file that contains a particular class and pattern. New files with this pattern will be placed in the class immediately. Existing files will be moved as well.                                                           |
| -E              | Specifies that existing files should be moved to the designated class in a one-time move to be scheduled at a later time, such as the sweep time specified in the <code>dbdst_admin</code> command.                                 |

### To create a preset policy

- ◆ Use the `dbdst_preset_policy` command as follows:

```
$ dbdst_preset_policy -S oracle_sid -d directory \  
[ -e | -R | -l | -P pattern_spec | -f pattern_file ] [-E]
```

where `pattern_spec` has the format of  
"class=pattern,pattern,...[:class=pattern,pattern,...]"

For example:

```
$ /opt/VRTS/bin/dbdst_preset_policy -S VRTS11r2 \  
-d /data11r2/VRTS11r2 -P "MEDIUM=*.dbf:FAST=*.log"
```

```
Assign placement policy file successful on filesystem /data11r2  
Begin enforcing filesystem /data11r2 ...  
Enforce placement policy successful on filesystem /data11r2
```

## Running reports using SmartTier for Oracle

You can create a report that lists all modified allocation policies or you can view an audit report, which lists recent relocation changes for a specific date range resulting from your policies.

To create a list of modified allocation policies, use the `dbdst_report` command with the `policy` option.

**To view modified allocation policies**

- ◆ Use the `dbdst_report` command to view a list of modified allocation policies.

For example:

```
$ /opt/VRTS/bin/dbdst_report -S $ORACLE_SID -o policy
```

```
$ /opt/VRTS/bin/dbdst_report -S VRTS11r1 -o policy
```

```
TSDB Database Policy Report
```

```
-----  
  
Plan Name = preset_dir:/data11r1/VRTS11r1  
Plan Type = PRESET POLICY DIRECTORY  
Rule Name = DBED_precreate_ino4_PRIMARY  
Directory=/dev/vx/dsk/dstadatdg09/datavol : VRTS11r1  
Rule Description = PRIMARY=MEDIUM=*.log,undo*.dbf
```

```
Plan Name = tbs_move:MYTBS  
Plan Type = TBS MOVE  
Rule Name = DBED_relocate_once_ino4_MEDIUM  
Directory=/dev/vx/dsk/dstadatdg09/datavol : VRTS11r1  
Rule Description = MEDIUM
```

To view an audit report, which lists recent file relocation changes within a specific date range, use the `dbdst_report` command with the `audit` option.

**To view audit reports**

- ◆ Use the `dbdst_report` command as follows:

```
$ /opt/VRTS/bin/dbdst_report -S $ORACLE_SID -o audit \
startdate=yyyy-mm-dd,enddate=yyyy-mm-dd
```

For example, to view an audit report of changes from January 1, 2007 through March 1, 2007, use the `dbdst_report` command as follows:

```
$ /opt/VRTS/bin/dbdst_report -S $ORACLE_SID -o audit \
startdate=2007-01-01,enddate=2007-03-01
```

Another example:

```
$ /opt/VRS/bin/dbdst_report -S VRTS11r2 -o audit \
startdate=2007-01-01,enddate=2010-08-13
```

| AUDIT DATETIME      | AUDIT DESCRIPTION                                                                                                  |
|---------------------|--------------------------------------------------------------------------------------------------------------------|
| 2010-08-13 23:38:48 | ADMIN;Added;class name=TIER1                                                                                       |
| 2010-08-13 23:38:48 | ADMIN;Modified Successfully;max/min class=4/2, \ statinterval=30, sweeptime=22:0, purgetime=20:0, swp/prg freq=1/1 |
| 2010-08-13 23:46:48 | ADMIN;Added;class name=FAST                                                                                        |
| 2010-08-13 23:46:58 | ADMIN;Added;class name=FAST                                                                                        |

## Extent balancing in a database environment using SmartTier for Oracle

To obtain better performance in a database environment, you would normally use a volume striped over several disks. As the amount of data stored in the file system increases over time, additional space in the form of new disks must be added.

To increase space, you could perform a volume relayout using the command. However, changing a large volume, for example, from a four-way striped volume to six-way striped volume involves moving old block information into temporary space and writing those blocks from the temporary space to a new volume, which would require an extended amount of time. To solve this problem, SFDB tools provide the Extent Balanced File System or EBFS .

An Extent Balanced File System is created on a multi-volume file system where individual volumes are not striped over individual disks. For data-availability, these individual volumes can be mirrored. The file system on the EBFS has a

special placement policy called a balance policy. When the balance policy is applied, all the files are divided in `vxrelayout` to small "chunks" and the chunks are laid out on volumes so that adjacent chunks are on different volumes. The default chunk size is 1MB and can be modified. Since every file contains chunks on all available volumes, it is important that individual volumes that make up the EBFS and volume set be of same size and same access properties.

Setting up the file system in this way provides the same benefit as striping your volumes.

---

**Note:** You cannot convert an existing file system to an EBFS file system.

---

## Extent balancing file system to improve database performance

You can define allocation policies with a balance allocation order and "chunk" size to files or a file system, known as extent balancing. The chunk size is the maximum size of any extent that files or a file system with this assigned policy can have. The chunk size can only be specified for allocation policies with a balance allocation order.

An extent balancing policy specifies the balance allocation order and a non-zero chunk size. The balance allocation order distributes allocations randomly across the volumes specified in the policy and limits each allocation to a maximum size equal to the specified chunk size.

Extent balancing extends the behavior of policy enforcement by rebalancing extent allocations such that each volume in the policy is as equally used as possible. Policy enforcement handles the following cases:

- New volumes are added to the policy, and the extents associated with a file need rebalancing across all volumes, including the new ones.
- Volumes are removed from the volume set or from the policy, and the extents for a file residing on a removed volume need to be moved to other volumes in the policy.
- An extent balancing policy is assigned to a file and its extents have to be reorganized to meet the chunk size requirements defined in the policy.

The extent balancing policy is intended for balancing data extents belonging to files across volumes defined in the policy. However, there is no restriction imposed in assigning extent balancing policy for metadata.

---

**Note:** If the fixed extent size is less than the chunk size, then the extent size will be limited to the largest multiple of the fixed extent size that is less than the chunk size. If the fixed extent size is greater than the chunk size, then the extent size will be the fixed extent size.

---

## Creating an extent balanced file system using SmartTier for Oracle

Any multi-volume file system (MVFS) can become an extent balanced file system, if the storage tier has a chunk size associated with the class. The `dbdst_admin` command permits the user to define a chunk size for the class.

For example, the following `dbdst_admin` commands define chunk sizes for the gold and silver storage classes:

```
$ /opt/VRTS/bin/dbdst_admin -S $ORACLE_SID \  
-o definechunk=gold:256K
```

```
$ /opt/VRTS/bin/dbdst_admin -S $ORACLE_SID \  
-o definechunk=silver:128K
```

For example:

```
$ /opt/VRTS/bin/dbdst_admin -S $ORACLE_SID \  
-o definechunk=TIER1:256K
```

The above commands make storage class gold as extent balanced.

Once the chunksize is defined for a storage tier, we can classify any MVFS into this storage tier.

For example, assume that `/oradata` is the filesystem created on volume-set `/dev/vx/dsk/oradg/ora_vset`, and contains database datafiles. Let us further assume that datafile names end with extension `*.dbf`. To define storage class in this MVFS, the following `dbdst_classify` command is used:

```
$ /opt/VRTS/bin/dbdst_classify -S $ORACLE_SID \  
-M /dev/vx/dsk/oradg/ora_vset -v vol1:GOLD,vol2:GOLD,vol3:GOLD
```

For example:

```
$ /opt/VRTS/bin/dbdst_classify -S VRTS11r2 \  
-M /dev/vx/dsk/dstdatadgot/datavol -v datavol1:FAST,datavol2:MEDIUM
```

It is important to note that, an MVFS can have multiple storage tiers and that each tier may have a different chunk size. For example, for the same MVFS in the above example, we can define another storage tier using the `dbdst_classify` command:

```
$ /opt/VRTS/bin/dbdst_classify -S $ORACLE_SID \  
-M /dev/vx/dsk/oradg/ora_vset -v vol4:silver,vol5:silver
```

For example:

```
$ /opt/VRTS/bin/dbdst_classify -S VRTS11r2 \  
-M /dev/vx/dsk/dstarchdgot/archvol -v archvol1:FAST,archvol2:MEDIUM
```

At this point we have two storage tiers in MVFS /oradata each having different chunk sizes. To create the real extent balance, we need to assign a SmartTier policy and to enforce it.

To define and enforce the policy, you could use the following `dbdst_preset_policy` command:

```
$/opt/VRTS/bin/dbdst_preset_policy -S $ORACLE_SID \  
-d /oradata -P GOLD=*.dbf:SILVER=*.inx
```

The above example creates a SmartTier policy, assigns the policy to /oradata and enforces the policy. All datafiles of the form \*.dbf will be extent balanced in GOLD tier with chunksize 256K and all index files of the form \*.inx will be extent balanced in SILVER tier with chunk size 128K.

Another example:

```
$ /opt/VRTS/bin/dbdst_preset_policy -S VRTS11r2 \  
-d /data11r2/VRTS11r2 -P "MEDIUM=temp*.dbf:FAST=*.log"
```

```
Assign placement policy file successful on filesystem /data11r2  
Begin enforcing filesystem /data11r2 ...  
Enforce placement policy successful on filesystem /data11r2
```

To view the space usage in the /oradata MVFS use the `dbdst_show_fs` command. For example:

```
$ /opt/VRTS/bin/dbdst_show_fs -S $ORACLE_SID -m /oradata
```

For example:

```
$ /opt/VRTS/bin/dbdst_show_fs -S VRTS11r2 -m /data11r2 -o volume
```

| VOLUME NAME    | SIZE     | USED    | AVAILABLE | TAG     |
|----------------|----------|---------|-----------|---------|
| -----          | ----     | ----    | -----     | ---     |
| datavol-b4vset | 10240000 | 3585514 | 6654486   | PRIMARY |
| datavol1       | 1024000  | 1024000 | 0         | FAST    |
| datavol2       | 4608000  | 2347872 | 2260128   | MEDIUM  |

When the GOLD or SILVER tier requires more space, we could add extra space by adding new volumes to the respective storage tier using the `dbdst_addvol` command. For example:

```
$ /opt/VRTS/bin/dbdst_addvol -S $ORACLE_SID \  
-M /dev/vx/dsk/oradg/ora_vset -v vol17:GOLD
```

As soon as you add a new volume, the SmartTier policy is enforced and the extents are balanced over the new volume too. This can be viewed by using the `dbdst_show_fs` command again.

To view detailed extent information about a given file, you can use the `fsmmap` command. For example:

```
$ /opt/VRTSvxfs/sbin/fsmmap -a /oradata/emp.dbf  
  
$ /opt/VRTS/bin/fsmmap -a /oradata/emp.dbf
```

```
$ fsmmap -a /standby/oradata1_1/slave/system01.dbf |more  
Volume Extent Type File Offset Extent Size File  
vol1 Data 0 262144 /standby/oradata1_1/slave/system01.dbf  
vol2 Data 262144 8192 /standby/oradata1_1/slave/system01.dbf  
vol3 Data 270336 131072 /standby/oradata1_1/slave/system01.dbf  
vol1 Data 401408 262144 /standby/oradata1_1/slave/system01.dbf  
vol2 Data 663552 180224 /standby/oradata1_1/slave/system01.dbf  
vol3 Data 843776 32768 /standby/oradata1_1/slave/system01.dbf  
vol1 Data 876544 49152 /standby/oradata1_1/slave/system01.dbf  
vol2 Data 925696 65536 /standby/oradata1_1/slave/system01.dbf  
vol3 Data 991232 196608 /standby/oradata1_1/slave/system01.dbf
```

## Running sub-file database object reports using SmartTier for Oracle

Use the `dbdst_obj_view` command to get detailed specific database, index, or partition information. The report indicates in which storage class each database table/index extent resides. The reports provide information for decisions to move the database objects within different storage classes of the multi-volume filesystem.

An Oracle tablespace is usually constructed of several datafiles. A database object such as a table or an index has extents allocated from multiple datafiles. A given datafile usually contains extents from multiple database objects.

The `dbdst_obj_view` command queries Oracle `dba_extents` catalog table and for each extent gets file offset and length in bytes. This command passes the offset



and length information to the File System low level SmartTier commands to get the exact location of the extent blocks.

**Usage for `dbdst_obj_view`**

```
dbdst_obj_view -S ORACLE_SID -H ORACLE_HOME -t table [-s start_extent] [-e end_extent]
dbdst_obj_view -S ORACLE_SID -H ORACLE_HOME -i index [-s start_extent] [-e end_extent]
dbdst_obj_view -S ORACLE_SID -H ORACLE_HOME -p partition [-s start_extent] [-e end_extent]
dbdst_obj_view -S ORACLE_SID -H ORACLE_HOME -f datafile
```

- |                                    |                                                                                                                                                                                                                                                                                                                           |
|------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Prerequisites</b>               | <ul style="list-style-type: none"> <li>■ The database must be online.</li> <li>■ The command must be run as Oracle user.</li> </ul>                                                                                                                                                                                       |
| <b>Notes</b>                       | <ul style="list-style-type: none"> <li>■ To make sure the SFDB repository is up-to-date, run <code>dbed_update</code> at least once before using the command.</li> <li>■ Generating a report for large tables will take long time.</li> <li>■ To restrict the scope of the table/index, use start/end extents.</li> </ul> |
| <b>For Oracle RAC environments</b> | <ul style="list-style-type: none"> <li>■ This command can be run on any node of an Oracle RAC cluster on which the database is running.</li> </ul>                                                                                                                                                                        |

[Table 23-5](#) shows the sub-file report command options.

**Table 23-5** `dbdst_obj_view` command options

| Command option                 | Description                                                                                                                                                                                                                                         |
|--------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <code>-S ORACLE_SID</code>     | Specifies the name of the Oracle database from which information will be retrieved.                                                                                                                                                                 |
| <code>-H ORACLE_HOME</code>    | Specifies the ORACLE_HOME for the database.                                                                                                                                                                                                         |
| <code>-v</code>                | This is an optional argument. If this option is specified, a verification will be done after moving each extent to target storage class. If the target storage class, does not have enough free sapce, some the the table extents may not be moved. |
| <code>-t table name</code>     | Name of the table for which view report needs to be generated.                                                                                                                                                                                      |
| <code>-i index name</code>     | Name of the index for which view report needs to be generated.                                                                                                                                                                                      |
| <code>-p partition name</code> | Name of the partition for which view report needs to be generated.                                                                                                                                                                                  |

**Table 23-5** dbdst\_obj\_view command options (*continued*)

| Command option  | Description                                                                                                                                           |
|-----------------|-------------------------------------------------------------------------------------------------------------------------------------------------------|
| -s start-extent | Specifies the starting extent of the table/index. The default starting extent is zero.                                                                |
| -e end-extent   | Specifies the last extent of the table/index. If this option is not specified, then the report will be generated to include last extent of the table. |

**To verify objects have been moved as expected to a new tier**

- ◆ Use following command to verify a relocation of the entire emp table to SYMMETRIX, extents 100 to 400 of table emp to SSD, and partition q1\_orders to SSD.

```
$ /opt/VRTS/bin/dbdst_obj_view -S PROD -H /opt/oracle/home11g \
-t emp
```

| File Name           | Ext-Id | File-Offset | Length  | Tier-Name |
|---------------------|--------|-------------|---------|-----------|
| -----               | -----  | -----       | -----   | -----     |
| /demo_data/emp1.dbf | 1      | 8462336     | 1048576 | SYMMETRIX |
| /demo_data/emp1.dbf | 2      | 2170880     | 1048576 | CLARION   |
| /demo_data/emp1.dbf | 3      | 3219456     | 1048576 | CLARION   |
| /demo_data/emp1.dbf | 4      | 9510912     | 1048576 | CLARION   |
| /demo_data/emp1.dbf | 5      | 12656640    | 1048576 | CLARION   |
| /demo_data/emp1.db  | 6      | 13705216    | 1048576 | SYMMETRIX |
| /demo_data/emp1.db  | 7      | 14753792    | 1048576 | SYMMETRIX |
| /demo_data/emp1.dbf | 8      | 15802368    | 1048576 | SYMMETRIX |
| /demo_data/emp1.db  |        | 16850944    | 1048576 | SYMMETRIX |

## Optimizing sub-file database object placement using SmartTier for Oracle

Use the `dbdst_obj_move` command to move the specified database table, index or a partition files to the desired storage class. The `dbdst_obj_move` command queries Oracle `dba_extents` catalog table and for each extent gets file offset and length in bytes. This command passes these offset/length information to VxFS low level SmartTier commands to move the database extents to desired storage class.

Usage for `dbdst_obj_view`

```
dbdst_obj_move -S ORACLE_SID -H ORACLE_HOME [-v] -t table \
    [-s start_extent] [-e end_extent] -c storage_class
dbdst_obj_move -S ORACLE_SID -H ORACLE_HOME [-v] -i index \
    [-s start_extent] [-e end_extent] -c storage_class
dbdst_obj_move -S ORACLE_SID -H ORACLE_HOME [-v] -p partition \
    [-s start_extent] [-e end_extent] -c storage_class
```

- Prerequisites**
- The database must be online.
  - The command must be run as Oracle user.
- Notes**
- To make sure the SFDB repository is up-to-date, run `dbed_update` at least once before using the command.
- For Oracle RAC environments**
- This command can be run on any node of an Oracle RAC cluster on which the database is running.

Table 23-6 shows the sub-file object movement command options.

**Table 23-6** dbdst\_obj\_move command options

| Command option    | Description                                                                                                                                                                                                                                            |
|-------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| -S ORACLE_SID     | Specifies the name of the Oracle database from which information will be retrieved.                                                                                                                                                                    |
| -H ORACLE_HOME    | Specifies the ORACLE_HOME for the database.                                                                                                                                                                                                            |
| -v                | This is an optional argument. If this option is specified, a verification will be done after moving each extent to the target storage class. If the target storage class does not have enough free space, some the the table extents may not be moved. |
| -t table name     | Name of the table for which view report needs to be generated.                                                                                                                                                                                         |
| -i index name     | Name of the index which must be relocated.                                                                                                                                                                                                             |
| -p partition name | Name of the partition which must be relocated. More than one partition can co-exist in the same tablespace.                                                                                                                                            |
| -c storage_class  | Specifies the storage class to which the table or index extents will be moved.                                                                                                                                                                         |

**Table 23-6** dbdst\_obj\_move command options (*continued*)

| Command option  | Description                                                                                                                                        |
|-----------------|----------------------------------------------------------------------------------------------------------------------------------------------------|
| -s start_extent | Specifies the starting extent of the table or index. The default starting extent is zero.                                                          |
| -e end_extent   | Specifies the last extent of the table or index . If this option is not specified, then the complete table or index will be moved to target class. |

**To relocate entire emp table to SYMMETRIX**

- 1 Run the dbed\_update command to make sure the repository is current.
- 2 Run the the following command:

```
$ /opt/VRTS/bin/dbdst_obj_move -S PROD -H /opt/oracle/home11g \  
-t emp -c SYMMETRIX
```

**To relocate extents 100 to 400 of table emp to SSD**

- 1 Run the dbed\_update command to make sure the repository is current.
- 2 Run the following command:

```
$ /opt/VRTS/bin/dbdst_obj_move -S PROD -H /opt/oracle/home11g \  
-t emp -s 100 -e 400 -c SSD
```

**To relocate and verify the relocation of partition q1\_orders to SSD**

- 1 Run the dbed\_update command to make sure the repository is current.
- 2 Run the following command:

```
$ /opt/VRTS/bin/dbdst_obj_move -S PROD -H /opt/oracle/home11g \  
-v -p q1_orders -c SSD
```

# SmartTier use cases for Oracle

This chapter includes the following topics:

- [SmartTier use cases for Oracle](#)
- [SmartTier for Oracle file-based use cases](#)
- [SmartTier for Oracle sub-file use cases](#)

## SmartTier use cases for Oracle

Storage Foundation High Availability Solutions include SmartTier, a storage tiering feature which enables you to tier your data to achieve optimal use of your storage.

Example procedures illustrate the following use cases:

For file-level SmartTier for Oracle:

- Migrating partitioned data and tablespaces
- Scheduling the relocation of archive and Flashback logs

For sub-file-level SmartTier for Oracle

- Using AWR statistics to identify sub-file objects for potential relocation
- Relocating a hot database segment to higher performance tier
- Relocating old table data to a lower cost tier

## SmartTier for Oracle file-based use cases

The following file-based use cases are supported for SmartTier for Oracle:

- Migrating partitioned data and tablespaces
- Scheduling the relocation of archive and Flashback logs

## Migrating partitioned data and tablespaces

Perhaps the simplest application of multi-tier storage to databases is relocation of individual table partitions between different placement classes as usage requirements change. If exact relocation times are unpredictable, or if relocation is infrequent, administrators may wish to relocate table partitions when necessary rather than defining strict periodic relocation schedules.

Ad hoc relocation of table partitions can be useful, for example, with databases that track sales and inventory for seasonal businesses such as sports equipment or outdoor furniture retailing. As the selling season for one type of inventory (for example, summer equipment or furniture) approaches, database table partitions that represent in-season goods can be relocated to high-performance storage, since they will be accessed frequently during the coming months. Similarly, partitions that represent out-of-season goods can be relocated to lower-cost storage, since activity against them is likely to be infrequent.

For example, sales are mostly catalog-driven for a large retailer specializing in sports equipment. Product details are saved in a large database and the product table is partitioned based on type of activity. Some of the products are seasonal and do not sell well at other times. For example, very few snow skis are sold during the summer. To achieve season-based migration, see the following example. Assume the table `product_tab` has two partitions, `summer` and `winter`. Each of these partitions is mapped to a separate data file.

First, you must set up your system to use SmartTier for Oracle.

### To add the `fast_storage` and `slow_storage` storage classes

- ◆ Use the `dbdst_admin` command as follows:

```
$ /opt/VRTS/bin/dbdst_admin -S PROD -o addclass=\
fast_storage:"Fast Storage for Production DB"
```

```
$ /opt/VRTS/bin/dbdst_admin -S PROD -o addclass=\
slow_storage:"Slow Storage for Production DB"
```

### To convert the database's file system and add volumes for use with SmartTier for Oracle

- ◆ Use the `dbdst_convert` command as follows:

```
$ /opt/VRTS/bin/dbdst_convert -S PROD \
-M /dev/vx/dsk/oradg/oradata -v new_vol1,new_vol2,new_vol3
```

### To classify volumes into storage classes

- ◆ Use the `dbdst_classify` command as follows:

```
$ /opt/VRTS/bin/dbdst_classify -S PROD \  
-M /dev/vx/dsk/oradg/oradata -v new_vol1:fast_storage  
  
$ /opt/VRTS/bin/dbdst_classify -S PROD \  
-M /dev/vx/dsk/oradg/oradata -v new_vol2:slow_storage,\  
new_vol3:slow_storage
```

Once the volumes are configured, an administrator can define file placement policy rules that specify seasonal relocation of selected tablespaces and partitions and assign them to the database's file system.

### To move summer data to slower storage and winter data to faster storage at the beginning of winter

- ◆ Use the `dbdst_partition_move` command as follows:

```
$ /opt/VRTS/bin/dbdst_partition_move -S PROD -T product_tab \  
-p winter -c fast_storage  
  
$ /opt/VRTS/bin/dbdst_partition_move -S PROD -T product_tab \  
-p summer -c slow_storage
```

These commands relocate the files that comprise the winter partition of the `product_tab` table to placement class `fast_storage`, and the files that comprise the summer partition to placement class `slow_storage`. SmartTier for Oracle determines which files comprise the winter and summer partitions of `product_tab`, and uses underlying SmartTier services to immediately relocate those files to the `fast_storage` and `slow_storage` placement classes respectively.

### To move winter data to slower storage and summer data to faster storage at the beginning of summer

- ◆ Use the `dbdst_partition_move` command as follows:

```
$ /opt/VRTS/bin/dbdst_partition_move -S PROD -T product_tab \  
-p summer -c fast_storage  
  
$ /opt/VRTS/bin/dbdst_partition_move -S PROD -T product_tab \  
-p winter -c slow_storage
```

SmartTier for Oracle formulates SmartTier policy rules that unconditionally relocate the files containing the target partitions to the destination placement classes. It merges these rules into the database file system's active policy, assigns

the resulting composite policy to the file system, and enforces it immediately to relocate the subject files. Because the added policy rules precede any other rules in the active policy, the subject files remain in place until the `dbdst_partition_move` command is next executed, at which time the rules are removed and replaced with others.

## Scheduling the relocation of archive and Flashback logs

As are the primary mechanism for recovering from data corruption, database logs are normally kept on premium storage, both for I/O performance and data reliability reasons. Even after they have been archived, logs are normally kept online for fast recovery, but the likelihood of referring to an archived log decreases significantly as its age increases. This suggests that archived database logs might be relocated to lower-cost volumes after a certain period of inactivity.

Similarly, Storage Foundation Flashback technology creates logs that can be used for quick recovery from database corruption by restoring a database to its state at a previous time. Flashback logs are normally kept for a shorter period than archived database logs, if used at all, they are typically used within a few hours of creation. Two or three days are a typical Flashback log lifetime.


The rapidly decaying probability of use for archive and Flashback logs suggests that regular enforcement of a placement policy that relocates them to lower-cost storage after a period of inactivity can reduce an enterprise's average cost of online storage.

For example procedures, a customer could be using a large OLTP Oracle database with thousands of active sessions, which must be up and running 24 hours a day and seven days a week with uptime of over 99%. The database uses Flashback technology to correct any accidental errors quickly and generates a large number of archive logs per day. If the database goes down for any reason, there is a business requirement to bring the database back online and get it functional within 15 minutes. To prevent Oracle log switch delays during transactions, the archive logs need to be created in a fast EMC array. Archive logs older than a week can be moved to a mid-range Clarion array. Archive logs older than 15 days can be moved to slow JBOD disks. Archive logs are purged after 30 days. Current Flashback logs are created manually by the database administrator on fast EMC storage and can be moved to Clarion storage after two days. The database administrator then deletes the Flashback logs after a week. To set up a system like this, see the following example. Assume that archive logs and Flashback logs are created on the same file system, `/oralog`. On the file system, `/oralog/archive1` contains archive logs and `/oralog/flashback` contains Flashback logs.

[Figure 24-1](#) illustrates a three-tier volume configuration that is suitable for automatic relocation and deletion of archive logs and Flashback logs.



**Figure 24-1** Database storage configuration suitable for automatic relocation of archive and Flashback logs

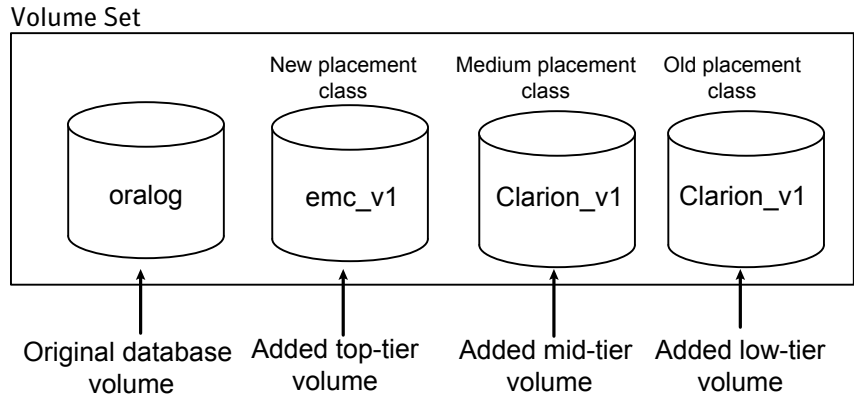

The file system used by the production database in this example originally resides on the single volume `oralog`, which must be prepared by adding volumes and placement classes assigned to the volumes.

#### To add the NEW, MEDIUM, and OLD storage classes

- ◆ Use the `dbdst_admin` command as follows:

```
$ /opt/VRTS/bin/dbdst_admin -S PROD -o addclass=\
NEW:"EMC Storage for Production DB"
```

```
$ /opt/VRTS/bin/dbdst_admin -S PROD -o addclass=\
MEDIUM:"Clarion Storage for Production DB"
```

```
$ /opt/VRTS/bin/dbdst_admin -S PROD -o addclass=\
OLD:"JBOD Storage for Production DB"
```

#### To convert the database's file system and add volumes for use with SmartTier for Oracle

- ◆ Use the `dbdst_convert` command as follows:

```
$ /opt/VRTS/bin/dbdst_convert -S PROD \
-M /dev/vx/dsk/oradg/oralog -v emc_v1,clarion_v1,jbod_v1
```

### To classify volumes into storage classes

- ◆ Use the `dbdst_classify` command as follows:

```
$ /opt/VRTS/bin/dbdst_classify -S PROD \  
-M /dev/vx/dsk/oradg/oralog -v emc_v1:NEW  
  
$ /opt/VRTS/bin/dbdst_classify -S PROD \  
-M /dev/vx/dsk/oradg/oralog -v clarion_v1:MEDIUM  
  
$ /opt/VRTS/bin/dbdst_classify -S PROD \  
-M /dev/vx/dsk/oradg/oralog -v jbod_v1:OLD
```

Once the volumes are configured, an administrator can define file placement policy rules that specify access age-based relocation of selected files and assign them to the database's file system.

### To define rules that periodically relocate Flashback and archive logs

- ◆ Use the `dbdst_file_move` command as follows:

```
$ /opt/VRTS/bin/dbdst_file_move -S PROD -o flashback -c MEDIUM:2
```

This command relocates files in the Flashback directory that have not been accessed for two days to the MEDIUM volume.

```
$ /opt/VRTS/bin/dbdst_file_move -S PROD -o archive1 -c MEDIUM:7 \  
-c OLD:15
```

This command relocates files in the archive1 directory that have not been accessed for seven days to the MEDIUM volume, and files that have not been accessed for 15 days to the OLD volume.

SmartTier for Oracle translates these commands into SmartTier access age-based policy rules, merges them with the file system's placement policy, and assigns the resulting policy to the file system. By default, SmartTier for Oracle enforces the active policy daily. During enforcement, the new rules relocate qualifying files to the destination storage tiers specified in the `dbdst_file_move` commands used to create the policies.

## SmartTier for Oracle sub-file use cases

The following sub-file based use cases are supported for SmartTier for Oracle:

- Using AWR statistics to identify sub-file objects for potential relocation
- Relocating a hot database segment to higher performance tier

- Relocating old table data to a lower cost tier

## Using AWR statistics to identify sub-file objects for potential relocation

You can use Oracle's Automatic Workload Repository (AWR) statistics to identify sub-file objects for potential relocation by identifying key properties such as activity levels. The Oracle database collects these statistics for a variety of purposes, including making self-management decisions. See the guidelines below for enabling AWR and generating AWR reports.

### To enable AWR statistics collection

- ◆ Specify the level of collection for database and operating system statistics by setting the initialization parameter: `STATISTICS_LEVEL`:
  - **TYPICAL**: is the default setting. This setting ensures collection of all major statistics required for database self-management functionality and provides best overall performance. The default value should be adequate for most environments.
  - **ALL**: additional statistics are added to the set of statistics collected with the **TYPICAL** setting. The additional statistics are timed OS statistics and plan execution statistics.
  - **BASIC**: disables the collection of many of the important statistics required by Oracle database features and functionality.

Symantec recommends setting `STATISTICS_LEVEL = typical`. This parameter can be dynamically changed when database is online.

### To change the `STATISTICS_LEVEL`

- ◆ Use the following:

```
SQL> alter system set statistics_level=typical;
```

An AWR report shows data captured between two snapshots (or two points in time). The AWR reports are divided into multiple sections. The HTML report includes links that can be used to navigate quickly between sections. The content of the report contains the workload profile of the system for the selected range of snapshots.

**To generate an HTML or text report for a range of snapshot IDs**

- 1 Run the `awrrpt.sql` script at the SQL prompt:

```
SQL> @$ORACLE_HOME/rdbms/admin/awrrpt.sql
```

- 2 Specify whether you want an HTML or a text report.

```
Enter value for report_type: text
```

- 3 Specify the number of days for which you want to list snapshot IDs.

```
Enter value for num_days: 2
```

- 4 After the list displays, you are prompted for the beginning and ending snapshot Id for the workload repository report.

```
Enter value for begin_snap: 150
```

```
Enter value for end_snap: 160
```

- 5 Accept the default report name or enter a report name. The default name is accepted in the following example:

```
Enter value for report_name:
```

```
Using the report name awrrpt_1_150_160
```

The workload repository report is generated.

You can use the AWR reports to identify candidate tables or indexes for moving to alternative storage. The AWR report has two sections which are useful for sub-file SmartTier. For a directed move of an object to a desired tier, the Segment Statistics portion of the AWR report can be used. Here is an example from TPCC workload. Using the Segment Statistics hot table/index can be moved to SSD tier.

**Table 24-1** Sample segments by physical read

| Owner | Tablespace name | Object Name | Object type | Physical reads | %Total |
|-------|-----------------|-------------|-------------|----------------|--------|
| TPCC  | USERS           | ITEM_ID     | INDEX       | 13,551         | 43.59  |
| TPCC  | USERS           | ITEM        | TABLE       | 7,718          | 24.83  |
| TPCC  | USERS           | CUSTOMER    | TABLE       | 4,403          | 14.16  |
| TPCC  | USERS           | STOCK       | TABLE       | 3,692          | 11.88  |
| TPCC  | USERS           | ORDERS      | TABLE       | 352            | 1.13   |

ITEM\_ID and ITEM from the sample segments reported above are the two most likely candidates for relocation to a higher performance tier. The commands to relocate them are:

```
$ dbdst_obj_move -S $ORACLE_SID -H $ORACLE_HOME \  
-i ITEM_ID -c SSD_TIER  
  
$ dbdst_obj_move -S $ORACLE_SID -H $ORACLE_HOME \  
-t ITEM -c SSD_TIER
```

For more on using the `dbdst_obj_move` command:

See [“Optimizing sub-file database object placement using SmartTier for Oracle”](#) on page 282.

## Relocating a hot database segment to a higher performance tier

You can relocate hot database segments or objects to higher performance storage using sub-file storage tiering when relocating the entire datafiles is not practical.

For the example values in the procedure below, see the information in [Table 24-1](#)

The command in the example below queries `dba_segments` and `dba_extents` and prepares a list of extents for a given table/index. From the extent information, a list containing (file, offset) is generated. This list is handed over to `fsspadm` to perform the sub-file enforcement.

### To relocate a hot database segment to a high-performance tier

- 1 Identify the most active hot objects or segments of the database using an Oracle AWR report.
- 2 Determine the size needed to relocate them to the higher-performance tier.
- 3 To ensure an up-to-date SFDB repository, run `dbed_update`.
- 4 Run the command to move the table `emp` to the tier `SSD`.

```
$ dbdst_obj_move -S PROD -H /ora11ghome -t EMP -c SSD
```

The command in the example below displays the set datafiles where the specified table/index resides. If the underlying file system is a multi-volume file system, it will display the corresponding volume and tier name.

### To verify that the database segment is relocated to the correct tier

- ◆ Run the command to view the relocated table:

```
$ dbdst_obj_view -S PROD -H /ora11ghome -t EMP
```

For more on using the `dbdst_obj_move` command:

See [“Optimizing sub-file database object placement using SmartTier for Oracle”](#) on page 282.

## Relocating old table data to a lower cost or secondary tier

In some databases such as TELCO applications, call detail records (CDR) accumulate very quickly. For regulatory purposes, these records must be saved for several years, causing the size of the database to grow at an enormous rate. If the CDR table is partitioned, the old partitions can be relocated to the lower cost tier. However, if the CDR table is not partitioned, alternatives are needed. One potential alternative is described below.

The extents for CDR tables are allocated on demand. This means extent 100 is created much earlier than extent 900. It also means that the activity for CDR records in extent 100 is less. From the extent-id, using `dba_extents` and `dba_segments` dictionary tables, file, offset, length information can be generated. From this information, you can relocate the identified portion of the file to the secondary tier.

### To relocate old table data to a lower cost or secondary tier

- 1 Identify the less active objects or segments of the database using an Oracle AWR report.
- 2 Determine the storage tier to which the less active objects or segments can be relocated.
- 3 To ensure an up-to-date SFDB repository, run `dbed_update`.
- 4 Run the command to move the table `CDR_100` to `tier-2`.

```
$ dbdst_obj_move -S PROD -H /ora11ghome -t CDR_100 -c tier-2
```

The command in the example below displays the set datafiles where the specified table/index resides. If the underlying file system is a multi-volume file system, it will display the corresponding volume and tier name.

### To verify that the database segment is relocated to the correct tier

- ◆ Run the command to view the relocated table:

```
$ dbdst_obj_view -S PROD -H /ora11ghome -o CDR_100
```

For more on using the `dbdst_obj_move` command:

See [“Optimizing sub-file database object placement using SmartTier for Oracle”](#) on page 282.

# Compressing files and databases to optimize storage costs

This chapter includes the following topics:

- [Compressed files and databases](#)

## Compressed files and databases

Compressing files helps to reduce the storage cost in a database environment. For Oracle databases, compression provides an excellent value add to reduce storage cost for archived logs, partitioned tables, and infrequently accessed tablespaces and datafiles. The compression ratio of database files depends on the type of object stored in the datafiles. Oracle traditionally stores TABLES and INDEXES in datafiles, in which case the compression ratio depends on type of columns associated with the TABLE and the type of keys in the INDEXES. Oracle also has the ability to store unstructured data, such as XML, spreadsheets, MS Word documents, and pictures, within a TABLE via the Secured Files feature. These types of unstructured data are very good candidates for compression. You can achieve up to 90% compression for archived logs, and about 50% to 65% compression for Oracle datafiles and indexes.

Oracle database files can be compressed and uncompressed as needed while the database is active, although this can have a significant performance impact on the database. Other than reduced I/O response time, compression runs seamlessly while the Oracle database is online and actively doing transactions to the files. Compression works seamlessly with advanced I/O methods, such as direct I/O, asynchronous I/O, concurrent I/O, ODM, and Cached ODM. Any updates and new inserts to the datafile result in uncompressing the portion of the file associated

with the write. The queries get uncompressed data in memory and the file remains compressed.

---

**Note:** You cannot compress Quick I/O files.

You can run the `vxcompress` command as a DBA user.

---

The following use cases apply to databases:

- [Supported database versions and environment](#)
- [Compressing archive logs](#)
- [Compressing read-only tablespaces](#)
- [Compressing infrequently accessed table partitions](#)
- [Compressing infrequently accessed datafiles](#)
- [Best practices for compressing files in an Oracle database](#)

## Supported database versions and environment

You can use compressed files with Oracle versions 10gR2, 11gR1, and 11gR2. Compression is supported in Veritas Storage Foundation (SF), Veritas Storage Foundation and High Availability (SFHA), Veritas Storage Foundation for Oracle RAC (SFRAC), and Veritas Storage Foundation Cluster File System High Availability (SFCFSHA). In a clustered environment, such as SFRAC and SFCFSHA, Symantec recommends that you compress files on a node that has minimal load. In a Fast Failover SFCFSHA environment, Symantec recommends that you compress files on a passive node where the database is offline.

## Compressing archive logs

Archive logs are critical files required for database recovery. In a busy online transaction processing (OLTP) database, several gigabytes of archive logs are generated each day. Company guidelines often mandate preserving archive logs for several days. The Oracle archive logs are read-only files and are never updated after they are generated. During recovery, Oracle reads archive logs sequentially. As such, archive logs are very good candidates for compression, and archive logs are highly compressible.

The following example procedure compresses all archive logs that are older than a day.



### To compress all archive logs that are older than a day

- 1 As an Oracle DBA, run the following query and get the archive log location:

```
SQL> select destination from v$archive_dest where status = 'VALID'  
and valid_now = 'YES';
```

Assume `/oraarch/MYDB` is the archive log destination.

- 2 Compress all of the archive logs that are older than a day:

```
$ find /oraarch/MYDB -mtime +1 -exec /opt/VRTS/bin/vxcompress {} \;
```

You can run this step daily via a scheduler, such as `cron`.

## Compressing read-only tablespaces

In a large database environment, it is a common practice to keep static tablespaces that do not have any changes in read-only mode. The primary purpose of read-only tablespaces is to eliminate the need to perform backup and recovery of large, static portions of a database. Read-only tablespaces also provide a way to protecting historical data so that users cannot modify it. Making a tablespace read-only prevents updates on all tables and objects residing in the tablespace, regardless of a user's update privilege level. These kinds of read-only tablespaces are excellent candidates for compression. In some cases such as month end reports, there may be large queries executed against these read-only tablespaces. To make the report run faster, you can uncompress the tablespace on demand before running the monthly reports.

In the following example, a sporting goods company has its inventory divided into two tablespaces: `winter_items` and `summer_items`. In the end of the Spring season, you can compress the `winter_item` tablespace and uncompress the `summer_item` tablespace. You can do the reverse actions at end of the Summer season. The following example procedure performs these tasks.

### To compress and uncompress tablespaces depending on the season

- 1 Using SQL, get a list of files in each tablespace and store the result in the files `summer_files` and `winter_files`:

```
SQL> select file_name from dba_data_files where  
tablespace_name = 'WINTER_ITEM';
```

Store the result in the `winter_files` file.

```
SQL> select file_name from dba_data_files where  
tablespace_name = 'SUMMER_ITEM';
```

Store the result in the `summer_files` file.

- 2 Compress the `winter_files` file:

```
$ /opt/VRTS/bin/vxcompress `/bin/cat winter_files`
```

- 3 Uncompress the `summer_files` file:

```
$ /opt/VRTS/bin/vxcompress -u `/bin/cat summer_files`
```

## Compressing infrequently accessed table partitions

Partitioned tables is a frequently used feature for large Oracle databases. Table partitioning improves database queries and updates because partitioning helps parallelizing transactions that use Parallel Queries. Partitioning also makes maintenance of database easy and improves the availability of TABLES. If a partition is down, only the corresponding portion of the TABLE goes offline and the rest of the TABLE remains online. In a telecommunications environment, a common practice is to partition a 'call\_details' table by month or quarter. The contents in the partition are less active as the partition gets older. The new records are added to a new partition, and previous quarter records do not get updated. Since telecommunications databases are generally very large, compressing last year's data provides great savings.

In the following example, assume that the table 'CALL\_DETAIL' is partitioned by quarters, and the partition names are CALL\_2010\_Q1, CALL\_2010\_Q2, and CALL\_2011\_Q1, and so on. In the first Quarter of 2011, you can compress the CALL\_2010\_Q1 data.

### To compress the CALL\_2010\_Q1 partition

- 1 Use SQL to retrieve the filenames belonging to the CALL\_2010\_Q1 partition:

```
SQL> select tablespace_name from dba_tab_partitions  
where table_name = 'CALL_DETAIL' and partition_name = 'CALL_2010_Q1';
```

Assume that the query returns "TBS\_2010\_Q1".

- 2 Store the names in the `my_compress_files` file:

```
SQL> select file_name from dba_data_files where  
tablespace_name = 'TBS_2010_Q1';
```

Store the result in the `my_compress_files` file.

- 3 Compress the files:

```
$ /opt/VRTS/bin/vxcompress `cat my_compress_files`
```

## Compressing infrequently accessed datafiles

Many customer databases do not use the Oracle partitioning feature. If partitioning is not used, then you can use Oracle catalog queries to identify datafiles that are not very active. Periodically, you can query the catalog tables and identify the least active datafiles and compress those files, as illustrated in the following example procedure.

### To identify the least active datafiles and compress those files

- 1 Query `v$filestat` and identify the least active datafiles:

```
SQL> select name, phydrds + phywrts 'TOT_IO' from v$datafile d  
and v$filestat f where d.file# = f.file# order by TOT_IO;
```

- 2 Select files that have the least I/O activity from the report and compress those files:

```
$ /opt/VRTS/bin/vxcompress file1 file2 file3 ...
```

- 3 Periodically run the query again to ensure that the compressed files do not have increased I/O activity. If I/O activity increases, uncompress the files:

```
$ /opt/VRTS/bin/vxcompress -u file1 file2 file3 ...
```

## Best practices for compressing files in an Oracle database

Even though an Oracle database runs without any errors when files are compressed, increased I/O to compressed files decreases database performance. Use the following guidelines for compressing Oracle datafiles:

- Do not compress database control files.
- Do not compress files belonging to TEMPORARY tablespaces.
- Do not compress files belonging to SYSTEM and SYSAUX tablespace.
- Monitor the I/O activity on compressed files periodically and uncompress the files if I/O activity increases.

# Using the Compression Advisor tool

This chapter includes the following topics:

- [About the Compression Advisor tool](#)
- [Compressing Oracle archive logs using Compression Advisor](#)
- [Displaying compression candidate data files using Compression Advisor](#)
- [Compressing Oracle data files using Compression Advisor](#)
- [Displaying compressed data files using Compression Advisor](#)
- [Uncompressing Oracle data files using Compression Advisor](#)
- [Compression Advisor command reference](#)

## About the Compression Advisor tool

Veritas File System (VxFS) provides the `vxcompress` utility that can be used to compress individual files transparent to the underlying applications. An application reading a compressed file automatically receives the uncompressed data that is uncompressed in memory only; the on disk part of the data remains compressed. If an application writes to a compressed file, parts of the file are uncompressed on disk.

Compression Advisor provides extended compression functionality for Oracle database files in Oracle single instance and Oracle RAC environments. You can use Compression Advisor to:

- Display Oracle data files that can be compressed for storage savings without affecting database performance.

- Compress and uncompress data files.
- Compress archive logs that were generated a specified number of days ago or earlier.
- Display compressed data files.

The Compression Advisor command `sfae_comp_adm` resides in the `/opt/VRTS/bin` directory and it should be run by the DBA user.

---

**Note:** If you have executed the FileSnap operations on a database, you cannot use the compression feature on the database.

---

See [“Compression Advisor command reference”](#) on page 307.

See [“Compressing Oracle archive logs using Compression Advisor”](#) on page 302.

See [“Displaying compression candidate data files using Compression Advisor”](#) on page 303.

See [“Compressing Oracle data files using Compression Advisor”](#) on page 304.

See [“Displaying compressed data files using Compression Advisor”](#) on page 305.

See [“Uncompressing Oracle data files using Compression Advisor”](#) on page 306.

## Compressing Oracle archive logs using Compression Advisor

The Oracle archive logs are read-only files and are never updated after they are generated. During recovery, Oracle reads archive logs sequentially. Archive logs are very good candidates for compression, and archive logs are highly compressible.

You can use the Compression Advisor command `sfae_comp_adm` to compress archive logs.

### To compress archive logs using Compression Advisor

- ◆ Use the following command.

```
$ sfae_comp_adm -o compress_archive_logs -n 2 -d /arch/sfaedb
```

```
Compressing file /arch/sfaedb/1_4_773425912.dbf resides on /arch/sfaedb  
Compressing file /arch/sfaedb/1_2_767364459.dbf resides on /arch/sfaedb  
Compressing file /arch/sfaedb/1_3_773425912.dbf resides on /arch/sfaedb  
Compressing file /arch/sfaedb/1_2_773425912.dbf resides on /arch/sfaedb  
Compressing file /arch/sfaedb/1_4_767364459.dbf resides on /arch/sfaedb  
Compressing file /arch/sfaedb/1_3_767364459.dbf resides on /arch/sfaedb  
Compressing file /arch/sfaedb/1_5_773425912.dbf resides on /arch/sfaedb  
Compressing file /arch/sfaedb/1_1_773425912.dbf resides on /arch/sfaedb  
Compressing file /arch/sfaedb/1_6_773425912.dbf resides on /arch/sfaedb
```

This command compresses all archive logs that were generated two days ago or earlier, and that belong to the destination `/arch/sfaedb`.

See [“About the Compression Advisor tool”](#) on page 301.

See [“Compression Advisor command reference”](#) on page 307.

## Displaying compression candidate data files using Compression Advisor

You can use Compression Advisor to identify Oracle data files that can be compressed without affecting the database performance. Compression Advisor uses Oracle Automatic Workload Repository (AWR) snapshots for this purpose. The data files that show minimal I/O activity in AWR snapshots are recommended for compression.

### To display candidate data files using Compression Advisor

- ◆ Use the following command.

```
$ sfae_comp_adm -o display -t tbs1
```

| Tablespace | Filename                | Amount of<br>Data Read<br>(bytes) | Amount of<br>Data Written<br>(bytes) |
|------------|-------------------------|-----------------------------------|--------------------------------------|
| TBS1       | /data/sfaedb/tbs1_2.dbf | 302                               | 344                                  |
| TBS1       | /data/sfaedb/tbs1_1.dbf | 1246                              | 6064                                 |

This command displays the data files in the tablespace TBS1. The output table is displayed in increasing order of I/O activity such that the data file with the least I/O activity is in the top row.

See [“About the Compression Advisor tool”](#) on page 301.

See [“Compression Advisor command reference”](#) on page 307.

## Compressing Oracle data files using Compression Advisor

You can use Compression Advisor to compress the specified Oracle data files to save storage costs. Use the compression candidate data files information to determine the data files that can be compressed. You can either specify a single data file name for compression or specify a file name with the `-f` option that contains a list of data files to be compressed. If you are using SmartTier, you can specify a tier on which all data files can be compressed.

The following data files are not compressed by Compression Advisor. Any attempts to compress any of these data files result in a warning. If you have specified a set of data files and any of them belongs to one of following categories, those data files are not compressed and a warning is generated.

- Data files that belong to the SYSTEM tablespace
- Data files that belong to the SYSAUX tablespace
- Oracle temp files
- Data files that belong to undo tablespaces
- The files that are not data files for the given Oracle instance
- The files that are not on Veritas File System (VxFS)



### To compress data files using Compression Advisor

- ◆ Use the following command.

```
$ sfae_comp_adm -o compress_datafiles -t ARCHIVE
Finding datafiles on tier ARCHIVE,
please be patient as this may take a while ...
Found on tier ARCHIVE, following datafiles:
/datavset/mytbs5.dbf
/datavset/mytbs4.dbf
/datavset/mytbs1.dbf
/datavset/mytbs2.dbf
/datavset/mytbs3.dbf

Compressing file /datavset/mytbs5.dbf resides on /datavset
Compressing file /datavset/mytbs4.dbf resides on /datavset
Compressing file /datavset/mytbs1.dbf resides on /datavset
Compressing file /datavset/mytbs2.dbf resides on /datavset
Compressing file /datavset/mytbs3.dbf resides on /datavset
```

This command compresses all data files that are on the tier ARCHIVE.

See [“About the Compression Advisor tool”](#) on page 301.

See [“Compression Advisor command reference”](#) on page 307.

## Displaying compressed data files using Compression Advisor

You can use Compression Advisor to display the list of compressed Oracle data files.

### To display compressed data files using Compression Advisor

- ◆ Use the following command.

```
$ sfae_comp_adm -o display -c
Tablespace      Filename                                     Filesize      Compression
Ratio (%)
TBS1            /data/sfaedb/tbs1_2.dbf                    1.01 MB       99.51%
TBS1            /data/sfaedb/tbs1_1.dbf                    112 KB        99.11%
USERS           /data/sfaedb/users01.dbf                   5.01 MB       78.98%

Total storage saving 5.15 MB (92.54%)
```

This command displays the compressed data files. The final summary displays the amount of storage space saving.

See [“About the Compression Advisor tool”](#) on page 301.

See [“Compression Advisor command reference”](#) on page 307.

## Uncompressing Oracle data files using Compression Advisor

You can use Compression Advisor to uncompress the specified Oracle data files. You can either specify a single data file name for uncompressing or specify a file name with the `-f` option that contains a list of data files to be uncompressing. If you are using SmartTier, you can specify a tier on which all data files can be uncompressing.

## To uncompress data files using Compression Advisor

- ◆ Use the following command.

```
$ sfacompadm -o uncompress_datafiles -t ARCHIVE

Finding datafiles on tier ARCHIVE,
please be patient as this may take a while ...
Found on tier ARCHIVE, following datafiles:
/datavset/mytbs5.dbf
/datavset/mytbs4.dbf
/datavset/mytbs1.dbf
/datavset/mytbs2.dbf
/datavset/mytbs3.dbf

Uncompressing file /datavset/mytbs5.dbf resides on /datavset
Uncompressing file /datavset/mytbs4.dbf resides on /datavset
Uncompressing file /datavset/mytbs1.dbf resides on /datavset
Uncompressing file /datavset/mytbs2.dbf resides on /datavset
Uncompressing file /datavset/mytbs3.dbf resides on /datavset
```

This command uncompresses all data files that are on the tier ARCHIVE.

See [“About the Compression Advisor tool”](#) on page 301.

See [“Compression Advisor command reference”](#) on page 307.

# Compression Advisor command reference

The `sfacompadm` command syntax is illustrated as follows and its options are listed in [Table 26-1](#).

```
sfacompadm [ -S ORACLE_SID ] [ -H ORACLE_HOME ]
-o compress_archive_logs [ -n N ] [ -d DESTINATION ]
```

```
sfacompadm [ -S ORACLE_SID ] [ -H ORACLE_HOME ]
-o { compress_datafiles | uncompress_datafiles }
DATAFILE1 [ DATAFILE2 ... ]
```

```
sfacompadm [ -S ORACLE_SID ] [ -H ORACLE_HOME ]
-o { compress_datafiles | uncompress_datafiles }
-f LISTFILE
```

```
sfacompadm [ -S ORACLE_SID ] [ -H ORACLE_HOME ]
-o { compress_datafiles | uncompress_datafiles }
```

-t TIER

```
sfae_comp_adm [ -S ORACLE_SID ] [ -H ORACLE_HOME ]
-o display [ -n N ] [ -t TABLESPACE ] [ -c ]
```

**Table 26-1** Compression Advisor command options

| Option                   | Use                                                                                                                                                                                                                                  |
|--------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| -S <i>ORACLE_SID</i>     | Specify the <i>ORACLE_SID</i> , which is the SID of the Oracle database to be used. You can set this value in the environment by using the environment variable <i>ORACLE_SID</i> .                                                  |
| -H <i>ORACLE_HOME</i>    | Specify the <i>ORACLE_HOME</i> , which is the HOME of the Oracle instance to be used. You can set this value in the environment by using the environment variable <i>ORACLE_HOME</i> .                                               |
| -o compress_archive_logs | Compress the specified archive logs.                                                                                                                                                                                                 |
| -d <i>DESTINATION</i>    | Used with -o compress_archive_logs. Compress archive logs generated from the specified destination. If your database is configured to archive to multiple destinations, archive logs on all destinations are compressed, by default. |
| -o compress_datafiles    | Compress the specified data files.                                                                                                                                                                                                   |
| -o uncompress_datafiles  | Uncompress the specified data files.                                                                                                                                                                                                 |
| -f <i>LISTFILE</i>       | Used with -o compress_datafiles or -o uncompress_datafiles. Specify a file that contains the names of the data files to be compressed or uncompressed, with each data file name on a single line.                                    |
| -o display               | Display the list of candidate data files that can be compressed.                                                                                                                                                                     |

**Table 26-1** Compression Advisor command options (*continued*)

| Option                                            | Use                                                                                                                                                                                                                                                                                                                                                                         |
|---------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <p>-t <i>TIER</i></p> <p>-t <i>TABLESPACE</i></p> | <ul style="list-style-type: none"> <li>■ When using with -o compress_datafiles or -o uncompress_datafiles:<br/>Specify the storage tier of which all data files are to be compressed or uncompressed.</li> <li>■ When using with -o display:<br/>Specify the tablespace of which all data files that are candidates for compression are to be displayed.</li> </ul>         |
| <p>-n <i>N</i></p>                                | <ul style="list-style-type: none"> <li>■ When using with -o compress_archive_logs:<br/>Compress archive logs generated <i>N</i> days ago or older. If you specify <i>N</i> as 0, all archive logs are compressed. The default value is 1.</li> <li>■ When using with -o display:<br/>Specify the number of files that can be displayed. The default value is 10.</li> </ul> |
| <p>-c</p>                                         | <p>Used with -o display.</p> <p>Display the list of compressed data files.</p>                                                                                                                                                                                                                                                                                              |

See [“About the Compression Advisor tool”](#) on page 301.



# Managing Oracle disaster recovery

- [Chapter 27. Using Storage Foundation for Databases \(SFDB\) tools in a replicated environment](#)
- [Chapter 28. Using volume snapshots in a replicated environment](#)





# Using Storage Foundation for Databases (SFDB) tools in a replicated environment

This chapter includes the following topics:

- [About deploying SF Databases tools with Veritas Volume Replicator \(VVR\)](#)
- [Using database accelerators for the Oracle database in a Veritas Volume Replicator \(VVR\) environment](#)
- [About deploying Storage Foundation for Databases \(SFDB\) tools with Oracle Data Guard](#)

## About deploying SF Databases tools with Veritas Volume Replicator (VVR)

Storage Foundation for Databases (SFDB) extends the strengths of the Storage Foundation Enterprise products with database-specific enhancements to offer performance, availability, and manageability for Oracle database servers. SFDB tools provide the means for:

- For AIX, HP-UX, and Solaris:  
Enhanced IO methods such as Quick IO, Cached Quick IO, ODM, and Cached ODM, which enhance database performance  
For Linux:  
Enhanced IO methods such as ODM, and Cached ODM, which enhance database performance
- Taking point-in-time copies filesystem checkpoints and Volume Snapshots

- Creating a clone database from volume snapshots
- Performing a rollback of the database from a given filesystem checkpoint
- Performing storage tiering using SmartTier for Oracle

Veritas Volume Replicator (VVR) is an option of Veritas Volume Manager (VxVM) that works as a fully integrated component of VxVM. VVR benefits from the robustness, ease of use, and high performance of VxVM, and at the same time, adds replication capability to VxVM.

VVR is able to:

- Replicate existing VxVM configurations
- Be transparently configured while the application is active
- Replicate application writes on the volumes at the source location to one or more remote locations across any distance
- Provide a consistent copy of application data at the remote locations

If a disaster occurs at the source location, you can use the copy of the application data at the remote location and restart the application at the remote location. This section describes how to use SFDB tools at a remote VVR site.

For more information about how to setup and configure VVR replication for Oracle database environment:

See the *Veritas Storage Foundation and High Availability Solutions Replication Administrator's Guide*

## Using database accelerators for the Oracle database in a Veritas Volume Replicator (VVR) environment

Database accelerators are fast I/O methods used for better database performance:

- Oracle Disk Manager (ODM)
- Cached Oracle Disk Manager (CODM)
- Quick I/O (QIO)
- Cached Quick I/O (CQIO)

When using SFDB tools in a global environment replicated by Veritas Volume Replicator (VVR):

- Using database accelerators for Oracle at the remote site does not require replicating the SFDB repository and hence there is no need to replicate the repository.

- It is not necessary to use the same I/O method at the primary and the remote sites. However if you need the same application performance at the remote site you may want to use same I/O method at remote site.
- There is no need to run SFDB commands `qio_getdbfiles` and `qio_convertdbfiles` because the Quick IO files are replicated.

Best practices for using database accelerators with Oracle:

- Make sure you use same version of Oracle at the primary and the remote site.
- Make sure you enable ODM by linking the proper ODM library at the remote site.
- Quick IO files will be replicated as Quick IO files at the remote site and hence no extra configuration is required. However, if you are using Cached Quick IO, and you would like to use Cached Quick IO at the remote site, then you need to change the mount properties using the `qioadmin` command and also need to copy the `/etc/vx/qioadmin` file from the primary to the remote.

---

**Note:** Quick I/O and Cached Quick I/O are not supported on Linux.

---

## About deploying Storage Foundation for Databases (SFDB) tools with Oracle Data Guard

The SFDB tools functionality is extended to support standby databases in an Oracle Data Guard environment.

Oracle Data Guard terminology:

- **Primary Database:** Also referred to as 'Production Database', this database is accessed by most of the user applications.
- **Standby Database:** A standby database is a transactionally consistent copy of the primary database.
- **Data Guard Configuration:** A Data Guard configuration consists of one production database and one or more standby databases.
- **Physical Standby Database:** A physically identical copy of the primary database, with on disk database structures that are identical to the primary database on a block-for-block basis.

The following point-in-time copy methods can be used on a Physical Standby database:

- Database Storage Checkpoints

- **Third mirror breakoff snapshot**

For cloning a standby read-write access database with Oracle Data Guard:

- Physical standby databases are read-only databases. Under normal circumstances, they offer limited utility value since you can not update their contents.
- Using the Data Guard support feature, DBI commands can clone a read-only standby database into a writable database.

In environments where the Oracle Active Data Guard feature (available in Oracle 11g) is used, the redo log application must be stopped explicitly on standby database before taking a database snapshot.

**To use Database FlashSnap in an Active Data Guard environment**

- 1 Stop redo log apply.

For example:

```
SQL>ALTER DATABASE RECOVER MANAGED STANDBY DATABASE CANCEL;
```

- 2 Run `dbed_update`.
- 3 Create a snapplan and validate it.
- 4 Take a snapshot.
- 5 Start redo log apply.

For example:

```
SQL>ALTER DATABASE RECOVER MANAGED STANDBY DATABASE DISCONNECT;
```

- 6 Clone the snapshot.

# Using volume snapshots in a replicated environment

This chapter includes the following topics:

- [Considerations for using volume snapshots with VVR](#)
- [Creating space-optimized snapshots in a VVR setup](#)
- [Creating third-mirror break-off snapshots in a VVR setup](#)
- [Considerations for using vxsfadm after replication role transfer](#)

## Considerations for using volume snapshots with VVR

If you are planning to use space-optimized snapshots or third-mirror break-off snapshots in a Veritas Volume Replicator (VVR) setup where the Oracle database on the primary host is replicated on the secondary host, the following considerations for SFDB tools apply.


- An Oracle single instance database is running on the Veritas Storage Foundation stack with all volumes in one disk group.
- The data and the archive log volumes are replicated on a secondary host.
- All the application volumes are within a single replicated volume group (RVG).
- For snapshots or clones on the VVR secondary site, instant and online snapshot modes are supported. Instant mode snapshots do not support Oracle RAC databases. Hence, the primary VVR site must use an Oracle single instance configuration only, if you plan to use instant mode snapshots.
- Replication to multiple secondary hosts is supported.

# Creating space-optimized snapshots in a VVR setup

To use space-optimized snapshots in a Veritas Volume Replicator (VVR) based replication environment, you need to generate a snapshot configuration on the primary host and then use that configuration on the secondary host.

Figure 28-1 provides an overview of a replicated database setup where space-optimized snapshots can be used.

Figure 28-1 Space-Optimized Snapshots - Replicated Database Setup

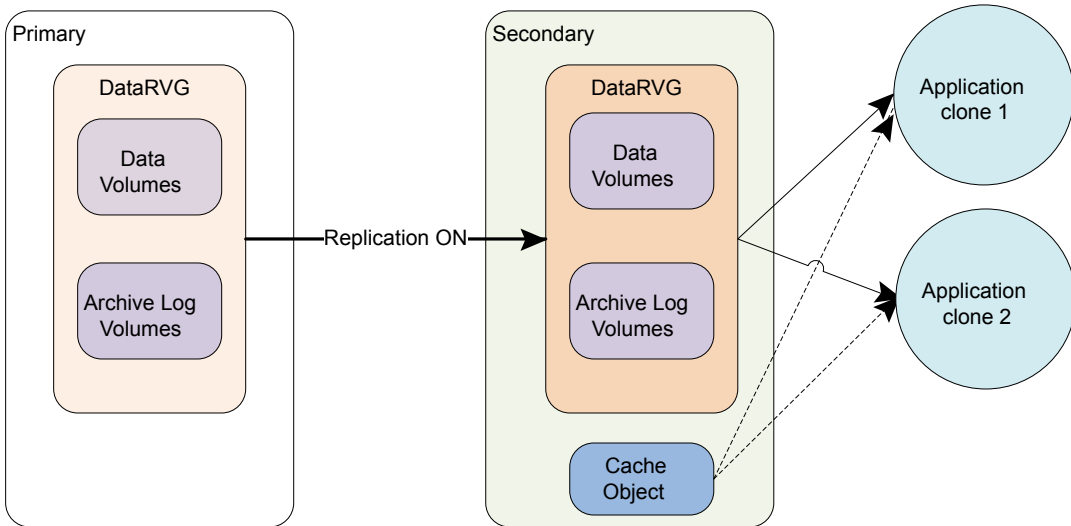

### To create space-optimized snapshots in a VVR setup

- 1 On the primary host, generate the snapshot configuration for the secondary host.

```
$ opt/VRTSdbed/bin/vxsfadm -a oracle -o getvvrinfo
Gathering offline data... Done
```

```
ORACLE_SID           = sfaedb
REPLICATION_ROLE     = secondary
REPLICATION_DG_VOL   = orasecondarydg,orasecondarydg2:datavol
SNAPSHOT_TIME        = Wed Feb 15 09:50:17 2012
```

```
Configuration file /tmp/config1 is ready.
Use this configuration file on replication
secondary site for cloning application instance.
```

---

**Note:** You do not need to specify the configuration name and the replication role. The same configuration file can be used on any secondary site for online mode or instant mode snapshots.

---

- 2 Copy the newly generated snapshot configuration from the primary host to the secondary host.

- 3 On the secondary host, validate the snapshot configuration, and then create the snapshot.

```
$ /opt/VRTS/bin/vxsfadm -s sos -a oracle -o valid -c config1
Validating database configuration for space-optimized snapshot:
ORACLE_SID                = sfaedb
ORACLE_HOME                = /ora_base/db_home
APP_MODE                   = online
Database validation successful.
Validating database volume layout for space-optimized snapshot:
REPLICATION_DG_VOL        = orasecondarydg,orasecondarydg2:datavol
CACHE_OBJECT               = cacheobj
Replicated data volumes ready for snapshot:
Volume/volume-set datavol of diskgroup orasecondarydg.
SNAPSHOT_VOL_PREFIX       = SNAP_
Database volume layout validated successfully.

$ /opt/VRTS/bin/vxsfadm -s sos -a oracle -o snap -c config1
Creating snapshot volumes for data volumes ... Done
```

After validating the snapshot configuration on the secondary host, you can perform operations such as clone and destroy, locally on the secondary host.

- 4 On the secondary host, create a clone using the space-optimized snapshot.

```
$ /opt/VRTS/bin/vxsfadm -s sos -a oracle -o clone -c config1
Generated mount path: /var/tmp/az8EHWQpVe
Mounting snapshot volumes ... Done
Preparing parameter file for clone database ... Done
Mounting clone database ... Done
Starting database recovery ...
Clone database sfaHrtyd is open.
```



- 5 On the secondary host, unmount and destroy the clone database, when you no longer need it.

```
$ /opt/VRTS/bin/vxsfadm -s sos -a oracle -o unmount -c config1
Shutting down clone database sfaHrtyd ...
Database shut down.
Unmounting snapshot volumes ... Done
```

```
$ /opt/VRTS/bin/vxsfadm -s sos -a oracle -o destroy -c config2
Destroying snapshot volumes ... Done
```

- 6 Restart the clone database.

```
bash-2.05b$ /opt/VRTS/bin/vxsfadm -s sos -a oracle -c config1 -o clone
--clone_name clones --clone_path /tmp/clones
Mounting snapshot volumes ... Done
Starting clone database clones ...
Clone database started.
```

You can use the `vxsfadm` command after the replication role transfer.

See [“Considerations for using vxsfadm after replication role transfer”](#) on page 325.

See [“vxsfadm command reference”](#) on page 329.

See [“Space-optimized snapshots configuration parameters”](#) on page 336.

See [“Space-optimized snapshots supported operations”](#) on page 338.

## Creating third-mirror break-off snapshots in a VVR setup

To use online third-mirror break-off (FlashSnap) snapshots in a Veritas Volume Replicator (VVR) based replication environment, you need to generate a snapshot configuration on the primary host and then use that configuration on the secondary host.

### To create third-mirror break-off snapshots in a VVR setup

- 1 On the primary host, generate the snapshot configuration for the secondary host.

```
$ opt/VRTSdbed/bin/vxsfadm -a oracle -o getvvrinfo
Gathering offline data... Done
```

```
ORACLE_SID           = sfaedb
REPLICATION_ROLE     = secondary
REPLICATION_DG_VOL   = orasecondarydg,orasecondarydg2:datavol
SNAPSHOT_TIME        = Wed Feb 15 09:50:17 2012
```

```
Configuration file /tmp/config.aTKYn is ready.
Use this configuration file on replication
secondary site for cloning application instance.
```

---

**Note:** You do not need to specify the configuration name and the replication role. The same configuration file can be used on any secondary host for online mode or instant mode snapshots.

---

- 2 Copy the newly generated snapshot configuration from the primary host to the secondary host.

### 3 On the secondary host, validate the snapshot configuration.

```
$ /opt/VRTS/bin/vxsfadm -s flashsnap -a oracle \  
--name flash3 -o valid -c config.aTKYn
```

Validating database configuration for third-mirror-break-off snapshot:

```
ORACLE_SID                = sfaedb  
ORACLE_HOME                = /home/ora11gr2/app/ora11gr2/product/11.2.0.3.0  
APP_MODE                   = online  
SNAPSHOT_ARCHIVE_LOG      = yes
```

Validating database volume layout for space-optimized snapshot:

```
REPLICATION_DG_VOL        = orasecondarydg:datavol  
CACHE_OBJECT               = co
```

Replicated volumes ready for snapshot:

Volume/volume-set datavol of diskgroup orasecondarydg.

Volume/volume-set archvol of diskgroup orasecondarydg.

```
SNAPSHOT_VOL_PREFIX       = SNAP_  
SNAPSHOT_DG_PREFIX        = SNAP_
```

Database volume layout validated successfully.

After validating the snapshot configuration on the secondary host, you can perform operations such as clone and destroy, locally on the secondary host.

#### 4 On the secondary host, create a third-mirror break-off snapshot.

```
$ /opt/VRTS/bin/vxsfadm -s flashsnap -a oracle \  
--name flash3 -o snap -c config.aTKYn  
snapshot started at Wed Feb 15 14:02:34 2012.  
Initiating snapshot from Primary site ...  
Message from Primary:  
Putting database in backup mode ... Done  
Message from Primary:  
Taking database out of backup mode ... Done  
Flushing online redo logs ... Done  
Sending IBC message to Secondary ... Done  
Message from Host system1.example.com:  
Creating snapshot volumes for data volumes ... Done  
Message from Host system1.example.com:  
Receiving IBC message from Primary ... Done  
Creating snapshot volume for archivelog volume ... Done  
Copying snapshot information to snapshot volume ... Done  
Creating snapshot diskgroups ... Done  
Deporting snapshot diskgroups ... Done  
SNAP_orasecondarydg  
snapshot ended at Wed Feb 15 14:02:55 2012.
```

You can use the following command to resynchronize snapshot volumes to original volumes.

```
$ /opt/VRTS/bin/vxsfadm -s flashsnap -a oracle \  
--name flash3 -o resync -c config.aTKYn  
resync started at Wed Feb 15 14:16:47 2012.  
Importing snapshot diskgroups ... Done  
Joining snapshot diskgroups to original diskgroups ... Done  
Reattaching snapshot volumes to original volumes ... Done  
resync ended at Wed Feb 15 14:16:58 2012.
```

---

**Note:** You cannot resynchronize a FlashSnap snapshot while there exist space-optimized snapshots created by using that FlashSnap snapshot as a golden image.

---

See [“Creating multiple clones using FlashSnap snapshots”](#) on page 209.

You can use the `vxsfadm` command after the replication role transfer.

See [“Considerations for using vxsfadm after replication role transfer”](#) on page 325.

See [“vxsfadm command reference”](#) on page 329.

See [“FlashSnap configuration parameters”](#) on page 333.

See [“FlashSnap supported operations”](#) on page 335.

See [“Space-optimized snapshots configuration parameters”](#) on page 336.

See [“Space-optimized snapshots supported operations”](#) on page 338.

## Considerations for using vxsfadm after replication role transfer

The `vxsfadm` command can be used in case primary role is migrated or failed over to the secondary site. File system level snapshots, Storage Checkpoints, and FileSnap snapshots created on primary site are available on secondary site after transfer of replication primary role from primary to secondary. However, volume level snapshots (third-mirror break-off and space-optimized) are not usable on the new primary site. For the `vxsfadm` command to work after role transfer, you must validate the snapshot configuration generated on the primary site, on the replication or secondary site. The `vxsfadm` command can also be used in case primary role is transferred back to the original primary host.

The following requirements must be met for using the `vxsfadm` command after the primary role transfer:

- Application key (such as `ORACLE_SID`) is not modified during or after the replication role transfer.
- SFDB repository is available after replication role transfer. You can use repository backup tool to ensure repository availability.

See [“vxsfadm command reference”](#) on page 329.



# Storage Foundation for Databases administrative reference

- [Chapter 29. Storage Foundation for Databases command reference](#)
- [Chapter 30. Tuning for Storage Foundation for Databases](#)
- [Chapter 31. Troubleshooting SFDB tools](#)
- [Chapter 32. Manual recovery of Oracle database](#)
- [Chapter 33. Storage Foundation for Databases command reference for the releases prior to 6.0](#)





# Storage Foundation for Databases command reference

This chapter includes the following topics:

- [vxsfadm command reference](#)
- [FlashSnap reference](#)
- [Space-optimized snapshots reference](#)
- [FileSnap reference](#)
- [Database Storage Checkpoints reference](#)

## vxsfadm command reference

`vxsfadm` is a command line utility that can be used to perform various point-in-time copy operations such as FlashSnap, FileSnap, space-optimized snapshots, and Database Storage Checkpoints for Oracle databases. This utility uses the underlying features of Storage Foundation to perform these operations.

---

**Note:** SFDB tools do not support taking point-in-time copies while structural changes to the database are in progress, such as adding or dropping tablespaces and adding or dropping data files. However, once a point-in-time copy is taken, a clone can be created at any time, regardless of the status of the database.

---

The `vxsfadm` utility is supported in multiple database configurations including:

- Oracle single instance
- Oracle single instance with off-host
- Oracle single instance in a highly available setup (VCS cluster)
- Oracle single instance with Storage Foundation Cluster File System High Availability
- Oracle RAC with Storage Foundation for Oracle RAC
- Oracle in a replicated setup with Veritas Volume Replicator or Oracle Data Guard

The syntax of the `vxsfadm` command is as follows:

```
vxsfadm -s <service_type> -a <application-name> -o <operation>
[ -c config-file ]
[ -r repository-host ]
[ service-specific parameters ]
[ application-specific parameters ]
```

```
vxsfadm -s <service-type> -a application-name> -o list
[ service-specific parameters ]
[ application-specific parameters ]
```

```
vxsfadm -s <service-type> -a application-name> -o setdefaults
[ service-specific parameters ]
[ application-specific parameters ]
```

The following are the `vxsfadm` parameters.

- |                              |                                                                                                                                                                                                                                                                                                                                   |
|------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <code>-s service_type</code> | Specifies the service type for the point-in-time copy operation.<br>Supported service types are: <ul style="list-style-type: none"><li>■ flashsnap: Volume-level snapshots</li><li>■ sos: Space-optimized volume-level snapshots</li><li>■ filesnap: File-level snapshots</li><li>■ checkpoint: File system checkpoints</li></ul> |
|------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|

|                                  |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
|----------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <code>-o operation</code>        | <p>Specifies the point-in-time copy operation that is being performed. The supported operations vary for the different service types. For more information on the operations supported for a service type, refer to the respective <code>vxsfadm</code> man page.</p> <p>The following operations are common to all service types:</p> <ul style="list-style-type: none"><li>■ <code>-o list</code>: Lists all the configurations/services for the specified application. If <code>service_type</code> is specified then all existing configurations for the specified <code>service_type</code> are displayed.</li><li>■ <code>-o setdefaults</code>: Generates the default configuration that can be saved to a file and then it can be used for the remainder of the operations.</li></ul> |
| <code>-a application_name</code> | <p>Specifies the application for which the point-in-time-copy operation is being performed.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| <code>-c config_file</code>      | <p>All the command line options specific to applications apart from <code>service_type</code>, <code>application_name</code>, and <code>operation</code> can be provided in the configuration file. The information in the configuration file should be in the format <code>PARAMETER_NAME=VALUE</code>. For information about the parameters supported for a service, refer to the respective <code>vxsfadm</code> man page.</p>                                                                                                                                                                                                                                                                                                                                                             |
| <code>-r repository-host</code>  | <p>Specifies the host of the SFDB repository for off-host operations.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |

service-specific parameters

These parameters are required by a service for processing. The most important service-specific parameter is `--service_name`. For example, if you want to create a third-mirror break-off snapshot (flashsnap), the `service_name` parameter is `flashsnap_name` and you can specify a unique identifier for this parameter as follows: `--flashsnap_name=dailysnap`. This identifier can be used for all operations performed on that copy.

These parameters can be provided in the configuration file or they can be exported in the environment.

For more information, refer to the `vxsfadm` man pages.

application-specific parameters

These parameters are required by application for processing. The most important application-specific parameter is the one that uniquely identifies an application instance.

For example, if there are two Oracle databases running on a system, `oracle_sid` and `oracle_home` parameters uniquely identify the application instance. These parameter are used for all the point-in-time copy operations for the specific application instance.

These parameters can be provided in the configuration file or they can be exported in the environment.

For more information, refer to the `vxsfadm` man pages.

---

**Note:** The `vxsfadm` parameters specified on the command line override the parameters specified in the configuration file and the parameters exported in the environment. The parameters specified in the configuration file override the parameters exported in the environment.

---

You can use `vxsfadm` logs and error messages for troubleshooting.

See [“Resources for troubleshooting SFDB tools”](#) on page 377.

For more information, refer to the following man pages:

`vxsfdm-flashsnap(1M)`, `vxsfdm-checkpoint(1M)`

`vxsfdm-sos(1M)`, `vxsfdm-filesnap(1M)`

`vxsfdm-oracle-flashsnap(1M)`, `vxsfdm-oracle-sos(1M)`,

`vxsfdm-oracle-checkpoint(1M)`, `vxsfdm-oracle-filesnap(1M)`

## FlashSnap reference

This section describes FlashSnap configuration parameters and supported operations.

### FlashSnap configuration parameters

[Table 29-1](#) lists the FlashSnap configuration parameters that can be provided in the configuration file. If you want to specify the parameter on the command line, refer to the Command Line Option column of the table.

**Table 29-1** FlashSnap - Configuration Parameters

| Parameter             | Description                                                                                             | Accepted Values                      | Command Line Option                             |
|-----------------------|---------------------------------------------------------------------------------------------------------|--------------------------------------|-------------------------------------------------|
| VERSION               | The version of the configuration file format.                                                           | n.n<br>Example: 6.0                  | NA                                              |
| FLASHSNAP_NAME<br>(*) | A unique identifier of the FlashSnap configuration.                                                     | String<br>Example: snap1             | --flashsnap_name snap1 OR --name snap1          |
| ORACLE_SID<br>(*)     | The SID of the database of which the snapshot is to be taken.                                           | String<br>Example: ora11gr2          | --oracle_sid ora11gr2<br>OR -S ora11gr2         |
| ORACLE_HOME<br>(*)    | The Oracle Home directory of the SID of the database.                                                   | Valid path<br>Example: /oracle/11gr2 | --oracle_home /oracle/11gr2 OR -H /oracle/11gr2 |
| APP_MODE              | The mode of the application when the snapshot operation is being performed.                             | offline<br>online<br>instant         | --app_mode offline OR --offline                 |
| PFILE                 | The location of the database pfile, if the database is running with a pfile in a non-standard location. | pfile location                       | --pfile <i>location</i>                         |

**Table 29-1** FlashSnap - Configuration Parameters (*continued*)

| Parameter            | Description                                                                                                                                                   | Accepted Values                                                                    | Command Line Option                                        |
|----------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------|------------------------------------------------------------|
| SNAPSHOT_PLEX_TAG    | The value of the putil2 attribute tag for the plexes that must be a part of the snapshot.                                                                     | String<br>Example: dbed_snap1                                                      | --snapshot_plex_tag dbed_snap1 OR<br>--plex_tag dbed_snap1 |
| SNAPSHOT_VOL_PREFIX  | The string prefixed to volume names to create snapshot volume names.                                                                                          | String<br>Example: SNAPVOL_                                                        | --snapshot_vol_prefix SNAPVOL_                             |
| SNAPSHOT_DG_PREFIX   | The string prefixed to disk group names to create snapshot disk group names.                                                                                  | String<br>Example: SNAPDG_                                                         | --snapshot_dg_prefix SNAPDG_                               |
| SNAPSHOT_MIRROR      | The number of mirrors that need to be broken off to form the snapshot volumes.                                                                                | Number                                                                             | --snapshot_mirror 2<br>OR --n 2                            |
| SNAPSHOT_ARCHIVE_LOG | If this parameter is set, the snapshot operation is also performed on the archive log volumes.<br><br>This parameter is applicable for Oracle databases only. | Y or N                                                                             | --snapshot_archive_log<br>OR<br>--no_snapshot_archive_log  |
| SECONDARY_HOST       | The host on which the snapshot can be mounted and the application can be cloned.                                                                              | Host name                                                                          | --secondary_host jupiter                                   |
| PFILE_MOD            | The location of the file in the Oracle pfile format that is used to modify initialization parameters for the clone instance.                                  | The location of the pfile.                                                         | --pfile_mod pfile_location                                 |
| MAPPED_MOUNTS        | The paths where the snapshot volumes should be mounted.                                                                                                       | dg1:volume1=path1;<br>dg2:volume2=path2<br><br>Example:<br>mydg:datavol=/tmp/fsnp; | --mapped_mounts mydg:datavol=/tmp/fsnp                     |
| CLONE_PATH           | The directory under which the snapshot volumes must be mounted.                                                                                               | Valid path<br><br>/tmp/so1                                                         | --clone_path /tmp/so1<br>OR mountpath /tmp/so1             |

**Table 29-1** FlashSnap - Configuration Parameters (*continued*)

| Parameter     | Description                                                                                                                                            | Accepted Values                                                                            | Command Line Option                                                        |
|---------------|--------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------|----------------------------------------------------------------------------|
| CLONE_NAME    | The Oracle_SID of the clone instance.                                                                                                                  | String<br>Example: clone1                                                                  | --clone_name clone1                                                        |
| EXTRA_OBJECTS | The list of additional objects that must be included in the snapshot disk groups. Examples of additional objects: volumes, volume sets, cache objects. | Comma-separated list of objects such that each object is specified as <diskgroup>:<object> | --extra_objects<br><dg1>:<vol1>, <dg2>:<vol2><br>OR --extra<br><dg1>:<col> |

**Note:** The path that is specified with the PFILE\_MOD parameter is local to the system on which the clone operation is performed. If the clone operation is performed on a host other than the one from which the command is invoked, then the parameter file should be copied to the host on which the clone operation is performed.

**Note:** (\*) denotes that the parameter is mandatory.

## FlashSnap supported operations

**Table 29-2** lists the FlashSnap operations that you can perform by using the `vxsfadm` command.

**Table 29-2** FlashSnap Supported Operations

| Operation   | Description                                                                                            |
|-------------|--------------------------------------------------------------------------------------------------------|
| setdefaults | Generates the default configuration file for an application.                                           |
| validate    | Validates the configuration file and the environment.                                                  |
| snap        | Takes a snapshot by breaking the mirrors, and splits the diskgroup.                                    |
| clone       | Creates an application clone. You can also use the clone option to restart a clone if it is unmounted. |
| mount       | Mounts the mirror volumes.                                                                             |

**Table 29-2** FlashSnap Supported Operations (*continued*)

| Operation | Description                                                                                                                                              |
|-----------|----------------------------------------------------------------------------------------------------------------------------------------------------------|
| unmount   | Unmounts the snapshots and if a clone is created, shuts down the clone.                                                                                  |
| destroy   | Destroys the FlashSnap configuration from the repository.                                                                                                |
| resync    | Resynchronizes mirror volumes with primary volumes.                                                                                                      |
| mountdb   | Performs all the operations required for cloning a database and opens a database in the mount state. You need to perform the database recovery manually. |
| list      | Lists the available snapshot configurations.                                                                                                             |

## Space-optimized snapshots reference

This section describes FlashSnap configuration parameters and supported operations.

### Space-optimized snapshots configuration parameters

[Table 29-3](#) lists the space-optimized snapshots configuration parameters that can be provided in the configuration file. If you want to specify the parameter on the command line, refer to the Command Line Option column of the table.

**Table 29-3** Space-Optimized Snapshots - Configuration Parameters

| Parameter         | Description                                                   | Accepted Values             | Command Line Option                      |
|-------------------|---------------------------------------------------------------|-----------------------------|------------------------------------------|
| SOS_NAME<br>(*)   | A unique identifier of the snapshot configuration.            | String<br>Example: sossnap  | --sos_name sossnap OR<br>--name sossnap  |
| VERSION           | The version of the configuration file format.                 | n.n<br>Example: 6.0         | NA                                       |
| ORACLE_SID<br>(*) | The SID of the database of which the snapshot is being taken. | String<br>Example: ora11gr2 | --oracle_sid ora11gr2<br>OR --S ora11gr2 |



**Table 29-3** Space-Optimized Snapshots - Configuration Parameters (*continued*)

| Parameter            | Description                                                                                                                                                   | Accepted Values                                                              | Command Line Option                                                                          |
|----------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------|
| ORACLE_HOME<br>(*)   | The Oracle Home directory of the SID of which the snapshot is being taken.                                                                                    | Valid path<br>Example: /oracle/11gr2                                         | --oracle_home<br>/oracle/11gr2                                                               |
| APP_MODE             | The mode of the application when the snapshot operation is being performed.                                                                                   | offline<br>online<br>instant                                                 | --app_mode offline OR<br>--offline/--instant/<br>--online                                    |
| MAPPED_MOUNTS        | The volume-to-mountpoint mapping provided by the user.                                                                                                        | dg1:volume1=path1;<br>dg2:volume2=path2<br>Example:<br>mydg:datavol=/tmp/so; | --mapped_mounts<br>mydg:datavol=/tmp/so                                                      |
| CLONE_NAME           | The name of the application instance that is created during the clone operation.                                                                              | String<br>Example: clone1                                                    | --clone_name= clone1                                                                         |
| CLONE_PATH           | The path to which the clone files are mounted.                                                                                                                | Valid path<br>/tmp/so1                                                       | --clone_path /tmp/so1<br>OR --mount_path<br>/tmp/so1 OR --on<br>/tmp/so1 OR --at<br>/tmp/so1 |
| SNAPSHOT_VOL_PREFIX  | The prefix to the mirror volume names.                                                                                                                        | String<br>Example: SNAPVOL_<br>Default: SNAP_                                | --snapshot_vol_prefix<br>SNAPVOL_ OR<br>--vol_prefix SNAPVOL_                                |
| SNAPSHOT_ARCHIVE_LOG | If this parameter is set, the snapshot operation is also performed on the archive log volumes.<br><br>This parameter is applicable for Oracle databases only. | Y or N<br>Default: Y                                                         | --snapshot_archive_log<br>OR<br>--no_snapshot_archive_log                                    |

**Table 29-3** Space-Optimized Snapshots - Configuration Parameters (*continued*)

| Parameter       | Description                                                                                                                                                                                 | Accepted Values                                                | Command Line Option                                     |
|-----------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------|---------------------------------------------------------|
| PFILE_MOD       | The location of the file in the Oracle pfile format that is used to modify initialization parameters for the clone instance.<br><br>This parameter is applicable for Oracle databases only. | The location of the pfile.                                     | --pfile_mod<br><i>pfile_location</i>                    |
| PFILE           | The location of the database pfile, if the database is running with a pfile in a non-standard location.                                                                                     | The location of the pfile.                                     | --pfile<br><i>pfile_location</i>                        |
| CACHE_OBJECT    | The comma separated values of the disk group and the corresponding cache object.                                                                                                            | str1:str2,str3:str4,...<br>Example:<br>mydg1:C1,mydg2:c=C2,... | --cache_object<br>mydg1:C1,mydg2:c=C2                   |
| SOURCE_SNAPSHOT | The name of the FlashSnap configuration that must be used as a golden image for space-optimized snapshots.                                                                                  | String<br>Example: dailysnap                                   | --source_snapshot<br>dailysnap OR --source<br>dailysnap |

---

**Note:** The path that is specified with the PFILE\_MOD parameter is local to the system on which the clone operation is performed. If the clone operation is performed on a host other than the one from which the command is invoked, then the parameter file should be copied to the host on which the clone operation is performed.

---



---

**Note:** (\*) denotes that the parameter is mandatory.

---

## Space-optimized snapshots supported operations

[Table 29-4](#) lists the space-optimized snapshots operations that you can perform by using the `vxsxfadm` command.

**Table 29-4** Space-optimized Snapshots Supported Operations

| Operation   | Description                                                                                                          |
|-------------|----------------------------------------------------------------------------------------------------------------------|
| setdefaults | Generates the default configuration file for an application.                                                         |
| validate    | Validates the database environment and the system setup.                                                             |
| snap        | Creates a snapshot of the volumes by using the specified cache object.                                               |
| clone       | Creates an application clone. You can also use this operation to restart a clone if it is unmounted.                 |
| mount       | Mounts the volumes at the specified location.                                                                        |
| umount      | Unmounts the mounted snapshots.                                                                                      |
| mountdb     | Opens the database in the mount state.<br><b>Note:</b> This operation is specific to Oracle databases.               |
| destroy     | Destroys the snapshot.                                                                                               |
| getvvrinfo  | Generates a snapshot configuration that can be used on a remote site for cloning replicated database in a VVR setup. |

## FileSnap reference

This section describes FileSnap configuration parameters and supported operations.

### FileSnap configuration parameters

[Table 29-5](#) lists the FileSnap configuration parameters that can be provided in the configuration file. If you want to specify the parameter on the command line, refer to the Command Line Option column of the table.

**Table 29-5** FileSnap - Configuration Parameters

| Parameter            | Description                                                                                                                       | Accepted Values                      | Command Line Option                                    |
|----------------------|-----------------------------------------------------------------------------------------------------------------------------------|--------------------------------------|--------------------------------------------------------|
| VERSION<br>(*)       | The version of the configuration file format.                                                                                     | n.n<br>Example: 6.0                  | NA                                                     |
| FILESNAP_NAME<br>(*) | A unique identifier of the snapshot configuration.                                                                                | String<br>Example: filesnap1         | --filesnap_name<br>filesnap1                           |
| ORACLE_SID<br>(*)    | The SID of the database of which the snapshot is being taken.                                                                     | String<br>Example: ora11gr2          | --oracle_sid ora11gr2                                  |
| ORACLE_HOME<br>(*)   | The Oracle Home directory of the SID of which the snapshot is being taken.                                                        | Valid path<br>Example: /oracle/11gr2 | --oracle_home<br>/oracle/11gr2 OR --H<br>/oracle/11gr2 |
| CLONE_NAME           | The name of the application instance that is created during the clone operation.                                                  | String<br>Example: clone1            | --clone_name clone1                                    |
| PFILE_MOD            | The location of a pfile with modified parameters that can be used during the clone operation.                                     | The location of the pfile.           | --pfile_mod<br>pfile_location                          |
| PFILE                | The path to the Oracle PFILE, if the database is using a PFILE and the PFILE is in a location other than <i>ORACLE_HOME</i> /dbs. | The location of the pfile.           | --pfile<br>pfile_location                              |

---

**Note:** The path that is specified with the PFILE\_MOD parameter is local to the system on which the clone operation is performed. If the clone operation is performed on a host other than the one from which the command is invoked, then the parameter file should be copied to the host on which the clone operation is performed.

---



---

**Note:** (\*) denotes that the parameter is mandatory.

---

## FileSnap supported operations

[Table 29-6](#) lists the FileSnap operations that you can perform by using the `vxsfsadm` command.

**Table 29-6** FileSnap Supported Operations

| Operation    | Description                                                           |
|--------------|-----------------------------------------------------------------------|
| setdefaults  | Generates the default configuration file for an application.          |
| snap         | Creates a snapshot of the volumes used by the application.            |
| destroysnap  | Destroys the snapshot.                                                |
| clone        | Creates an application clone.                                         |
| destroyclone | Destroys the application clone.                                       |
| restore      | Restores the files of which a snapshot was taken to the primary files |
| list         | Lists the snapshots and clones with their status.                     |

## Database Storage Checkpoints reference

This section describes FlashSnap configuration parameters and supported operations.

### Database Storage Checkpoints configuration parameters

[Table 29-7](#) lists the Database Storage Checkpoints configuration parameters that can be provided in the configuration file. If you want to specify the parameter on the command line, refer to the Command Line Option column of the table.

**Table 29-7** Database Storage Checkpoints - Configuration Parameters

| Parameter | Description                                   | Accepted Values     | Command Line Option |
|-----------|-----------------------------------------------|---------------------|---------------------|
| VERSION   | The version of the configuration file format. | n.n<br>Example: 6.0 | NA                  |

**Table 29-7** Database Storage Checkpoints - Configuration Parameters  
*(continued)*

| Parameter              | Description                                                                                | Accepted Values                                 | Command Line Option                                                                                               |
|------------------------|--------------------------------------------------------------------------------------------|-------------------------------------------------|-------------------------------------------------------------------------------------------------------------------|
| CHECKPOINT_NAME<br>(*) | A unique identifier of the checkpoint.                                                     | String<br>Example:<br>ckpt1                     | --checkpoint_name ckpt1 OR<br>--checkpoint-name ckpt1 OR -name ckpt1                                              |
| ORACLE_SID<br>(*)      | The SID of the database of which the checkpoint is being taken.                            | String<br>Example:<br>ora11gr2                  | --oracle_sid ora11gr2 OR -S ora11gr2                                                                              |
| ORACLE_HOME<br>(*)     | The Oracle Home directory of the SID of which the checkpoint is being taken.               | String<br>Example:<br>/oracle_home              | --oracle_home /oracle_home OR<br>--oracle-home /oracle_home OR -H<br>/oracle_home                                 |
| APP_MODE               | The mode of the application when the snapshot operation is being performed.                | offline<br>online<br>instant<br>Default: online | --app_mode offline OR<br>--offline/--online/--instant                                                             |
| CLONE_NAME             | The name of the application instance that is created during the clone operation.           | String<br>Example:<br>clone1                    | --clone_name clone1 OR --clone-name<br>clone1                                                                     |
| CLONE_PATH             | The path to which the clone files are mounted.                                             | Valid path<br>/tmp/ckpt1                        | --clone_path /tmp/ckpt1 OR<br>--clone-path /tmp/ckpt1 OR<br>--mount-path /tmp/ckpt1 OR<br>--mount_path /tmp/ckpt1 |
| SNAPSHOT_REMOVABLE     | A parameter to specify whether a removable or a non-removable checkpoint is being created. | Y or N<br>Default:<br>removable Y               | --snapshot_removable OR<br>--no_snapshot_removable--snapshot-removable<br>or --no-snapshot-removable              |

**Table 29-7** Database Storage Checkpoints - Configuration Parameters  
(continued)

| Parameter              | Description                                                                                                                                                                                 | Accepted Values                                         | Command Line Option                                                                         |
|------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------|---------------------------------------------------------------------------------------------|
| DATAFILE_ROLLBACK      | A comma separated list of data files that are to be rolled back.                                                                                                                            | A comma separated list of data files.                   | <code>--datafile_rollback list</code> OR<br><code>--datafile-rollback list</code>           |
| DATAFILE_LIST_ROLLBACK | A file containing a list of data files, separated by new line, that are to be rolled back.                                                                                                  | The path to the file containing the list of data files. | <code>--datafile_list_rollback path</code> OR<br><code>--datafile-list-rollback path</code> |
| TABLESPACE_ROLLBACK    | The name of the table space that is to be rolled back.                                                                                                                                      | Table space name                                        | <code>--tablespace_rollback name</code> OR<br><code>--tablespace-rollback name</code>       |
| PFILE_MOD              | The location of the file in the Oracle pfile format that is used to modify initialization parameters for the clone instance.<br><br>This parameter is applicable for Oracle databases only. | The location of the pfile.                              | <code>--pfile_mod pfile_location</code> OR<br><code>--pfile-mod pfile_location</code>       |
| PFILE                  | The location of the database pfile, if the database is running with a pfile in a non-standard location.                                                                                     | The location of the pfile.                              | <code>--pfile pfile_location</code>                                                         |

**Note:** The path that is specified with the PFILE\_MOD parameter is local to the system on which the clone operation is performed. If the clone operation is performed on a host other than the one from which the command is invoked, then the parameter file should be copied to the host on which the clone operation is performed.

---

**Note:** (\*) denotes that the parameter is mandatory.

---

## Database Storage Checkpoints supported operations

[Table 29-8](#) lists the Database Storage Checkpoints operations that you can perform by using the `vxsfsadm` command.

**Table 29-8** Database Storage Checkpoints Supported Operations

| Operation             | Description                                                                                                                                                |
|-----------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------|
| setdefaults           | Generates the default configuration file for an application.                                                                                               |
| create                | Creates a Database Storage Checkpoint for the application.                                                                                                 |
| mount                 | Mounts the Database Storage Checkpoint in the read-only mode or the read-write mode to the specified mount point..                                         |
| mountrw               | Mounts the Database Storage Checkpoint in the read-write mode (a shadow checkpoint of the original checkpoint is created and it is mounted as read_write). |
| unmount/umount        | Unmounts the Database Storage Checkpoint.                                                                                                                  |
| delete/remove/destroy | Removes the Database Storage Checkpoint.                                                                                                                   |
| clone                 | Creates a clone of the Database Storage Checkpoint.                                                                                                        |
| restore               | Restores the data files from the Database Storage Checkpoint.                                                                                              |
| list                  | Lists the Database Storage Checkpoints.                                                                                                                    |
| getappdata            | Gathers database information when the database is online. This information is used for offline checkpoint processing.                                      |



# Tuning for Storage Foundation for Databases

This chapter includes the following topics:

- [Additional documentation](#)
- [About tuning Veritas Volume Manager \(VxVM\)](#)
- [About tuning VxFS](#)
- [About tuning Oracle databases](#)
- [About tuning AIX Virtual Memory Manager](#)
- [About tuning HP-UX](#)
- [About tuning Solaris for Oracle](#)

## Additional documentation

Use the tuning tips and information provided in this chapter in conjunction with other more in-depth publications, such as:

- *Oracle Performance Tuning Tips & Techniques* (Osborne McGraw-Hill)
- Oracle installation documents (Oracle Corporation)
- *Oracle Performance Tuning* (O'Reilly & Associates)
- *Oracle Performance Tuning and Optimization* (Sams Publishing)
- *Bullet-Proofing your Oracle Database with HACMP: A Guide to Implementing AIX Databases with HACMP* (IBM Corporation)
- *IBM Configuration and Performance RedBooks* (IBM Corporation)

- *Veritas Storage Foundation Administrator's Guide*, chapter on “VxVM Performance Monitoring”

## About tuning Veritas Volume Manager (VxVM)

Veritas Volume Manager (VxVM) is tuned for most configurations ranging from small systems to larger servers. On smaller systems with less than a hundred drives, tuning should not be necessary and Veritas Volume Manager should be capable of adopting reasonable defaults for all configuration parameters. On very large systems, however, there may be configurations that require additional tuning of these parameters, both for capacity and performance reasons.

Various mechanisms exist for tuning VxVM. Many parameters can be tuned using AIX's System Management Interface Tool (SMIT). Other values can only be tuned using the command line interface for VxVM.

For more information on tuning VxVM, see the *Veritas Storage Foundation Administrator's Guide*.

## About obtaining volume I/O statistics

If your database is created on a single file system that is on a single volume, there is typically no need to monitor the volume I/O statistics. If your database is created on multiple file systems on multiple volumes, or the volume configurations have changed over time, it may be necessary to monitor the volume I/O statistics for the databases.

Use the `vxstat` command to access information about activity on volumes, plexes, subdisks, and disks under VxVM control, and to print summary statistics to the standard output. These statistics represent VxVM activity from the time the system initially booted or from the last time the counters were reset to zero. If no VxVM object name is specified, statistics from all volumes in the configuration database are reported. Use the `-g` option to specify the database disk group to report statistics for objects in that database disk group.

VxVM records the following I/O statistics:

- count of operations
- number of blocks transferred (one operation can involve more than one block)
- average operation time (which reflects the total time through the VxVM interface and is not suitable for comparison against other statistics programs)

VxVM records the preceding three pieces of information for logical I/Os, including reads, writes, atomic copies, verified reads, verified writes, plex reads, and plex writes for each volume. VxVM also maintains other statistical data such as read

failures, write failures, corrected read failures, corrected write failures, and so on. In addition to displaying volume statistics, the `vxstat` command is capable of displaying more detailed statistics on the components that form the volume. For detailed information on available options, refer to the `vxstat(1M)` manual page.

To reset the statistics information to zero, use the `-r` option. You can reset the statistics information for all objects or for only those objects that are specified. Resetting just prior to an operation makes it possible to measure the impact of that particular operation.

The following is an example of output produced using the `vxstat` command:

| OPERATIONS |           | BLOCKS |        | AVG TIME (ms) |         |      |       |
|------------|-----------|--------|--------|---------------|---------|------|-------|
| TYP        | NAME      | READ   | WRITE  | READ          | WRITE   | READ | WRITE |
| vol        | blop      | 0      | 0      | 0             | 0       | 0.0  | 0.0   |
| vol        | foobarvol | 0      | 0      | 0             | 0       | 0.0  | 0.0   |
| vol        | rootvol   | 73017  | 181735 | 718528        | 1114227 | 26.8 | 27.9  |
| vol        | swapvol   | 13197  | 20252  | 105569        | 162009  | 25.8 | 397.0 |
| vol        | testvol   | 0      | 0      | 0             | 0       | 0.0  | 0.0   |

Additional information is available on how to use the `vxstat` output to identify volumes that have excessive activity and how to reorganize, change to a different layout, or move these volumes.

Additional volume statistics are available for RAID-5 configurations.

See the `vxstat(1M)` manual page.

See the “Performance Monitoring” section of the “Performance Monitoring and Tuning” chapter in the *Veritas Storage Foundation Administrator's Guide*.

## About tuning VxFS

Veritas File System provides a set of tuning options to optimize file system performance for different application workloads. VxFS provides a set of tunable I/O parameters that control some of its behavior. These I/O parameters help the file system adjust to striped or RAID-5 volumes that could yield performance far superior to a single disk. Typically, data streaming applications that access large files see the largest benefit from tuning the file system.

Most of these tuning options have little or no impact on database performance when using Quick I/O, with the exception of the `max_thread_proc` parameter.

Other than setting the `max_thread_proc` parameter, use the general VxFS defaults when creating a VxFS file system for databases.

See “[max\\_thread\\_proc](#)” on page 368.

However, you can gather file system performance data when using Quick I/O, and use this information to adjust the system configuration to make the most efficient use of system resources.

Most of these tuning options have little or no impact on database performance when using Quick I/O. However, you can gather file system performance data when using Quick I/O, and use this information to adjust the system configuration to make the most efficient use of system resources.

## How monitoring free space works

In general, VxFS works best if the percentage of free space in the file system is greater than 10 percent. This is because file systems with 10 percent or more of free space have less fragmentation and better extent allocation. Regular use of the `df` command to monitor free space is desirable. Full file systems may have an adverse effect on file system performance. Full file systems should therefore have some files removed or should be expanded.

See the `fsadm_vxfs(1M)` manual page.

### About monitoring fragmentation

Fragmentation reduces performance and availability. Regular use of `fsadm`'s fragmentation reporting and reorganization facilities is therefore advisable.

The easiest way to ensure that fragmentation does not become a problem is to schedule regular defragmentation runs using the `cron` command.

Defragmentation scheduling should range from weekly (for frequently used file systems) to monthly (for infrequently used file systems). Extent fragmentation should be monitored with `fsadm` or the `df -os` commands.

Defragmentation scheduling should range from weekly (for frequently used file systems) to monthly (for infrequently used file systems). Extent fragmentation should be monitored with `fsadm` or the `df -os` commands.

Defragmentation scheduling should range from weekly (for frequently used file systems) to monthly (for infrequently used file systems). Extent fragmentation should be monitored with `fsadm` command.

There are three factors that can be used to determine the degree of fragmentation:

- Percentage of free space in extents that are less than eight blocks in length

- Percentage of free space in extents that are less than 64 blocks in length
- Percentage of free space in extents that are 64 or more blocks in length

An unfragmented file system will have the following characteristics:

- Less than 1 percent of free space in extents that are less than eight blocks in length
- Less than 5 percent of free space in extents that are less than 64 blocks in length
- More than 5 percent of the total file system size available as free extents that are 64 or more blocks in length

A badly fragmented file system will have one or more of the following characteristics:

- More than 5 percent of free space in extents that are less than 8 blocks in length
- More than 50 percent of free space in extents that are less than 64 blocks in length
- Less than 5 percent of the total file system size available as free extents that are 64 or more blocks in length

The optimal period for scheduling extent reorganization runs can be determined by choosing a reasonable interval, scheduling `fsadm` runs at the initial interval, and running the extent fragmentation report feature of `fsadm` before and after the reorganization.

The “before” result is the degree of fragmentation prior to the reorganization. If the degree of fragmentation approaches the percentages for bad fragmentation, reduce the interval between `fsadm`. If the degree of fragmentation is low, increase the interval between `fsadm` runs.

## How tuning VxFS I/O parameters works

VxFS provides a set of tunable I/O parameters that control some of its behavior. These I/O parameters are useful to help the file system adjust to striped or RAID-5 volumes that could yield performance far superior to a single disk. Typically, data streaming applications that access large files see the biggest benefit from tuning the file system.

If VxFS is being used with Veritas Volume Manager, the file system queries VxVM to determine the geometry of the underlying volume and automatically sets the I/O parameters. VxVM is queried by `mkfs` when the file system is created to automatically align the file system to the volume geometry. If the default alignment from `mkfs` is not acceptable, the `-o align=n` option can be used to override

alignment information obtained from VxVM. The `mount` command also queries VxVM when the file system is mounted and downloads the I/O parameters.

If the default parameters are not acceptable or the file system is being used without VxVM, then the `/etc/vx/tunefstab` file can be used to set values for I/O parameters. The `mount` command reads the `/etc/vx/tunefstab` file and downloads any parameters specified for a file system. The `tunefstab` file overrides any values obtained from VxVM. While the file system is mounted, any I/O parameters can be changed using the `vxtunefs` command, which can have tunables specified on the command line or can read them from the `/etc/vx/tunefstab` file.

The `vxtunefs` command can be used to print the current values of the I/O parameters.

See the `vxtunefs(1M)` and `tunefstab(4)` manual pages.

## About tunable VxFS I/O parameters

The following are tunable VxFS I/O parameters:

|                            |                                                                                                                                                                                                                                                                                                                                    |
|----------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <code>read_pref_io</code>  | The preferred read request size. The file system uses this parameter in conjunction with the <code>read_nstream</code> value to determine how much data to read ahead. The default value is 64K.                                                                                                                                   |
| <code>write_pref_io</code> | The preferred write request size. The file system uses this parameter in conjunction with the <code>write_nstream</code> value to determine how to do flush behind on writes. The default value is 64K.                                                                                                                            |
| <code>read_nstream</code>  | The number of parallel read requests of size <code>read_pref_io</code> that you can have outstanding at one time. The file system uses the product of <code>read_nstream</code> multiplied by <code>read_pref_io</code> to determine its read ahead size. The default value for <code>read_nstream</code> is 1.                    |
| <code>write_nstream</code> | The number of parallel write requests of size <code>write_pref_io</code> that you can have outstanding at one time. The file system uses the product of <code>write_nstream</code> multiplied by <code>write_pref_io</code> to determine when to do flush behind on writes. The default value for <code>write_nstream</code> is 1. |

`default_indir_size` On VxFS, files can have up to ten variably sized direct extents stored in the inode. After these extents are used, the file must use indirect extents that are a fixed size. The size is set when the file first uses indirect extents. These indirect extents are 8K by default. The file system does not use larger indirect extents because it must fail a write and return `ENOSPC` if there are no extents available that are the indirect extent size. For file systems with many large files, the 8K indirect extent size is too small. Large files that require indirect extents use many smaller extents instead of a few larger ones. By using this parameter, the default indirect extent size can be increased so that large files in indirects use fewer large extents.

Be careful using this tunable. If it is too large, then writes fail when they are unable to allocate extents of the indirect extent size to a file. In general, the fewer and the larger the files on a file system, the larger the `default_indir_size` parameter can be. The value of this parameter is generally a multiple of the `read_pref_io` parameter.

This tunable is not applicable on Version 4 disk layouts.

`discovered_direct_iosz` Any file I/O requests larger than the `discovered_direct_iosz` are handled as discovered direct I/O. A discovered direct I/O is unbuffered similar to direct I/O, but does not require a synchronous commit of the inode when the file is extended or blocks are allocated. For larger I/O requests, the CPU time for copying the data into the page cache and the cost of using memory to buffer the I/O data becomes more expensive than the cost of doing the disk I/O. For these I/O requests, using discovered direct I/O is more efficient than regular I/O. The default value of this parameter is 256K.

|                                  |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
|----------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <code>initial_extent_size</code> | Changes the default initial extent size. VxFS determines the size of the first extent to be allocated to the file based on the first write to a new file. Normally, the first extent is the smallest power of 2 that is larger than the size of the first write. If that power of 2 is less than 8K, the first extent allocated is 8K. After the initial extent, the file system increases the size of subsequent extents (see <code>max_seqio_extent_size</code> ) with each allocation. Since most applications write to files using a buffer size of 8K or less, the increasing extents start doubling from a small initial extent. <code>initial_extent_size</code> can change the default initial extent size to be larger, so the doubling policy will start from a much larger initial size and the file system will not allocate a set of small extents at the start of file. Use this parameter only on file systems that will have a very large average file size. On these file systems, it will result in fewer extents per file and less fragmentation. <code>initial_extent_size</code> is measured in file system blocks. |
| <code>max_buf_data_size</code>   | The maximum buffer size allocated for file data; either 8K bytes or 64K bytes. Use the larger value for workloads where large reads/writes are performed sequentially. Use the smaller value on workloads where the I/O is random or is done in small chunks. The default value is 8K bytes.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| <code>max_direct_iosz</code>     | The maximum size of a direct I/O request that will be issued by the file system. If a larger I/O request comes in, then it is broken up into <code>max_direct_iosz</code> chunks. This parameter defines how much memory an I/O request can lock at once, so it should not be set to more than 20 percent of memory.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| <code>max_diskq</code>           | Limits the maximum disk queue generated by a single file. When the file system is flushing data for a file and the number of pages being flushed exceeds <code>max_diskq</code> , processes will block until the amount of data being flushed decreases. Although this doesn't limit the actual disk queue, it prevents flushing processes from making the system unresponsive. The default value is 1MB.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |



|                                    |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
|------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <code>max_seqio_extent_size</code> | Increases or decreases the maximum size of an extent. When the file system is following its default allocation policy for sequential writes to a file, it allocates an initial extent that is large enough for the first write to the file. When additional extents are allocated, they are progressively larger (the algorithm tries to double the size of the file with each new extent) so each extent can hold several writes' worth of data. This is done to reduce the total number of extents in anticipation of continued sequential writes. When the file stops being written, any unused space is freed for other files to use. Normally, this allocation stops increasing the size of extents at 2048 blocks, which prevents one file from holding too much unused space. <code>max_seqio_extent_size</code> is measured in file system blocks. |
| <code>qio_cache_enable</code>      | Enables or disables caching on Quick I/O files. The default behavior is to disable caching. To enable caching, set <code>qio_cache_enable</code> to 1. On systems with large memories, the database cannot always use all of the memory as a cache. By enabling file system caching as a second level cache, performance may be improved. If the database is performing sequential scans of tables, the scans may run faster by enabling file system caching so the file system will perform aggressive read-ahead on the files.                                                                                                                                                                                                                                                                                                                           |

`write_throttle`

**Warning:** The `write_throttle` parameter is useful in special situations where a computer system has a combination of a lot of memory and slow storage devices. In this configuration, `sync` operations (such as `fsync()`) may take so long to complete that the system appears to hang. This behavior occurs because the file system is creating dirty pages (in-memory updates) faster than they can be asynchronously flushed to disk without slowing system performance.

Lowering the value of `write_throttle` limits the number of dirty pages per file that a file system will generate before flushing the pages to disk. After the number of dirty pages for a file reaches the `write_throttle` threshold, the file system starts flushing pages to disk even if free memory is still available. The default value of `write_throttle` typically generates a lot of dirty pages, but maintains fast user writes. Depending on the speed of the storage device, if you lower `write_throttle`, user write performance may suffer, but the number of dirty pages is limited, so `sync` operations will complete much faster.

Because lowering `write_throttle` can delay write requests (for example, lowering `write_throttle` may increase the file disk queue to the `max_diskq` value, delaying user writes until the disk queue decreases), it is recommended that you avoid changing the value of `write_throttle` unless your system has a large amount of physical memory and slow storage devices.

If the file system is being used with VxVM, it is recommended that you set the VxFS I/O parameters to default values based on the volume geometry.

If the file system is being used with a hardware disk array or volume manager other than VxVM, align the parameters to match the geometry of the logical disk. With striping or RAID-5, it is common to set `read_pref_io` to the stripe unit size and `read_nstream` to the number of columns in the stripe. For striping arrays, use the same values for `write_pref_io` and `write_nstream`, but for RAID-5 arrays, set `write_pref_io` to the full stripe size and `write_nstream` to 1.

For an application to do efficient disk I/O, it should issue read requests that are equal to the product of `read_nstream` multiplied by `read_pref_io`. Generally, any multiple or factor of `read_nstream` multiplied by `read_pref_io` should be a good size for performance. For writing, the same rule of thumb applies to the `write_pref_io` and `write_nstream` parameters. When tuning a file system, the best thing to do is try out the tuning parameters under a real-life workload.

If an application is doing sequential I/O to large files, it should issue requests larger than the `discovered_direct_iosz`. This causes the I/O requests to be performed as discovered direct I/O requests, which are unbuffered like direct I/O but do not require synchronous inode updates when extending the file. If the file is too large to fit in the cache, then using unbuffered I/O avoids throwing useful data out of the cache and lessons CPU overhead.

## About obtaining file I/O statistics using the Quick I/O interface

The `qiostat` command provides access to activity information on Quick I/O files on VxFS file systems. The command reports statistics on the activity levels of files from the time the files are first opened using their Quick I/O interface. The accumulated `qiostat` statistics are reset once the last open reference to the Quick I/O file is closed.

The `qiostat` command displays the following I/O statistics:

- Number of read and write operations
- Number of data blocks (sectors) transferred
- Average time spent on read and write operations

When Cached Quick I/O is used, `qiostat` also displays the caching statistics when the `-l` (the long format) option is selected.

The following is an example of `qiostat` output:

| FILENAME    | OPERATIONS |        | FILE BLOCKS |         | AVG TIME (ms) |       |
|-------------|------------|--------|-------------|---------|---------------|-------|
|             | READ       | WRITE  | READ        | WRITE   | READ          | WRITE |
| /db01/file1 | 0          | 00     | 0           | 0.0     | 0.0           |       |
| /db01/file2 | 0          | 00     | 0           | 0.0     | 0.0           |       |
| /db01/file3 | 73017      | 181735 | 718528      | 1114227 | 26.8          | 27.9  |
| /db01/file4 | 13197      | 20252  | 105569      | 162009  | 25.8          | 397.0 |
| /db01/file5 | 0          | 00     | 0           | 0.0     | 0.0           |       |

For detailed information on available options, see the `qiostat(1M)` manual page.

## About I/O statistics data

Once you gather the file I/O performance data, you can use it to adjust the system configuration to make the most efficient use of system resources.

There are three primary statistics to consider:

- file I/O activity
- volume I/O activity
- raw disk I/O activity

If your database is using one file system on a striped volume, you may only need to pay attention to the file I/O activity statistics. If you have more than one file system, you may need to monitor volume I/O activity as well.

First, use the `qiostat -r` command to clear all existing statistics. After clearing the statistics, let the database run for a while during a typical database workload period. For example, if you are monitoring a database with many users, let the statistics accumulate for a few hours during prime working time before displaying the accumulated I/O statistics.

To display active file I/O statistics, use the `qiostat` command and specify an interval (using `-i`) for displaying the statistics for a period of time. This command displays a list of statistics such as:

| FILENAME     | OPERATIONS |       | FILE BLOCKS |       | AVG TIME (ms) |       |
|--------------|------------|-------|-------------|-------|---------------|-------|
|              | READ       | WRITE | READ        | WRITE | READ          | WRITE |
| /db01/cust1  | 218        | 36    | 872         | 144   | 22.8          | 55.6  |
| /db01/hist1  | 0          | 10    | 4           | 0.0   | 10.0          |       |
| /db01/nord1  | 10         | 14    | 40          | 56    | 21.0          | 75.0  |
| /db01/ord1   | 19         | 16    | 76          | 64    | 17.4          | 56.2  |
| /db01/ord11  | 189        | 41    | 756         | 164   | 21.1          | 50.0  |
| /db01/roll11 | 0          | 50    | 0           | 200   | 0.0           | 49.0  |
| /db01/stk1   | 1614       | 238   | 6456        | 952   | 19.3          | 46.5  |
| /db01/sys1   | 0          | 00    | 0           | 0.0   | 0.0           |       |
| /db01/temp1  | 0          | 00    | 0           | 0.0   | 0.0           |       |
| /db01/ware1  | 3          | 14    | 12          | 56    | 23.3          | 44.3  |
| /logs/log1   | 0          | 00    | 0           | 0.0   | 0.0           |       |
| /logs/log2   | 0          | 217 0 | 2255        | 0.0   | 6.8           |       |

File I/O statistics help identify files with an unusually large number of operations or excessive read or write times. When this happens, try moving the “hot” files or busy file systems to different disks or changing the layout to balance the I/O load.

```
Mon May 11 16:21:20 2015
```

```
/db/dbfile01          813    0    813    0    0.3    0.0
/db/dbfile02           0  813     0  813    0.0    5.5
```

```
Mon May 11 16:21:25 2015
```

```
/db/dbfile01          816    0    816    0    0.3    0.0
/db/dbfile02           0  816     0    816    0.0
```

```
Mon May 11 16:21:30 2015
```

```
/db/dbfile01           0    0     0     0    0.0    0.0
/db/dbfile02           0    0     0     0    0.0    0.0
```

## Obtaining file I/O statistics using Veritas extension for Oracle Disk Manager

The `odmstat` command provides access to activity information on Oracle Disk Manager files on VxFS systems. Refer to the `odmstat(1M)` manual page for more information. The command reports statistics on the activity from the time that the files were opened by the Oracle Disk Manager interface. The command has an option for zeroing the statistics. When the file is closed, the statistics are discarded.

The `odmstat` command displays the following I/O statistics:

- Number of read and write operations
- Number of data blocks read and written
- Average time spent on read and write operations

**To obtain i/o statistics**

- ◆ Use the `odmstat` command as follows:

```
# /opt/VRTS/bin/odmstat -i 5 /mnt/odmfile*
```

For example:

```
# /opt/VRTS/bin/odmstat -i 5 /db/odmfile*
```

| FILE NAME                | OPERATIONS |       | FILE BLOCKS |       | AVG TIME (ms) |       |
|--------------------------|------------|-------|-------------|-------|---------------|-------|
|                          | READ       | WRITE | READ        | WRITE | READ          | WRITE |
| Mon May 11 16:21:10 2015 |            |       |             |       |               |       |
| /db/cust.dbf             | 0          | 0     | 0           | 0     | 0.0           | 0.0   |
| /db/system.dbf           | 0          | 0     | 0           | 0     | 0.0           | 0.0   |
| Mon May 11 16:21:15 2015 |            |       |             |       |               |       |
| /db/cust.dbf             | 371        | 0     | 371         | 0     | 0.2           | 0.0   |
| /db/system.dbf           | 0          | 371   | 0           | 371   | 0.0           | 5.7   |
| Mon May 11 16:21:20 2015 |            |       |             |       |               |       |
| /db/cust.dbf             | 813        | 0     | 813         | 0     | 0.3           | 0.0   |
| /db/system.dbf           | 0          | 813   | 0           | 813   | 0.0           | 5.5   |
| Mon May 11 16:21:25 2015 |            |       |             |       |               |       |
| /db/cust.dbf             | 816        | 0     | 816         | 0     | 0.3           | 0.0   |
| /db/system.dbf           | 0          | 816   | 0           | 816   | 0.0           | 5.3   |
| Mon May 11 16:21:30 2015 |            |       |             |       |               |       |
| /db/cust.dbf             | 0          | 0     | 0           | 0     | 0.0           | 0.0   |
| /db/system.dbf           | 0          | 0     | 0           | 0     | 0.0           | 0.0   |

**About I/O statistics**

When running your database through the file system, the read-write lock on each file allows only one active write per file. When you look at the disk statistics using `iostat`, the disk reports queuing time and service time. The service time is the

time that I/O spends on the disk, and the queueing time is how long it waits for all of the other I/Os ahead of it. At the volume level or the file system level, there is no queueing, so `vxstat` and `qiostat` do not show queueing time.

For example, if you send 100 I/Os at the same time and each takes 10 milliseconds, the disk reports an average of 10 milliseconds of service and 490 milliseconds of queueing time. The `vxstat`, `odmstat`, and `qiostat` report an average of 500 milliseconds service time.

## About tuning Oracle databases

To achieve optimal performance on your Oracle database, the database needs to be tuned to work with VxFS. There are a number of Oracle parameters that you can tune to improve your Oracle database performance.

### Sequential table scans

Quick I/O performs all I/O as direct I/O. In the case of single-threaded sequential scans (common in decision support system (DSS) workloads), using buffered reads can yield better performance. Because the file system detects these sequential reads and performs read-aheads, the next few blocks that Oracle requests are readily available in the system buffer cache and are simply copied to the Oracle system global area (SGA). Because access from memory is inherently faster than access from disk, this achieves a significant reduction in response time.

To handle large sequential scans when using Quick I/O, use the Oracle parallel query process to break the single large scan into multiple smaller scans. This is done by setting the Oracle parameters `PARALLEL_MAX_SERVERS`, `PARALLEL_MIN_SERVERS`, and `SORT_AREA_SIZE` suitably.

---

**Note:** Consult the Oracle documentation for your system and version of Oracle, and use the settings recommended for these parameters when provided.

---

### Sequential table scans

Quick I/O in its default mode performs all I/O as direct I/O. In the case of single-threaded sequential scans (common in decision support system (DSS) workloads), using buffered reads can yield better performance. Because the file system detects these sequential reads and performs read-aheads, the next few blocks that Oracle requests are readily available in the system buffer cache and are simply copied to the Oracle system global area (SGA). Because access from memory is inherently faster than access from disk, this achieves a significant reduction in response time.

To handle large sequential scans when using Quick I/O, one of two methods is available to improve performance:

- Use the Oracle Parallel Query Option to break the single large scan into multiple smaller scans.

---

**Note:** Consult the Oracle documentation for your system and version of Oracle, and use the settings recommended for these parameters when provided.

---

- The second method is to enable Cached Quick I/O for the files that would be read by the Oracle sequential scan process. Cached Quick I/O enables buffered reads, and the automatic file system read-ahead helps lower response times by pre-loading data.

---

**Note:** Do not use this option if you are using a 64-bit version of Oracle.

---

## Sequential table scans

Quick I/O performs all I/O as direct I/O. In the case of single-threaded sequential scans (common in decision support system (DSS) workloads), using buffered reads can yield better performance. Because the file system detects these sequential reads and performs read-aheads, the next few blocks that Oracle requests are readily available in the system buffer cache and are simply copied to the Oracle system global area (SGA). Because access from memory is inherently faster than access from disk, this achieves a significant reduction in response time.

To handle large sequential scans when using Quick I/O, one of two methods is available to improve performance:

- Use the Oracle Parallel Query Option to break the single large scan into multiple smaller scans.

---

**Note:** Consult the Oracle documentation for your system and version of Oracle, and use the settings recommended for these parameters when provided.

---

- The second method is applicable only if you are using Oracle8. In this method, Cached Quick I/O is enabled for the files that would be read by the Oracle sequential scan process. Cached Quick I/O enables buffered reads, and the automatic file system read-ahead helps lower response times by pre-loading data.



## Asynchronous I/O

Quick I/O and Oracle Disk Manager support kernel asynchronous I/O, which reduces CPU utilization and improves transaction throughput.

Oracle Disk Manager supports kernel asynchronous I/O, which reduces CPU utilization and improves transaction throughput.

Enabling the following parameters lets Oracle take advantage of asynchronous I/O and avoids having to configure multiple DBWR slaves:

- If you are using Quick I/O datafiles with Oracle9, set `DISK_ASYNC_IO` to `TRUE` in `init.ora`.
- If you are using ODM on Oracle9, you do not need to change any `init.ora` parameters.

Your Oracle Installation Guide provides detailed instructions on implementing asynchronous I/O on your system.

## Tuning buffer cache

The UNIX buffer cache plays an important role in performance when using JFS in buffered I/O mode.

When using Quick I/O, however, the database cache must be tuned as if raw devices are being used. You can allocate more memory to the database buffer cache because Quick I/O bypasses the file system cache to improve database performance.

Memory pages normally allocated to the file system cache can be allocated to the database buffer cache (SGA). With Oracle9i, you can adjust the SGA size without shutting down the database.

## Tuning buffer cache

The UNIX buffer cache plays an important role in performance when using HFS or JFS in buffered I/O mode.

When using Quick I/O, however, the database cache must be tuned as if raw devices are being used. You can allocate more memory to the database buffer cache because Quick I/O bypasses the file system cache to improve database performance.

Memory pages normally allocated to the file system cache can be allocated to the database buffer cache (SGA). With Oracle9i, you can adjust the SGA size without shutting down the database.

## Tuning buffer cache

The UNIX buffer cache plays an important role in performance when using UFS in buffered I/O mode.

When using Quick I/O, however, the database cache must be tuned as if raw devices are being used. You can allocate more memory to the database buffer cache because Quick I/O bypasses the file system cache to improve database performance.

Memory pages normally allocated to the file system cache can be allocated to the database buffer cache (SGA). With Oracle9i, you can adjust the SGA size without shutting down the database.

## Setting Oracle block reads during sequential scans

The `DB_FILE_MULTIBLOCK_READ_COUNT` parameter specifies the maximum number of blocks Oracle reads in one I/O operation during a sequential scan. The `/etc/system` tunable parameter `maxphys` establishes the maximum physical I/O transfer size at the operating system level. To take advantage of the maximum transfer size, the Oracle `init.ora` parameter `DB_FILE_MULTIBLOCK_READ_COUNT` should be set to `maxphys/DB_BLOCK_SIZE`.

For example, if `maxphys` is set to 1048576 and `DB_BLOCK_SIZE` is set to 4096, then `DB_FILE_MULTIBLOCK_READ_COUNT` should be set to 256.

The `DB_FILE_MULTIBLOCK_READ_COUNT` parameter specifies the maximum number of blocks Oracle reads in one I/O operation during a sequential scan. A large value for the `DB_FILE_MULTIBLOCK_READ_COUNT` initialization parameter usually yields better I/O throughput. On AIX, this parameter ranges from 1 to 512, but using a value higher than 16 usually does not provide additional performance gain.

When the file system is created on a striped volume, set this parameter to a value that is a multiple of the full stripe size divided by `DB_BLOCK_SIZE`. Using a full stripe size allows the read operations to take advantage of the full bandwidth of the striped disks during sequential table scan.

Set the `DB_FILE_MULTIBLOCK_READ_COUNT` to a value that is a multiple of  $(read\_pref\_io * read\_nstream) / DB\_BLOCK\_SIZE$ , but the value should not exceed the value of `max\_direct\_iosz / DB_BLOCK_SIZE`.

Use the `vxtunefs` command to display the value of `read_pref_io`, `read_nstream`, and `max_direct_iosz`, for example:

```
# vxtunefs /db01
```

The `vxtunefs` command displays output similar to the following:

```
Filesystem i/o parameters for /db01
```

```
read_pref_io = 65536
read_nstream = 1
read_unit_io = 65536
write_pref_io = 65536
write_nstream = 1
write_unit_io = 65536
pref_strength = 10
buf_breakup_size = 262144
discovered_direct_iosz = 262144
max_direct_iosz = 1048576
default_indir_size = 8192

qio_cache_enable = 0

write_throttle = 0

max_diskq = 1048576

initial_extent_size = 8

max_seqio_extent_size = 2048

max_buf_data_size = 8192

hsm_write_prealloc = 0

read_ahead = 1

inode_aging_size = 0

inode_aging_count = 0

fcl_maxalloc = 130150400

fcl_keeptime = 0

fcl_winterval = 3600

oltp_load = 0
```

For a description of these parameters and the tuning instructions, refer to the `vxtunefs(1M)` manual page.

The `DB_FILE_MULTIBLOCK_READ_COUNT` parameter specifies the maximum number of blocks Oracle reads in one I/O operation during a sequential scan. When the file system is created on a striped volume, set this parameter to a value that is a multiple of the full stripe size divided by `DB_BLOCK_SIZE`. Using a full stripe size

allows the read operations to take advantage of the full bandwidth of the striped disks during sequential table scan.

Set the `DB_FILE_MULTIBLOCK_READ_COUNT` to a value that is a multiple of  $(read\_pref\_io * read\_nstream) / DB\_BLOCK\_SIZE$ , but the value should not exceed the value of  $max\_direct\_iosz / DB\_BLOCK\_SIZE$ .

Use the `vxtunefs` command to display the value of `read_pref_io`, `read_nstream`, and `max_direct_iosz`, for example:

```
# vxtunefs /db01
```

The `vxtunefs` command displays output similar to the following:

```
Filesystem i/o parameters for /db01

read_pref_io   = 65536
read_nstream   = 4
read_unit_io   = 65536
write_pref_io  = 65536
write_nstream  = 4
write_unit_io  = 65536
pref_strength  = 10
buf_breakup_size = 131072
discovered_direct_iosz = 262144
max_direct_iosz = 2097152
default_indir_size = 8192
```

The `DB_FILE_MULTIBLOCK_READ_COUNT` parameter specifies the maximum number of blocks Oracle reads in one I/O operation during a sequential scan. The `/etc/system` tunable parameter `maxphys` establishes the maximum physical I/O transfer size at the operating system level. To take advantage of the maximum transfer size, the Oracle `init.ora` parameter `DB_FILE_MULTIBLOCK_READ_COUNT` should be set to  $maxphys / DB\_BLOCK\_SIZE$ .

For example, if `maxphys` is set to 1048576 and `DB_BLOCK_SIZE` is set to 4096, then `DB_FILE_MULTIBLOCK_READ_COUNT` should be set to 256.

## Setting slave parameters

Quick I/O and ODM provide support for kernel asynchronous I/O, eliminating the need for multiple logwriter slaves or database writer slaves. This parameter is set to 0 by default.

It is not necessary to set the `DBWR_IO_SLAVES` settings if you are using Quick I/O. The number of `DBWR` writer processes is set within `DB_WRITER_PROCESSES`, which performs asynchronous I/O.

ODM provides support for asynchronous I/O, eliminating the need for multiple logwriter slaves or database writer slaves. This parameter is set to 0 by default.

## Configuring memory allocation

Never configure Oracle to make use of more memory than is physically available on the system. Oracle may have to compete with other processes for system memory resources, and all of these potential processes must be considered when sizing and allocating memory. In the ideal configuration, a system that is dedicated to Oracle simplifies the tuning and monitoring issues and ensures best performance.

## About tuning AIX Virtual Memory Manager

If you are using either Cached Quick I/O or buffered I/O (that is, plain VxFS files without Quick I/O or mount options specified), it is recommended that you monitor any paging activity to the swap device on your database servers. To monitor swap device paging, use the `vmstat -I` command. Swap device paging information appears in the `vmstat -I` output under the columns labeled `pi` and `po` (for paging in and paging out from the swap device, respectively). Any nonzero values in these columns indicates swap device paging activity.

For example:

```
# /usr/bin/vmstat -I
```

| kthr |   |   | memory |         |      |    | page |    |    |    | faults |       |       |    | cpu |    |    |  |
|------|---|---|--------|---------|------|----|------|----|----|----|--------|-------|-------|----|-----|----|----|--|
| r    | b | p | avm    | fre     | fi   | fo | pi   | po | fr | sr | in     | sy    | cs    | us | sy  | id | wa |  |
| 5    | 1 | 0 | 443602 | 1566524 | 661  | 20 | 0    | 0  | 7  | 28 | 4760   | 37401 | 7580  | 11 | 7   | 43 | 38 |  |
| 1    | 1 | 0 | 505780 | 1503791 | 18   | 6  | 0    | 0  | 0  | 0  | 1465   | 5176  | 848   | 1  | 1   | 97 | 1  |  |
| 1    | 1 | 0 | 592093 | 1373498 | 1464 | 1  | 0    | 0  | 0  | 0  | 4261   | 10703 | 7154  | 5  | 5   | 27 | 62 |  |
| 3    | 0 | 0 | 682693 | 1165463 | 3912 | 2  | 0    | 0  | 0  | 0  | 7984   | 19117 | 15672 | 16 | 13  | 1  | 70 |  |
| 4    | 0 | 0 | 775730 | 937562  | 4650 | 0  | 0    | 0  | 0  | 0  | 10082  | 24634 | 20048 | 22 | 15  | 0  | 63 |  |

|   |    |   |         |        |      |   |     |     |      |       |       |       |       |    |    |   |    |
|---|----|---|---------|--------|------|---|-----|-----|------|-------|-------|-------|-------|----|----|---|----|
| 6 | 0  | 0 | 864097  | 715214 | 4618 | 1 | 0   | 0   | 0    | 0     | 9762  | 26195 | 19666 | 23 | 16 | 1 | 61 |
| 5 | 0  | 0 | 951657  | 489668 | 4756 | 0 | 0   | 0   | 0    | 0     | 9926  | 27601 | 20116 | 24 | 15 | 1 | 60 |
| 4 | 1  | 0 | 1037864 | 266164 | 4733 | 5 | 0   | 0   | 0    | 0     | 9849  | 28748 | 20064 | 25 | 15 | 1 | 59 |
| 4 | 0  | 0 | 1122539 | 47155  | 4476 | 0 | 0   | 0   | 0    | 0     | 9473  | 29191 | 19490 | 26 | 16 | 1 | 57 |
| 5 | 4  | 0 | 1200050 | 247    | 4179 | 4 | 70  | 554 | 5300 | 27420 | 10793 | 31564 | 22500 | 30 | 18 | 1 | 52 |
| 6 | 10 | 0 | 1252543 | 98     | 2745 | 0 | 138 | 694 | 4625 | 12406 | 16190 | 30373 | 31312 | 35 | 14 | 2 | 49 |
| 7 | 14 | 0 | 1292402 | 220    | 2086 | 0 | 153 | 530 | 3559 | 17661 | 21343 | 32946 | 40525 | 43 | 12 | 1 | 44 |
| 7 | 18 | 0 | 1319988 | 183    | 1510 | 2 | 130 | 564 | 2587 | 14648 | 21011 | 28808 | 39800 | 38 | 9  | 3 | 49 |

If there is evidence of swap device paging, proper AIX Virtual Memory Manager (VMM) tuning is required to improve database performance. VMM tuning limits the amount of memory pages allocated to the file system cache. This prevents the file system cache from stealing memory pages from applications (which causes swap device page-out) when the VMM is running low on free memory pages.

The command to tune the AIX VMM subsystem is:

```
# /usr/samples/kernel/vmtune
```

Changes made by `vmtune` last until the next system reboot. The VMM kernel parameters to tune include: `maxperm`, `maxclient`, and `minperm`. The `maxperm` and `maxclient` parameters specify the maximum amount of memory (as a percentage of total memory) that can be used for file system caching. The maximum amount of memory for file system caching should not exceed the amount of unused memory left by the AIX kernel and all active applications. Therefore, it can be calculated as:

$$100*(T-A)/T$$

where T is the total number of memory pages in the system and A is the maximum number of memory pages used by all active applications.

The `minperm` parameter should be set to a value that is less than or equal to `maxperm`, but greater than or equal to 5.

For more information on AIX VMM tuning, see the `vmtune(1)` manual page and the performance management documentation provided with AIX.

The following is a tunable VxFS I/O parameter:

VMM Buffer Count  
(-b <value> option)

Sets the virtual memory manager (VMM) buffer count. There are two values for the VMM: a default value based on the amount of memory, and a current value. You can display these two values using `vxtunefs -b`. Initially, the default value and the current value are the same. The `-b` value option specifies an increase, from zero to 100 per cent, in the VMM buffer count from its default. The specified value is saved in the file `/etc/vx/vxfssystem` to make it persistent across VxFS module loads or system reboots.

In most instances, the default value is suitable for good performance, but there are counters in the kernel that you can monitor to determine if there are delays waiting for VMM buffers. If there appears to be a performance issue related to VMM, the buffer count can be increased. If there is better response time on the system, it is a good indication that VMM buffers were a bottleneck.

The following fields displayed by the `kdb vmker` command can be useful in determining bottlenecks.

```
THRPGIO buf wait (_waitcnt) value
```

This field may indicate that there were no VMM buffers available for pagein or pageout. The thread was blocked waiting for a VMM buffer to become available. The count is the total number of waits since cold load. This field, together with pages “paged in” and pages “paged out” displayed by the `kdb vmstat` command can be used to determine if there are an adequate number of VMM buffers. The ratio:

$$\text{waitcnt} / \text{pageins} + \text{pageouts}$$

is an indicator of waits for VMM buffers, but cannot be exact because `pageins + pageouts` includes page I/Os to other file systems and pageing space. It is not possible to give a typical value for this ratio because it depends on the amount of memory and page I/Os to file systems other than VxFS. A number greater than 0.1 may indicate a VMM buffer count bottleneck. Other relevant fields displayed by `kdb vmker` are:

- `THRPGIO partial cnt (_partialcnt) value`  
This field indicates page I/O was done in two or more steps because there were fewer VMM buffers available than the number of pages requiring I/O.
- `THRPGIO full cnt (_fullcnt) value`  
All the VMM buffers were found for all the pages requiring I/O.

## About tuning HP-UX

To achieve optimal performance, certain HP-UX parameters need to be tuned. Changing these parameters requires modifying the HP-UX kernel settings, rebuilding the kernel, and rebooting the system. See the HP-UX System Administration Tasks manual for the detailed procedure on how to reconfigure the HP-UX kernel. If you use SAM, the HP-UX system administration utility, to rebuild your kernel, make sure the

---

**Note:** The settings for all tunable parameters depend on such factors as the size of your system and database, the database load, and the number of users. In some cases we make suggestions for setting the parameters; however, you should always consult the Oracle Installation Guide for your system and version, and use the settings recommended by Oracle when provided.

---

### max\_thread\_proc

This parameter sets the maximum number of threads that a process can create. The high performance of VxFS and the Quick I/O driver depend on the value of this tunable. Set the `max_thread_proc` parameter to 1200.

### asyncdsk, asyncdsk\_included, and max\_async\_ports

These parameters are used for including and configuring the asynchronous I/O driver in the HP-UX kernel, resulting in less I/O overhead and higher throughput. The parameter `max_async_ports` sets the maximum number of connections between user processes and the `asyncdsk` driver. See your Oracle documentation for the recommended value, or set `max_async_ports` to 1024 if a value is not recommended.

### eqmemsize

The I/O subsystem uses a pool of memory allocated by the `eqmemsize` parameter for I/O system memory. The `eqmemsize` parameter specifies the minimum amount of this equivalently mapped memory. The exhaustion of this memory pool degrades I/O performance, thus impacting application performance. See your Oracle documentation for the recommended value, or set `eqmemsize` to 512 if a value is not recommended.



## nproc

This parameter sets the maximum number of processes. The `nproc` parameter may need to be set higher for a large database. See your HP-UX and Oracle documentation for the recommended value.

## maxuproc

This parameter sets the maximum number of processes a non-`root` user can create in parallel. The `maxuproc` parameter may need to be set higher for a large database. See your HP-UX and Oracle documentation for the recommended value.

## semnmi

This parameter sets the number of semaphore set identifiers in the system. The `semnmi` parameter determines the number of semaphore sets that can be created at any one time, and may need to be set higher for a large database. See your HP-UX and Oracle documentation for the recommended value.

## semmns

This parameter sets the maximum number of semaphores in the system. The `semmns` parameter may need to be set higher for a large database. See your HP-UX and Oracle documentation for the recommended value.

# About tuning Solaris for Oracle

To achieve optimal performance using Veritas Storage Foundation for Oracle, certain Solaris parameters need to be tuned. Changing these parameters requires modifying the Solaris kernel settings (specified in the `/etc/system` file) and rebooting the system.

You can add or change these tuning parameters in the `/etc/system` file using a text editor. The following example shows the contents of an `/etc/system` file:

```
* start Oracle *
set shmsys:shminfo_shmmax=0xffffffff
set shmsys:shminfo_shmmin=1
set shmsys:shminfo_shmmni=100
set shmsys:shminfo_shmseg=200
*
set semsys:seminfo_semmap=100
set semsys:seminfo_semmni=1000
```

```
set semsys:seminfo_semmns=4000
set semsys:seminfo_semmnu=800
set semsys:seminfo_semmsl=512
* end Oracle *
```

---

**Note:** The settings for all tunable parameters depend on such factors as the size of your system and database, the database load, and the number of users. In some cases, we make suggestions for setting the parameters; however, you should always consult the Oracle Installation Guide for your system and version, and use the settings recommended by Oracle when provided.

---

## maxuprc

This parameter sets the maximum number of processes that can be run concurrently by any one user. If you anticipate having a large number of users accessing the database concurrently, you may need to increase this parameter.

### To increase the maxuprc parameter

- 1 Check the current setting for `maxuprc` as follows:

```
# echo "maxuprc/D" | adb -k
```

- 2 Modify or add the `maxuprc` setting in the `/etc/system` file as follows:

```
# set maxuprc=some_integer
```

## shmmax

This parameter sets the maximum size (in bytes) of a single shared memory segment. See your database documentation for the recommended value.

## shmmin

This parameter sets the minimum size (in bytes) of a single shared memory segment. See your Oracle documentation for the recommended value.

## shmmni

This parameter sets the number of shared memory identifiers. See your database documentation for the recommended value.

## shmseg

This parameter sets the maximum number of shared memory segments that can be attached by a process. See your database documentation for the recommended value.

## semmap

This parameter sets the number of entries in semaphore map. The memory space given to the creation of semaphores is taken from `semmap`, which is initialized with a fixed number of map entries based on the value of `semmap`. The value of `semmap` should never be larger than `semnmi`. See your database documentation for the recommended value.

## semmni

This parameter sets the number of semaphore set identifiers in the system. The `semmni` parameter determines the number of semaphore sets that can be created at any one time, and may need to be set higher for a large database. See your database documentation for the recommended value.

## semmns

This parameter sets the maximum number of semaphores in the system. The `semmns` parameter may need to be set higher for a large database. See your database documentation for the recommended value.

## semmnu

This parameter sets the system-wide maximum number of undo structures. Setting this parameter value equal to `semmni` provides for an undo structure for every semaphore set. Semaphore operations performed using `semop(2)` can be undone if the process terminates, but an undo structure is required to guarantee it. See your database documentation for the recommended value of `semmnu`.

## semmsl

This parameter sets the maximum number of semaphores that can be in one semaphore set. The `semmsl` parameter should be equal to the maximum number of Oracle processes. See your Oracle documentation for the recommended value.



# Troubleshooting SFDB tools

This chapter includes the following topics:

- [About troubleshooting Storage Foundation for Databases \(SFDB\) tools](#)
- [About the vxdbd daemon](#)
- [Troubleshooting vxdbd](#)
- [Resources for troubleshooting SFDB tools](#)
- [Troubleshooting SmartTier for Oracle](#)
- [Upgrading Veritas Storage Foundation for Databases \(SFDB\) tools from 5.0MP2 to 6.0.1 \(2003131\)](#)
- [Upgrading Veritas Storage Foundation for Databases \(SFDB\) tools from 5.0x to 6.0.1 \(2184482\)](#)
- [Upgrading in an HP Serviceguard environment \(2116455\)](#)

## About troubleshooting Storage Foundation for Databases (SFDB) tools

Storage Foundation for Databases (SFDB) tools are deployed with several Storage Foundation products, and as a result can be affected by any issue with those products. The first step in case of trouble should be to identify the source of the problem. It is rare to encounter problems in Storage Foundation for Databases (SFDB) tools; more commonly the problem can be traced to setup issues or problems in the base products.

Use the information in this chapter to diagnose the source of problems. Indications may point to base product set up or configuration issues, in which case solutions may require reference to other Storage Foundation documentation. In cases where

indications point to a component product or to Oracle as the source of a problem, it may be necessary to refer to the appropriate documentation to resolve it.

For troubleshooting Storage Foundation product issues:

- *Veritas Storage Foundation Administrator's Guide*
- *Veritas Storage Foundation for Cluster File System High Availability Administrator's Guide*
- *Veritas Storage Foundation for Oracle RAC Administrator's Guide*

## Running scripts for engineering support analysis for SFDB tools

Troubleshooting scripts gather information about the configuration and status of your product and its modules. The scripts identify package information, debugging messages, console messages, and information about disk groups and volumes. Forwarding the output of these scripts to Symantec Tech Support can assist with analyzing and solving any problems.

**To obtain SFDB repository and log information**

◆ Run:

```
# /opt/VRTSspt/VRTSexplorer/VRTSexplorer
```

Send the output to Support.

## Storage Foundation for Databases (SFDB) tools log files

Checking the following log files can provide useful diagnostic information.

SFDB tools commands log files are located in the `/var/vx/vxdba/logs` directory.

## About the vxdbd daemon

The SFDB commands are run as the DBA user. DBA users need to perform several operations, such as creating snapshots and mounting file systems, as the root user. The `vxdbd` daemon is used by the SFDB commands to run privileged commands, or when communicating with the SFDB repository on a different host.

## Starting and stopping vxdbd

The `vxdbd` daemon is configured to automatically start when the system boots up. The script at `/opt/VRTS/bin/vxdbdctrl` can be used to stop and start the daemon, and to query its status. Only the root user can start and stop the daemon.

### To query the daemon status

- ◆ Run the command:

```
# /opt/VRTS/bin/vxdbdctrl status
```

### To start the daemon

- ◆ Run the command:

```
# /opt/VRTS/bin/vxdbdctrl start
```

### To stop the daemon

- ◆ Run the command:

```
# /opt/VRTS/bin/vxdbdctrl stop
```

---

**Note:** Most SFDB commands require that the vxdbd daemon be running.

---

## Configuring listening port for the vxdbd daemon

The vxdbd daemon listens on TCP port 3233, by default. If this port is in use by some other application, vxdbd can be configured to listen on an alternate port. In cluster environments, vxdbd must be configured to listen on the same port on all the nodes.

### To configure listening port for the vxdbd daemon

- 1 Stop the vxdbd daemon:

```
# /opt/VRTS/bin/vxdbdctrl stop
```

- 2 Set VXDBD\_PORT to the desired port number by editing the `/etc/vx/vxdbed/admin.properties` configuration file.

- 3 Start the vxdbd daemon:

```
# /opt/VRTS/bin/vxdbdctrl start
```

## Limiting vxdbd resource usage

Although the vxdbd daemon is light-weight in terms of resource usage, system administrators might want to additionally restrict its resource usage. This can be

controlled by using two configuration parameters in

`/etc/vx/vxdbed/admin.properties`:

- **MAX\_CONNECTIONS**: This parameter controls the maximum number of simultaneous requests that vxdbd should allow.
- **MAX\_REQUEST\_SIZE**: This parameter controls the maximum size of a single request (in bytes).

Setting these parameters too low may cause SFDB commands to fail. The following are the suggested minimum values for these parameters:

- **MAX\_CONNECTIONS**: 5
- **MAX\_REQUEST\_SIZE**: 1048576 (1 MB)

---

**Note:** Restart vxdbd after making any changes to these parameters for the changes to take effect.

---

## Configuring encryption ciphers for vxdbd

Communication with the vxdbd daemon is encrypted. The encryption algorithms used for communication can be configured by editing the

`/var/vx/vxdba/auth/vxdbd/root/.VRTSat/profile/VRTSatlocal.conf`

configuration file. The `SSLCipherSuite` configuration parameter specifies the ciphers that are allowed when establishing a secure connection. Refer to the `OpenSSL ciphers(1)` man page for details on the acceptable values of this parameter.

For example, to configure vxdbd to deny communication using the medium-strength and low-strength ciphers, set the `SSLCipherSuite` parameter as follows:

```
"SSLCipherSuite"="HIGH:!MEDIUM:!eNULL:!aNULL:!SSLv2:!LOW"
```

## Troubleshooting vxdbd

If the vxdbd daemon is not running, SFDB commands may fail with an error message. The following steps can help in troubleshooting the instances of the daemon that are down:

- Use the `/opt/VRTS/bin/vxdbdctrl status` to verify that the daemon is running.
- If the output states that the daemon is not running, use the `/opt/VRTS/bin/vxdbdctrl start` command to start the daemon.



- If the daemon fails to start, verify that no other process is listening on the same port. If there is such a process, stop that process, or configure `vxdbd` to listen on a different port.
- The daemon generates logs in the file at `/var/vx/vxdba/logs/vxsfaed.log`. To enable verbose logging, edit the `/etc/vx/vxdbed/admin.properties` configuration file and set `LOG_LEVEL` to `DEBUG`.

## Resources for troubleshooting SFDB tools

If Storage Foundation for Databases (SFDB) commands fail, use the following resources to troubleshoot.

See “[SFDB logs](#)” on page 377.

See “[SFDB error messages](#)” on page 378.

See “[SFDB repository and repository files](#)” on page 378.

### SFDB logs

The SFDB commands generate logs that can be used to narrow down to the actual problem.

#### Log files:

- Log files are generated in the location `/var/vx/vxdba/logs`.
- There are two kind of logs:
  - User logs are generated in the `<user>` folder.
  - Logs from `vxdbd` and other root operations are generated in the `logs` folder.
- The user log files have the naming convention:  
`log_<service>_<application>_<service_identifier><application_identifier>.log`.  
 A `system.log` is also present until `vxsfadm` can recognize the service and the application identifiers.
- The `vxdbd` logs have the name `vxsfaed.log`.  
 A `system.log` also exists for all root operations performed.
- The log files are archived after they reach a threshold of 1MB and are backed up as  
`log_<service><application><application_identifier><service_identifier>.log.<randomnumber>`  
 Every log file has a pointer to the previously archived log.

#### Log levels:

- Log levels can be set using the environment variable `SFAE_LOG_LEVEL`.

- The following additional environment variables can be set that override SFAE\_LOG\_LEVEL:
  - APP\_LOG\_LEVEL: Log application-specific operations.
  - SER\_LOG\_LEVEL: Log VxFS/VxVM stack specific operations.
  - REP\_LOG\_LEVEL: Log repository operations.
  - FSM\_LOG\_LEVEL: Log vxsfadm engine-specific operations.
- The log levels can be set to the following levels:
  - FATAL: Logs only fatal messages.
  - ERROR: Logs errors and above messages.
  - WARN: Logs warning and above messages.
  - INFO: Logs info and above messages.
  - DEBUG: Logs debug and above messages.
- The default log level is DEBUG.

**Log messages:**

- The actual log messages appear in the following format:

```
yyyy/mm/dd hh:mm:ss: <loglevel> : <module> : <message>
```

For example:

## SFDB error messages

Each error message is based on a standard template wherein the following fields are displayed:

- MESSAGE: The actual error message.
- REASON: The reason for the error.
- ACTION: The action to be taken to correct the error.

These fields provide you with precise information about the cause of a problem.

## SFDB repository and repository files

See [“About the Storage Foundation for Databases \(SFDB\) repository”](#) on page 74.

---

**Caution:** Any troubleshooting that involves operations related to the SFDB repository must be done under the supervision of a trained Symantec Engineer.

---

The name of the repository database is in the following format:

`dbed-<application>-<application identifier>-repository.db.`

For example: `dbed-oracle-SFAEDB-repository.db.`

The repository database can be queried to view a variety of information about an application instance. This includes the following tables:

- `_fsm_state_`: Displays the progress of various services.
- `_operational_data_`: Displays the various configuration values set for various services.
- `files`: Displays the files used by the services.

SFDB tools create files under `<repositorylocation>/files`.

- These files are used for various processing activities for all services.
- The `files` table from the repository points to the various file names used by a service under the `files` directory.

## Troubleshooting SmartTier for Oracle

If the SmartTier for Oracle commands fail as in the following example, review the `tsdb_debug.log`.

The `tsdb_debug.log` is located at:

`/var/vx/vxdba/logs/tsdb_debug.log`

For example, when the following message appears after issuing a `dbdst_addvol` command review the `tsdb_debug.log`:

```
$ /opt/VRTS/bin/dbdst_addvol -S BLM21 -M /dev/vx/dsk/nobody_data1/ \
data1vol -v new_vol1:fast_storage,new_vol2:slow_storage,new_vol3:slow_storage
```

```
SFORA dbdst_addvol ERROR V-81-6222 Could not add volume new_vol1 to vset
```

The `tsdb_debug.log` file contains information that resembles the following:

```
# view /var/vx/vxdba/logs/tsdb_debug.log
1216606 Tue May 13 10:11:05 2008
/opt/VRTS/bin/dbdst_addvol -S BLM21 -M /dev/vx/dsk/nobody_data1/data1vol -v
new_vol1:fast_storage,new_vol2:slow_storage,
new_vol3:slow_storage
1216606 Tue May 13 10:11:09 2008
RACmaster = system1
1216606 Tue May 13 10:11:09 2008
```

```
system1:/opt/VRTSdbed/common/.dba/tsdb_setup.sh -g nobody_data1 -o addvol -d\  
data1vol - v new_voll -m /oradata1 -t vxfs.placement_class.FAST_STORAGE  
1216606 Tue May 13 10:11:09 2008  
command failed, ret=1  
  
1216606 Tue May 13 10:11:09 2008  
tsdb_setup.sh arguments -g nobody_data1 -o addvol -d data1vol -v  
new_voll -m /or  
adata1 -t vxfs.placement_class.FAST_STORAGE  
05/13/08@17:08:11  
size of volume new_voll is 204800  
VxVM vxvset ERROR V-5-1-10035 Volume set data1vol contains volume(s)  
in snapshot chain.  
This can cause inconsistencies in the snapshot hierarchy. Specify "-f" option  
to force the operation.  
^^^^ NOTE: here is the reason for the failure, barried in this log file:  
^^^^ /var/vx/vxdba/logs/tsdb_debug.log  
Can not add to data1vol, ERR 1  
ERROR:1
```

## Upgrading Veritas Storage Foundation for Databases (SFDB) tools from 5.0MP2 to 6.0.1 (2003131)

While upgrading from 5.0 MP2 to 6.0.1 the following error message could be seen when running `sfua_rept_migrate`:

```
# /opt/VRTSdbed/migrate/sfua_rept_migrate  
Mounting SFUA Sybase ASA repository.  
SFORA sfua_rept_migrate ERROR V-81-8903 Could not start repository database.  
/usr/lib/dld.sl: Can't find path for shared library: libcur_colr.1  
/usr/lib/dld.sl: No such file or directory  
sh: 3845 Abort(coredump)  
Symantec DBMS 3.0.85.0 vxdbms_start_db utility  
ASA failed. Sybase ASA error code: [134].  
Sybase ASA Error text: {{{{}}}  
  
SFORA sfua_rept_migrate ERROR V-81-9160 Failed to mount repository.
```

## Workaround

### To upgrade without an existing SFDB repository set up

- 1 Verify X/Open curses is installed on the system.
- 2 Create the following link: `ln -s /usr/lib/libxcurses.1 /usr/lib/libcur_colr.1`

- 3 Run:

```
# sfua_rept_migrate
```

## Upgrading Veritas Storage Foundation for Databases (SFDB) tools from 5.0x to 6.0.1 (2184482)

The `sfua_rept_migrate` command results in an error message after upgrading SFHA or SF for Oracle RAC version 5.0 or 5.0MP3 to SFHA or SF for Oracle RAC 6.0.1.

The `sfua_rept_migrate` command results in an error message after upgrading SFHA or SF for Oracle RAC version 5.0 to SFHA or SF for Oracle RAC 6.0.1.

When upgrading from SF Enterprise products version 5.0 or 5.0MP3 to SF Enterprise products 6.0.1 the `S*vxdbs3` startup script is renamed to `NO_S*vxdbs3`. The `S*vxdbs3` startup script is required by `sfua_rept_upgrade`. Thus when `sfua_rept_upgrade` is run, it is unable to find the `S*vxdbs3` startup script and gives the error message:

When upgrading from SF Enterprise products version 5.0 or 5.0.1 to SF Enterprise products 6.0.1 the `S*vxdbs3` startup script is renamed to `NO_S*vxdbs3`. The `S*vxdbs3` startup script is required by `sfua_rept_upgrade`. Thus when `sfua_rept_upgrade` is run, it is unable to find the `S*vxdbs3` startup script and gives the error message:

When upgrading from SF Enterprise products version 5.0 to SF Enterprise products 6.0.1 the `S*vxdbs3` startup script is renamed to `NO_S*vxdbs3`. The `S*vxdbs3` startup script is required by `sfua_rept_upgrade`. Thus when `sfua_rept_upgrade` is run, it is unable to find the `S*vxdbs3` startup script and gives the error message:

```
/sbin/rc3.d/S*vxdbs3 not found
SFORA sfua_rept_migrate ERROR V-81-3558 File: is missing.
SFORA sfua_rept_migrate ERROR V-81-9160 Failed to mount repository.
```

## Workaround

Before running `sfua_rept_migrate`, rename the startup script `NO_S*vxdbms3` to `S*vxdbms3`.

## Upgrading in an HP Serviceguard environment (2116455)

When upgrading SFDB to 5.1SP1 from the previous release in an HP Serviceguard environment, first verify that the `cmviewcl` command can be executed by a non-root user. This permission change must be done before executing SFDB upgrade commands.

# Manual recovery of Oracle database

This chapter includes the following topics:

- [Manual recovery of a clone database](#)
- [Manual recovery after a restore operation](#)

## Manual recovery of a clone database

Storage Foundation for Databases (SFDB) tools let you clone an application based on a point-in-time copy.

Application-level recovery required to clone an application, in the case of online and instant mode snapshots, is normally automatically done whenever a clone operation is performed. However, you may want to manually perform Oracle recovery for the clone database instance. Manual recovery might be required for reasons such as performing a point-in-time recovery of the clone database to a point after the time when the snapshot was taken.

To do manual recovery, use the `preclone` or the `mountdb` operation instead of the clone operation. The `preclone` operation mounts the clone database and lets you perform database recovery manually to open the database.

---

**Note:** A manual recovery option is only available, and advised, when using the online snapshot mode. Offline snapshots do not require any recovery and the database can be directly opened with `RESETLOGS`.

---

Use the following series of SQL statements to perform manual recovery:

```
1) ALTER DATABASE RECOVER UNTIL CANCEL USING BACKUP CONTROLFILE;
   OR

   ALTER DATABASE RECOVER UNTIL TIME <time> USING BACKUP CONTROLFILE;
   OR

   ALTER DATABASE RECOVER UNTIL CHANGE <SCN> USING BACKUP CONTROLFILE;

2) ALTER DATABASE RECOVER LOGFILE '<archived redo log file>';
   { Repeat this step until the desired recovery point/target is reached.}
   {The recovery target must be after the time the snapshot was taken.}

3) ALTER DATABASE RECOVER CANCEL;
   { Use if cancel-based recovery was initiated in step 1.}
```

Once manual recovery is done, you can open the database with the RESETLOGS option. The data files belonging to read-only or offline tablespaces can then be added so that read-only or offline tablespaces are added back into the clone database. Temp files may also be added to the clone database to provide storage for the temporary tablespaces.

## Manual recovery after a restore operation

Storage Checkpoints and FileSnap services of Storage Foundation for Databases (SFDB) tools provide a restore operation that restores application files from a point-in-time copy. In the case of Oracle, a restore operation restores the database files from the point-in-time copy.

The restore operation restores only the data files onto the primary database data files, thus overwriting them. It lets you then perform a database point-in-time recovery manually to recover the database to the desired recovery target or time. The restore operation also places a copy of the control file from the snapshot in the `/var/tmp` directory to you to perform point-in-time recovery to the snapshot time.

---

**Note:** You can perform a restore operation only with an online or an offline mode snapshot.

---

After performing a restore operation, use the following SQL statements to recover the database to any point-in-time, starting from the time the snapshot was taken:

```
{ To perform complete recovery:}
1) SET AUTORECOVERY ON;
```



```
2) RECOVER DATABASE;
```

```
{ To perform incomplete recovery:}
```

```
1) SET AUTORECOVERY ON;
```

```
2) RECOVER DATABASE UNTIL CANCEL;
```

```
OR
```

```
RECOVER DATABASE UNTIL TIME <time>;
```

```
OR
```

```
RECOVER DATABASE UNTIL CHANGE <SCN>;
```

```
{ Note: The 'USING BACKUP CONTROLFILE' clause must be used  
if recovery is performed using a backup control file, or if using  
the control file from the snapshot.}
```

```
3) ALTER DATABASE OPEN RESETLOGS;
```



# Storage Foundation for Databases command reference for the releases prior to 6.0

This chapter includes the following topics:

- [About SFDB commands backward compatibility](#)
- [Veritas Storage Foundation for Databases \(SFDB\) tools features which are no longer supported](#)
- [Preparing storage for Database FlashSnap](#)
- [About creating database snapshots](#)
- [FlashSnap commands](#)
- [Guidelines for Oracle recovery](#)
- [Database Storage Checkpoint Commands](#)

## About SFDB commands backward compatibility

The following sections contain information about the Storage Foundation for Databases (SFDB) tools commands from the previous release. Symantec recommends using the `vxsfadm` CLI. The commands from the previous release are supported for backward compatibility and they will be deprecated in a subsequent release.

## Veritas Storage Foundation for Databases (SFDB) tools features which are no longer supported

The following Storage Foundation for Databases (SFDB) tools features are not supported in this release:

- FlashSnap reverse resync
- Checkpoint policy and Checkpoint quotas
- Interactive modes in clone and rollback

## Preparing storage for Database FlashSnap

The following sections contain information about preparing storage for Database FlashSnap.

### Example procedure to create a snapshot mirror of a volume

This example shows the steps involved in creating a snapshot mirror for the volume `data_vol` belonging to the disk group `PRODDg`.

---

**Note:** You must be logged in as superuser (`root`) to issue the commands in the following procedure.

---

#### To create a snapshot mirror of the volume `data_vol`

- 1 Prepare the volume `data_vol` for mirroring:

```
# vxsnap -g PRODDg prepare data_vol alloc=PRODDg01,PRODDg02
```

- 2 Verify that `FastResync` is enabled:

```
# vxprint -g PRODDg -F%fastresync data_vol
```

```
on
```

- 3 Verify that a `DCO` and a `DCO log` are attached to the volume:

```
# vxprint -g PRODDg -F%hasdcolog data_vol
```

```
on
```

**4** Create a snapshot mirror of data\_vol:

```
# vxsnap -g PRODDg addmir data_vol alloc=PRODDg02
```

**5** List the data plexes:

```
# vxprint -g PRODDg -F%name -e"pl_v_name in \"data_vol\""
```

```
data_vol-01
```

```
data_vol-02
```

**6** Choose the plex that is in the SNAPDONE state. Use the `vxprint -g diskgroup` command to identify the plex that is in the SNAPDONE state.**7** Identify the plex name in the above step and set the `dbed_flashsnap` tag for it:

```
# vxedit -g PRODDg set putil2=dbed_flashsnap data_vol-02
```

- 8 Verify that the `dbed_flashsnap` tag has been set to the desired data plex, `data_vol-02`:

```
# vxprint -g PRODDg -F%name -e"pl_v_name in \"data_vol\" \  
&& p2 in \"dbed_flashsnap\""  
data_vol-02
```

**9** To verify that the snapshot volume was created successfully, use the `vxprint` `-g dg` command as follows:

```
# vxprint -g PRODdg
```

```
# vxprint -g flashdgso
```

| TY NAME           | ASSOC          | KSTATE   | LENGTH   | PLOFFS | STATE    | TUTILO | PUTILO |
|-------------------|----------------|----------|----------|--------|----------|--------|--------|
| dg flashdgso      | flashdgso      | -        | -        | -      | -        | -      | -      |
| dm hdisk5         | hdisk5         | -        | 10411776 | -      | -        | -      | -      |
| dm hdisk6         | hdisk6         | -        | 10411776 | -      | -        | -      | -      |
| dm hdisk8         | hdisk8         | -        | 10411776 | -      | -        | -      | -      |
| dm hdisk10        | hdisk10        | -        | 10411776 | -      | -        | -      | -      |
| dm hdisk14        | hdisk14        | -        | 10411776 | -      | -        | -      | -      |
| dm hdisk17        | hdisk17        | -        | 10411776 | -      | -        | -      | -      |
| v archvol         | fsgen          | ENABLED  | 10237952 | -      | ACTIVE   | -      | -      |
| pl archvol-01     | archvol        | ENABLED  | 10237952 | -      | ACTIVE   | -      | -      |
| sd hdisk6-01      | archvol-01     | ENABLED  | 10237952 | 0      | -        | -      | -      |
| pl archvol-02     | archvol        | ENABLED  | 10237952 | -      | SNAPDONE | -      | -      |
| sd hdisk8-01      | archvol-02     | ENABLED  | 10237952 | 0      | -        | -      | -      |
| dc archvol_dco    | archvol        | -        | -        | -      | -        | -      | -      |
| v archvol_dcl     | gen            | ENABLED  | 1120     | -      | ACTIVE   | -      | -      |
| pl archvol_dcl-01 | archvol_dcl    | ENABLED  | 1120     | -      | ACTIVE   | -      | -      |
| sd hdisk14-01     | archvol_dcl-01 | ENABLED  | 1120     | 0      | -        | -      | -      |
| pl archvol_dcl-02 | archvol_dcl    | DISABLED | 1120     | -      | DCOSNP   | -      | -      |
| sd hdisk8-02      | archvol_dcl-02 | ENABLED  | 1120     | 0      | -        | -      | -      |
| v datavol         | fsgen          | ENABLED  | 10237952 | -      | ACTIVE   | -      | -      |
| pl datavol-01     | datavol        | ENABLED  | 10237952 | -      | ACTIVE   | -      | -      |
| sd hdisk5-01      | datavol-01     | ENABLED  | 10237952 | 0      | -        | -      | -      |
| pl datavol-02     | datavol        | ENABLED  | 10237952 | -      | SNAPDONE | -      | -      |
| sd hdisk10-01     | datavol-02     | ENABLED  | 10237952 | 0      | -        | -      | -      |
| dc datavol_dco    | datavol        | -        | -        | -      | -        | -      | -      |
| v datavol_dcl     | gen            | ENABLED  | 1120     | -      | ACTIVE   | -      | -      |
| pl datavol_dcl-01 | datavol_dcl    | ENABLED  | 1120     | -      | ACTIVE   | -      | -      |
| sd hdisk17-01     | datavol_dcl-01 | ENABLED  | 1120     | 0      | -        | -      | -      |
| pl datavol_dcl-02 | datavol_dcl    | DISABLED | 1120     | -      | DCOSNP   | -      | -      |
| sd hdisk10-02     | datavol_dcl-02 | ENABLED  | 1120     | 0      | -        | -      | -      |
| TY NAME           | ASSOC          | KSTATE   | LENGTH   | PLOFFS | STATE    | TUTILO | PUTILO |
| dg PRODdg         | PRODdg         | -        | -        | -      | -        | -      | -      |
| dm PRODdg01       | Disk_1         | -        | 71117760 | -      | -        | -      | -      |

|    |          |                    |        |                 |        |          |          |        |
|----|----------|--------------------|--------|-----------------|--------|----------|----------|--------|
| dm | PRODdg02 | Disk_2             | -      | 71117760        | -      | -        | -        | -      |
| dm | PRODdg03 | Disk_3             | -      | 71117760        | -      | -        | -        | -      |
| TY | NAME     | ASSOC              | KSTATE | LENGTH          | PLOFFS | STATE    | TUTIL0   | PUTIL0 |
| dg | PRODdg   | PRODdg             | -      | -               | -      | -        | -        | -      |
| dm | PRODdg01 | Disk_1             | -      | 71117760        | -      | -        | -        | -      |
| dm | PRODdg02 | Disk_2             | -      | 71117760        | -      | -        | -        | -      |
| dm | PRODdg03 | Disk_3             | -      | 71117760        | -      | -        | -        | -      |
| TY | NAME     | ASSOC              | KSTATE | LENGTH          | PLOFFS | STATE    | TUTIL0   | PUTIL0 |
| dg | PRODdg   | PRODdg             | -      | -               | -      | -        | -        | -      |
| dm | PRODdg01 | c1t2d0s2           | -      | 35358848        | -      | -        | -        | -      |
| dm | PRODdg02 | c1t3d0s2           | -      | 17674896        | -      | -        | -        | -      |
| dm | PRODdg03 | c1t1d0s2           | -      | 17674896        | -      | -        | -        | -      |
|    |          | v data_vol         |        | fsgen           |        |          |          |        |
|    |          | ENABLED            |        | 4194304         |        | -        | ACTIVE   | -      |
|    |          | pl data_vol-01     |        | data_vol        |        |          |          |        |
|    |          | ENABLED            |        | 4194304         |        | -        | ACTIVE   | -      |
|    |          | sd PRODdg03-01     |        | data_vol-01     |        |          |          |        |
|    |          | ENABLED            |        | 4194304         |        | 0        | -        | -      |
|    |          | pl data_vol-02     |        | data_vol        |        |          |          |        |
|    |          | ENABLED            |        | 4194304         |        | -        | SNAPDONE | -      |
|    |          | sd PRODdg02-01     |        | data_vol-02     |        |          |          |        |
|    |          | ENABLED            |        | 4194304         |        | 0        | -        | -      |
|    |          | dc data_vol_dco    |        | data_vol        |        |          |          |        |
|    |          | -                  |        | -               |        |          | -        | -      |
|    |          | v data_vol_dcl     |        | gen             |        |          |          |        |
|    |          | ENABLED            |        | 560             |        | -        | ACTIVE   | -      |
|    |          | pl data_vol_dcl-01 |        | data_vol_dcl    |        | ENABLED  |          |        |
|    |          | 560                |        | -               |        | ACTIVE   | -        | -      |
|    |          | sd PRODdg01-01     |        | data_vol_dcl-01 |        | ENABLED  |          |        |
|    |          | 560                |        | 0               |        | -        | -        | -      |
|    |          | pl data_vol_dcl-02 |        | data_vol_dcl    |        | DISABLED |          |        |
|    |          | 560                |        | -               |        | DCOSNP   | -        | -      |
|    |          | sd PRODdg02-02     |        | data_vol_dcl-02 |        | ENABLED  |          |        |
|    |          | 560                |        | 0               |        | -        | -        | -      |

Identify that the specified plex is in the SNAPDONE state. In this example, it is data\_vol-02.

The snapshot mirror is now ready to be used.



## Upgrading existing volumes to use Veritas Volume Manager 6.0.1

The procedure in this section describes how to upgrade a volume created using a version older than VxVM 5.0 so that it can take advantage of FlashSnap and space-optimized snapshots.

Note the following requirements and caveats for this procedure:

- The plexes of the DCO volume require persistent storage space on disk to be available. To make room for the DCO plexes, you may need to add extra disks to the disk group, or reconfigure existing volumes to free up space in the disk group. Another way to add disk space is to use the disk group move feature to bring in spare disks from a different disk group.
- Existing snapshot volumes created by the `vxassist` command are not supported. A combination of snapshot volumes created by `vxassist` and `vxsnap` are also not supported.
- You must be logged in as superuser (root) to issue the commands in the following procedure.

### To upgrade an existing volume created with an earlier version of VxVM

- 1 Upgrade the disk group that contains the volume to version 120 or higher before performing the remainder of the procedure described in this section. Use the following command to check the version of a disk group:

```
# vxdg list diskgroup
```

To upgrade a disk group to the latest version, use the following command:

```
# vxdg upgrade diskgroup
```

- 2 If the volume to be upgraded has a DRL plex or subdisk from an earlier version of VxVM, use the following command to remove this:

```
# vxassist [-g diskgroup] remove log volume [nlog=n]
```

Use the optional attribute `nlog=n` to specify the number, *n*, of logs to be removed. By default, the `vxassist` command removes one log.

- 3 For a volume that has one or more associated snapshot volumes, use the following command to reattach and resynchronize each snapshot:

```
# vxsnap [-g diskgroup] snapback snapvol
```

If persistent FastResync was enabled on the volume before the snapshot was taken, the data in the snapshot plexes is quickly resynchronized from the original volume. If persistent FastResync was not enabled, a full resynchronization is performed.

- 4 Use the following command to turn off persistent FastResync for the volume:

```
# vxvol [-g diskgroup] set fastresync=off volume
```

- 5 Use the following command to dissociate a DCO object from an earlier version of VxVM, DCO volume and snap objects from the volume:

```
# vxassist [-g diskgroup] remove log volume logtype=dcv
```

- 6 Use the following command on the volume to upgrade it:

```
# vxsnap [-g diskgroup] prepare volume \  
alloc="disk_name1,disk_name2"
```

Provide two disk names to avoid overlapping the storage of the snapshot DCO plex with any other non-moving data or DCO plexes.

The `vxsnap prepare` command automatically enables persistent FastResync on the volume and on any snapshots that are generated from it. It also associates a DCO and DCO log volume with the volume to be snapshot.

- 7 To view the existing DCO plexes and see whether there are enough for the existing data plexes, enter:

```
# vxprint -g diskgroup
```

There needs to be one DCO plex for each existing data plex.

- 8 If there are not enough DCO plexes for the existing data plexes, create more DCO plexes:

```
# vxsnap [-g diskgroup] addmir dco_volume_name \  
[alloc=disk_name]
```

where *dco\_volume\_name* is the name of the DCO volume you are creating.

- 9 If the plex is in a SNAPDONE state, convert it to an ACTIVE state:

```
# vxplex [-g diskgroup] convert state=ACTIVE data_plex
```

- 10 Convert the data plexes to a SNAPDONE state and associate a DCO plex with the data plex that will be used for snapshot operations:

```
# vxplex [-g diskgroup] -o dcoplex=dco_plex_name convert \  
state=SNAPDONE data_plex
```

where *dco\_plex\_name* is the name of the DCO plex you are creating.

## Example procedure to upgrade existing volumes to use Veritas Volume Manager 6.0.1

---

**Note:** You must be logged in as superuser (root) to issue the commands in the following procedure.

---

In this example, the volume, *data\_vol*, is upgraded to make use of VxVM 6.0.1 features.

**To upgrade an existing volume created with an earlier version of VxVM**

- 1 Upgrade the disk group, *PRODDg*.

```
# vxdg upgrade PRODDg
```

- 2 Remove the DRL plexes or subdisks belonging to an earlier version of VxVM from the volume to be upgraded.

```
# vxassist -g PRODDg remove log data_vol logtype=drl
```

- 3 Reattach any snapshot volume back to the primary volume to be upgraded.

```
# vxsnap -g PRODDg snapback SNAP-data_vol
```

- 4 Turn off FastResync on the volume to be upgraded.

```
# vxvol -g PRODDg set fastresync=off data_vol
```

- 5 Disassociate and remove any older DCO object and DCO volumes.

```
# vxassist -g PRODDg remove log data_vol logtype=dc
```

- 6 Upgrade the volume by associating a new DCO object and DCO volume.

```
# vxsnap -g PRODDg prepare data_vol alloc="PRODDg01,PRODDg02"
```

- 7 View the existing DCO plexes and plex state.

#### Scenario 1

In this scenario, there are enough DCO plexes for the data plexes. Also, no data plex is associated with a DCO plex.

```
# vxprint -g PRODDg
```

| TY NAME     | ASSOC          | KSTATE | LENGTH      | PLOFFS | STATE | TUTILO   | PUTILO |
|-------------|----------------|--------|-------------|--------|-------|----------|--------|
| dg PRODDg   | PRODDg         | -      | -           | -      | -     | -        | -      |
| dm PRODDg01 | c1t2d0s2       | -      | 35358848    | -      | -     | -        | -      |
| dm PRODDg02 | c1t3d0s2       | -      | 17674896    | -      | -     | -        | -      |
| dm PRODDg03 | c1t1d0s2       | -      | 17674896    | -      | -     | -        | -      |
|             | v data_vol     |        | fsgen       |        |       |          |        |
|             | ENABLED        |        | 4194304     |        | -     | ACTIVE   | -      |
|             | pl data_vol-01 |        | data_vol    |        |       |          |        |
|             | ENABLED        |        | 4194304     |        | -     | ACTIVE   | -      |
|             | sd PRODDg01-01 |        | data_vol-01 |        |       |          |        |
|             | ENABLED        |        | 4194304     | 0      | -     | -        | -      |
|             | pl data_vol-04 |        | data_vol    |        |       |          |        |
|             | ENABLED        |        | 4194304     |        | -     | SNAPDONE | -      |
|             | sd PRODDg02-03 |        | data_vol-04 |        |       |          |        |
|             | ENABLED        |        | 4194304     | 0      | -     | -        | -      |

```
dc data_vol_dco data_vol
-          -          -          -          -          -
v data_vol_dcl gen
ENABLED      560          -          ACTIVE  -          -
pl data_vol_dcl-01 data_vol_dcl
ENABLED      560          -          ACTIVE  -          -
sd PRODDg01-02 data_vol_dcl-01
ENABLED      560          0          -          -          -
pl data_vol_dcl-02 data_vol_dcl
ENABLED      560          -          ACTIVE  -          -
sd PRODDg02-02 data_vol_dcl-02
ENABLED      560          0          -          -          -
```

■ Convert the data plex state from SNAPDONE to ACTIVE.

```
# vxplex -g PRODDg convert state=ACTIVE data_vol-04
```

■ Associate the data plex with a new DCO plex and convert it back to a SNAPDONE state.

```
# vxplex -g PRODDg -o dcoplex=data_vol_dcl-02 \
convert state=SNAPDONE data_vol-04
```

```
# vxprint -g PRODDg
```

| TY NAME        | ASSOC       | KSTATE   | LENGTH   | PLOFFS | STATE  | TUTIL0 | PUTIL0 |
|----------------|-------------|----------|----------|--------|--------|--------|--------|
| dg PRODDg      | PRODDg      | -        | -        | -      | -      | -      | -      |
| dm PRODDg01    | c1t2d0s2    | -        | 35358848 | -      | -      | -      | -      |
| dm PRODDg02    | c1t3d0s2    | -        | 17674896 | -      | -      | -      | -      |
| dm PRODDg03    | c1t1d0s2    | -        | 17674896 | -      | -      | -      | -      |
| pl data_vol-03 | -           | DISABLED | 4194304  | -      | -      | -      | -      |
| sd PRODDg02-01 | data_vol-03 | ENABLED  | 4194304  | 0      | -      | -      | -      |
| v data_vol     | fsgen       | ENABLED  | 4194304  | -      | ACTIVE | -      | -      |
| pl data_vol-01 | data_vol    | ENABLED  | 4194304  | -      | ACTIVE | -      | -      |
| sd PRODDg01-01 | data_vol-01 | ENABLED  | 4194304  | 0      | -      | -      | -      |

```

pl data_vol-04 data_vol
ENABLED 4194304 - SNAPDONE - -
sd PRODDg02-03 data_vol-04
ENABLED 4194304 0 - - -
dc data_vol_dco data_vol
- - - - -
v data_vol_dcl gen
ENABLED 560 - ACTIVE - -
pl data_vol_dcl-01 data_vol_dcl
ENABLED 560 - ACTIVE - -
sd PRODDg01-02 data_vol_dcl-01
ENABLED 560 0 - - -
pl data_vol_dcl-02 data_vol_dcl
DISABLED 560 - DCOSNP - -
sd PRODDg02-02 data_vol_dcl-02
ENABLED 560 0 - - -

```

### Scenario 2

In this scenario, there are fewer DCO plexes than data plexes.

```
# vxprint -g PRODDg
```

| TY NAME     | ASSOC    | KSTATE | LENGTH   | PLOFFS | STATE | TUTIL0 | PUTIL0 |
|-------------|----------|--------|----------|--------|-------|--------|--------|
| dg PRODDg   | PRODDg   | -      | -        | -      | -     | -      | -      |
| dm PRODDg01 | c1t2d0s2 | -      | 35358848 | -      | -     | -      | -      |
| dm PRODDg02 | c1t3d0s2 | -      | 17674896 | -      | -     | -      | -      |
| dm PRODDg03 | c1t1d0s2 | -      | 17674896 | -      | -     | -      | -      |

```

pl data_vol-03 -
DISABLED 4194304 - - -
sd PRODDg02-01 data_vol-03
ENABLED 4194304 0 - - -
v data_vol fsgen
ENABLED 4194304 - ACTIVE - -
pl data_vol-01 data_vol
ENABLED 4194304 - ACTIVE - -
sd PRODDg01-01 data_vol-01
ENABLED 4194304 0 - - -
pl data_vol-04 data_vol
ENABLED 4194304 - ACTIVE - -
sd PRODDg02-03 data_vol-04
ENABLED 4194304 0 - - -
dc data_vol_dco data_vol

```

```
-
-
-
-
-
-
v data_vol_dcl gen
ENABLED 560 - ACTIVE -
pl data_vol_dcl-01 data_vol_dcl
ENABLED 560 - ACTIVE -
sd PRODDg01-02 data_vol_dcl-01
ENABLED 560 0 - -
```

- Add a DCO plex to the DCO volume using the vxassist mirror command.

```
# vxsnap -g PRODDg addmir data_vol_dcl alloc=PRODDg02
```

- Associate the data plex with the new DCO plex and convert it to a SNAPDONE state.

```
# vxplex -g PRODDg -o dcoplex=data_vol_dcl-02 \
convert state=SNAPDONE data_vol-04
```

| TY NAME     | ASSOC    | KSTATE | LENGTH   | PLOFFS | STATE | TUTIL0 | PUTIL0 |
|-------------|----------|--------|----------|--------|-------|--------|--------|
| dg PRODDg   | PRODDg   | -      | -        | -      | -     | -      | -      |
| dm PRODDg01 | c1t2d0s2 | -      | 35358848 | -      | -     | -      | -      |
| dm PRODDg02 | c1t3d0s2 | -      | 17674896 | -      | -     | -      | -      |
| dm PRODDg03 | c1t1d0s2 | -      | 17674896 | -      | -     | -      | -      |

```
pl data_vol-03 -
DISABLED 4194304 - - -
v data_vol fsgen
ENABLED 4194304 - ACTIVE -
pl data_vol-01 data_vol
ENABLED 4194304 - ACTIVE -
sd PRODDg01-01 data_vol-01
ENABLED 4194304 0 - -
pl data_vol-04 data_vol
ENABLED 4194304 - SNAPDONE -
sd PRODDg02-03 data_vol-04
ENABLED 4194304 0 - -
dc data_vol_dco data_vol
-
-
-
-
-
-
v data_vol_dcl gen
ENABLED 560 - ACTIVE -
pl data_vol_dcl-01 data_vol_dcl
ENABLED 560 - ACTIVE -
sd PRODDg01-02 data_vol_dcl-01
```

|                    |                 |   |        |   |   |
|--------------------|-----------------|---|--------|---|---|
| ENABLED            | 560             | 0 | -      | - | - |
| pl_data_vol_dcl-02 | data_vol_dcl    |   |        |   |   |
| DISABLED           | 560             | - | DCOSNP | - | - |
| sd_PRODdg02-02     | data_vol_dcl-02 |   |        |   |   |
| ENABLED            | 560             | 0 | -      | - | - |

## Changing the default control file location

For Oracle 11gR2, while creating a database using DBCA, one of the control file locations defaults to the flash recovery area. (parameter : flash\_recovery\_area). Storage Foundation for database (SFDB) utilities require that all of the control files of a database reside on a Veritas file system other than on ORACLE\_HOME.

### To change the default installation

- ◆ Perform one of the following:
  - Instruct Oracle not to place a copy of a control file in flash recovery area at the time of database creation.
  - Move or remove the copy of control file residing in flash recovery area using SQL commands. Do not use OS commands to perform this task.

## Updating after structural changes to the database

In case of any structural change to database, for instance adding or removing any database objects such as control files, data files , arch location etc., you must execute `dbed_update` on the node to refresh the SFDB repository. If there are any flashsnaps which are taken before the database modification, you must perform the following steps:

### To update a flashsnap after structural change to a database

- 1 Resynchronize the snapshots using the `dbed_vmsnap` utility.
- 2 Run `dbed_update`.
- 3 Validate the snapplan again and take new snapshot.

## About creating database snapshots

A snapshot can be a source for backing up the database or creating a clone database for decision-support purposes. You can use Database FlashSnap commands to create a snapshot of your entire database on the same host (node) or on a different one.



## Online database snapshots

Table 33-1 describes the three types of snapshots that can be created.

**Table 33-1** Database snapshot types

| Database snapshot type | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
|------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| online                 | <p>If the SNAPSHOT_MODE specified in the snapplan is set to online, the <code>dbed_vmsnap</code> command first puts the tablespaces to be snapshot into backup mode. After the snapshot is created, the tablespaces are taken out of backup mode, the log files are switched to ensure that the extra redo logs are archived, and a snapshot of the archive logs is created.</p> <p>Both online and offline snapshots provide a valid backup copy of the database.</p> |
| offline                | <p>If the SNAPSHOT_MODE is set to offline, the database must be shut down before the snapshot is created. Online redo logs and control files are required and will be used to ensure a full database recovery.</p>                                                                                                                                                                                                                                                     |
| instant                | <p>If the SNAPSHOT_MODE is set to instant, tablespaces are not put into and out of backup mode. Online redo logs and control files are required and will be used to ensure a full database recovery.</p> <p>Instant snapshots do not represent a valid backup copy for point-in-time recovery.</p>                                                                                                                                                                     |

**Note:** For Storage Foundation for Oracle RAC, only the online snapshot mode is supported.

Database FlashSnap supports online database snapshot types.

When the SNAPSHOT\_MODE specified in the snapplan is set to online, the `dbed_vmsnap` command first puts the tablespaces to be snapshot into backup mode. After the snapshot is created, the tablespaces are taken out of backup mode, the log files are switched to ensure that the extra redo logs are archived, and a snapshot of the archive logs is created.

Online snapshots provide a valid backup copy of the database.


## Tasks before creating a snapshot

Review the details on how to create snapshots of all volumes on a database using the snapplan.

Optionally, you can use the VxVM command (`vxsnap`) to create volume snapshots. However, unlike the Database FlashSnap commands, the `vxsnap` command does not automate disk group content reorganization functions.

Figure 33-1 depicts the sequence of steps leading up to taking a snapshot using Database FlashSnap.

**Figure 33-1** Prerequisites for creating a snapshot of your database

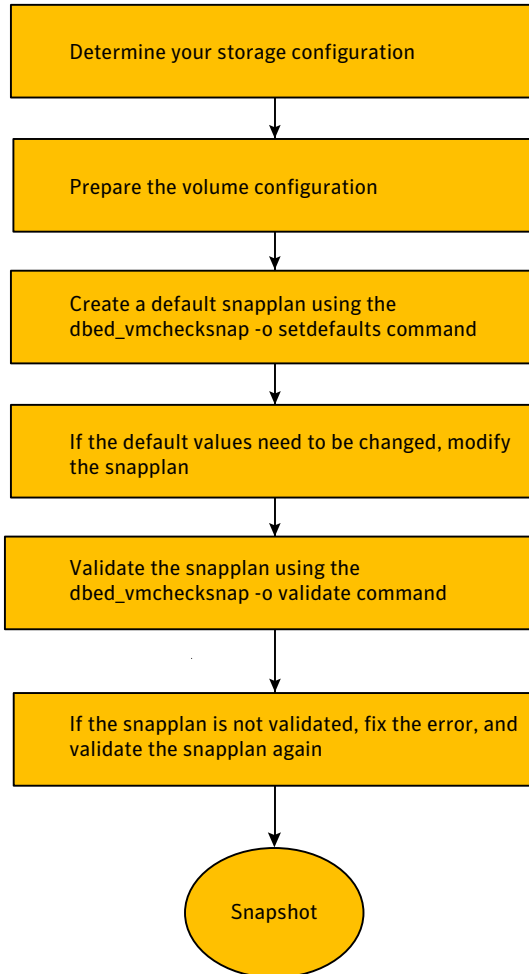

## Creating a snapshot

Make sure the volumes used by the database are configured properly before attempting to take a snapshot. This database configuration requires superuser (root) privileges.

---

**Note:** Database FlashSnap commands must be run by the Oracle database administrator.

---

Whenever you change the structure of the database (for example, by adding or deleting datafiles, converting PFILE to SPFILE, or converting SPFILE to PFILE), you must run `dbed_update`. For example:

```
$ /opt/VRTS/bin/dbed_update -s $ORACLE_SID -h $ORACLE_HOME
```

### To create a snapshot image of a database

- 1 Create a snapshot mirror of a volume or volume set.  
See [“To create a snapshot mirror of a volume or volume set”](#) on page 188.
- 2 Use the `dbed_vmchecksnap` command to create a snapplan template and check the volume configuration to ensure that it is valid for creating volume snapshots of the database.

The snapplan contains detailed database and volume configuration information that is needed for snapshot creation and resynchronization. You can modify the snapplan template with a text editor.

The `dbed_vmchecksnap` command can also be used to:

|                                                                  |                                                     |
|------------------------------------------------------------------|-----------------------------------------------------|
| List all snapplans associated with a specific ORACLE_SID         | <code>dbed_vmchecksnap -o list</code>               |
| Remove the snapplan from the SFDB repository                     | <code>dbed_vmchecksnap -o remove -f SNAPPLAN</code> |
| Copy a snapplan from the SFDB repository to your local directory | <code>dbed_vmchecksnap -o copy -f SNAPPLAN</code>   |

See [“Creating a snapplan \(dbed\\_vmchecksnap\)”](#) on page 411.

- 3 Use the `dbed_vmsnap` command to create snapshot volumes for the database.  
See [“Creating a snapshot \(dbed\\_vmsnap\)”](#) on page 428.

- 4 On the secondary host, use the `dbed_vmclonedb` command to create a clone database using the disk group deported from the primary host. For more information:

See “Cloning a database (`dbed_vmclonedb`)” on page 435.

If the primary and secondary hosts specified in the snapplan are different, the `dbed_vmclonedb` command takes the following actions:

- Imports the disk group that was deported from the primary host
- Recovers the snapshot volumes
- Mounts the file systems
- Recovers the database
- Brings the database online with a different Oracle SID name than the primary host.

You can use the `-o recoverdb` option to let `dbed_vmclonedb` perform an automatic database recovery, or you can use the `-o mountdb` option to perform your own point-in-time recovery and bring up the database manually. For a point-in-time recovery, the snapshot mode must be online.

You can also create a clone on the primary host. Your snapplan settings specify whether a clone should be created on the primary or secondary host.

- 5 You can now use the clone database to perform database backup and other off-host processing work.
- 6 For single instance Oracle, the clone database can be used to reverse resynchronize the original volume from the data in the snapshot, or can be discarded by rejoining the snapshot volumes with the original volumes (that is, by resynchronizing the snapshot volumes) for future use.
- 7 The clone database can be discarded by rejoining the snapshot volumes with the original volumes (that is, by resynchronizing the snapshot volumes) for future use.

## Tasks after creating a snapshot


There are many actions you can take after creating a snapshot of your database using Database FlashSnap. You can create a clone of the database for backup and off-host processing purposes. You can resynchronize the snapshot volumes with the primary database.

For single instance Oracle, in the event of primary database failure, you can recover it by reverse resynchronizing the snapshot volumes in the event of primary database failure.

The following flow chart depicts the actions you can perform after creating a snapshot of your database using Database FlashSnap, and involve the following four questions:

[Figure 33-2](#) is a flow chart that depicts the actions you can perform after creating a snapshot of your database using Database FlashSnap.

Figure 33-2 Actions you can perform after creating a snapshot of your database

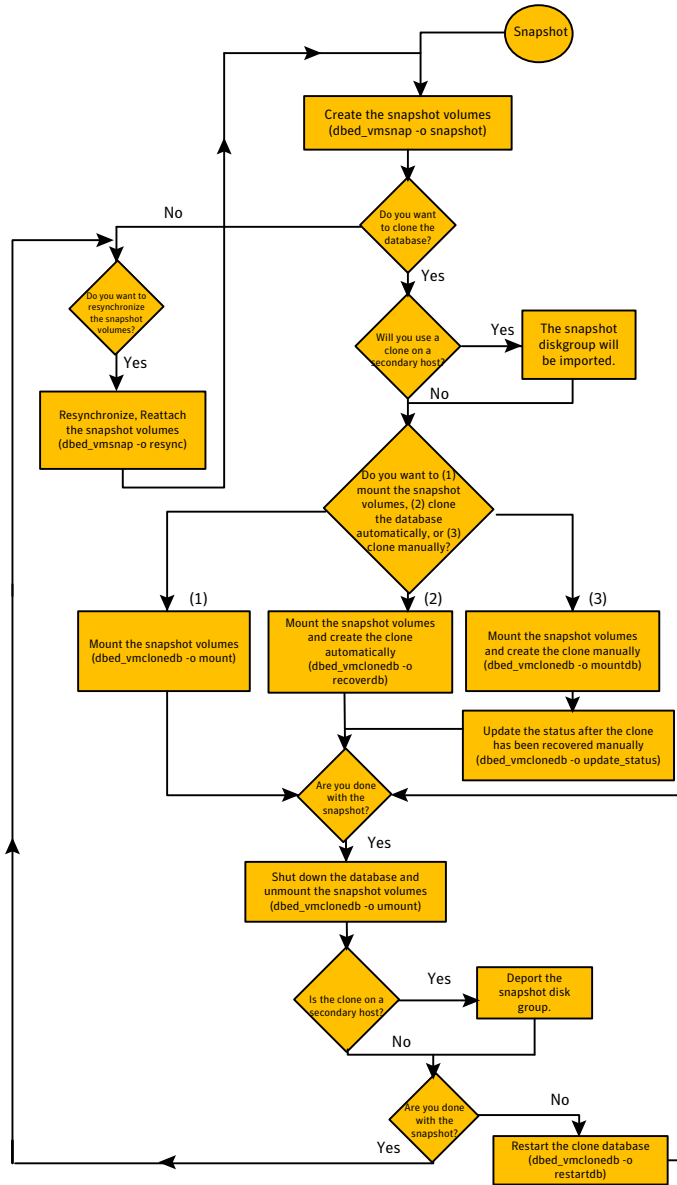


### Do you want to clone the database?

After creating the snapshot volumes, you can proceed to clone the database and use the clone on a secondary host or resynchronize the snapshot volumes.

Figure 33-3 is a flow chart of this process.

Figure 33-3 Clone the database

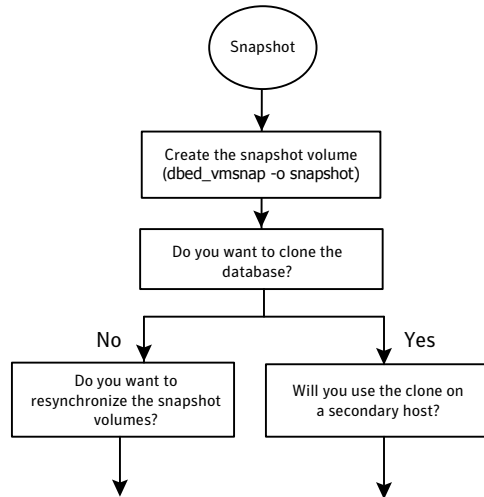


### Do you want to resynchronize the snapshot volumes?

If you decide not to clone the database, then you can proceed to resynchronize and reattach the snapshot volumes, or begin a reverse resynchronization process.

Figure 33-4 is a flow chart of this process.

Figure 33-4 Resynchronize the database

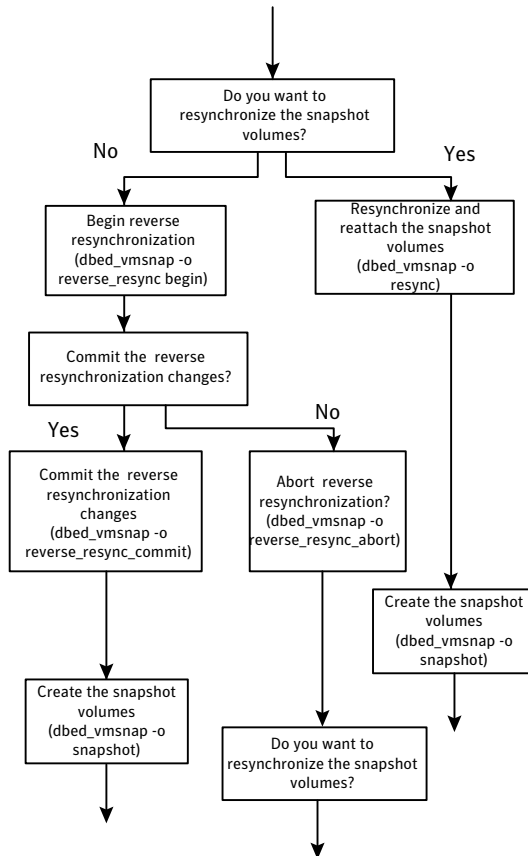

### Will you use the clone on a secondary host?


If you decide to clone the database and use the clone on a secondary host, then the snapshot diskgroup will be imported. If not, then proceed with one of the following three options:

- Mount the snapshot volumes
- Mount the snapshot volumes and create the clone automatically
- Mount the snapshot volumes and create the clone manually

Figure 33-5 is a flow chart of this process.



**Figure 33-5** Clone on a secondary host

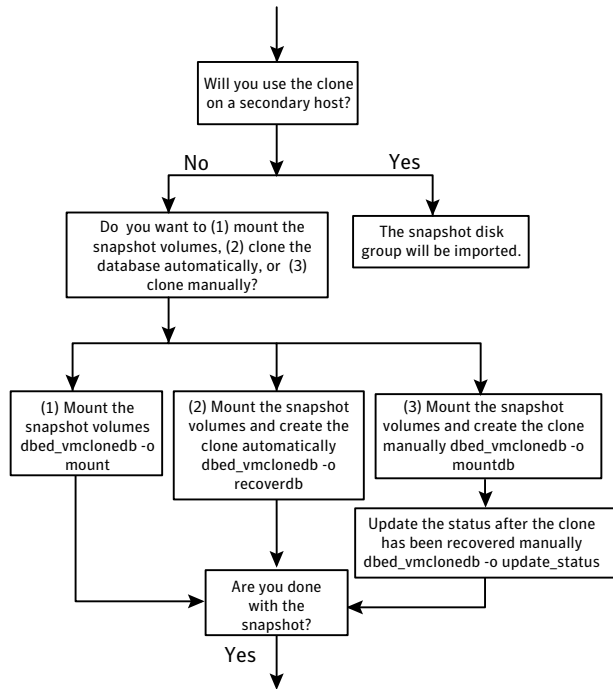


### Are you done with the snapshot?

If you are done with the snapshot, then shut down the database and unmount the snapshot volumes. If the clone is on a secondary host, then deport the snapshot diskgroup.

Figure 33-6 is a flow chart of these processes.

Figure 33-6 Finished with the snapshot

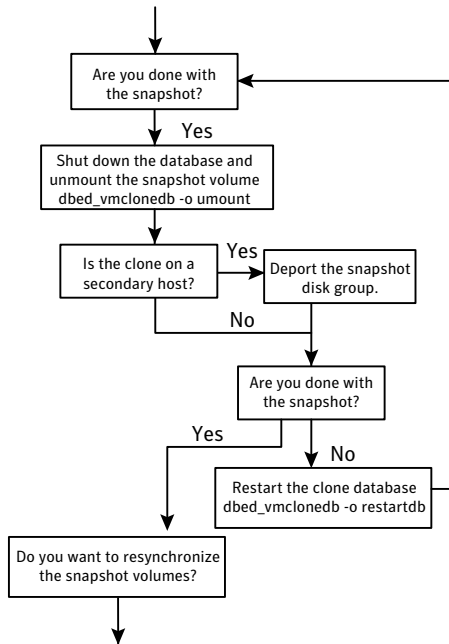

## FlashSnap commands

Database FlashSnap actions can be performed by using the following FlashSnap commands described in the following sections:

- [Creating a snapplan \(dbed\\_vmchecksnap\)](#)
- [Validating a snapplan \(dbed\\_vmchecksnap\)](#)
- [Displaying, copying, and removing a snapplan \(dbed\\_vmchecksnap\)](#)
- [Creating a snapshot \(dbed\\_vmsnap\)](#)
- [Backing up the database from snapshot volumes \(dbed\\_vmclonedb\)](#)
- [Cloning a database \(dbed\\_vmclonedb\)](#)
- [Resynchronizing the snapshot to your database](#)
- [Removing a snapshot volume](#)

## Creating a snapplan (dbed\_vmchecksnap)

The `dbed_vmchecksnap` command creates a snapplan that `dbed_vmsnap` uses to create a snapshot of an Oracle database.

The snapplan specifies snapshot scenarios: online, offline, or instant.

You can name a snapplan file whatever you choose. Each entry in the snapplan file is a line in `parameter=argument` format.

[Table 33-2](#) describes the parameters that can be set when using the `dbed_vmchecksnap` command to create or validate a snapplan.

**Table 33-2** Parameter values for `dbed_vmchecksnap`

| Parameter          | Value                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
|--------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| SNAPSHOT_VERSION   | Specifies the snapshot version for this major release of SF Enterprise products.                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| PRIMARY_HOST       | The name of the host where the primary database resides.                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| SECONDARY_HOST     | The name of the host where the database will be imported.                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| PRIMARY_DG         | Colon-separated list of names of the VxVM disk group's used by the primary database                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| SNAPSHOT_DG_PREFIX | <p>The name of the prefix attached to the disk group name. A snapshot disk group's name is a concatenation of <code>SNAPSHOT_DG_PREFIX</code> and the corresponding primary dg name. Its default value will be "SNAP_".</p> <p>The snapshot volumes will be put into this disk group on the primary host and deported. The secondary host will import this disk group to start a clone database.</p> <p><code>SNAPSHOT_DG</code> is not supported in release 5.1. It is replaced by <code>SNAPSHOT_DG_PREFIX</code>.</p> |
| ORACLE_SID         | The name of the Oracle database. By default, the name of the Oracle database is included in the snapplan.                                                                                                                                                                                                                                                                                                                                                                                                                |

**Table 33-2** Parameter values for `dbed_vmchecksnap` (*continued*)

| Parameter            | Value                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
|----------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| ARCHIVELOG_DEST      | <p>The full path of the archive logs.</p> <p>There are several archive log destinations that can be used for database recovery if you are multiplexing the archive logs. You must specify which archive log destination to use.</p> <p>It is recommended that you have the archive log destination on a separate volume if <code>SNAPSHOT_ARCHIVE_LOG</code> is yes.</p>                                                                                                                                             |
| SNAPSHOT_ARCHIVE_LOG | <p>yes or no</p> <p>Specifies whether to create a snapshot of the archive log volumes. Specify <code>yes</code> to split the archive log volume mirrors and deport them to the secondary host. When using the Oracle remote archive log destination feature to send the archive logs to the secondary host, you can specify <code>no</code> to save some space.</p> <p>Because the archive logs may not always be delivered to the secondary host reliably, it is recommended that you specify <code>yes</code>.</p> |

**Table 33-2** Parameter values for `dbed_vmchecksnap` (continued)

| Parameter           | Value                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
|---------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| SNAPSHOT_MODE       | <p>Specifies the database snapshot mode. Values can be online, offline, or instant.</p> <ul style="list-style-type: none"> <li>■ If the snapshot is created while the database is online, the <code>dbed_vmsnap</code> command will put the tablespaces into backup mode. After <code>dbed_vmsnap</code> finishes creating the snapshot, it will take the tablespaces out of backup mode, switch the log files to ensure that the extra redo logs are archived, and create a snapshot of the archived logs.</li> <li>■ If the database is offline, it is not necessary to put the tablespaces into backup mode. The database must be shut down before creating an offline snapshot.</li> <li>■ If the database snapshot is instant, <code>dbed_vmsnap</code> will skip putting the tablespace into backup mode.</li> </ul> <p><b>Note:</b> If SNAPSHOT_MODE is set to offline or instant, an off-host configuration is required and the <code>-r relocate_path</code> option is not allowed.</p> <p><b>Note:</b> The offline and instant snapshot modes are not supported for Oracle RAC.</p> |
| SNAPSHOT_PLAN_FOR   | <p>The default value is <b>database</b> and cannot be changed.</p> <p>Specifies the database object for which you want to create a snapshot.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| SNAPSHOT_PLEX_TAG   | <p>Specifies the snapshot plex tag. Use this variable to specify a tag for the plexes to be snapshot. The maximum length of the <code>plex_tag</code> is 15 characters. The default plex tag is <code>dbed_flashsnap</code>.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
| SNAPSHOT_VOL_PREFIX | <p>Specifies the snapshot volume prefix. Use this variable to specify a prefix for the snapshot volumes split from the primary disk group. A volume name cannot be more than 32 characters. You should consider the length of the volume name when assigning the prefix.</p>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |

**Table 33-2** Parameter values for `dbed_vmchecksnap` (*continued*)

| Parameter            | Value                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
|----------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| ALLOW_REVERSE_RESYNC | yes or no<br><br>By default, reverse resynchronization is <b>off</b> (set equal to no). If it is set to <b>yes</b> , data from the snapshot volume can be used to update the primary volume.<br><br><b>Note:</b> This parameter must be set to <b>no</b> for Oracle RAC.                                                                                                                                                                                                                     |
| SNAPSHOT_MIRROR      | Specifies the number of plexes to be snapshot. The default value is 1.                                                                                                                                                                                                                                                                                                                                                                                                                       |
| <i>DG:VOL</i>        | Optional<br><br>These entries are created by default if the <code>dbed_vmchecksnap</code> command is run with the <code>-o setdefaults -m</code> option. These entries specify the mount path for the associated snapshot volumes when we perform a clone operation using <code>dbed_vmclondb</code> . The values for these fields can be left blank, if they are blank then the <code>-r relocate_path</code> needs to be specified when performing a <code>dbed_vmclondb</code> operation. |

When you first run `dbed_vmchecksnap`, use the `-o setdefaults` option to create a `snapplan` using default values for variables. You may then edit the file manually to set the variables for different snapshot scenarios.

Before creating a `snapplan`, make sure the following conditions have been met:

- Prerequisites
- Storage must be configured as specified:  
See [“Preparing hosts and storage for Database FlashSnap”](#) on page 184.
  - You must be the Oracle database administrator.
  - The disk group must be version 110 or later. For more information on disk group versions, see the `vxddg(1M)` manual page.
  - Be sure that a DCO and DCO volume are associated with the volume for which you are creating the snapshot.
  - Snapshot plexes and their associated DCO logs should be on different disks than the original plexes, and should be configured correctly for creating snapshots by the system administrator.
  - Persistent FastResync must be enabled on the existing database volumes and disks must be assigned for the snapshot volumes.
  - The database must be running in archive log mode. Archive log mode is set in the Oracle initialization parameter file.
  - The Oracle database must have at least one mandatory archive destination.
  - ORACLE\_HOME cannot reside on a disk which will be used for snapshot.
  - The Oracle database files and archive log files should use different volumes with unique disks in same disk group.
- Usage Notes
- If you are performing offhost processing, the snapplan should be created on the primary host.
  - After creating the snapplan using the `dbed_vmchecksnap` command, you can use a text editor to review and update the file, if necessary.
  - It is recommended that you create a local working directory to store your snapplans in.
  - See the `dbed_vmchecksnap(1M)` online manual page for more information.
  - If the `SNAPSHOT_MODE` for the database is set to online, the primary and secondary hosts can be the same.
  - If the `SNAPSHOT_MODE` is set to offline or instant, the primary and secondary hosts must be different.

### To create a snapplan

- 1 Perform the following steps as an Oracle database administrator.
- 2 Change directories to the working directory you want to store your snapplan in.

```
$ cd /working_directory
```

**3** Create a snapplan with default values using the `dbed_vmchecksnap` command:

```
$ /opt/VRTS/bin/dbed_vmchecksnap -S ORACLE_SID \  
-H ORACLE_HOME -f SNAPPLAN -o setdefaults -t host_name \  
[-p PLEX_TAG] [-m]
```

Example output for using `multi-dg` and for when you specify `-m` option for mapped mount point.

```
$ /opt/VRTS/bin/dbed_vmchecksnap -S slave -H $ORACLE_HOME \  
-f snapplan3 -o setdefaults -t mensa -m  
Snapplan snapplan3 for slave.  
=====
```

```
SNAPSHOT_VERSION=5.0  
PRIMARY_HOST=mensa.veritas.com  
SECONDARY_HOST=mensa  
PRIMARY_DG=archdg1:datadg1:datadg2  
ORACLE_SID=slave  
ARCHIVELOG_DEST=/standby/oraarch1_1/slave  
SNAPSHOT_ARCHIVE_LOG=yes  
SNAPSHOT_MODE=online  
SNAPSHOT_PLAN_FOR=database  
SNAPSHOT_PLEX_TAG=dbed_flashsnap  
SNAPSHOT_DG_PREFIX=SNAP_  
SNAPSHOT_VOL_PREFIX=SNAP_  
ALLOW_REVERSE_RESYNC=no  
SNAPSHOT_MIRROR=1  
archdg1:arch1vol1=  
datadg1:data1vol2=  
datadg1:data1vol1=  
datadg2:data1vol1=  
datadg2:data1vol2=
```

**4** Open the snapplan file in a text editor and modify it as needed.

**Example snapplans created for a snapshot image**

In this example, a snapplan, `snap1`, is created for a snapshot image in a same-node configuration and default values are set. The host is named `host1` and the working directory is `/export/snap_dir`.

The following is an example of the `dbed_vmchecksnap` command and sample output:



```
$ cd /export/snap_dir

$ $ /opt/VRTS/bin/dbed_vmchecksnap -S PROD \
-H /oracle/product/orahome -f snap1 -o setdefaults -t host1
```

Example output for a single disk group environment:

```
Snapplan snap1 for PROD.
=====
SNAPSHOT_VERSION=5.0
PRIMARY_HOST=host1
SECONDARY_HOST=host1
PRIMARY_DG=PRODdg
ORACLE_SID=PROD
ARCHIVELOG_DEST=/prod_ar
SNAPSHOT_ARCHIVE_LOG=yes
SNAPSHOT_MODE=online
SNAPSHOT_PLAN_FOR=database
SNAPSHOT_PLEX_TAG=dbed_flashsnap
SNAPSHOT_DG_PREFIX=SNAP_
SNAPSHOT_VOL_PREFIX=SNAP_
ALLOW_REVERSE_RESYNC=no
SNAPSHOT_MIRROR=1
```

Example output for an environment with multiple disk groups:

```
Snapplan snap1 for PROD.
=====
SNAPSHOT_VERSION=5.0
PRIMARY_HOST=host1
SECONDARY_HOST=host1
PRIMARY_DG=PRODdg1:PRODdg2
ORACLE_SID=PROD
ARCHIVELOG_DEST=/prod_ar
SNAPSHOT_ARCHIVE_LOG=yes
SNAPSHOT_MODE=online
SNAPSHOT_PLAN_FOR=database
SNAPSHOT_PLEX_TAG=dbed_flashsnap
SNAPSHOT_DG_PREFIX=SNAP_
SNAPSHOT_VOL_PREFIX=SNAP_
ALLOW_REVERSE_RESYNC=no
SNAPSHOT_MIRROR=1
```

In this second example, a snapplan, snap2, is created for a snapshot image in a two-node in the cluster configuration, and default values are set. The primary

host is host1, the secondary host is host2, and the working directory is /export/snap\_dir.

The following is an example of the `dbed_vmchecksnap` command and sample output:

```
$cd /export/snap_dir

$/opt/VRTS/bin/dbed_vmchecksnap -S PROD \
-H /oracle/product/orahome -f snap2 -o setdefaults -t host2
```

Example output for a single disk group environment:

```
Snapplan snap2 for PROD.
=====
SNAPSHOT_VERSION=5.0
PRIMARY_HOST=host1
SECONDARY_HOST=host2
PRIMARY_DG=PRODDG
ORACLE_SID=PROD
ARCHIVELOG_DEST=/mytest/arch
SNAPSHOT_ARCHIVE_LOG=yes
SNAPSHOT_MODE=online
SNAPSHOT_PLAN_FOR=database
SNAPSHOT_PLEX_TAG=dbed_flashsnap
SNAPSHOT_DG_PREFIX=SNAP
SNAPSHOT_VOL_PREFIX=SNAP_
ALLOW_REVERSE_RESYNC=no
SNAPSHOT_MIRROR=1
```

Example output for an environment with multiple disk groups:

```
Snapplan snap2 for PROD.
=====
SNAPSHOT_VERSION=5.0
PRIMARY_HOST=host1
SECONDARY_HOST=host2
PRIMARY_DG=PRODDG1:PRODDG2
ORACLE_SID=PROD
ARCHIVELOG_DEST=/mytest/arch
SNAPSHOT_ARCHIVE_LOG=yes
SNAPSHOT_MODE=online
SNAPSHOT_PLAN_FOR=database
SNAPSHOT_PLEX_TAG=dbed_flashsnap
SNAPSHOT_DG_PREFIX=SNAP
```

```
SNAPSHOT_VOL_PREFIX=SNAP_
ALLOW_REVERSE_RESYNC=no
SNAPSHOT_MIRROR=1
```

By default, a snapplan's `SNAPSHOT_PLEX_TAG` value is set as `dbed_flashsnap`. You can use the `-p` option to assign a different tag name. Make use of the `-p` option when creating the snapplan with the `setdefaults` option.

In the following example, the `-p` option is used with `setdefaults` to assign `my_tag` as the `SNAPSHOT_PLEX_TAG` value.

```
$ dbed_vmchecksnap -S PROD -H $ORACLE_HOME -o setdefaults \
-p my_tag -f snap1 -t host2
```

Example output for a single disk group environment:

```
Snapplan snap1 for PROD
=====
SNAPSHOT_VERSION=5.0
PRIMARY_HOST=host1
SECONDARY_HOST=host2
PRIMARY_DG=PRODDG
ORACLE_SID=PROD
ARCHIVELOG_DEST=/arch_data
SNAPSHOT_ARCHIVE_LOG=yes
SNAPSHOT_MODE=online
SNAPSHOT_PLAN_FOR=database
SNAPSHOT_PLEX_TAG=my_tag
SNAPSHOT_DG_PREFIX=SNAP
SNAPSHOT_VOL_PREFIX=SNAP_
ALLOW_REVERSE_RESYNC=no
SNAPSHOT_MIRROR=1
```

Example output for an environment with multiple disk groups:

```
Snapplan snap1 for PROD
=====
SNAPSHOT_VERSION=5.0
PRIMARY_HOST=host1
SECONDARY_HOST=host2
PRIMARY_DG=PRODDG1:PRODDG2
ORACLE_SID=PROD
ARCHIVELOG_DEST=/arch_data
SNAPSHOT_ARCHIVE_LOG=yes
SNAPSHOT_MODE=online
```

```
SNAPSHOT_PLAN_FOR=database
SNAPSHOT_PLEX_TAG=my_tag
SNAPSHOT_DG_PREFIX=SNAP
SNAPSHOT_VOL_PREFIX=SNAP_
ALLOW_REVERSE_RESYNC=no
SNAPSHOT_MIRROR=1
```

## Example for creating a snapplan with mapped mount option enabled

Example for creating a snapplan with mapped mount option enabled.

```
$/opt/VRTS/bin/dbed_vmchecksnap -S PROD \  
  -H /oracle/product/orahome -f snap2 -o setdefaults -t host2 -m  
Snapplan snap2 for PROD.  
=====
```

```
SNAPSHOT_VERSION=5.0  
PRIMARY_HOST=host1  
SECONDARY_HOST=host2  
PRIMARY_DG=PRODdg  
SNAPSHOT_DG=SNAP_PRODdg  
ORACLE_SID=PROD  
ARCHIVELOG_DEST=/mytest/arch  
SNAPSHOT_ARCHIVE_LOG=yes  
SNAPSHOT_MODE=online  
SNAPSHOT_PLAN_FOR=database  
SNAPSHOT_PLEX_TAG=dbed_flashsnap  
SNAPSHOT_VOL_PREFIX=SNAP_  
ALLOW_REVERSE_RESYNC=no  
SNAPSHOT_MIRROR=1  
PRODdg:data_vol=/tmp/datadst  
PRODdg:arch_vol=/tmp/archdst
```

Example output for an environment when -m option is used in dbed\_vmchecksnap  
:

```
$/opt/VRTS/bin/dbed_vmchecksnap -S slave -H $ORACLE_HOME \  
-f snapplan3 -o setdefaults -t mensa -m  
  
Snapplan snapplan3 for slave.  
=====
```

```
SNAPSHOT_VERSION=5.0  
PRIMARY_HOST=mensa  
SECONDARY_HOST=mensa
```

```
PRIMARY_DG=archdg1:datadg1:datadg2
ORACLE_SID=slave
ARCHIVELOG_DEST=/oraarch1_1/slave
SNAPSHOT_ARCHIVE_LOG=yes
SNAPSHOT_MODE=online
SNAPSHOT_PLAN_FOR=database
SNAPSHOT_PLEX_TAG=dbed_flashsnap
SNAPSHOT_DG_PREFIX=SNAP_
SNAPSHOT_VOL_PREFIX=SNAP_
ALLOW_REVERSE_RESYNC=no
SNAPSHOT_MIRROR=1
archdg1:arch1vol1=
datadg1:data1vol2=
datadg1:data1vol1=
datadg2:data1vol1=
datadg2:data1vol2=
```

Edit the snapplan and add the mountpoints to the *dg:volume* pairs before you validate the snapplan. The mountpoints entered would be the location where the clone database would be mounted after a `dbed_vmclonedb` operation.

## Creating multi-mirror snapshots

To make the Database Snapshots highly available, the snapped snapshot volume should contain more than one mirror. This makes the snapshot volumes available even if one of the mirrors becomes disabled. Snapshot volumes can be mounted and the entire database snapshot is usable even if one of the mirrors becomes disabled. The multi-mirror snapshots are enabled by `SNAPSHOT_MIRROR=<n>` in the snapplan.

---

**Note:** There are no changes to the Command Line usage or arguments for the Flashsnap tools.

---

Before taking the snapshot, make sure all tagged snapshot mirrors are in SNAPDONE state.

For information about snapshot mirrors, refer to the *Veritas Storage Foundation Administrator's Guide*.

## Validating a snapplan (dbed\_vmchecksnap)

After creating a snapplan, the next steps are to validate the snapplan parameters and check whether the snapshot volumes have been configured correctly for

creating snapshots. If validation is successful, the snapplan is copied to the repository. The snapplan is validated using the `dbed_vmchecksnap` command with the `-o validate` option.

Consider the following prerequisites and notes before validating a snapplan:

- |               |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
|---------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Prerequisites | ■ The database must be up and running while executing the <code>dbed_vmchecksnap</code> command.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| Usage Notes   | ■ The <code>dbed_vmchecksnap</code> command must be run as the Oracle database administrator.<br>■ On AIX:<br>The default behavior is to force validation. Use the <code>-n</code> option if you want to skip validation.<br>■ When using <code>dbed_vmchecksnap -o validate</code> to validate the snapplan and storage, you can save the validation output. The system administrator can use this information to adjust the storage setup if the validation fails.<br>■ If a snapplan is updated or modified, you must re-validate it. It is recommended that snapplans are revalidated when changes are made in the database disk group.<br>■ See the <code>dbed_vmchecksnap(1M)</code> manual page for more information. |

---

**Note:** You must issue commands as an Oracle database administrator in the following procedure.

---

### To validate a snapplan

- 1 Change directories to the working directory your snapplan is stored in:

```
$ cd /working_directory
```

- 2 Validate the snapplan using the `dbed_vmchecksnap` command:

```
$ /opt/VRTS/bin/dbed_vmchecksnap -S ORACLE_SID \  
-H ORACLE_HOME -f SNAPPLAN -o validate
```

### Example to validate snapplan snap1 for a snapshot image

In the following example, a snapplan, `snap1`, is validated for a snapshot image in a same-node configuration. The primary host is `host1` and the working directory is `/export/snap_dir`. Commands are issued as an Oracle database administrator.

The following is an example of the `dbed_vmchecksnap` command and sample output:

```
$ cd /export/snap_dir
$ /opt/VRTS/bin/dbed_vmchecksnap -S PROD -H /oracle/product/orahome \
-f snap1 -o validate
```

Example output for a single disk group environment:

```
PRIMARY_HOST is host1
SECONDARY_HOST is host1
The version of PRIMARY_DG-PRODDg is 160.
The primary diskgroup PRODDg is a shared disk group
SNAPSHOT_DG is SNAP_PRODDg

SNAPSHOT_MODE is online

The database is running in archivelog mode.

ARCHIVELOG_DEST is /prod_ar
SNAPSHOT_PLAN_FOR is database
SNAPSHOT_ARCHIVE_LOG is yes
ARCHIVELOG_DEST=/prod_ar is mount on /dev/vx/dsk/PRODDg/prod_ar.
```

Examining Oracle volume and disk layout for snapshot

```
Volume prod_db on PRODDg is ready for snapshot.
Original plex and DCO log for prod_db is on PRODDg01.
Snapshot plex and DCO log for prod_db is on PRODDg02.
SNAP_PRODDg for snapshot will include: PRODDg02
ALLOW_REVERSE_RESYNC is no
```

The snapplan `snap1` has been created.

Example output for an environment with multiple disk groups:

```
PRIMARY_HOST is host1
SECONDARY_HOST is host1
The version of PRIMARY_DG-PRODDg1 is 160.
SNAPSHOT_DG is SNAP_PRODDg1
The version of PRIMARY_DG-PRODDg2 is 160.
SNAPSHOT_DG is SNAP_PRODDg2
SNAPSHOT_MODE is online
The database is running in archivelog mode.
ARCHIVELOG_DEST is /archvol
```

```
SNAPSHOT_PLAN_FOR is database
SNAPSHOT_ARCHIVE_LOG is yes
ARCHIVELOG_DEST=/archvol is mount on /dev/vx/dsk/archdgv/archvol.
Examining Oracle volume and disk layout for snapshot.
Volume prodvol1 on PRODDg1 is ready for snapshot.
Original plex and DCO log for prodvol1 is on PRODDisk11.
Snapshot plex and DCO log for prodvol1 is on PRODDisk12.
SNAP_PRODDg1 for snapshot will include: PRODDisk11 PRODDisk12
Examining Oracle volume and disk layout for snapshot.
Volume prodvol2 on PRODDg2 is ready for snapshot.
Original plex and DCO log for prodvol2 is on PRODDisk21.
Snapshot plex and DCO log for prodvol2 is on PRODDisk22.
SNAP_PRODDg2 for snapshot will include: PRODDisk21 PRODDisk22
ALLOW_REVERSE_RESYNC is no
The snapplan snap1 has been created.
```

In the following example, a snapplan, snap2, is validated for a snapshot image in an off-host configuration. The primary host is host1, the secondary host is host2, and the working directory is /export/snap\_dir.

The following is an example of the `dbed_vmchecksnap` command and sample output:

```
$ cd /export/snap_dir
$ /opt/VRTS/bin/dbed_vmchecksnap -S PROD -H \
/oracle/product/orahome -f snap2 -o validate
```

Example output for a single disk group environment:

```
PRIMARY_HOST is host1
SECONDARY_HOST is host2
The version of PRIMARY_DG-PRODDg is 160.
The primary diskgroup PRODDg is a shared disk group
SNAPSHOT_DG is SNAP_PRODDg
SNAPSHOT_MODE is online
```

The database is running in archivelog mode.

```
ARCHIVELOG_DEST is /mytest/arch
SNAPSHOT_PLAN_FOR is database
SNAPSHOT_ARCHIVE_LOG is yes
ARCHIVELOG_DEST=/mytest/arch is mount on
/dev/vx/dsk/PRODDg/arch.
```

Examining Oracle volume and disk layout for snapshot.



```
Volume arch on PRODDg is ready for snapshot.  
Original plex and DCO log for arch is on PRODDg01.  
Snapshot plex and DCO log for arch is on PRODDg02.
```

```
Volume prod_db on PRODDg is ready for snapshot.  
Original plex and DCO log for prod_db is on PRODDg01.  
Snapshot plex and DCO log for prod_db is on PRODDg04.
```

```
SNAP_PRODDg for snapshot will include: PRODDg02
```

```
ALLOW_REVERSE_RESYNC is no
```

```
The snapplan snap2 has been created.
```

### Example output for an environment with multiple disk groups:

```
PRIMARY_HOST is host1  
SECONDARY_HOST is host2  
The version of PRIMARY_DG-PRODDg1 is 16.  
SNAPSHOT_DG is SNAP_PRODDg1  
The version of SECONDARY_DG-PRODDg2 is 160.  
SNAPSHOT_DG is SNAP_PRODDg2  
SNAPSHOT_MODE is online  
The database is running in archivelog mode.  
ARCHIVELOG_DEST is /archvol  
SNAPSHOT_PLAN_FOR is database  
SNAPSHOT_ARCHIVE_LOG is yes  
ARCHIVELOG_DEST=/archvol is mount on /dev/vx/dsk/archdg/archvol.  
Examining Oracle volume and disk layout for snapshot.  
Volume prodvol1 on PRODDg1 is ready for snapshot.  
Original plex and DCO log for prodvol1 is on PRODDisk11.  
Snapshot plex and DCO log for prodvol1 is on PRODDisk12.  
SNAP_PRODDg1 for snapshot will include: PRODDisk11 PRODDisk12  
Examining Oracle volume and disk layout for snapshot.  
Volume prodvol2 on PRODDg2 is ready for snapshot.  
Original plex and DCO log for prodvol2 is on PRODDisk21.  
Snapshot plex and DCO log for prodvol2 is on PRODDisk22.  
SNAP_PRODDg2 for snapshot will include: PRODDisk21 PRODDisk22  
ALLOW_REVERSE_RESYNC is no  
The snapplan snap1 has been created.
```

## Displaying, copying, and removing a snapplan (dbed\_vmchecksnap)

Consider the following usage notes before listing all snapplans for a specific Oracle database, displaying a snapplan file, or copying and removing snapplans.

- Usage Notes
- If the local snapplan is updated or modified, you must revalidate it.
  - If the database schema or disk group is modified, you must revalidate it after running `dbed_update`.

### Displaying a snapplan

You can use the `dbed_vmchecksnap` command to list all available snapplans and to display detailed information for a particular snapplan.

#### To list all available snapplans for a specific Oracle database

- ◆ Use the `dbed_vmchecksnap` command as follows:

```
$ /opt/VRTS/bin/dbed_vmchecksnap -S ORACLE_SID -o list
```

In the following example, all available snapplans are listed for the database PROD.

```
$ /opt/VRTS/bin/dbed_vmchecksnap -S PROD -o list
```

The following snapplan(s) are available for PROD:

| SNAP_PLAN | SNAP_STATUS | DB_STATUS | SNAP_READY |
|-----------|-------------|-----------|------------|
| snap1     | init_full   | init      | yes        |
| snap2     | init_full   | init      | yes        |

The command output displays all available snapplans, their snapshot status (SNAP\_STATUS), database status (DB\_STATUS), and whether a snapshot may be taken (SNAP\_READY).

For Database FlashSnap status information:

See [“About Database FlashSnap status information”](#) on page 507.

## To display detailed information for a snapplan

- ◆ Use the `dbed_vmchecksnap` command as follows:

```
$ /opt/VRTS/bin/dbed_vmchecksnap -S \  
ORACLE_SID -f SNAPPLAN -o list
```

In the following example, the snapplan `snap1` is displayed.

```
$ /opt/VRTS/bin/dbed_vmchecksnap -S PROD -f snap1 -o list  
  
SNAPSHOT_VERSION=5.0  
PRIMARY_HOST=host1  
SECONDARY_HOST=host1  
SNAPSHOT_DG_PREFIX=SNAP_  
ORACLE_SID=PROD  
ARCHIVELOG_DEST=/prod_ar  
SNAPSHOT_ARCHIVE_LOG=yes  
SNAPSHOT_MODE=online  
SNAPSHOT_PLAN_FOR=database  
SNAPSHOT_PLEX_TAG=dbed_flashsnap  
SNAPSHOT_VOL_PREFIX=SNAP_  
ALLOW_REVERSE_RESYNC=no  
SNAPSHOT_MIRROR=1  
  
STORAGE_INFO  
PRODdg02  
SNAP_PLEX=prod_ar-02  
STATUS_INFO  
SNAP_STATUS=init_full  
DB_STATUS=init
```

## Copying a snapplan

If you want to create a snapplan similar to an existing snapplan, you can simply create a copy of the existing snapplan and modify it. To copy a snapplan from the SFDB repository to your current directory, the snapplan must not already be present in the current directory.

### To copy a snapplan from the SFDB repository to your current directory

- ◆ Use the `dbed_vmchecksnap` command as follows:

```
$ /opt/VRTS/bin/dbed_vmchecksnap -S ORACLE_SID \  
-f SNAPPLAN -o copy
```

In the following example, the snapplan, `snap1`, is copied from the VxDBA repository to the current directory.

```
$ /opt/VRTS/bin/dbed_vmchecksnap -S PROD -f snap1 -o copy  
Copying 'snap1' to '/export/snap_dir'
```

### Removing a snapplan

A snapplan can be removed from a local directory or repository if the snapplan is no longer needed.

#### To remove a snapplan from the SFDB repository

- ◆ Use the `dbed_vmchecksnap` command as follows:

```
$ /opt/VRTS/bin/dbed_vmchecksnap -S ORACLE_SID -f\  
SNAPPLAN -o remove
```

In the following example, the snapplan, `snap1`, is removed from the SFDB repository.

```
$ /opt/VRTS/bin/dbed_vmchecksnap -S PROD -f snap1 -o remove  
The snapplan snap1 has been removed.
```

## Creating a snapshot (`dbed_vmsnap`)

The `dbed_vmsnap` command creates a snapshot of an Oracle database by splitting the mirror volumes used by the database into a snapshot database. You can use the snapshot image on either the same host as the database or on a secondary host provided storage is shared by the two hosts.

The snapshot image created by `dbed_vmsnap` is a frozen image of an Oracle database's datafiles. The `dbed_vmsnap` command ensures that a backup control file is created when the snapshot database is created, which allows for complete data recovery, if needed.

For Database FlashSnap status information:

See “[About Database FlashSnap status information](#)” on page 507.

- |               |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
|---------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Prerequisites | <ul style="list-style-type: none"><li>■ You must be logged in as the Oracle database administrator.</li><li>■ You must create and validate a snapplan using <code>dbed_vmchecksnap</code> before you can create a snapshot image with <code>dbed_vmsnap</code>.</li></ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| Usage Notes   | <ul style="list-style-type: none"><li>■ If you are performing offhost processing, you should use the <code>dbed_vmsnap</code> command on the primary host.</li><li>■ Do not share volumes between Oracle database files and other software.</li><li>■ When creating a snapshot volume, create the snapshot on a separate controller and on separate disks from the primary volume.</li><li>■ Make sure your archive log destination is separate from your Oracle database volumes.</li><li>■ Do not place any datafiles, including control files, in the <code>\$ORACLE_HOME/dbs</code> directory.</li><li>■ Resynchronization speed varies based on the amount of data changed in both the primary and secondary volumes when the mirror is broken off.</li><li>■ See the <code>dbed_vmsnap (1M)</code> manual page for more information.</li></ul> |

Note the following points:

- To force snapshot creation, use the `-F` option. The `-F` option can be used after a snapshot operation has failed and the problem was fixed without using SFDB commands. (That is, the volumes were synchronized using VxVM commands.) In this situation, the status of the snapplan will appear as unavailable for creating a snapshot. The `-F` option ignores the unavailable status, checks for the availability of volumes, and creates the snapshot after the volumes pass the availability check.
- After the snapshot is created, `dbed_vmsnap` returns values you will need to run `dbed_vmclonedb`. These values include the snapshot disk group, the snapplan name, and the SFDB repository volume for an off-host configuration. Make a note of these values so you have them when running `dbed_vmclonedb`.
- You can also use the command `dbed_vmchecksnap -f snapplan -o list` to access the information regarding the snapshot disk group, the snapplan name, and the SFDB repository.

---

**Note:** You must issue commands as an Oracle database administrator in the following procedure.

---

### To create a snapshot

- 1 Change directories to the working directory in which your snapplan is stored:

```
$ cd /working_directory
```

- 2 If SNAPSHOT\_MODE is set to offline in the snapplan, shut down the database.
- 3 Create the snapshot image using the `dbed_vmsnap` command.

```
$ /opt/VRTS/bin/dbed_vmsnap -S ORACLE_SID -f SNAPPLAN \  
-o snapshot
```

```
$ /opt/VRTS/bin/dbed_vmsnap -S ORACLE_SID -f SNAPPLAN \  
-o snapshot [-F]
```

```
$ /opt/VRTS/bin/dbed_vmsnap -S ORACLE_SID -f SNAPPLAN \  
-o snapshot
```

```
$ /opt/VRTS/bin/dbed_vmsnap -S ORACLE_SID -f SNAPPLAN \  
-o snapshot [-F]
```

The snapshot volumes now represent a consistent backup copy of the database. You can backup the database by copying the snapshot volumes to tape or other backup media.

See “[Backing up the database from snapshot volumes \(dbed\\_vmclonedb\)](#)” on page 432.

- 4 You can also create another Oracle database for decision-support purposes. See “[Cloning a database \(dbed\\_vmclonedb\)](#)” on page 435.

### Example to create a snapshot image of the database PROD

In this example, a snapshot image of the database, PROD, is created for a same-node configuration. In this case, the `SECONDARY_HOST` parameter is set the same as the `PRIMARY_HOST` parameter in the snapplan.

---

**Note:** You must issue commands as an Oracle database administrator in the following procedure.

---

```
$ /opt/VRTS/bin/dbed_vmsnap -S PROD -f snap1 -o snapshot
```

```
dbed_vmsnap started at 2006-03-02 14:15:27  
VxDBA repository is up to date.  
The database is running in archivelog mode.  
A snapshot of ORACLE_SID PROD is in DG SNAP_PRODDg.  
Snapplan snap1 is used for the snapshot.
```

If `-r <relocate_path>` is used in `dbed_vmclonedb`, make sure `<relocate_path>` is created and owned by Oracle DBA. Otherwise, the following mount points need to be created and owned by Oracle DBA:

```
    /prod_db.  
    /prod_ar.
```

```
dbed_vmsnap ended at 2006-03-02 14:16:11
```

In this example, a snapshot image of the primary database, PROD, is created for an off-host configuration. In this case, the `SECONDARY_HOST` parameter specifies a different host name than the `PRIMARY_HOST` parameter in the snapplan.

```
$ /opt/VRTS/bin/dbed_vmsnap -S PROD -f snap2 -o snapshot
```

```
dbed_vmsnap started at 2005-03-02 23:01:10  
VxDBA repository is up to date.  
The database is running in archivelog mode.  
A snapshot of ORACLE_SID PROD is in DG SNAP_PRODDg.  
Snapplan snap2 is used for the snapshot.  
VxDBA repository volume is SNAP_arch.
```

If `-r <relocate_path>` is used in `dbed_vmclonedb`, make sure `<relocate_path>` is created and owned by Oracle DBA. Otherwise, the following mount points need to be created and owned by

Oracle DBA:

```
    /prod_db.  
    /prod_ar.
```

```
dbed_vmsnap ended at 2005-03-02 23:02:58
```


## Backing up the database from snapshot volumes (dbed\_vmclonedb)

Snapshots are most commonly used as a source for backing up a database. The advantage of using snapshot volumes is that the backup will not contest the I/O bandwidth of the physical devices. Making the snapshot volumes available on a secondary host will eliminate the extra loads put on processors and I/O adapters by the backup process on the primary host.

A clone database can also serve as a valid backup of the primary database. You can back up the primary database to tape using snapshot volumes.

Figure 33-7 shows a typical configuration when snapshot volumes are used on a secondary host.

**Figure 33-7** Example system configuration for database backup on a secondary host

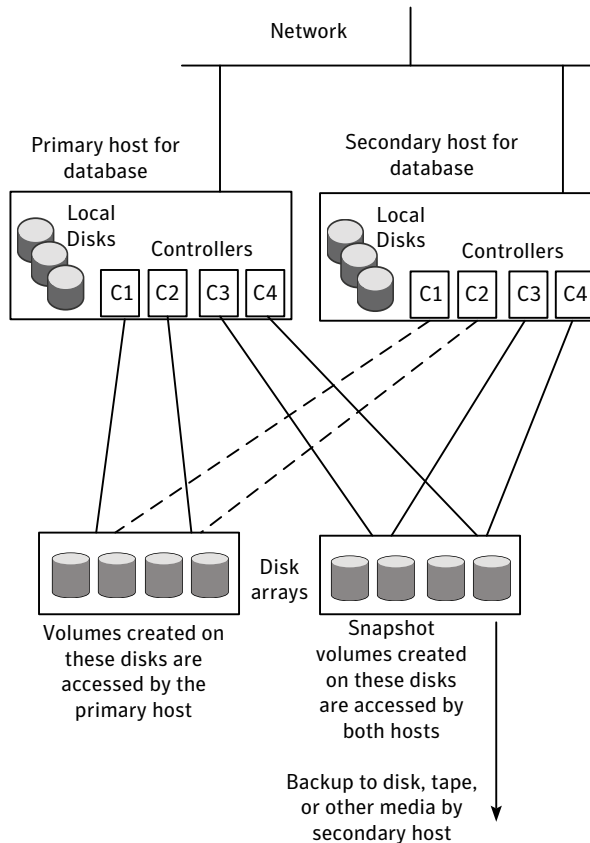



- Prerequisites
- You must be logged in as the Oracle database administrator to use `dbed_vmclonedb` command.
  - Before you can use the `dbed_vmclonedb` command, you must validate a snapplan and create a snapshot.  
See [“Backing up the database from snapshot volumes \(dbed\\_vmclonedb\)”](#) on page 432.  
See [“Validating a snapplan \(dbed\\_vmchecksnap\)”](#) on page 421.  
See [“Creating a snapshot \(dbed\\_vmsnap\)”](#) on page 428.
  - The volume snapshot must contain the entire database.
  - Before you can use the `dbed_vmclonedb` command with the `-r relocate_path` option (which specifies the initial mount point for the snapshot image), the system administrator must create the mount point and then change the owner to the Oracle database administrator.
- Usage Notes
- The `dbed_vmclonedb` command can be used on the secondary host.
  - In a same-node configuration, the primary and secondary hosts are the same.
  - In a same-node configuration, `-r relocate_path` is required if no mapped mounts were specified or some of the mapped mount entries were left blank in the snapplan.
  - See the `dbed_vmclonedb(1M)` manual page for more information.

## Mounting the snapshot volumes and backing up

Before using the snapshot volumes to do a backup, you must first mount them.

---

**Note:** You must issue commands as an Oracle database administrator in the following procedure.

---

---

**Note:** If you use the Oracle online backup method, you must also back up all the archived log files in order to do a complete restore and recovery of the database.

---

### To mount the snapshot volumes

- ◆ Use the `dbed_vmclonedb` command as follows:

```
$ /opt/VRTS/bin/dbed_vmclonedb -S ORACLE_SID \  
-o mount,new_sid=new_sid,server_name=svr_name \  
-f SNAPPLAN [-H ORACLE_HOME] \  
[-r relocate_path]
```

You can now back up an individual file or a group of files under a directory onto the backup media.

In this example, snapshot volumes are mounted.

```
$ /opt/VRTS/bin/dbed_vmclonedb -S PROD \  
-o mount,new_sid=NEWPROD,server_name=svr_name \  
-f snap1 -r /clone/single
```

```
dbed_vmclonedb started at 2010-06-21 23:03:47  
dbed_vmclonedb ended at 2010-06-21 23:04:23
```

The following is an example of creating a snapshot on the same host (host nobody):

```
$ /opt/VRTS/bin/dbed_vmclonedb -S PROD \  
-o mount,new_sid=NEWPROD,server_name=nobody -f snap1 \  
-r /clone/single
```

```
dbed_vmclonedb started at 2010-06-21 23:03:47  
dbed_vmclonedb ended at 2010-06-21 23:04:23
```

---

**Note:** A usage error is displayed if the `server_name` is not given in the above command.

---

### To mount a Storage Checkpoint carried over from the snapshot volumes to a secondary host

- 1 On the secondary host, list the Storage Checkpoints carried over from the primary database using the `dbed_ckptdisplay` command.

For example:

```
$ /opt/VRTS/bin/dbed_ckptdisplay -S ORACLE_SID -n
```

- 2 You can mount one of the listed Storage Checkpoints using the `dbed_ckptmount` command.

For example:

```
$ /opt/VRTS/bin/dbed_ckptmount -S ORACLE_SID -c CKPT_NAME \  
-m MOUNT_POINT
```

Note the following limitations:

- Any mounted Storage Checkpoints must be unmounted before running the following commands:

```
$ /opt/VRTS/bin/dbed_ckptmount -S ORACLE_SID -c CKPT_NAME
```

- It is only possible to mount a Storage Checkpoint carried over with the snapshot volumes in an off-host configuration if the snapshot volumes were mounted with the `dbed_vmclonedb` command with the `-o mount` option without the use of `-r relocate_path`.
- Storage Checkpoints carried over with the snapshot volumes can be mounted before a clone database is created using `dbed_vmclonedb` with the `-o mount` option. After a clone database is created using `dbed_vmclonedb` with the `-o recoverdb` option, however, Storage Checkpoints are no longer present.

#### To back up the database using the snapshot

- ◆ Copy the snapshot volumes to tape or other appropriate backup media.

## Restoring from backup

For single instance Oracle environments, backup copies are used to restore volumes lost due to disk failure, or data destroyed due to human error. If a volume's data is corrupted and you know that you need to restore it from backup, you can use Database FlashSnap's reverse resynchronization function to restore the database.

## Cloning a database (dbed\_vmclonedb)

The SFDB commands enable you to create a clone database using snapshot volumes. You can use snapshots of a primary database to create a clone of the database at a given point in time. You can then implement decision-support analysis and report generation operations that take their data from the database

clone rather than from the primary database to avoid introducing additional burdens on the production database.

A clone database can also serve as a valid backup of the primary database.

See [“Backing up the database from snapshot volumes \(dbed\\_vmclonedb\)”](#) on page 432.

You can also back up the primary database to tape using snapshot volumes.

The resynchronization functionality of Database FlashSnap allows you to quickly refresh the clone database with up-to-date information from the primary database. Reducing the time taken to update decision-support data also lets you generate analysis reports more frequently.

## Using Database FlashSnap to clone a database

In a same-node configuration, the `dbed_vmclonedb` command creates a clone database on the same host. The command can also be used to shut down the clone database and unmount its file systems. When creating or unmounting the clone database in a same-node configuration, `-r relocate_path` is required so that the clone database’s file systems use different mount points than those used by the primary database.

When used in an off-host configuration, the `dbed_vmclonedb` command imports the snapshot disk groups, mounts the file systems on the snapshot, and starts a clone database. It can also reverse the process by shutting down the clone database, unmounting the file systems, and deporting the snapshot disk group.

---

**Warning:** When creating a clone database, all Storage Checkpoints in the original database are discarded.

---

- Prerequisites
- You must be logged in as the Oracle database administrator.
  - Before you can use the `dbed_vmclonedb` command, you must validate a snapplan and create a snapshot.  
See [“About creating database snapshots”](#) on page 400.  
See [“Validating a snapplan \(dbed\\_vmchecksnap\)”](#) on page 421.  
See [“Creating a snapshot \(dbed\\_vmsnap\)”](#) on page 428.
  - The volume snapshot must contain the entire database.
  - The system administrator must provide the database administrator with access to the necessary volumes and mount points.
  - Before you can use the `dbed_vmclonedb` command with the `-r relocate_path` option (which specifies the initial mount point for the snapshot image), the system administrator must create the mount point and then change the owner to the Oracle database administrator.
  - The Oracle database must have at least one mandatory archive destination.
  - In case of mapped mounts, the mapped mount points need to be created by the System Administrator.
- Usage Notes
- The `dbed_vmclonedb` command can be used on the secondary host.
  - In a same-node configuration, `-r relocate_path` is required if no mapped mounts were specified or some of the mapped mount entries were left blank in the snapplan.
  - The initialization parameters for the clone database are copied from the primary database. This means that the clone database takes up the same memory and machine resources as the primary database. If you want to reduce the memory requirements for the clone database, shut down the clone database and then start it up again using a different `init.ora` file that has reduced memory requirements. If the host where `dbed_vmclonedb` is run has little available memory, you may not be able to start up the clone database and the cloning operation may fail.
  - See the `dbed_vmclonedb(1M)` manual page for more information.

---

**Note:** You must issue commands as an Oracle database administrator in the following procedure.

---

## To mount a database and recover it manually

### 1 Start and mount the clone database to allow manual database recovery:

```
dbed_vmclonedb started at 2010-04-29 02:21:57
Editing remote_login_passwordfile in initclons1.ora.
All redo-log files found.
Altering instance_name parameter in initclons1.ora.
Altering instance_number parameter in initclons1.ora.
Altering thread parameter in initclons1.ora.
Database CLONS1 (SID=clons1) is in recovery mode.
```

If the database clons1 is recovered manually, you must run  
dbed\_vmclonedb -o update\_status to change the snapshot status.  
dbed\_vmclonedb ended at 2010-04-29 02:25:28

### 2 Follow the Oracle recovery procedure to recover the database manually.

### 3 Update the snapshot status information for the clone database in the SFDB repository:

```
The output displayed is :
dbed_vmclonedb started at 2006-03-02 15:35:16
The snapshot status has been updated.
dbed_vmclonedb ended at 2006-03-02 15:35:42
```

## Example: Mounting the file systems without bringing up the clone database

In this example, file systems are mounted without bringing up the clone database. The clone database must be manually created and recovered before it can be used. This example is for a clone created on the same host as the primary database.

---

**Note:** You must issue commands as an Oracle database administrator in the following procedure.

---

```
$ /opt/VRTS/bin/dbed_vmclonedb -S FLAS11r2 \  
-o mountdb,new_sid=clone1,server_name=notmot -f snap1 \  
-r /cudb
```

```
dbed_vmclonedb started at 2010-06-22 00:11:45
Editing remote_login_passwordfile in initclone1.ora.
All redo-log files found.
Altering instance_name parameter in initclone1.ora.
Altering instance_number parameter in initclone1.ora.
```

```
Altering thread parameter in initclone1.ora.
Database CLONE1 (SID=clone1) is in recovery mode.
```

```
If the database clone1 is recovered manually, you must run
dbed_vmclonedb -o update_status to change the snapshot status.
dbed_vmclonedb ended at 2010-06-22 00:13:19
```

The database status (database\_recovered) needs to be updated for a clone database on the primary host after manual recovery has been completed.

```
$ /opt/VRTS/bin/dbed_vmclonedb -o update_status, \
  new_sid=NEWPROD,server_name=svr_name -f snap1 -r /clone
```

```
dbed_vmclonedb started at 2006-03-02 15:35:16
The snapshot status has been updated.
dbed_vmclonedb ended at 2006-03-02 15:35:42
```

### To clone the database automatically

- ◆ Use the `dbed_vmclonedb` command as follows:

```
$ /opt/VRTS/bin/dbed_vmclonedb -S ORACLE_SID \
  -o recoverdb,new_sid=new_sid,server_name=svr_name -f SNAPPLAN \
  [-H ORACLE_HOME] [-r relocate_path]
```

Where:

|               |                                                                         |
|---------------|-------------------------------------------------------------------------|
| ORACLE_SID    | Represents the name of the Oracle database used to create the snapshot. |
| new_sid       | Specifies the ORACLE_SID for the clone database.                        |
| server_name   | Specifies the server name as svr_name.                                  |
| SNAPPLAN      | Represents the name of the snapplan file.                               |
| ORACLE_HOME   | Represents the ORACLE_HOME setting for the ORACLE_SID database.         |
| relocate_path | Represents the name of the initial mount point for the snapshot image.  |

When cloning a database on a secondary host, ensure that PRIMARY\_HOST and SECONDARY\_HOST parameters in the snapplan file are different.

When the `-o recoverdb` option is used with `dbed_vmclonedb`, the clone database is recovered automatically using all available archive logs. If the `-o`

`recoverdb` option is not used, you can perform point-in-time recovery manually.

In the following example, a clone of the primary database is automatically created on the same host as the primary database.

```
$ /opt/VRTS/bin/dbed_vmclonedb -S FLAS11r2 \  
-o recoverdb,new_sid=clone1,server_name=notmot.veritas.com -f snap1 \  
-r /cudb
```

```
USERNAME: orallgr2  
STDOUT:  
dbed_vmclonedb started at 2010-06-21 23:43:02  
Editing remote_login_passwordfile in initclone1.ora.  
All redo-log files found.  
Altering instance_name parameter in initclone1.ora.  
Altering instance_number parameter in initclone1.ora.  
Altering thread parameter in initclone1.ora.  
Database CLONE1 (SID=clone1) is running.  
dbed_vmclonedb ended at 2010-06-21 23:47:44
```

In the following example, a clone of the primary database is automatically created on a secondary host.

```
$ /opt/VRTS/bin/dbed_vmclonedb -S FLAS11r2 \  
-o recoverdb,new_sid=clone1,server_name=notmot.veritas.com \  
-f snap1 -r /cudb
```

```
USERNAME: orallgr2  
STDOUT:  
dbed_vmclonedb started at 2010-06-21 23:43:02  
Editing remote_login_passwordfile in initclone1.ora.  
All redo-log files found.  
Altering instance_name parameter in initclone1.ora.  
Altering instance_number parameter in initclone1.ora.  
Altering thread parameter in initclone1.ora.  
Database CLONE1 (SID=clone1) is running.  
dbed_vmclonedb ended at 2010-06-21 23:47:44
```

In the following example, a clone of the primary database is automatically created using mapped mounts. The Primary database mount points are located at `/prod_db` and `/prod_ar` these were specified in the snapplan to be mapped to `/tmp/datadst` and `/tmp/archdst`.

```
$/opt/VRTS/bin/dbed_vmclonedb -S PROD \  
-o recoverdb,new_sid=NEWPROD,server_name=svr_name -f snap1
```



```
dbed_vmclonedb started at 2009-08-01 16:12:00
/prod_db should have been mapped to /tmp/datadst and
/prod_ar should have been mapped to /tmp/archdst
Editing remote_login_passwordfile in initcl2.ora.
All redo-log files found.
Altering instance_name parameter in initcl2.ora.
Altering instance_number parameter in initcl2.ora.
Altering thread parameter in initcl2.ora.
Database NEWPROD (SID=NEWPROD) is running.
dbed_vmclonedb ended at 2009-08-01 16:15:05
```

## Shutting down the clone database and unmounting file systems

When you are done using the clone database, you can shut it down and unmount all snapshot file systems with the `dbed_vmclonedb -o umount` command. If the clone database is used on a secondary host that has shared disks with the primary host, the `-o umount` option also deports the snapshot disk group.

---

**Note:** Any mounted Storage Checkpoints mounted need to be unmounted before running `dbed_vmclonedb -o umount`.

---

### To shut down the clone database and unmount all snapshot file systems

- ◆ Use the `dbed_vmclonedb` command as follows:

```
$ /opt/VRTS/bin/dbed_vmclonedb \  
-o umount,new_sid=NEWPROD,server_name=svr_name -f snap1 -r /clone  
dbed_vmclonedb started at 2006-03-02 15:11:22  
umounting /clone/prod_db  
umounting /clone/arch  
dbed_vmclonedb ended at 2006-03-02 15:11:47
```

In this example output, the clone database is shut down, file systems are unmounted, and the snapshot disk group is deported for a clone on a secondary host ( two node configuration).

```
$ /opt/VRTS/bin/dbed_vmclonedb \  
-o umount,new_sid=NEWPROD,server_name=svr_name -f snap2  
dbed_vmclonedb started at 2006-03-09 23:09:21  
Umounting /prod_db  
Umounting /arch  
dbed_vmclonedb ended at 2006-03-09 23:09:50
```

In the following example output, the clone database is shutdown and the file systems are unmounted for a clone created using mapped mounts.

```
dbed_vmclonedb -o umount,new_sid=NEWPROD,server_name=svr_name \  
-f snap1  
dbed_vmclonedb started at 2009-08-01 16:25:52  
Umounting /tmp/dadst.  
Umounting /tmp/ardst.  
dbed_vmclonedb ended at 2009-08-01 16:25:57
```

## Restarting a Clone Database

If the clone database is down as a result of using `dbed_vmclonedb -o umount` or rebooting the system, you can restart it with the `-o restartdb` option.

---

**Note:** This option can only be used when a clone database is created successfully. If the clone database is recovered manually, `-o update_status` must be run to update the status before `-o restartdb` will work.

---

## To start the clone database

- ◆ Use the `dbed_vmclonedb` command as follows:

```
$ /opt/VRTS/bin/dbed_vmclonedb -S ORACLE_SID \
-o restartdb,new_sid=new_sid,server_name=svr_name \
-f SNAPPLAN [-H ORACLE_HOME] \
[-r relocate_path]
```

In this example, the clone database is re-started on the same host as the primary database (same-node configuration).

```
$ /opt/VRTS/bin/dbed_vmclonedb -S FLAS11r2 \
-o restartdb,new_sid=clon1,server_name=motmot \
-f snap1 -r /cudb
```

```
dbed_vmclonedb started at 2010-06-21 23:54:04
Oracle instance clon1 successfully started.
dbed_vmclonedb ended at 2010-06-21 23:55:19
```

In this example, the clone database is re-started on the secondary host (two node configuration).

```
$ /opt/VRTS/bin/dbed_vmclonedb -S FLAS11r2 \
-o restartdb,new_sid=clon1,server_name=motmot \
-f snap1
```

```
dbed_vmclonedb started at 2010-06-17 00:43:42
Oracle instance clon1 successfully started.
dbed_vmclonedb ended at 2010-06-17 00:44:59
```

## Recreating Oracle tempfiles

After a clone database is created and opened, the tempfiles are added if they were residing on the snapshot volumes. If the tempfiles were not residing on the same file systems as the datafiles, `dbed_vmsnap` does not include the underlying volumes in the snapshot. In this situation, `dbed_vmclonedb` issues a warning message and you can then recreate any needed tempfiles on the clone database as described in the following procedure.

### To recreate the Oracle tempfiles

- 1 If the tempfiles were not residing on the same file systems as the datafiles, the `dbed_vmclonedb` command displays WARNING and INFO messages similar to the following:

```
WARNING: Not all tempfiles were included in snapshot for
$ORACLE_SID, there is no snapshot volume for
/clone_path/temp02.dbf.
WARNING: Could not recreate tempfiles for $ORACLE_SID due to
lack of free space.INFO: The sql script for adding tempfiles to
$ORACLE_SID is at /tmp/add_tf.$ORACLE_SID.sql.
```

where `$ORACLE_SID` is the name of the clone database.

- 2 A script named `add_tf.$ORACLE_SID.sql` is provided in the `/tmp` directory for the purpose of recreating Oracle tempfiles. This script contains the SQL\*Plus commands to recreate the missing tempfiles.
- 3 Make a copy of the `/tmp/add_tf.$ORACLE_SID.sql` script and open it to view the list of missing tempfiles.

An example of the `add_tf.$ORACLE_SID.sql` script is shown below:

```
$ cat add_tf.mnt2.sql
-- Commands to add tempfiles to temporary tablespaces.
-- Online tempfiles have complete space information.
-- Other tempfiles may require adjustment.
ALTER TABLESPACE TEMP ADD TEMPFILE 'DBED:ADJUST_BEFORE_RUN/snap_data11r2/mnt2/temp01.dbf'
    SIZE 20971520 REUSE AUTOEXTEND ON NEXT 655360 MAXSIZE 32767M;
```

- 4 Evaluate whether you need to recreate any temp files. If you want to recreate tempfiles, proceed to the next step.
- 5 In the `add_tf.$ORACLE_SID.sql` file, edit the sizes and default path names of the tempfiles as needed to reside on cloned volumes configured for database storage.

---

**Warning:** Do not run the script without first editing it because path names may not exist and the specified mount points may not contain sufficient space.

---

- 6 After you have modified the `add_tf.$ORACLE_SID.sql` script, execute it against your clone database.
- 7 After you have successfully run the script, you may delete it.

## Resynchronizing the snapshot to your database

When you have finished using a clone database or want to refresh it, you can resynchronize it with the original database. This is also known as refreshing the snapshot volume or merging the split snapshot image back to the current database image. After resynchronizing, the snapshot can be retaken for backup or decision-support purposes.

When resynchronizing the data in a volume:

- Resynchronize the snapshot from the original volume. This procedure is explained in this section.
- Resynchronizing the original volume from the snapshot. This choice is known as reverse resynchronization. Reverse resynchronization may be necessary to restore a corrupted database and is usually much quicker than using alternative approaches such as full restoration from backup media.

---

**Note:** The reverse resynchronization option is not available for Oracle RAC environments.

---

You can resynchronize the snapshot from the original volume.

- |               |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
|---------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Prerequisites | <ul style="list-style-type: none"><li>■ You must be logged in as the Oracle database administrator.</li><li>■ Before you can resynchronize the snapshot image, you must validate a snapplan and create a snapshot.<br/>See <a href="#">“About creating database snapshots”</a> on page 400.<br/>See <a href="#">“Validating a snapplan (dbed_vmchecksnap)”</a> on page 421.<br/>See <a href="#">“Creating a snapshot (dbed_vmsnap)”</a> on page 428.</li><li>■ If a clone database has been created, shut it down and unmount the file systems using the <code>dbed_vmclonedb -o umount</code> command. This command also deports the disk group if the primary and secondary hosts are different.<br/>See <a href="#">“Shutting down the clone database and unmounting file systems”</a> on page 441.</li><li>■ The Oracle database must have at least one mandatory archive destination.</li></ul> |
| Usage Notes   | <ul style="list-style-type: none"><li>■ The <code>dbed_vmsnap</code> command can be executed on either host.</li><li>■ In an off-host configuration, the <code>dbed_vmsnap</code> command imports the disk group that was deported from the secondary host and joins the disk group back to the original disk group. The snapshot volumes again become plexes of the original volumes. The snapshot is then resynchronized.</li><li>■ See the <code>dbed_vmsnap(1M)</code> manual page for more information.</li></ul>                                                                                                                                                                                                                                                                                                                                                                               |

---

**Note:** You must issue commands as an Oracle database administrator in the following procedure.

---

### To resynchronize the snapshot image

- ◆ Use the `dbed_vmsnap` command as follows:

```
$ /opt/VRTS/bin/dbed_vmsnap -S ORACLE_SID -f SNAPPLAN -o resync
```

In this example, the snapshot image is resynchronized with the primary database.

```
$ dbed_vmsnap -S FLAS11r2 -f snap -o resync
```

```
dbed_vmsnap started at 2010-08-13 04:33:36
Snapback Volumes OK for flashdgl1.
The option resync has been completed.
dbed_vmsnap ended at 2010-08-13 04:34:08
```

Now, you can again start creating snapshots.

## Removing a snapshot volume

If a snapshot volume is no longer needed, you can remove it and free up the disk space for other uses by using the `vxedit rm` command.

- Prerequisites
- You must be logged in as superuser.
  - If the volume is on a mounted file system, you must unmount it before removing the volume.

### To remove a snapplan and snapshot volume

- 1 To remove the snapshot and free up the storage used by it:
  - If the snapshot has been taken, remove the snapshot as follows:

```
# vxsnap -g diskgroup dis snapshot_volume
# vxvol -g diskgroup stop snapshot_volume
# vxedit -g diskgroup -rf rm snapshot_volume
```

- If the snapshot has not been taken and the snapshot plex (mirror) exists, remove the snapshot as follows:

```
# vxsnap -g diskgroup rmmir volume
```

## 2 Remove the DCO and DCO volume:

```
# vxsnap -g diskgroup unprepare volume
```

## 3 Remove the snapplan.

```
# /opt/VRTS/bin/dbed_vmchecksnap -S PROD -f snapplan -o remove
```

For example, the following commands will remove a snapshot volume from disk group PRODDg:

```
# vxsnap -g PRODDg dis snap_v1  
# vxvol -g PRODDg stop snap_v1  
# vxedit -g PRODDg -rf rm snap_v1
```

# Guidelines for Oracle recovery

For an optimal Oracle recovery, the following steps should be taken:

- [Back up all control files before Storage Rollback](#)
- [Ensure that the control files are not rolled back](#)
- [Ensure that all archived redo logs are available](#)
- [Media recovery procedures](#)

## Back up all control files before Storage Rollback

This guideline is recommended in case the subsequent Oracle recovery is not successful.

Oracle recommends that you keep at least two copies of the control files for each Oracle database and that you store the copies on different disks. Control files should also be backed up before and after making structural changes to databases.

---

**Note:** The `dbed_ckptcreate` command automatically saves control file and log information when you create a Storage Checkpoint.

---

## Ensure that the control files are not rolled back

A control file is a small binary file that describes the structure of the database and must be available to mount, open, and maintain the database. The control file stores all necessary database file information, log file information, the name of the database, the timestamp of database creation, and synchronization information, such as the Storage Checkpoint and log-sequence information needed for recovery.

Rolling back the control file will result in an inconsistency between the physical database structure and the control file.

## Ensure that all archived redo logs are available

A database backup with online and archived logs is required for a complete database recovery.

Query `V$ARCHIVED_LOG` to list all the archived log information and `V$ARCHIVE_DEST` to list the location of archive destinations.

---

**Note:** Refer to your Oracle documentation for information about querying archived information.

---

For Storage Foundation for Oracle RAC, the archive log destination must be on a Veritas cluster file system.

To restore the necessary archived redo log files, you can query `V$LOG_HISTORY` to list all the archived redo log history or query `V$RECOVERY_LOG` to list only the archived redo logs needed for recovery. The required archived redo log files can be restored to the destination specified in the `LOG_ARCHIVE_DEST` parameter or to an alternate location. If the archived redo logs were restored to an alternate location, use the `ALTER DATABASE RECOVER ... FROM` statement during media recovery.

After Storage Rollback, perform Oracle recovery, applying some or all of the archived redo logs.

---

**Note:** After rolling back the database (including control files and redo logs) to a Storage Checkpoint, you need to recover the Oracle database instance. Rolling the database forward is not supported; that is, you cannot apply archived redo logs.

---



## Media recovery procedures

The following are the procedures for performing either a complete or incomplete media recovery.

### Media recovery procedures

- To perform a complete media recovery:

```
SQL> SET AUTORECOVERY ON;
```

```
SQL> RECOVER DATABASE;
```

- To perform an incomplete media recovery, use one of the following:

```
SQL> RECOVER DATABASE UNTIL CANCEL;
```

or

```
SQL> RECOVER DATABASE UNTIL TIME 'yyyy-mm-dd:hh:mm:ss';
```

(You can confirm the time of error by checking the ../bdump/alert\*.log file.)

or

```
SQL> RECOVER DATABASE UNTIL TIME 'yyyy-mm-dd:hh:mm:ss' \
using backup controlfile;
```

or

```
SQL> RECOVER DATABASE UNTIL CHANGE scn;
```

- To open the database after an incomplete media recovery, use the following:

```
SQL> ALTER DATABASE OPEN RESETLOGS;
```

RESETLOGS resets the log sequence. The RESETLOGS option is required after an incomplete media recovery. After opening the database with the RESETLOGS option, remove the Storage Checkpoint you just rolled back to as well as any Storage Checkpoints that were taken before that one. These earlier Storage Checkpoints can no longer be used for storage rollback. After removing these Storage Checkpoints, be sure to create a new Storage Checkpoint.

---

**Warning:** Attempting to roll back to the same Storage Checkpoint more than once can result in data corruption. After rolling back, be sure to delete the Storage Checkpoint that you rolled back to and then create a new one.

---

See your Oracle documentation for complete information on recovery.

## Database Storage Checkpoint Commands

The Storage Foundation for Databases (SFDB) tools provide a command line interface to many key operations. The command line interface enables you to incorporate command operations into scripts and other administrative processes.

SFDB tools commands supported are located in the /opt/VRTS/bin directory.

The online manual pages for these commands are located in the /opt/VRTS/man directory.

---

**Note:** For a Storage Foundation product database, when you issue the commands, replace `$ORACLE_SID` with `$ORACLE_SID=instance_name` and provide the instance name on which the instance is running.

---

[Table 33-3](#) summarizes the commands available to you from the command line.

**Table 33-3** Database Checkpoint commands

| Command                       | Description                                                                                                                                                                       |
|-------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <code>dbed_ckptcreate</code>  | Command that creates a Storage Checkpoint for an Oracle database.<br><br>See <a href="#">“Creating Storage Checkpoints using dbed_ckptcreate”</a> on page 452.                    |
| <code>dbed_ckptdisplay</code> | Command that displays the Storage Checkpoints associated with an Oracle instance.<br><br>See <a href="#">“Displaying Storage Checkpoints using dbed_ckptdisplay”</a> on page 453. |
| <code>dbed_ckptmount</code>   | Command that mounts a Storage Checkpoint for an Oracle instance.<br><br>See <a href="#">“Mounting Storage Checkpoints using dbed_ckptmount”</a> on page 455.                      |

**Table 33-3** Database Checkpoint commands (*continued*)

| Command                        | Description                                                                                                                                                                                                                                                                                                                                                          |
|--------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <code>dbed_ckptumount</code>   | Command that unmounts a Storage Checkpoint for an Oracle instance.<br><br>See “ <a href="#">Unmounting Storage Checkpoints using <code>dbed_ckptumount</code></a> ” on page 456.                                                                                                                                                                                     |
| <code>dbed_ckptrollback</code> | Command that rolls back an Oracle instance to a Storage Checkpoint point-in-time image.<br><br>See “ <a href="#">Performing Storage Rollback using <code>dbed_ckptrollback</code></a> ” on page 456.                                                                                                                                                                 |
| <code>dbed_ckptremove</code>   | Command that removes a Storage Checkpoint for an Oracle instance.<br><br>See “ <a href="#">Removing Storage Checkpoints using <code>dbed_ckptremove</code></a> ” on page 458.                                                                                                                                                                                        |
| <code>dbed_clonedb</code>      | Command that creates a copy of an Oracle database by cloning all existing database files and recreating the control file accordingly. This cloned database can only be started on the same host as the existing database as long as it uses a different SID.<br><br>See “ <a href="#">Cloning the Oracle instance using <code>dbed_clonedb</code></a> ” on page 458. |

This section displays examples of SFDB commands that are used to perform administrative operations for Storage Checkpoints and Storage Rollbacks. Review the prerequisites and usage notes listed for each command before using that command.

---

**Note:** For detailed information about these commands, their command syntax, and available options, see the individual manual pages.

---

## Creating or updating the repository using `dbed_update`

You can use the `dbed_update` command to create or update the repository.

---

**Note:** Any time you change the structure of the database (for example, by adding or deleting data files, converting PFILE to SPFILE, or converting SPFILE to PFILE), you must run the `dbed_update` command.

---

Before creating or updating the repository, the following conditions must be met:

- |               |                                                                                                                                                                                                                                                                                                                                                                                                        |
|---------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Prerequisites | ■ You must be logged on as the database administrator (typically, the user ID oracle).                                                                                                                                                                                                                                                                                                                 |
| Usage notes   | ■ If the repository already exists, the <code>dbed_update</code> command will refresh the information.<br>■ The database must be up and running, and the <code>ORACLE_SID</code> and the <code>ORACLE_HOME</code> variable arguments must be specified with the <code>-S</code> and <code>-H</code> options, respectively.<br>■ See the <code>dbed_update(1M)</code> manual page for more information. |

#### To update the repository

- ◆ Use the `dbed_update` command as follows:

```
$ /opt/VRTS/bin/dbed_update -S PROD -H /oracle/product/ORA_HOME
```

---

**Note:** If the user switches from SPFILE to PFILE, then the `dbed_update` command must be issued using the `-P` option. The `<ORACLE_PFILE >` option specifies the fully qualified path of the Oracle PFILE, if it is not located under `ORACLE_HOME/dbs` directory.

---

## Creating Storage Checkpoints using `dbed_ckptcreate`

You can use the `dbed_ckptcreate` command to create a Storage Checkpoint for an Oracle database from the command line.

Storage Checkpoints can be online, offline, or instant. By default, Storage Checkpoints are online. For online Storage Checkpoints, the database is put into hot-backup mode when the Storage Checkpoint is created. If offline is specified, the database is expected to be down.

If instant is specified, the database must be online and a Storage Checkpoint will be taken for a "crash recovery"-type recovery.

Before creating a Storage Checkpoint, the following conditions must be met:

- |               |                                                                                                                                                                                               |
|---------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Prerequisites | ■ You must be logged on as the database administrator (typically, the user ID oracle).<br>■ For best recoverability, always keep ARCHIVELOG mode enabled when you create Storage Checkpoints. |
|---------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|

- Usage notes
- `dbed_ckptcreate` stores Storage Checkpoint information in the SFDB repository.
  - See the `dbed_ckptcreate(1M)` manual page for more information.

### To create Storage Checkpoints while the database is online

- ◆ Use the `dbed_ckptcreate` command as follows:

```
$/opt/VRTS/bin/dbed_ckptcreate -S PROD \  
-H /oracle/product/ORA_HOME -o online
```

```
Putting database in backup mode... Done  
Creating Storage Checkpoint Ckpt_971672043 ... Done  
Removing the database from backup mode... Done
```

### To create Storage Checkpoints while the database is offline

- ◆ Use the `dbed_ckptcreate` command as follows:

```
$/opt/VRTS/bin/dbed_ckptcreate -S PROD \  
-H /oracle/product/ORA_HOME -o offline
```

```
Creating Storage Checkpoint Ckpt_971672043 ... Done
```

### To create an instant Storage Checkpoints

- ◆ Ensure that the database is online and use the `dbed_ckptcreate` command as follows:

```
$/opt/VRTS/bin/dbed_ckptcreate -S PROD \  
-H /oracle/product/oracle -o instant
```

```
Creating Storage Checkpoint Ckpt_971672043 ... Done
```

## Displaying Storage Checkpoints using `dbed_ckptdisplay`

You can use the `dbed_ckptdisplay` command to display the Storage Checkpoints associated with an Oracle database from the command line.

Before displaying Storage Checkpoints, the following conditions must be met:

- Prerequisites
- You must be logged on as the database administrator.

Usage Notes

- In addition to displaying the Storage Checkpoints created by SF Enterprise products, `dbed_ckptdisplay` also displays other Storage Checkpoints (for example, Storage Checkpoints created by the Capacity Planning Utility and NetBackup).
- The Status field identifies if the Storage Checkpoint is partial (P), complete (C), error (E), mounted (M), read only (R), writable (W), or of type online (ON), offline (OF), instant (IN), or unknown (UN).
- Database FlashSnap commands are integrated with Storage Checkpoint functionality. It is possible to display and mount Storage Checkpoints carried over with snapshot volumes to a secondary host.
- See the `dbed_ckptdisplay(1M)` manual page for more information.

**To display Database Checkpoints**

- ◆ Use the `dbed_ckptdisplay` command as follows to display information for Storage Checkpoints created by SF Enterprise products:

```
$ /opt/VRTS/bin/dbed_ckptdisplay -S PROD \  
-H /oracle/product/ORA_HOME
```

| Storage Checkpoint | Creation Time            | Status |
|--------------------|--------------------------|--------|
| Ckpt_975877759     | Sun Apr 3 12:50:59 2005  | C+R+ON |
| Ckpt_974428423     | Thu May 16 17:28:42 2004 | C+R+ON |

**To display other Storage Checkpoints**

- ◆ Use the `dbed_ckptdisplay` command as follows:

```
$ /opt/VRTS/bin/dbed_ckptdisplay -S PROD \  
-H /oracle/product/ORA_HOME -o other
```

| Storage Checkpoint           | Creator | Location |
|------------------------------|---------|----------|
| -----                        | -----   | -----    |
| NetBackup_incr_PROD_95518740 | NBU     | /db01    |
| NetBackup_incr_PROD_95518673 | NBU     | /db01    |

## To display all Storage Checkpoints

- ◆ Use the `dbed_ckptdisplay` command as follows:

```
$ /opt/VRTS/bin/dbed_ckptdisplay -S PROD \
-H /oracle/product/ORA_HOME -o all
```

| Storage Checkpoint | Creation Time            | Status |
|--------------------|--------------------------|--------|
| Ckpt_971672042     | Sun May 15 13:55:53 2005 | C+R+IN |
| Ckpt_903937870     | Fri May 13 22:51:10 2005 | C+R+ON |

| Storage Checkpoint           | Creator | Location |
|------------------------------|---------|----------|
| -----                        | -----   | -----    |
| NetBackup_incr_PROD_95518740 | NBU     | /db01    |
| NetBackup_incr_PROD_95518673 | NBU     | /db01    |

## Mounting Storage Checkpoints using `dbed_ckptmount`

You can use the `dbed_ckptmount` command to mount a Storage Checkpoint for the database from the command line.

Before mounting Storage Checkpoints, the following conditions must be met:

- |               |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
|---------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Prerequisites | <ul style="list-style-type: none"> <li>■ You must be logged on as the database administrator.</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| Usage notes   | <ul style="list-style-type: none"> <li>■ The <code>dbed_ckptmount</code> command is used to mount a Storage Checkpoint into the file system namespace. Mounted Storage Checkpoints appear as any other file system on the machine and can be accessed using all normal file system based commands.</li> <li>■ Storage Checkpoints can be mounted as read only or read-write. By default, Storage Checkpoints are mounted as read only.</li> <li>■ If the <code>rw</code> (read-write) option is used, <code>rw_xxxx</code>, where <code>xxx</code> is an integer, will be appended to the Storage Checkpoint name.</li> <li>■ If the specified mount point directory does not exist, then <code>dbed_ckptmount</code> creates it before mounting the Storage Checkpoint, as long as the Oracle database owner has permission to create it.</li> <li>■ Database FlashSnap commands are integrated with Storage Checkpoint functionality. It is possible to display and mount Storage Checkpoints carried over with snapshot volumes to a secondary host.</li> <li>■ See the <code>dbed_ckptmount(1M)</code> manual page for more information.</li> </ul> |

### To mount Storage Checkpoints with the read/write option

- ◆ Use the `dbed_ckptmount` command as follows:

```
$ /opt/VRTS/bin/dbed_ckptmount -S PROD -c Ckpt_971672042 \  
-m /tmp/ckpt_rw -o rw  
Creating Storage Checkpoint Ckpt_971672042_rw_1316003740 ... Done  
Mounting Checkpoint to /tmp/ckpt_rw... Done
```

### To mount Storage Checkpoints with the read only option

- ◆ Use the `dbed_ckptmount` command as follows:

```
$ /opt/VRTS/bin/dbed_ckptmount -S PROD -c Ckpt_971672042 \  
-m /tmp/ckpt_ro -o ro
```

## Unmounting Storage Checkpoints using `dbed_ckptumount`

You can use the `dbed_ckptumount` command to unmount a Storage Checkpoint for an Oracle database from the command line.

Before unmounting Storage Checkpoints, the following conditions must be met:

- |               |                                                                                                                                                                                                                                                                                                                                                                                                                                  |
|---------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Prerequisites | ■ You must be logged on as the database administrator.                                                                                                                                                                                                                                                                                                                                                                           |
| Usage notes   | ■ The <code>dbed_ckptumount</code> command is used to unmount a mounted Storage Checkpoint from the file system namespace. Mounted Storage Checkpoints appear as any other file system on the machine and can be accessed using all normal file system based commands. When mounted Storage Checkpoints are not required, they can be unmounted.<br>■ See the <code>dbed_ckptumount(1M)</code> manual page for more information. |

### To unmount Storage Checkpoints

- ◆ Use the `dbed_ckptumount` command as follows:

```
$ /opt/VRTS/bin/dbed_ckptumount -S PROD -c Ckpt_97167042  
Unmounting the checkpoint... Done
```

## Performing Storage Rollback using `dbed_ckptrollback`

You can use the `dbed_ckptrollback` command to rollback an Oracle database to a Storage Checkpoint.



Before performing a Storage Rollback, the following conditions must be met:

- |               |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
|---------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Prerequisites | ■ You must be logged on as the database administrator.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| Usage notes   | ■ The <code>dbed_ckptrollback</code> command rolls an Oracle database back to a specified Storage Checkpoint. You can perform a Storage Rollback for the entire database, a specific tablespace, or list of datafiles.<br>Database rollback for the entire database requires that the database be inactive before Storage Rollback commences. The <code>dbed_ckptrollback</code> command will not commence if the Oracle database is active. However, to perform a Storage Rollback of a tablespace or datafile, only the tablespace or datafile to be rolled back must be offline (not the entire database).<br>■ See the <code>dbed_ckptrollback(1M)</code> manual page for more information. |

### To roll back an Oracle database to a Storage Checkpoint

- ◆ Use the `dbed_ckptrollback` command as follows:

```
$ /opt/VRTS/bin/dbed_ckptrollback -S PROD \  
-H /oracle/product/ORA_HOME -c Ckpt_903937870
```

### To rollback a tablespace to a Storage Checkpoint

- ◆ Use the `dbed_ckptrollback` command with the `-T` option as follows:

```
$ /opt/VRTS/bin/dbed_ckptrollback -S PROD \  
-H /oracle/product/ORA_HOME -T DATA01 -c Ckpt_903937870
```

If the Oracle database is running, you must take the tablespace offline before running this command. If the tablespace is online, the command will fail.

### To rollback datafiles to a Storage Checkpoint

- ◆ Use the `dbed_ckptrollback` command with the `-F` option as follows:

```
$ /opt/VRTS/bin/dbed_ckptrollback -S PROD \  
-H /oracle/product/ORA_HOME \  
-F /share/oradata1/data01.dbf,/share/oradata2/index01.dbf \  
-c Checkpoint_903937870
```

If the Oracle database is running, you must take the datafile offline before running this command. If the datafile is online, the command will fail.

## Removing Storage Checkpoints using `dbed_ckptremove`

You can use the `dbed_ckptremove` command to remove a Storage Checkpoint for an Oracle database at the command line.

Before removing Storage Checkpoints, the following conditions must be met:

- |               |                                                                                                                                                                                                                                                                                                                                   |
|---------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Prerequisites | ■ You must be logged on as the database administrator.                                                                                                                                                                                                                                                                            |
| Usage notes   | ■ The <code>dbed_ckptremove</code> command is used to remove a Storage Checkpoint from the file system, or file systems, it is associated with. The Storage Checkpoint must have been created using the <code>dbed_ckptcreate(1M)</code> command.<br>■ See the <code>dbed_ckptremove(1M)</code> manual page for more information. |

### To remove Storage Checkpoints

- ◆ Use the `dbed_ckptremove` command as follows:

```
$ /opt/VRTS/bin/dbed_ckptremove -S PROD \  
-c Ckpt_971672042
```

## Cloning the Oracle instance using `dbed_clonedb`

You can use the `dbed_clonedb` command to clone an Oracle instance using a Storage Checkpoint.

Cloning an existing database using a Storage Checkpoint must be done on the same host.

---

### Warning: On AIX:

If the `-o cio` option was used with the `mount` command to mount your primary database file systems, Concurrent I/O will not be preserved when using `dbed_clonedb` to create a clone database.

---

Before cloning the Oracle instance, the following conditions must be met:

- Prerequisites**
- You must first create a Storage Checkpoint. See [“Creating Storage Checkpoints using dbed\\_ckptcreate”](#) on page 452.
  - You must be logged in as the database administrator.
  - Make sure you have enough space and system resources to create a clone database on your system.
  - A clone database takes up as much memory and machine resources as the primary database.
- Usage notes**
- The `dbed_clonedb` command is used to create a copy of a database, cloning all existing database files to new locations.
  - The `ORACLE_SID` and `ORACLE_HOME` environment variables must be set to the primary database.
  - It is assumed that the user has a basic understanding of the database recovery process.
  - See the `dbed_clonedb(1M)` manual page for more information.
- Limitations for Oracle RAC**
- When you clone the database by using Checkpoint, the node can be any node in the same Oracle RAC cluster but the archive log destination is required to be on CFS file system. Otherwise, you must manually copy the archive log files.

[Table 33-4](#) lists the options for the `dbed_clonedb` command.

**Table 33-4** `dbed_clonedb` command options

| Option                      | Description                                                                                                                                                                                      |
|-----------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <code>-S CLONE_SID</code>   | Specifies the name of the new Oracle SID, which will be the name of the new database instance.                                                                                                   |
| <code>-m MOUNT_POINT</code> | Indicates the new mount point of the Storage Checkpoint.                                                                                                                                         |
| <code>-c CKPT_NAME</code>   | Indicates the name of the Storage Checkpoint.                                                                                                                                                    |
| <code>-o umount</code>      | Shuts down the clone database and unmounts the Storage Checkpoint file system.                                                                                                                   |
| <code>-o restartdb</code>   | Mounts the Storage Checkpoint file system and starts the clone database. The <code>-o restartdb</code> option will not attempt to recover the clone database.                                    |
| <code>-d</code>             | Used with the <code>-o umount</code> option. If the <code>-d</code> option is specified, the Storage Checkpoint used to create the clone database will be removed along with the clone database. |

**Table 33-4** dbed\_clonedb command options (*continued*)

| Option | Description                                                                                                                                                                                                                                                      |
|--------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| -p     | Specifies a file containing initialization parameters to be modified or added to the clone database's initialization parameter file prior to startup. The format of the pfile_modification_file is the same as that of the Oracle initialization parameter file. |

**To clone an Oracle instance**

- ◆ Use the dbed\_clonedb command as follows:

```

$/opt/VRTS/bin/dbed_clonedb -S new2 -m /tmp/new2 \
-c onCkpt
Creating Storage Checkpoint onCkpt_rw_1316003740 ... Done
Mounting Checkpoint to /tmp/new2... Done
Cloning the Pfile ... Done
Mounting the database... Done
Recovering the clone database... Done

```

**To shut down the clone database and unmount the Storage Checkpoint**

- ◆ Use the dbed\_clonedb command as follows:

```

$/opt/VRTS/bin/dbed_clonedb -S new2 -o umount
Shutting down the clone database new2... Done
Unmounting the checkpoint... Done

```

**To mount a Storage Checkpoint file system and start the clone database**

- ◆ Use the dbed\_clonedb command as follows:

```

$/opt/VRTS/bin/dbed_clonedb -S new2 -o restartdb
Mounting Checkpoint to /tmp/new2... Done
Mounting the database... Done
Starting the Clone database ... Done

```

**To delete a clone database and the Storage Checkpoint used to create it**

- ◆ Use the `dbed_clonedb` command as follows:

```
$ /opt/VRTS/bin/dbed_clonedb -S new2 -o umount -d
Shutting down the clone database new2... Done
Unmounting the checkpoint... Done
Deleting the Checkpoint onCkpt_rw_1316003740...
Deleting Checkpoint from /db01... Done
```



## Reference

- [Appendix A. Integrating Storage Foundation Application Edition with Oracle Enterprise Manager](#)
- [Appendix B. VCS Oracle agents](#)
- [Appendix C. Sample configuration files for clustered deployments](#)
- [Appendix D. Database FlashSnap status information](#)
- [Appendix E. Using third party software to back up files](#)





# Integrating Storage Foundation Application Edition with Oracle Enterprise Manager

This appendix includes the following topics:

- [About Symantec Plug-ins for Oracle Enterprise Manager](#)
- [Requirements for Symantec Plug-ins for Oracle Enterprise Manager](#)
- [Deploying the Storage Foundation Plug-in for Oracle Enterprise Manager](#)
- [Deploying the Veritas Cluster Server Plug-in for Oracle Enterprise Manager](#)
- [Adding instances for monitoring in the VCS Plug-in for OEM](#)
- [Adding instances for monitoring in the Storage Foundation Plug-in for OEM](#)
- [Viewing Storage Foundation Plug-in for OEM reports](#)
- [Viewing Veritas Cluster Server Plug-in for OEM reports](#)
- [Troubleshooting the SFHA Plug-ins for OEM](#)

## About Symantec Plug-ins for Oracle Enterprise Manager

The Veritas Storage Foundation (SF) and Veritas Cluster Server (VCS) Plug-ins for Oracle Enterprise Manager (OEM) enable you to view Storage Foundation and

VCS objects through the OEM interface. The Symantec Plug-ins extend OEM Grid Control to add support for managing Symantec's storage stack and RAC extensions.

The Storage Foundation Plug-in enables you to view the following through the OEM interface:

- VxFS properties
- VxVM volume information
- LUN information for database objects such as tablespace, redo logs, controlfile, datafiles

The Veritas Cluster Server Plug-in enables you to do the following through the OEM interface:

- Monitor Veritas Cluster Server
- Raise alerts and violations based on resource state

## Requirements for Symantec Plug-ins for Oracle Enterprise Manager

Storage Foundation and High Availability product requirements are included in:

- *Veritas Storage Foundation™ Release Notes*
- *Veritas Storage Foundation™ for Cluster File System Release Notes*
- *Veritas Storage Foundation™<sup>a</sup> for Oracle RAC Release Notes*
- *Veritas Cluster Server™<sup>a</sup> Release Notes*

For Storage Foundation for Databases (SFDB) tools requirements:

See [“Requirements for Storage Foundation for Databases \(SFDB\) tools”](#) on page 74.

### Hardware requirements for OEM Plug-ins

There are no specific hardware requirements or limitations for the OEM plugin. Consult the installation requirements in the documentation for your Storage Foundation product.

### Software requirements for OEM Plug-ins

All Storage Foundation Enterprise products on UNIX support the Storage Foundation Plug-in. All VCS products on UNIX support the VCS Plug-in.

The Storage Foundation Plugin supports the following Oracle database versions:

- Oracle 10gR2
- Oracle 11gR1
- Oracle 11gR2
- Oracle 10gR2 RAC
- Oracle 11gR1 RAC
- Oracle 11gR2 RAC

## Prerequisites for Symantec Plug-ins for OEM

The following prerequisites must be met before you can deploy the Plug-in:

- Oracle Enterprise Manager Grid Control 10g Release 2 or higher system and Agent
- The Symantec Plug-in can only be deployed on UNIX Enterprise Manager Agents
- Access must be granted to run plug in as Oracle user for the VCS plugin

## Supported configurations for Symantec Plug-ins for OEM

Symantec Plug-ins for OEM are supported for the following configurations:

- Storage Foundation with single-instance Oracle
- Storage Foundation HA with single-instance Oracle
- Storage Foundation for Cluster File System with single-instance Oracle
- Storage Foundation for Cluster File System HA with single-instance Oracle
- Storage Foundation for Cluster File System with Oracle RAC database
- Storage Foundation for Cluster File System HA with Oracle RAC database
- Storage Foundation for Oracle RAC, with multiple-instance Oracle

The Storage Foundation Plug-in for OEM does not support:

- Non-VxFS file systems
- Non-VxVM volumes
- SmartTier for Oracle
- Volume or plex rename
- Clone databases created from either checkpoints or snapshots
- RAW datafiles

# Deploying the Storage Foundation Plug-in for Oracle Enterprise Manager

Follow these steps to deploy the Storage Foundation Plug-in for Oracle Enterprise Manager (OEM). The Storage Foundation and VCS Plug-ins can be deployed concurrently or independently.

## To deploy the Storage Foundation Plug-in for OEM

- 1 Get the `symantec_storage.jar` file from `/opt/VRTSdbed/.dba` directory or download it from the following Web site.  
[SF Plug-in for OEM Download](#)
- 2 Log in to Enterprise Manager Grid Control as a Super Administrator.
- 3 Select the Setup link in the upper right corner of the Grid Control Home page, then click the Management Plug-ins link on the left side of the Setup page.
- 4 Select **Import**.
- 5 Select **Browse** and select the Plug-in archive.
- 6 Select **List Archive** to list the Plug-ins from the selected archive.
- 7 Choose the Storage Foundation Plug-in for Oracle Enterprise Manager:
  - Select **symantec\_storage**.
  - Click OK to confirm your choice.
- 8 Verify that you have set preferred credentials on all Agents where you want to deploy the Plug-in.
- 9 In the Management Plug-ins page, click the icon in the Deploy column for the Symantec Storage Foundation Plug-in. The Deploy Management Plug-in wizard appears.
- 10 Click **Add Agents**, then select one or more Agents to which you want to deploy the Plug-in. The wizard reappears and displays the Agent you selected.
- 11 Click **Next**, then click **Finish**.

If you see an error message indicating that the preferred credential is not set up, go to the Preferences page and add the preferred credentials for the Agent target type.

# Deploying the Veritas Cluster Server Plug-in for Oracle Enterprise Manager

After you ensure that the prerequisites are met, follow these steps to deploy the Veritas Cluster Server Plug-in for Oracle Enterprise Manager (OEM). The VCS and Storage Foundation Plug-ins can be deployed concurrently or independently.

## To deploy the VCS Plug-in for OEM

- 1 Get the `vcs.jar` file from `/opt/VRTSvcs/rac/oem/vcs.jar` directory or download from the following Web site.  
[VCS Plug-in for OEM Download](#)
- 2 Log in to Enterprise Manager Grid Control a SYSMAN User.
- 3 Select the Setup link in the upper right corner of the Grid Control Home page, and then click the Management Plug-ins link on the left side of the Setup page.
- 4 Select **Import**.
- 5 Select **Browse** and select the Plug-in archive.
- 6 Select **List Archive** to list the Plug-ins from the selected archive.
- 7 Choose the VCS Plug-in for Oracle Enterprise Manager:
  - Select **VCS**.
  - Click OK to confirm your choice.
- 8 Verify that you have set preferred credentials on all agents where you want to deploy the Plug-in.
- 9 In the Management Plug-ins page, click the icon in the Deploy column for the Symantec Foundation Plug-in. The Deploy Management Plug-in wizard displays.
- 10 Click **Add Agents**, then select one or more agents to which you want to deploy the Plug-in. The wizard reappears and displays the agent you selected.
- 11 Click **Next**, then click **Finish**.

If you see an error message indicating that the preferred credential is not set up, go to the Preferences page and add the preferred credentials for the Agent target type.


# Adding instances for monitoring in the VCS Plug-in for OEM

Follow these steps to add the Plug-in target to Grid Control for central monitoring and management.


To add an instance for monitoring Veritas Cluster Server

- 1 On the Targets tab, select the target to be monitored.  
 For example: [Figure A-2](#) below.
- 2 Select **Veritas Cluster Server** and click **Go**.
- 3 Add a name for the target type: **VCS**.


**Figure A-1** Select target for monitoring

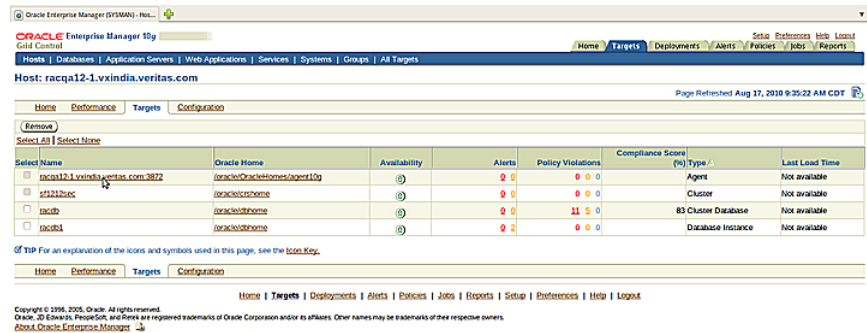

**Figure A-2** Select target type

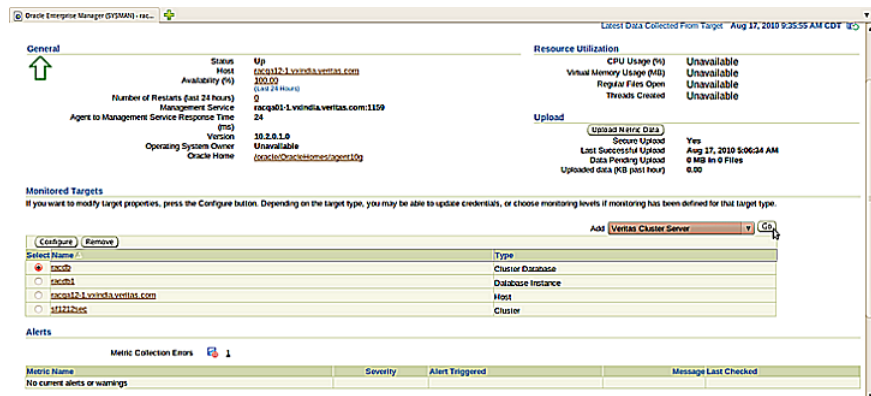

**Figure A-3** Add target name

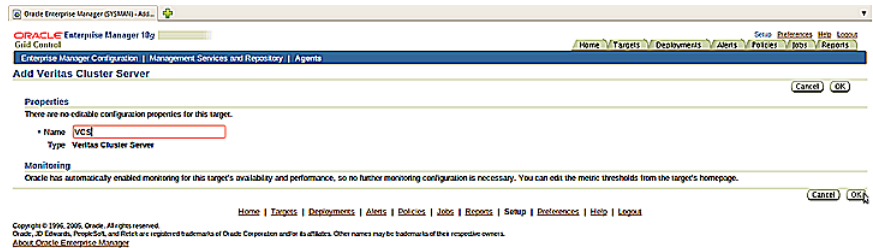

## Adding instances for monitoring in the Storage Foundation Plug-in for OEM


After successfully deploying the Plug-in, follow these steps to add the Plug-in target to Grid Control for central monitoring and management.

To add an instance for monitoring in the Storage Foundation Plug-in for OEM (symantec\_storage)


- 1 In the Agent home page, select the **symantec\_storage** target type from the Add drop-down list, then click **GO**. The Add Symantec Storage page appears as below.
- 2 Add the requested information for:
  - Machine name
  - Port
  - ORACLE\_HOME
  - SID
  - USERNAME
  - password for SID
- 3 Click **OK** to confirm.

The Storage Foundation Plug-in home page displays, which may take a minute.

**Figure A-4** Add Symantec Storage page

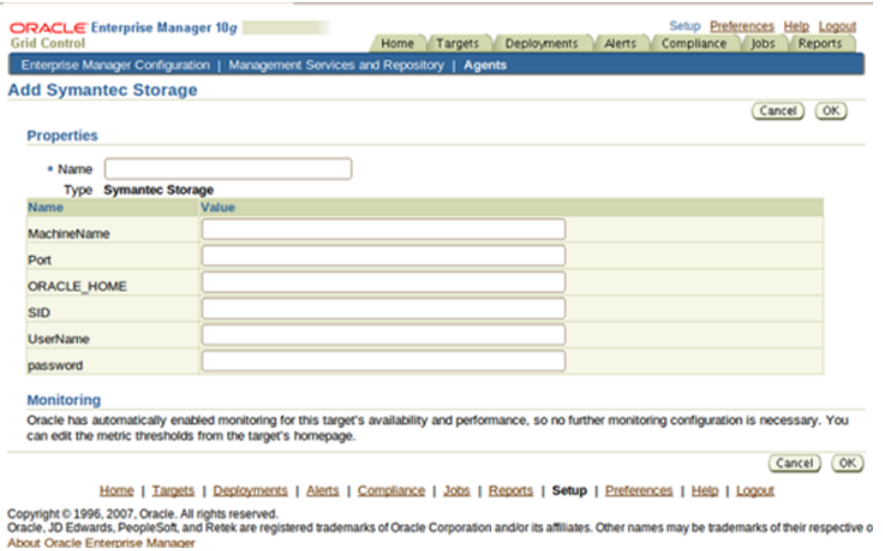

**Figure A-5** Storage Foundation Plug-in home page

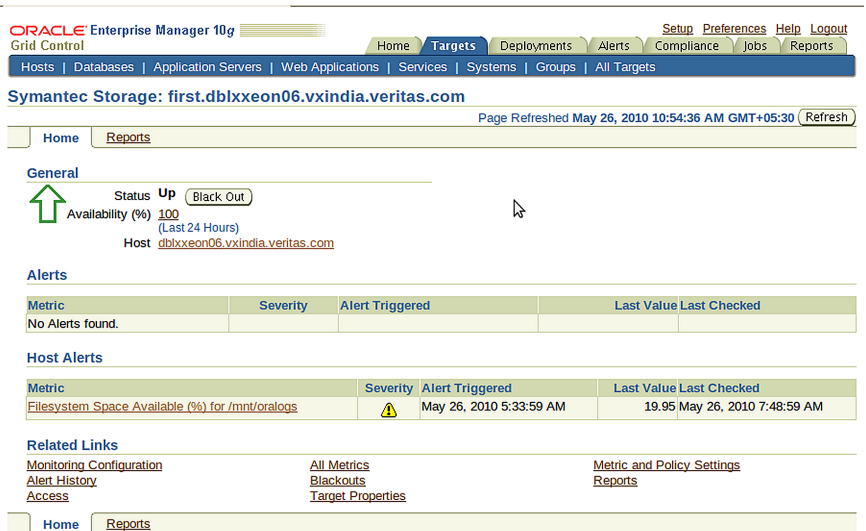



# Viewing Storage Foundation Plug-in for OEM reports


## Viewing reports in the storage Plug-in for OEM

- 1 Before displaying reports in Oracle Enterprise Manager, run `dbed_update`.
- 2 In the Storage Foundation Plug-in home page, select the Reports page. The Reports overview page describes the database information on Symantec Storage software as shown below.

Hourly and daily volume statistics provide a graphical display of volume statistics (KB read/written) over a user-selectable time period. The volume statistics reports are accessible from the Reports tab in Enterprise Manager. Database objects are mapped to the Symantec storage stack. Reports are categorized as:


- Tablespace
- Datafile
- Controlfile
- Redolog
- File
- Temp datafile

Figure A-6 Reports overview page

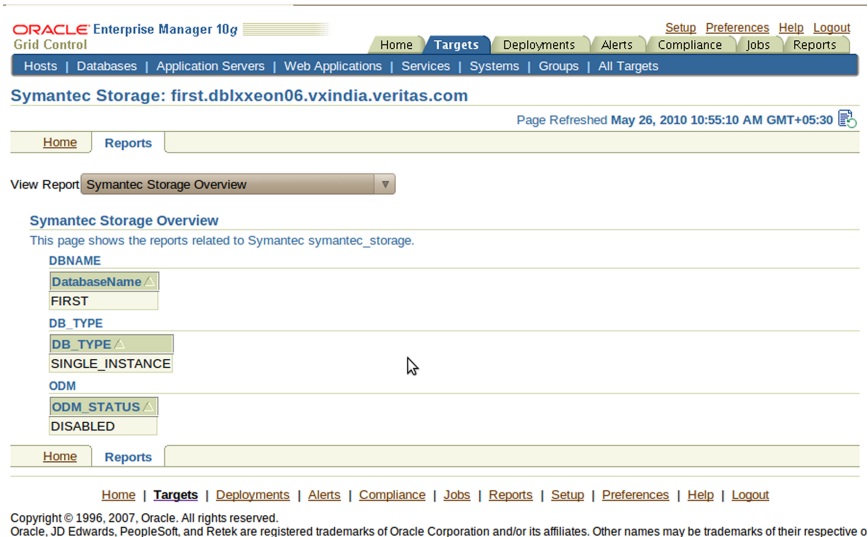


On the Tablespace Report page, the tablespace name is mapped to VxFS mount point, mount properties with volume usage in readable form.

Figure A-7 Tablespace report

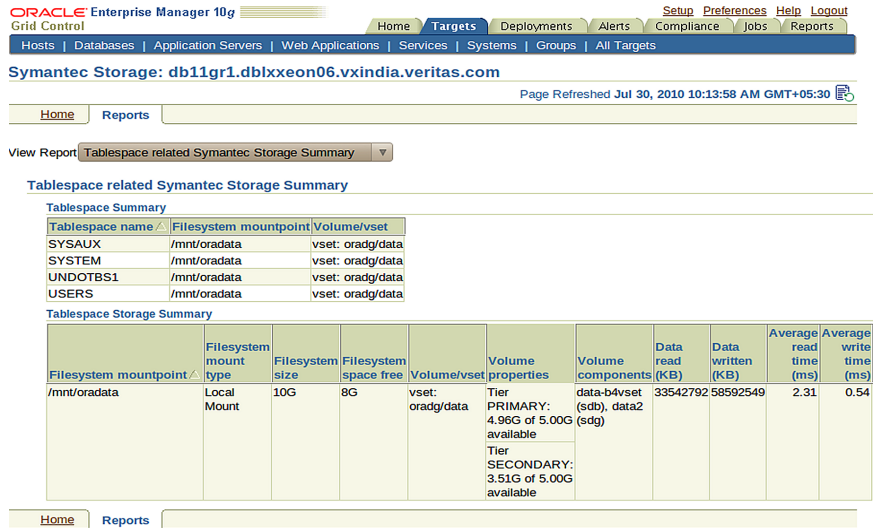


The Datafile report maps the datafile and its tablespace to Symantec volumes & file systems with detailed property information and the LUNs being used by the volume containing the datafile.

Figure A-8 Datafile report

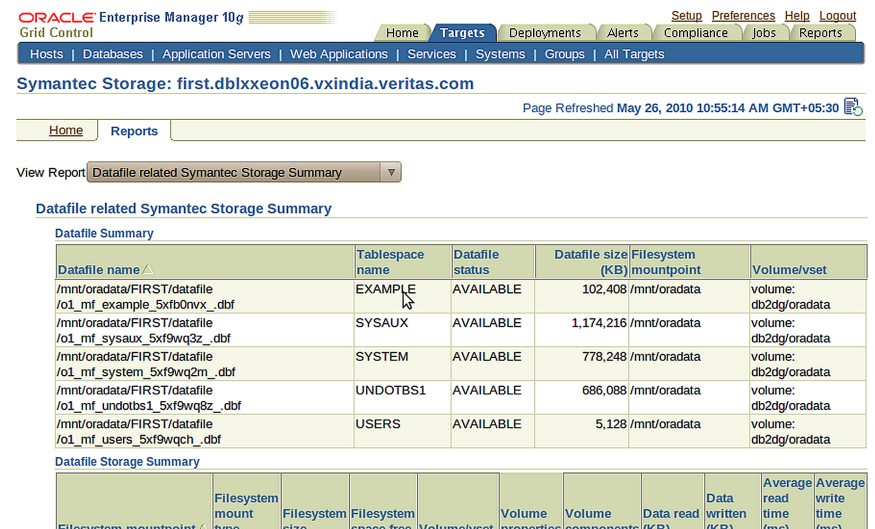


The controlfile, tempfile, and redo log reports are similar to the Datafile Report.

**Figure A-9** Volume Statistics Daily Report

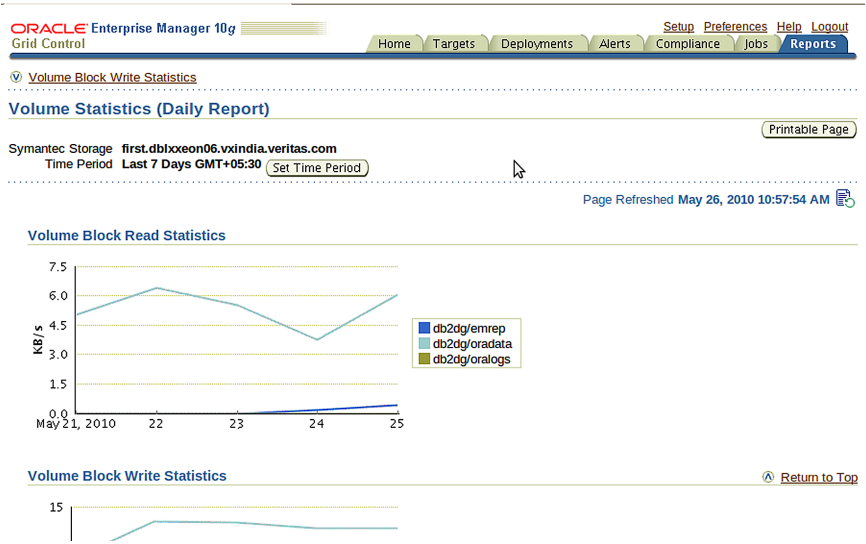

**Figure A-10** Volume Statistics Hourly Report

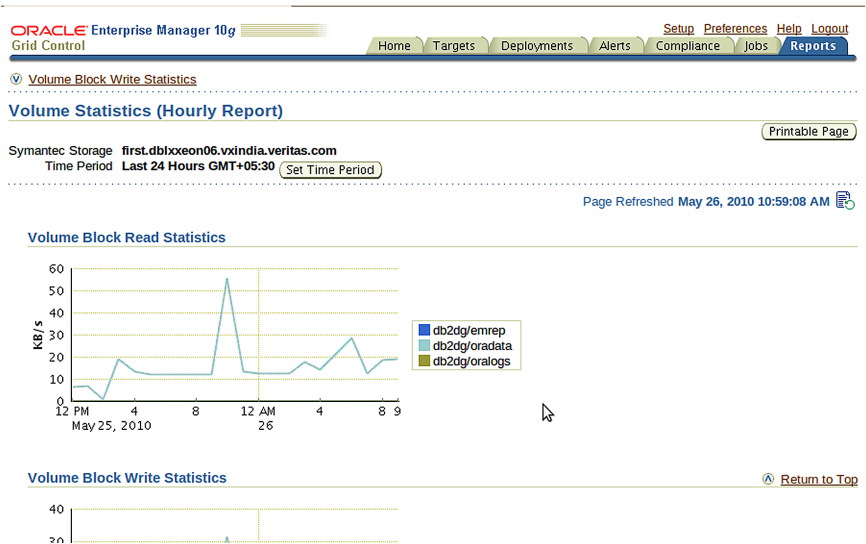

# Viewing Veritas Cluster Server Plug-in for OEM reports

The Veritas Cluster Server Plug-in uses the VCS commands to gather the information on the target server. Therefore, the Oracle user on the target server should be authorized to use the VCS commands.

## To authorize the Oracle user to use the VCS commands

- 1 On the target server, as a superuser, create a VCS user with guest privileges.

```
# hauser -add username -priv Guest
```

- 2 On the target server, as an Oracle user, authorize the Oracle user to use the VCS commands.

```
$ halogin username
```

## To view the VCS Plug-in for OEM reports

- 1 On the **Oracle Enterprise Manager** home page, select the **Targets** tab.
- 2 Click on the host name for which you want to view the reports.
- 3 On the host details page, select **Targets > VCS Plug-in Target Name**.

---

**Note:** In the Targets table, to identify a VCS Plug-in target, look for the entry Veritas Cluster Server in the **Type** column.

---

- 4 On the VCS Plug-in page, select the **Reports** tab.

You can view the following information in the VCS Plug-in for OEM reports:

- Cluster Information
  - Cluster Name
  - I/O Fencing Mode
- Cluster Nodes
  - Node
  - Node ID
- Database Instances
  - Resources
  - Service Group

- SID
- Oracle Home
- Detailed Monitor
- VCS-controlled Oracle Listeners
  - Listener
  - Node
  - VIP
- Private Interconnects
  - Node
  - Private IP
  - Device

**Figure A-11** Cluster Configuration report

**ORACLE Enterprise Manager**  
 Grid Control 11g

Home Targets Deployments

Hosts Databases Middleware Web Applications Services Systems Groups Virtual Servers All Targets

**Veritas Cluster Server: vcs**

Home Reports

View Report Cluster Configuration

**Cluster Configuration**

**Cluster Info**

| Cluster Name | I/O Fencing Mode |
|--------------|------------------|
| clustam0405  | SCSI3            |

**Cluster Nodes**

| Node   | Node Id |
|--------|---------|
| slam04 | 0       |
| slam05 | 1       |

**Database Instances**

| Resource | Service Group | Node   | SID   | ORACLE_HOME         | Detailed Monitor |
|----------|---------------|--------|-------|---------------------|------------------|
| Oracle   | cvm           | slam05 | test2 | /oracle/OraHome_2_0 |                  |
| Oracle   | cvm           | slam04 | test1 | /oracle/OraHome_2_0 |                  |

**VCS controlled Oracle Listeners**

| Listener | Node   | Virtual IP   |
|----------|--------|--------------|
| Listener | slam04 | 10.209.134.9 |
| Listener | slam05 | 10.209.134.5 |

**Private Interconnects**

| Node               | Private IP Device |
|--------------------|-------------------|
| (No rows returned) |                   |

### To view the VCS Plug-in for OEM metrics

- 1 On the VCS Plug-in home page, select the **Home** tab.
- 2 Under **Related Links**, select **All Metrics**.

You can gather the following metrics in the VCS Plug-in for OEM:

- CRS
  - CRS State
- dbResource
  - Database State
  - Detailed Monitoring
  - SID
  - Oracle Home
- Listeners
  - Listener State
  - VIP
- lmxstat
  - rxPkts
  - txPkts
- privnicAddress
  - Address
  - Device
- VCS
  - Fencing Mode
- VCS Nodes
  - Node State
  - Node ID

**Figure A-12** All Metrics page

| Metrics        | Thresholds     | Collection Schedule | Upload Interval  | Last Upload  |
|----------------|----------------|---------------------|------------------|--------------|
| Response       | All            | Every 5 Minutes     | Every Collection | Apr 26, 2011 |
| crs            | All            | Every 5 Minutes     | Every Collection | Apr 26, 2011 |
| dbResource     | All            | Every 5 Minutes     | Every Collection | Apr 26, 2011 |
| listeners      | All            | Every 5 Minutes     | Every Collection | Apr 26, 2011 |
| lmxstat        | Not Applicable | Real-time Only      | n/a              | n/a          |
| privnicAddress | Not Applicable | Every 5 Minutes     | Every Collection | -            |
| vcs            | All            | Every 5 Minutes     | Every Collection | Apr 26, 2011 |
| vcs_nodes      | All            | Every 5 Minutes     | Every Collection | Apr 26, 2011 |

## Troubleshooting the SFHA Plug-ins for OEM

To troubleshoot a Symantec OEM Plug-in problem, you must determine which component is causing the difficulty. It could be the agent or the Oracle Management Server (OMS).

### To check the agent if the agent is running the the monitoring scripts

- 1 Go to the agent home directory.
- 2 Configure the agent to start the metric browser: edit `sysman/log/emd.properties` and set `enableMetricBrowser=true` (it's commented out by default).
- 3 While you have the file open, search for `EMD_URL` and make a note of it.
- 4 Make the agent re-read its config: `./bin/emctl reload agent`.
- 5 From the `EMD_URL`, change `/emd/main` to `/emd/browser/main` and go to that URL. You should see all the targets that this agent is monitoring, including the Symantec Storage target you've added.
- 6 Selecting any target will display the list of metrics. Selecting any metric displayed should run the corresponding monitoring script and display a table of results.

As long as the metric browser shows correct results, the agent is correctly able to gather metrics.

### To find an error in the monitoring scripts

- 1 If the metric browser doesn't show the correct results, look at `sysman/log/emagent.{log,trc}`. One of the files should tell you if you have, for example, some error in the monitoring scripts.
- 2 The lines in the logs are tagged with target name and type. Search for `symantec` to get to the problem more quickly.
- 3 The `./bin/emctl status agent` shows how much data the agent has yet to upload to the OMS. If this value is not getting any smaller, the agent is unable to reach the OMS.

### To find an error in the Oracle Management Server (OMS)

- ◆ Search the OMS home directory for similar logs in `sysman/log/emoms.{log,trc}` for troubleshooting the OMS.

### To correct volume properties not displaying correctly

- ◆ Run `dbed_update`.



# VCS Oracle agents

This appendix includes the following topics:

- [VCS agents for Oracle](#)

## VCS agents for Oracle

The VCS agents for Oracle include the following agents that work together to make Oracle highly available:

- The Oracle agent monitors the database processes.  
See [“Oracle agent functions”](#) on page 481.  
See [“Resource type definition for the Oracle agent”](#) on page 485.
- The Netlsnr agent monitors the listener process.  
See [“Netlsnr agent functions”](#) on page 488.
- The ASMDG agent monitors the Oracle ASM disk groups.

Refer to the *Veritas Cluster Server Agent for Oracle Installation and Configuration Guide* for more details on the agent functions and the resource types.

## Oracle agent functions

The Oracle agent monitors the database processes.

[Table B-1](#) lists the Oracle agent functions.

**Table B-1** Oracle agent functions

| Agent operation | Description                                                                                                                                                                                   |
|-----------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Monitor         | Verifies the status of the Oracle processes. The Oracle agent provides two levels of monitoring: basic and detail.<br>See <a href="#">“Monitor options for the Oracle agent”</a> on page 482. |

**Table B-1** Oracle agent functions (*continued*)

| Agent operation | Description                                                                                                                                                      |
|-----------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Info            | Provides the static and dynamic information about the state of the database.<br><br>See <a href="#">“Info entry point for VCS agent for Oracle”</a> on page 483. |
| Action          | Performs the predefined actions on a resource.<br><br>See <a href="#">“Action entry point for VCS agent for Oracle”</a> on page 484.                             |

## Monitor options for the Oracle agent

The Oracle agent provides two levels of monitoring: basic and detail. By default, the agent does a basic monitoring.

The basic monitoring mode has the following options:

- Process check
- Health check

The MonitorOption attribute of the Oracle resource determines whether the agent must perform basic monitoring in Process check or Health check mode.

[Table B-2](#) describes the basic monitoring options.

**Table B-2** Basic monitoring options

| Option         | Description                                                                                                                                                                  |
|----------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 0<br>(Default) | Process check<br><br>The agent scans the process table for the ora_dbw0, ora_smon, ora_pmon, ora_lmon, and ora_lgwr processes to verify that Oracle is running.              |
| 1              | Health check (supported on Oracle 10g and later)<br><br>The agent uses the Health Check APIs from Oracle to monitor the SGA and retrieve the information about the instance. |

Review the following considerations if you want to configure basic monitoring:

- Basic monitoring of Oracle processes is user-specific. As a result, an Oracle instance started under the context of another user cannot be detected as online. For example, if an Oracle instance is started under the user "oraVRT" and the agent is configured for a user "oracle", the agent will not detect the instance started by "oraVRT" as online.

This could lead to situations where issuing a command to online a resource on a node might online an already running instance on that node (or any other node).

So, Symantec recommends that instances started outside VCS control be configured with the correct Owner attribute corresponding to the OS user for that instance.

- Within a failover service group you cannot online a resource that is already online on another node in a cluster through VCS. But, you can perform this action from outside of VCS. In such circumstances, such a conflict is detected only by health check monitoring option of basic monitoring or detail monitoring. Detail monitoring updates the database table after detecting a failure whereas health check monitoring does not.

If health check monitoring option of basic monitoring or detail monitoring is not configured, then such a conflict would go undetected.

In the detail monitoring mode, the agent performs a transaction on a test table in the database to ensure that Oracle database functions properly. The agent uses this test table for internal purposes. Symantec recommends that you do not perform any other transaction on the test table.

## Info entry point for VCS agent for Oracle

The supports the Info entry point, which provides static and dynamic information about the state of the database.

To invoke the Info entry point, type the following command:

```
# hares -value resource ResourceInfo [system] \  
[-clus cluster | -localclus]
```

The entry point retrieves the following static information:

- |                |              |                |
|----------------|--------------|----------------|
| ■ Version      | ■ InstanceNo | ■ InstanceName |
| ■ DatabaseName | ■ HostName   | ■ StartupTime  |
| ■ Parallel     | ■ Thread     | ■ InstanceRole |

The entry point retrieves the following dynamic information:

- |                            |                       |                  |
|----------------------------|-----------------------|------------------|
| ■ InstanceStatus           | ■ Logins              | ■ OpenMode       |
| ■ LogMode                  | ■ ShutdownPending     | ■ DatabaseStatus |
| ■ Shared Pool Percent free | ■ Buffer Hits Percent |                  |

You can add additional attributes by adding sql statements to the file `/opt/VRTSagents/ha/bin/Oracle/resinfo.sql`. For example:

```
select 'static:HostName:'||host_name from v$instance;
select 'dynamic:ShutdownPending:'||shutdown_pending from
v$instance;
```

The format of the selected record must be as follows:

```
attribute_type:userkey_name:userkey_value
```

The variable *attribute\_type* can take the value static and/or dynamic.

## Action entry point for VCS agent for Oracle

The supports the Action entry point, which enables you to perform predefined actions on a resource.

To perform an action on a resource, type the following command:

You can also add custom actions for the agent.

[Table B-3](#) describes the agent's predefined actions.

**Table B-3** Predefined agent actions

| Action                  | Description                                                                                                                |
|-------------------------|----------------------------------------------------------------------------------------------------------------------------|
| VRTS_GetInstanceName    | Retrieves the name of the configured instance. You can use this option for the Oracle and the Netlsnr resources.           |
| VRTS_GetRunningServices | Retrieves the list of processes that the agent monitors. You can use this option for the Oracle and the Netlsnr resources. |
| DBRestrict              | Changes the database session to enable the RESTRICTED mode.                                                                |
| DBUndoRestrict          | Changes the database session to disable the RESTRICTED mode.                                                               |
| DBSuspend               | Suspends a database.                                                                                                       |
| DBResume                | Resumes a suspended database.                                                                                              |
| DBTbspBackup            | Backs up a tablespace; <code>actionargs</code> contains name of the tablespace to be backed up.                            |

## Resource type definition for the Oracle agent

The Oracle agent of the is represented by the Oracle resource type in VCS.

The following extract shows the type definition of the Oracle resource in the OracleTypes.cf file.

### Attribute definition for the Oracle agent

Review the description of the Oracle agent attributes. The agent attributes are classified as required, optional, and internal.

[Table B-4](#) lists the required attributes. You must assign values to the required attributes.

**Table B-4** Required attributes for Oracle agent

| Required attributes | Type and dimension | Definition                                                                                                                                                                                                                                      |
|---------------------|--------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Sid                 | string-scalar      | The variable \$ORACLE_SID that represents the Oracle instance. The Sid is considered case-sensitive by the Oracle agent and by the Oracle database server.<br><br>For a policy managed database, the Sid attribute should be set to Sid prefix. |
| Owner               | string-scalar      | The Oracle user who has privileges to start or stop the database instance.<br><br>The agent also supports LDAP users as Oracle user.                                                                                                            |
| Home                | string-scalar      | The \$ORACLE_HOME path to Oracle binaries and configuration files. For example, you could specify the path as /opt/ora_home.<br><br><b>Note:</b> Do not append a slash (/) at the end of the path.                                              |

[Table B-5](#) lists the optional attributes for Oracle agent. You can configure the optional attributes if necessary.

**Table B-5** Optional attributes for Oracle agent

| Optional Attributes | Type and Dimension | Definition                                                                                                                                                                                                                                                                                                                                                                                                               |
|---------------------|--------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| StartUpOpt          | string-scalar      | <p>Startup options for the Oracle instance. This attribute can take the following values:</p> <ul style="list-style-type: none"> <li>■ STARTUP</li> <li>■ STARTUP_FORCE</li> <li>■ RESTRICTED</li> <li>■ RECOVERDB</li> <li>■ SRVCTLSTART</li> <li>■ SRVCTLSTART_RO</li> <li>■ CUSTOM</li> </ul> <p>Default is STARTUP_FORCE.</p>                                                                                        |
| ShutDownOpt         | string-scalar      | <p>Shut down options for the Oracle instance. This attribute can take the following values:</p> <ul style="list-style-type: none"> <li>■ IMMEDIATE</li> <li>■ TRANSACTIONAL</li> <li>■ SRVCTLSTOP</li> <li>■ SRVCTLSTOP_TRANSACT</li> <li>■ SRVCTLSTOP_ABORT</li> <li>■ SRVCTLSTOP_IMMEDIATE</li> <li>■ CUSTOM</li> </ul> <p>Default is IMMEDIATE.</p>                                                                   |
| EnvFile             | string-scalar      | <p>The full path name of the file that is sourced by the entry point scripts. This file contains the environment variables set by the user for the Oracle database server environment such as LD_LIBRARY_PATH, NLS_DATE_FORMAT, and so on.</p> <p>The syntax for the contents of the file depends on the login shell of Owner. File must be readable by Owner. The file must not contain any prompts for user input.</p> |
| Pfile               | string-scalar      | <p>The name of the initialization parameter file with the complete path of the startup profile.</p> <p>You can also use the server parameter file. Create a one-line text initialization parameter file that contains only the SPFILE parameter. See the Oracle documentation for more information.</p>                                                                                                                  |

**Table B-5** Optional attributes for Oracle agent (*continued*)

| Optional Attributes | Type and Dimension | Definition                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
|---------------------|--------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| AutoEndBkup         | integer-scalar     | Setting the AutoEndBkup attribute to a non-zero value takes the datafiles in the database out of the backup mode, during Online.<br><br>Default = 1                                                                                                                                                                                                                                                                                                                                                                                |
| MonitorOption       | integer-scalar     | Monitor options for the Oracle instance. This attribute can take values 0 or 1.<br><br><ul style="list-style-type: none"> <li>■ 0—Process check monitoring (recommended)</li> <li>■ 1—Health check monitoring</li> </ul> Default = 0<br><br>See “ <a href="#">Monitor options for the Oracle agent</a> ” on page 482.                                                                                                                                                                                                              |
| MonScript           | string-scalar      | Pathname to the script provided for detail monitoring. The default (basic monitoring) is to monitor the database PIDs only.<br><br><b>Note:</b> Detail monitoring is disabled if the value of the attribute MonScript is invalid or is set to an empty string.<br><br>The pathname to the supplied detail monitor script is /opt/VRTSagents/ha/bin/Oracle/SqlTest.pl.<br><br>MonScript also accepts a pathname relative to /opt/VRTSagents/ha. A relative pathname should start with "./", as in the path ./bin/Oracle/SqlTest.pl. |
| User                | string-scalar      | Internal database user. Connects to the database for detail monitoring.                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| Pword               | string-scalar      | Encrypted password for internal database-user authentication.<br><br>Encrypt passwords only when entering them using the command-line. Passwords must be encrypted using the VCS Encrypt utility.                                                                                                                                                                                                                                                                                                                                  |
| Table               | string-scalar      | Table for update by User/Pword.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| DBName              | string-scalar      | Set this attribute only when the database is a policy managed RAC database. The value of this attribute must be set to the database unique name.                                                                                                                                                                                                                                                                                                                                                                                   |
| ManagedBy           | string-scalar      | Default value for this attribute is ADMIN. In a policy managed RAC database this attribute must be set to POLICY.                                                                                                                                                                                                                                                                                                                                                                                                                  |

**Table B-6** lists the internal attribute for Oracle agent. This attribute is for internal use only. recommends not to modify the value of this attribute.

**Table B-6** Internal attributes for Oracle agent

| Optional Attributes | Type and Dimension | Definition                                                                                                                                 |
|---------------------|--------------------|--------------------------------------------------------------------------------------------------------------------------------------------|
| AgentDirectory      | static-string      | Specifies the location of binaries, scripts, and other files related to the Oracle agent.<br><br>Default is /opt/VRTSagents/ha/bin/Oracle. |

## Netlsnr agent functions

The listener is a server process that listens to incoming client connection requests and manages traffic to the database. The Netlsnr agent brings the listener services online, monitors their status, and takes them offline.

[Table B-7](#) lists the Netlsnr agent functions.

**Table B-7** Netlsnr agent functions

| Agent operation | Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
|-----------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Online          | Starts the listener process by using the following command:<br><br><code>lsnrctl start \$LISTENER</code>                                                                                                                                                                                                                                                                                                                                                                                                |
| Offline         | Stops the listener process by using the following command:<br><br><code>lsnrctl stop \$LISTENER</code><br><br>If the listener is configured with a password, the agent uses the password to stop the listener.                                                                                                                                                                                                                                                                                          |
| Monitor         | Verifies the status of the listener process.<br><br>The Netlsnr agent provides two levels of monitoring, basic and detail: <ul style="list-style-type: none"> <li>■ In the basic monitoring mode, the agent scans the process table for the <code>tnslsnr</code> process to verify that the listener process is running.</li> <li>■ In the detail monitoring mode, the agent uses the <code>lsnrctl status \$LISTENER</code> command to verify the status of the Listener process. (Default)</li> </ul> |
| Clean           | Scans the process table for <code>tnslsnr \$LISTENER</code> and kills it.                                                                                                                                                                                                                                                                                                                                                                                                                               |
| Action          | Performs the predefined actions on a resource.<br><br>See <a href="#">“Action entry point for VCS agent for Oracle”</a> on page 484.                                                                                                                                                                                                                                                                                                                                                                    |



## Resource type definition for the Netlsnr agent

The Netlsnr agent of the is represented by the Netlsnr resource type in VCS.

### Attribute definition for the Netlsnr agent

Review the description of the Netlsnr agent attributes. The agent attributes are classified as required, optional, and internal.

[Table B-8](#) lists the required attributes for Netlsnr agent. You must assign values to the required attributes.

**Table B-8** Required attributes for Netlsnr agent

| Required attributes | Type and dimension | Definition                                                                                                                                                                        |
|---------------------|--------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Owner               | string-scalar      | The Oracle user who has privileges to start or stop the listener process.<br>The agent also supports LDAP users as Oracle user.                                                   |
| Home                | string-scalar      | The \$ORACLE_HOME path to Oracle binaries and configuration files. For example, you could specify the path as /opt/ora_home.<br>Do not append a slash (/) at the end of the path. |

[Table B-9](#) lists the optional attributes for Netlsnr agent. You can configure the optional attributes if necessary.

**Table B-9** Optional attributes for Netlsnr agent

| Optional attributes | Type and dimension | Definition                                                                                                                                                                                                                                                 |
|---------------------|--------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| TnsAdmin            | string-scalar      | The \$TNS_ADMIN path to directory in which the Listener configuration file resides (listener.ora).<br>Default is /var/opt/oracle.                                                                                                                          |
| Listener            | string-scalar      | Name of Listener. The name for Listener is considered case-insensitive by the Netlsnr agent and the Oracle database server.<br>Default is LISTENER.                                                                                                        |
| LsnrPwd             | string-scalar      | The VCS encrypted password used to stop and monitor the listener. This password is set in the Listener configuration file.<br>Encrypt passwords only when entering them using the command-line. Passwords must be encrypted using the VCS Encrypt utility. |

**Table B-9** Optional attributes for Netlsnr agent (*continued*)

| Optional attributes | Type and dimension | Definition                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
|---------------------|--------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| EnvFile             | string-scalar      | <p>Specifies the full path name of the file that is sourced by the entry point scripts. This file contains the environment variables set by the user for the Oracle listener environment such as LD_LIBRARY_PATH and so on.</p> <p>The syntax for the contents of the file depends on the login shell of Owner. This file must be readable by Owner. The file must not contain any prompts for user input.</p>                                                                                                                                      |
| MonScript           | string-scalar      | <p>Pathname to the script provided for detail monitoring. By default, the detail monitoring is enabled to monitor the listener process.</p> <p><b>Note:</b> If the value of the attribute MonScript is set to an empty string, the agent disables detail monitoring.</p> <p>The pathname to the supplied detail monitoring script is /opt/VRTSagents/ha/bin/Netlsnr/LsnrTest.pl.</p> <p>MonScript also accepts a pathname relative to /opt/VRTSagents/ha. A relative pathname should start with "./", as in the path ./bin/Netlsnr/LsnrTest.pl.</p> |

[Table B-10](#) lists the internal attribute for Netlsnr agent. This attribute is for internal use only. recommends not to modify the value of this attribute.

**Table B-10** Internal attributes for Netlsnr agent

| Optional Attributes | Type and Dimension | Definition                                                                                                                                          |
|---------------------|--------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------|
| AgentDirectory      | static-string      | <p>Specifies the location of binaries, scripts, and other files related to the Netlsnr agent.</p> <p>Default is /opt/VRTSagents/ha/bin/Netlsnr.</p> |

# Sample configuration files for clustered deployments

This appendix includes the following topics:

- [About sample configuration files](#)
- [Sample configuration file for Storage Foundation for High Availability](#)
- [Sample configuration file for Storage Foundation for Clustered File System HA](#)
- [Sample configuration file for Storage Foundation for Oracle RAC](#)

## About sample configuration files

The sample configuration files illustrate several deployment scenarios:

- Storage Foundation for High Availability
- Storage Foundation for Clustered File System HA
- Storage Foundation for Oracle RAC

You may use the sample files as a guideline for setting up your environment.

Sample configuration files with the Oracle agent resources is located in the following directory:

- For SF HA: `/etc/VRTSagents/ha/conf/Oracle`
- For SFCFS HA: `/etc/VRTSagents/ha/conf/Oracle`
- For SF Oracle RAC: `/etc/VRTSvcsvcs/conf/sample_rac`

# Sample configuration file for Storage Foundation for High Availability

```
include "OracleASMTypes.cf"
include "types.cf"
include "Db2udbTypes.cf"
include "OracleTypes.cf"
include "SybaseTypes.cf"

cluster cluster1 (
    UserNames = { admin = anoGniNkoJooMwoInl }
    Administrators = { admin }
)

system system1 (
)

system system2 (
)

group Oracle_Group (
    SystemList = { system1 = 0, system2 = 1 }
    AutoStartList = { system1 }
)

DiskGroup DG-orabindg (
    DiskGroup = qorasrc
    PanicSystemOnDGLoss = 1
)

DiskGroup DG-oradatadg (
    DiskGroup = oradatadg
    PanicSystemOnDGLoss = 1
)

IP Ora_IP (
    Device = NIC0
    Address = "10.182.187.108"
    NetMask = "255.255.248.0"
)

Mount ora_arch1_mnt (
```

```

MountPoint = "/oraarch"
BlockDevice = "/dev/vx/dsk/oradatadg/oraarchvol"
FSType = vxfs
FsckOpt = "-n"
)

Mount ora_bin_mnt (
    MountPoint = "/opt/oracle/orahome"
    BlockDevice = "/dev/vx/dsk/qorasrc/orasrc10g"
    FSType = vxfs
    FsckOpt = "-n"
)

Mount ora_data1_mnt (
    MountPoint = "/oradata"
    BlockDevice = "/dev/vx/dsk/oradatadg/oradatavol"
    FSType = vxfs
    FsckOpt = "-n"
)

NIC Ora_NIC (
    Device = NIC0
)

Oracle Ora_Oracle (
    Sid = ora10g
    Owner = oracle
    Home = "/opt/oracle/orahome"
    Pfile = "/opt/oracle/orahome/dbs/initora10g.ora"
    AgentDebug = 1
)

Ora_IP requires Ora_NIC
Ora_Oracle requires ora_arch1_mnt
Ora_Oracle requires ora_bin_mnt
Ora_Oracle requires ora_data1_mnt
ora_arch1_mnt requires DG-oradatadg
ora_bin_mnt requires DG-orabindg
ora_data1_mnt requires DG-oradatadg

// resource dependency tree
//

```

```
//      group Oracle_Group
//      {
//      IP Ora_IP
//      {
//      NIC Ora_NIC
//      }
//      Oracle Ora_Oracle
//      {
//      Mount ora_arch1_mnt
//      {
//      DiskGroup DG-oradatadg
//      }
//      Mount ora_bin_mnt
//      {
//      DiskGroup DG-orabindg
//      }
//      Mount ora_data1_mnt
//      {
//      DiskGroup DG-oradatadg
//      }
//      }
//      }
```

## Sample configuration file for Storage Foundation for Clustered File System HA

```
include "OracleASMTypes.cf"
include "types.cf"
include "CFSTypes.cf"
include "CVMTypes.cf"
include "Db2udbTypes.cf"
include "OracleTypes.cf"
include "SybaseTypes.cf"

cluster cluster1 (
    UserNames = { admin = HopHojOlpKppNxpJom }
    Administrators = { admin }
    HacliUserLevel = COMMANDROOT
)

system system1 (
)
```

```

system system2 (
)

group Oracle_Group (
  SystemList = { system1 = 0, system2 = 1 }
  AutoStartList = { system1 }

)

IP Ora_IP (
  Device = NIC0
  Address = "10.200.117.243"
  NetMask = "255.255.255.0"
)

NIC Ora_NIC (
  Device = NIC0
)

Oracle Ora_Oracle (
  Sid = orallg
  Owner = oracle
  Home = "/opt/oracle/orahome"
  Pfile = "/opt/oracle/orahome/dbs/initorallg.ora"
  AgentDebug = 1
)

Ora_IP requires Ora_NIC
Ora_Oracle requires Ora_IP

// resource dependency tree
//
//   group Oracle_Group
//   {
//   Oracle Ora_Oracle
//     {
//       IP Ora_IP
//         {
//           NIC Ora_NIC
//         }
//     }
//   }

```

```
        //      }

group cvm (
    SystemList = { system1 = 0, system2 = 1 }
    AutoFailOver = 0
    Parallel = 1
    AutoStartList = { system1, system2 }
)

CFSMount oraarch_mnt (
    Critical = 0
    MountPoint = "/oraarch"
    BlockDevice = "/dev/vx/dsk/oradatadg/oraarchvol"
)

CFSMount orabin_mnt (
    Critical = 0
    MountPoint = "/ora11"
    BlockDevice = "/dev/vx/dsk/ora11bin/ora11vol"
)

CFSMount oradata2_mnt (
    Critical = 0
    MountPoint = "/oradata2"
    BlockDevice = "/dev/vx/dsk/oradatadg2/oradatavol2"
)

CFSMount oradata_mnt (
    Critical = 0
    MountPoint = "/oradata"
    BlockDevice = "/dev/vx/dsk/oradatadg/oratavol"
)

CFSMount oraredo_mnt (
    Critical = 0
    MountPoint = "/oraredo"
    BlockDevice = "/dev/vx/dsk/oradatadg2/oraredovol"
)

CFSfsckd vxfsckd (
)
```



```

CVMCluster cvm_clus (
    CVMClustName = cluster1
    CVMNodeId = { system1 = 0, system2 = 1 }
    CVMTransport = gab
    CVMTimeout = 200
)

CVMVolDg orabin_voldg (
    CVMDiskGroup = orabindg
    CVMVolume = { oracle_volume }
    CVMActivation = sw
)

CVMVolDg oradata2_voldg (
    CVMDiskGroup = oradatadg2
    CVMVolume = { oradatavol2, oraaredovol }
    CVMActivation = sw
)

CVMVolDg oradata_voldg (
    CVMDiskGroup = oradatadg
    CVMVolume = { oradatavol, oraarchvol }
    CVMActivation = sw
)

CVMVxconfigd cvm_vxconfigd (
    Critical = 0
    CVMVxconfigdArgs = { syslog }
)

cvm_clus requires cvm_vxconfigd
oraarch_mnt requires oradata_voldg
oraarch_mnt requires vxfsckd
orabin_mnt requires vxfsckd
orabin_voldg requires cvm_clus
oradata2_mnt requires oradata2_voldg
oradata2_mnt requires vxfsckd
oradata2_voldg requires cvm_clus
oradata_mnt requires oradata_voldg
oradata_mnt requires vxfsckd
oradata_voldg requires cvm_clus

```

```
oraredo_mnt requires oradata2_voldg
oraredo_mnt requires vxfsckd
vxfsckd requires cvm_clus

// resource dependency tree
//
//   group cvm
//   {
//     CFSSMount oraarch_mnt
//     {
//       CVMVolDg oradata_voldg
//       {
//         CVMCluster cvm_clus
//         {
//           CVMVxconfigd cvm_vxconfigd
//         }
//       }
//       CFSfsckd vxfsckd
//       {
//         CVMCluster cvm_clus
//         {
//           CVMVxconfigd cvm_vxconfigd
//         }
//       }
//     }
//     CFSSMount orabin_mnt
//     {
//       CFSfsckd vxfsckd
//       {
//         CVMCluster cvm_clus
//         {
//           CVMVxconfigd cvm_vxconfigd
//         }
//       }
//     }
//     CVMVolDg orabin_voldg
//     {
//       CVMCluster cvm_clus
//       {
//         CVMVxconfigd cvm_vxconfigd
//       }
//     }
//   }
}
```

```

//      CFSMount oradata2_mnt
//      {
//          CVMVolDg oradata2_voldg
//          {
//              CVMCluster cvm_clus
//              {
//                  CVMVxconfigd cvm_vxconfigd
//              }
//          }
//      }
//      CVMVolDg orabin_voldg
//      {
//          CVMCluster cvm_clus
//          {
//              CVMVxconfigd cvm_vxconfigd
//          }
//      }
//      CFSMount oradata2_mnt
//      {
//          CVMVolDg oradata2_voldg
//          {
//              CVMCluster cvm_clus
//              {
//                  CVMVxconfigd cvm_vxconfigd
//              }
//          }
//          CFSfsckd vxfsckd
//          {
//              CVMCluster cvm_clus
//              {
//                  CVMVxconfigd cvm_vxconfigd
//              }
//          }
//      }
//      CFSMount oradata_mnt
//      {
//          CVMVolDg oradata_voldg
//          {
//              CVMCluster cvm_clus
//              {
//                  CVMVxconfigd cvm_vxconfigd
//              }
//          }
//      }

```

```
//          CFSfsckd vxfsckd
//          {
//          CVMCluster cvm_clus
//          {
//          CVMVxconfigd cvm_vxconfigd
//          }
//          }
//          }
//          CFSMount oraredo_mnt
//          {
//          CVMVolDg oradata2_voldg
//          {
//          CVMCluster cvm_clus
//          {
//          CVMVxconfigd cvm_vxconfigd
//          }
//          }
//          CFSfsckd vxfsckd
//          {
//          CVMCluster cvm_clus
//          {
//          CVMVxconfigd cvm_vxconfigd
//          }
//          }
//          }
//          }
```

## Sample configuration file for Storage Foundation for Oracle RAC

```
include "OracleASMTypes.cf"
include "types.cf"
include "CFSTypes.cf"
include "CRSResource.cf"
include "CVMTypes.cf"
include "MultiPrivNIC.cf"
include "OracleTypes.cf"
include "PrivNIC.cf"

cluster cluster1 (
    UserNames = { admin = hqrJqlQnrMrrPzrLqo,
                  "root@sxsvm02" = 0,
```

```

        "root@sxsvm03" = 0 }
Administrators = { admin, "root@sxsvm02",
                  "root@sxsvm03" }
SecureClus = 1
UseFence = SCSI3
HacliUserLevel = COMMANDROOT
)

system system1 (
)

system system2 (
)

group VxSS (
    SystemList = { system1 = 0, system2 = 1 }
    Parallel = 1
    AutoStartList = { system1, system2 }
    OnlineRetryLimit = 3
    OnlineRetryInterval = 120
)

Phantom phantom_vxss (
)

ProcessOnOnly vxatd (
    IgnoreArgs = 1
    PathName = "/opt/VRTSat/bin/vxatd"
)

// resource dependency tree
//
//     group VxSS
//     {
//     Phantom phantom_vxss
//     ProcessOnOnly vxatd
//     }

group cvm (
    SystemList = { system1 = 0, system2 = 1 }

```

```
AutoFailOver = 0
Parallel = 1
AutoStartList = { system1, system2 }
)

Application cssd (
    Critical = 0
    StartProgram = "/opt/VRTSvcs/rac/bin/cssd-online"
    StopProgram = "/opt/VRTSvcs/rac/bin/cssd-offline"
    CleanProgram = "/opt/VRTSvcs/rac/bin/cssd-clean"
    MonitorProgram = "/opt/VRTSvcs/rac/bin/cssd-monitor"
)

CFMount ocrmnt (
    Critical = 0
    MountPoint = "/ocr_vote"
    BlockDevice = "/dev/vx/dsk/ocrdg/ocrvol"
)

CFSfsckd vxfsckd (
)

CVMCluster cvm_clus (
    CVMClustName = sfrac_rp2
    CVMNodeId = { system1 = 0, system2 = 1 }
    CVMTransport = gab
    CVMTimeout = 200
)

CVMVolDg ocrvoldg (
    Critical = 0
    CVMDiskGroup = ocrdg
    CVMVolume = { ocrvol }
    CVMActivation = sw
)

CVMVxconfigd cvm_vxconfigd (
    Critical = 0
    CVMVxconfigdArgs = { syslog }
)

PrivNIC ora_priv (
    Critical = 0
```

```
Device @system1 = { NIC1 = 0, NIC2 = 1 }
Device @system2 = { NIC1 = 0, NIC2 = 1 }
Address @system1 = "192.168.12.1"
Address @system2 = "192.168.12.2"
NetMask = "255.255.240.0"
)

cssd requires ocrmnt
cssd requires ora_priv
cvm_clus requires cvm_vxconfigd
ocrmnt requires ocrvoldg
ocrmnt requires vxfsckd
ocrvoldg requires cvm_clus
vxfsckd requires cvm_clus

// resource dependency tree
//
//   group cvm
//   {
//   Application cssd
//     {
//       CFSSMount ocrmnt
//         {
//           CVMVolDg ocrvoldg
//             {
//               CVMCluster cvm_clus
//                 {
//                   CVMVxconfigd cvm_vxconfigd
//                 }
//             }
//           CFSfsckd vxfsckd
//             {
//               CVMCluster cvm_clus
//                 {
//                   CVMVxconfigd cvm_vxconfigd
//                 }
//             }
//         }
//       PrivNIC ora_priv
//     }
//   }
}
```

```
group ora_db (
    SystemList = { system1 = 0, system2 = 1 }
    AutoStart = 0
    AutoFailOver = 0
    Parallel = 1
    AutoStartList = { system1, system2 }
)

CFSMount archive_mnt (
    Critical = 0
    MountPoint = "/oraarchive"
    BlockDevice = "/dev/vx/dsk/oradg/archivevol"
)

CFSMount ora_data_mnt (
    Critical = 0
    MountPoint = "/oradata"
    BlockDevice = "/dev/vx/dsk/oradg/oradatavol"
)

CVMVolDg ora_data_voldg (
    Critical = 0
    CVMDiskGroup = oradg
    CVMVolume = { oradatavol }
    CVMActivation = sw
)

Oracle ORACLE (
    Sid @system1 = orarp1
    Sid @system2 = orarp2
    Owner = oracle
    Home = "/oracle/app/orahome"
    Pfile @system1 = "/oradata/orarp/spfileorarp.ora"
    Pfile @system2 = "/oradata/orarp/spfileorarp.ora"
    StartUpOpt = SRVCTLSTART
    ShutDownOpt = SRVCTLSTOP
)

requires group cvm online local firm
ORACLE requires archive_mnt
ORACLE requires ora_data_mnt
archive_mnt requires ora_data_voldg
```



```
ora_data_mnt requires ora_data_voldg
```

```
// resource dependency tree
//
//   group ora_db
//   {
//   Oracle ORACLE
//     {
//       CFSSMount archive_mnt
//         {
//           CVMVolDg ora_data_voldg
//         }
//       CFSSMount ora_data_mnt
//         {
//           CVMVolDg ora_data_voldg
//         }
//     }
//   }
```



# Database FlashSnap status information

This appendix includes the following topics:

- [About Database FlashSnap status information](#)
- [Database FlashSnap Snapshot status information from the CLI](#)

## About Database FlashSnap status information

Veritas Database FlashSnap functionality provides the following information for the various snapplan stages and snapshot procedures:

- Snapshot status information
- Snapshot database status information

## Database FlashSnap Snapshot status information from the CLI

To view snapshot status information from the command line interface (CLI), use the `dbed_vmchecksnap` command with the `-o list` option to list all available snapplans for a specified database. Snapshot status information is displayed in the command output under the column heading `SNAP_STATUS`.

---

**Note:** The snapshot status and snapshot database status information may also appear in error messages.

---

## Snapshot status information from the CLI

Table D-1 shows detailed information about each snapshot status (SNAP\_STATUS) value.

**Table D-1** Snapshot status information from the CLI

| SNAP_STATUS        | Completed operations                                                                                                                        | Allowed operations                                                                                                                                                                    |
|--------------------|---------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| init_full          | <ul style="list-style-type: none"> <li>■ dbed_vmchecksnap -o validate (successful)</li> <li>■ dbed_vmsnap -o resync (successful)</li> </ul> | dbed_vmsnap -o snapshot                                                                                                                                                               |
| init_db            | dbed_vmchecksnap -o validate -f <i>snapplan</i> (failed)                                                                                    | Ensure that your storage configuration has been set up correctly.                                                                                                                     |
| snapshot_start     | dbed_vmsnap -o snapshot (failed)                                                                                                            | Contact your system administrator for help. Use Veritas Volume Manager commands to resynchronize the snapshot volumes, and use dbed_vmsnap -o snapshot -F to force snapshot creation. |
| snapshot_end       | ■ dbed_vmsnap -o snapshot (successful)                                                                                                      | <ul style="list-style-type: none"> <li>■ dbed_vmsnap -o resync</li> <li>■ dbed_vmclonedb -o mount mountdb recoverdb</li> </ul>                                                        |
| snapshot_vol_start | dbed_vmsnap -o snapshot (failed)                                                                                                            | Re-run dbed_vmsnap -o snapshot                                                                                                                                                        |
| snapshot_vol_end   |                                                                                                                                             |                                                                                                                                                                                       |
| resync_dg_start    |                                                                                                                                             |                                                                                                                                                                                       |
| resync_dg_end      |                                                                                                                                             |                                                                                                                                                                                       |
| resync_vol_start   | dbed_vmsnap -o resync (failed)                                                                                                              | Re-run dbed_vmsnap -o resync                                                                                                                                                          |
| resync_vol_end     |                                                                                                                                             |                                                                                                                                                                                       |
| snapshot_dg_start  |                                                                                                                                             |                                                                                                                                                                                       |
| snapshot_dg_end    |                                                                                                                                             |                                                                                                                                                                                       |

**Table D-1** Snapshot status information from the CLI (*continued*)

| SNAP_STATUS     | Completed operations                        | Allowed operations                                                                                                                                                                                 |
|-----------------|---------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| resync_start    | dbed_vmsnap -o resync<br>(failed)           | Contact your system administrator for help. Use Veritas Volume Manager commands to resynchronize the snapshot volumes, and use <code>dbed_vmsnap -o snapshot -F</code> to force snapshot creation. |
| mount_start     | dbed_vmclonedb -o mount<br>(failed)         | dbed_vmclonedb -o -umount                                                                                                                                                                          |
| mount_end       | dbed_vmclonedb -o mount<br>(successful)     | dbed_vmclonedb -o umount                                                                                                                                                                           |
| restartdb_start | dbed_vmclonedb -o restartdb<br>(failed)     | <ul style="list-style-type: none"> <li>■ dbed_vmclonedb -o umount</li> <li>■ Start the snapshot database manually.</li> </ul>                                                                      |
| restartdb_end   | dbed_vmclonedb -o restartdb<br>(successful) | dbed_vmclonedb -o umount                                                                                                                                                                           |
| mountdb_start   | dbed_vmclonedb -o mountdb<br>(failed)       | Recover the snapshot database manually, then run <code>dbed_vmclonedb -o update_status</code>                                                                                                      |
| mountdb_end     | dbed_vmclonedb -o mountdb<br>(successful)   | <ul style="list-style-type: none"> <li>■ dbed_vmclonedb -o update_status</li> <li>■ dbed_vmclonedb -o umount</li> </ul>                                                                            |
| recoverdb_start | dbed_vmclonedb -o recoverdb<br>(failed)     | <ul style="list-style-type: none"> <li>■ Recover the snapshot database manually, then run <code>dbed_vmclonedb -o update_status</code></li> <li>■ dbed_vmclonedb -o umount</li> </ul>              |
| recoverdb_end   | dbed_vmclonedb -o recoverdb<br>(successful) | dbed_vmclonedb -o umount                                                                                                                                                                           |

**Table D-1** Snapshot status information from the CLI (*continued*)

| SNAP_STATUS  | Completed operations                  | Allowed operations                                                                                                                                  |
|--------------|---------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------|
| umount_start | dbed_vmclonedb -o umount (failed)     | Verify that your file system(s) are not busy and retry the command.                                                                                 |
| umount_end   | dbed_vmclonedb -o umount (successful) | <ul style="list-style-type: none"> <li>■ dbed_vmclonedb -o mount</li> <li>■ dbed_vmclonedb -o restartdb</li> <li>■ dbed_vmsnap -o resync</li> </ul> |

## Snapshot database status information from the CLI

To view snapshot database status information from the command line, use the `dbed_vmchecksnap` command with the `-o list` option to list all available snapplans for a specified database. Snapshot database status information is displayed in the command output under the column heading `DB_STATUS`.

[Table D-2](#) shows detailed information about each database status (`DB_STATUS`) value.

**Table D-2** Snapshot database status information from the CLI

| DB_STATUS          | Completed operations                                                                                                                          |
|--------------------|-----------------------------------------------------------------------------------------------------------------------------------------------|
| init               | <ul style="list-style-type: none"> <li>■ dbed_vmchecksnap -o validate (successful)</li> <li>■ dbed_vmsnap -o snapshot (successful)</li> </ul> |
| database_recovered | dbed_vmclonedb -o recoverdb (successful)                                                                                                      |

# Using third party software to back up files

This appendix includes the following topics:

- [About using third party software to back up files](#)
- [Using third party software to back up files](#)

## About using third party software to back up files

SF Enterprise products supports the use of third party software for backing up files. However, Quick I/O is not supported for SF Enterprise products.

## Using third party software to back up files

If you are using third party backup software other than Veritas NetBackup, ensure that it can back up and restore VxFS extent attributes. This is important because restored Oracle Disk Manager (ODM) files rely on proper extent layouts for best performance.

## Backing up and restoring Oracle Disk Manager files using Oracle RMAN

Oracle allocates Oracle Disk Manager files with contiguous extent layouts for good database performance. When you restore database files they are allocated using these extent attributes. If you are using Oracle RMAN's conventional backup method with any backup software, datafiles are also restored with the proper extent layouts.

If you are using RMAN's "proxy copy" backup method with a backup software other than NetBackup, the extent attributes may not be backed up. To ensure the

restored datafiles have proper extent layouts, preallocate the lost datafiles using the `odmmkfile` command. This command preallocates contiguous space for files prior to restoring them.

For example, to preallocate an Oracle datafile with size 100M, assuming the Oracle database block size is 8K, use the `odmmkfile` command and enter:

```
# /opt/VRTS/bin/odmmkfile -h 8k -s 100m filename
```

For additional information about the `odmmkfile` command, see the `odmmkfile(1)` manual page.



# Index

## A

- about deploying Oracle with VVR 65
- agent operations
  - Netlsnr agent 488
  - Oracle agent 481
- allocating
  - memory to buffer cache 361–362
- allocation policies
  - extent 28
  - extent based 27
- analyzing I/O statistics 148
- archiving
  - using NetBackup 235
- asyncdsk 368
- asyncdsk\_included 368
- asynchronous I/O 136
- attribute definitions
  - Netlsnr agent 489
  - Oracle agent 485
- attributes
  - ndcomirs 203
  - regionsize 205
- automatic backups 235

## B

- backing up
  - using NetBackup 235
- backups
  - creating for volumes 163
- backward compatibility 387
  - Database FlashSnap 426, 428, 432, 445
  - dbed\_ckptcreate 452
  - dbed\_ckptdisplay 453
  - dbed\_ckptremove 458
  - dbed\_ckptrollback 456
  - dbed\_ckptumount 456
  - dbed\_clonedb 458
  - dbed\_update 451
  - dbed\_vmchecksnap command 426
  - dbed\_vmclonedb command 432
  - dbed\_vmsnap -o resync command 445

- backward compatibility (*continued*)
  - dbed\_vmsnap command 428
  - preparing storage 388
  - Storage Checkpoints 450, 452–453, 456, 458
  - Storage Rollback 456
- balancing I/O load 357
- basic monitoring 482
  - health check 482
  - process 482
- benefits of Quick I/O 135
- BLI Backup. *See* Block-Level Incremental Backup
- block size 28
- Block-Level Incremental Backup
  - overview 236
- buffer cache 361–362

## C

- cache
  - creating for use by space-optimized snapshots 203
  - for space-optimized instant snapshots 165
- cache advisory
  - checking setting for 154
- cache hit ratio
  - calculating 148
- Cached Quick I/O
  - caching statistics 355
  - customizing 151
  - determining files to use 148
  - disabling individual files 151
  - enabling individual files 152
  - making settings persistent 152
  - prerequisite for enabling 143
- caches
  - used by space-optimized instant snapshots 166
- calculating cache hit ratio 148
- checkpoints
  - supported operations 344
- chmod command
  - commands
    - chmod 142

- chown command
  - commands
    - chown 142
- clone database behavior 181
- cloning checkpoints 222
- cloning database 189, 205, 227
- cloning database on secondary host 198
- collecting I/O statistics 148
- commands
  - dbed\_ckptcreate 447
  - fstyp 236
  - grep 146
  - qioadmin 151
  - qiostat 148, 355–356
  - vxtunefs 153, 362, 364
- compression advisor
  - about 301
  - command reference 307
  - command syntax 307
  - compressing archive logs 302
  - compressing data files 304
  - displaying candidates 303
  - displaying compressed data files 305
  - uncompressing data files 306
- copy-on-write technique 169, 217
- CREADs 150
- creating checkpoints 219
- creating database clone 189, 205, 227
- creating database clones
  - golden image snapshots 209
- creating multiple clones
  - FlashSnap snapshots 209
- cron 348
- customizing Cached Quick I/O 151

## D

- data Storage Checkpoints definition 173
- database
  - tuning 359, 369
- Database FlashSnap
  - advanced operations 198
  - cloning database on secondary host 198
  - creating a snapshot mirror 186
  - creating database clone 189
  - mountdb 197
  - node in the cluster configuration 185
  - overview 400
  - recovering database manually 197
  - refreshing mirror volumes 195

- Database FlashSnap (*continued*)
  - resynchronizing mirror volumes 195
  - resyncing mirror volumes 195
  - same-node configuration 184
  - setting up hosts 184
  - using 189
- database performance
  - using Quick I/O 136
- Database Storage Checkpoints
  - cloning 222
  - configuration parameters 341
  - creating 219
  - creating clone 222
  - deleting 220
  - gathering data 224
  - mounting 220
  - offline mode 224
  - restoring data files 223
  - restoring data files in tablespace 223
  - supported operations 344
  - unmounting 221
- databases
  - backing up using BLI Backup 236
  - integrity of data in 164
- DB\_BLOCK\_SIZE 362, 364
- DB\_FILE\_MULTIBLOCK\_READ\_COUNT 362, 364
- dbed\_ckptcreate command 447
- DBWR processes 361
- default
  - block size 28
- default\_indir\_size tunable parameter 351
- defragmentation
  - extent 348
  - scheduling 348
- deleting checkpoints 220
- deploying Oracle
  - adding disks to disk group 53
  - creating database 59
  - creating disk group 53
  - creating file system 56
  - creating volumes 55
  - determining file systems 52
  - disk group configuration 55
  - file system creation guidelines 58
  - installing Oracle 59
  - mounting file system 58
  - off-host configuration requirements 61
  - planning storage 52
  - selecting volume layout 53

- deploying Oracle *(continued)*
  - setting up disk group 53
  - volume configuration 56
  - VVR environment 65–67, 69
- deploying Oracle single instance 51
- deploying Oracle with VVR
  - configuring VVR 69
  - setting up primary node 66
  - setting up secondary node 67
- destroying database clone 230
- destroying FileSnap snapshot 231
- detail monitoring 482
- direct I/O 136, 359–360
- disabling Cached Quick I/O for a file 151
- disabling qio\_cache\_enable flag 144
- discovered\_direct\_iosize tunable parameter 351
- disk group
  - naming a disk group 55
- disk space allocation 28
- double buffering 136

## E

- enabling Cached Quick I/O for a file 152
- enabling qio\_cache\_enable flag 143
- ENOSPC 175
- eqmemsize 368
- excessive reads or writes 357
- expansion
  - file system 348
- extent 27
- extent allocation 28

## F

- FastResync
  - Persistent 163
- file system creation 56
- file system creation guidelines 58
- file system locking 136
- fileset
  - primary 168
- FileSnap
  - configuration parameters 339
  - creating database clone 227
  - destroying database clone 230
  - destroying snapshot 231
  - listing clones 233
  - listing snapshots 233
  - preparing to use 227

## FileSnap *(continued)*

- restoring data files 232
- supported operations 341
- using 227, 230–233

FileSnaps

- about 175
- backup 178
- block map fragmentation 177
- concurrent I/O 176
- copy-on-write 177
- properties 175
- reading from 177

FlashSnap 159

- configuration parameters 333
- supported operations 335

fragmentation

- monitoring 348
- reorganization facilities 348
- reporting 348

fragmented file system

- characteristics 349

free space 348

- monitoring 348

freezing and thawing, relation to Storage Checkpoints 168

fsadm

- reporting extent fragmentation 349
- scheduling 349

fstyp command 236

full backups 235

## G

- grep command 146

## H

- health check APIs 482
- health check monitoring 482

## I

I/O

- asynchronous 136
- direct 136
- kernel asynchronous 136
- load balancing 357
- performance data 356
- statistics
  - obtaining 346

**improving**

- database performance 136

- incremental backups 235

- initial\_extent\_size tunable parameter 352

- inodes, block based 28

- instant snapshots

- space-optimized 165

- intent log 26

- intent log resizing 27

- intent logging 164

**K**

- kernel asynchronous I/O 136

- kernel settings

- modifying 369

- kernel write locks 136

**L**

- listing FileSnap snapshots 233

**M**

- manual recovery

- after restore 384

- clone database 383

- max\_async\_ports 368

- max\_buf\_data\_size tunable parameter 352

- max\_direct\_iosize tunable parameter 352

- max\_direct\_iosz 362, 364

- max\_diskq tunable parameter 352

- max\_seqio\_extent\_size tunable parameter 353

- max\_thread\_proc 347, 368

- maxuprc 370

- maxuproc 369

- monitoring

- basic 482

- detail 482

- monitoring fragmentation 348

- mountdb operation 197

- mounting checkpoints 220

- moving hot files or busy file systems 357

- multiple block operations 28

**N**

- name space

- preserved by Storage Checkpoints 218

- ndcomirs attribute 203

- NetBackup

- overview 235

- NetBackup BLI Extension

- overview 236

- Netlsnr agent

- attribute definitions 489

- operations 488

- resource type 489

- Netlsnr agent attributes

- AgentDebug 489

- AgentDirectory 489

- EnvFile 489

- Home 489

- Listener 489

- LsnrPwd 489

- MonScript 489

- Owner 489

- TnsAdmin 489

- no longer supported 388

- nproc 369

**O**

- OMF

- working with Oracle Disk Manager 97

- online snapshots

- configuring for replicated databases 321

- configuring for VVR mode 321

- operations

- Netlsnr agent 488

- Oracle agent 481

- Oracle agent

- attribute definitions 485

- operations 481

- resource type 485

- Oracle agent attributes

- AgentDebug 485

- AgentDirectory 485

- AutoEndBkup 485

- EnvFile 485

- Home 485

- MonitorOption 485

- MonScript 485

- Owner 485

- Pfile 485

- Pword 485

- ShutDownOpt 485

- Sid 485

- StartupOpt 485

- Table 485

- User 485

- Oracle considerations
  - database layouts 179
  - supported configurations 180
- Oracle Disk Manager 93
  - benefits 95
  - disabling 111
  - preparing existing databases for use with 104–105
  - restoring files using NetBackup 237, 511
- Oracle Managed Files
  - working with Oracle Disk Manager 97

## P

- PARALLEL\_MAX\_SERVERS 359
- PARALLEL\_MIN\_SERVERS 359
- parameters
  - default 350
  - tunable 350
  - tuning 349
- performance
  - obtaining statistics for volumes 346
  - tuning
    - for databases 359
- performance data
  - using 356
- performance tuning
  - for databases 369
  - list of guides 345
- persistence
  - for Cached Quick I/O settings 152
- Persistent FastResync 163
- point-in-time copy methods
  - comparison 160
- point-in-time copy solutions
  - applications 158
- PREADs 150
- primary fileset relation to Storage Checkpoints 168
- process monitoring 482

## Q

- qio\_cache\_enable flag
  - disabling 144
  - enabling 143
- qio\_cache\_enable tunable parameter 353
- qioadmin command 151
- qiostat
  - output of 148
- qiostat command 148, 355–356

## Quick I/O

- benefits 135
- improving database performance with 136
- performance tuning for 368

## R

- read\_nstream 362, 364
- read\_nstream tunable parameter 350
- read\_pref\_io 362, 364
- read\_pref\_io tunable parameter 350
- recovering clone database manually 215
- redo logs 236
- regionsize attribute 203, 205
- removable Storage Checkpoints definition 174
- report
  - extent fragmentation 348
- resource type
  - Netlsnr 489
  - Oracle 485
- restoring
  - using NetBackup 235
- restoring from checkpoints 223
- resyncing mirror volumes 195

## S

- selecting volume layout 53
- semmap 371
- semgni 369, 371
- semgns 369, 371
- semgnu 371
- semmsl 371
- sequential scans 359–360
- settings
  - making Cached Quick I/O persistent 144
- SFDB authentication
  - adding nodes 86
  - authorizing users 87
  - configuring vxdbd 85
- SFDB commands
  - backward compatibility 387
  - vxsfadm 329
- shmmx 370
- shmmn 370
- shmmni 370
- shmseg 371
- single-threaded sequential scans 359–360

- snapshot volumes
  - creating
    - using the command line 188, 388
- snapshots
  - instant 165
  - space-optimized instant 165
- SO snapshots
  - configuration parameters 336
  - configuring for replicated databases 318
  - configuring for VVR mode 318
  - creating database clone 205
  - HA environment 208
  - mountdb 215
  - recovering clone database manually 215
  - replicated databases 317
  - supported operations 338
  - using 205
  - VVR mode 317
- `SORT_AREA_SIZE` 359
- space-optimized instant snapshots 165
- space-optimized snapshots
  - configuration parameters 336
  - configuring for replicated databases 318
  - configuring for VVR mode 318
  - creating database clone 205
  - golden image snapshots 209
  - HA environment 208
  - mountdb 215
  - recovering clone database manually 215
  - replicated databases 317
  - supported operations 338
  - using 205
  - VVR mode 317
- statistics
  - volume I/O 346
- storage cache 165
  - used by space-optimized instant snapshots 166
- Storage Checkpoints 166, 172
  - data Storage Checkpoints 173
  - definition of 218
  - freezing and thawing a file system 168
  - operation failures 174
  - removable Storage Checkpoints 174
  - space management 174
  - types of 173
- Storage Rollback 172
  - guidelines for recovery 447
- system failure recovery 26
- system global area (SGA) 359–360

## T

- third-mirror break-off snapshots
  - configuring for replicated databases 321
  - configuring for VVR mode 321
  - replicated databases 317
  - VVR mode 317
- troubleshooting SFDB tools 377
- tunable I/O parameters 350
  - `default_indir_size` 351
  - `discovered_direct_iosize` 351
  - `initial_extent_size` 352
  - `max_buf_data_size` 352
  - `max_direct_iosize` 352
  - `max_diskq` 352
  - `max_seqio_extent_size` 353
  - `qio_cache_enable` 353
  - `read_nstream` 350
  - `read_pref_io` 350
  - `write_nstream` 350
  - `write_pref_io` 350
  - `write_throttle` 354
- tunefstab file
  - adding tuning parameters to 144
- Tuning
  - file I/O statistics 355
  - VxFS 347
  - VxFS I/O parameters 349
- tuning
  - for database performance 359, 369
  - vxfs 347
  - VxVM 346
- tuning I/O parameters 349
- tuning parameters
  - adding to tunefstab file 144

## U

- unattended backups 235
- unmounting checkpoints 221
- upgrade
  - from raw devices 105
- using performance data 356
- utilities. *See* commands

## V

- verifying caching using vxfstune parameters 146
- verifying vxtunefs system parameters 146
- Veritas Operations Manager 31

- volume layout
  - selecting 53
- volume layouts 56
- volumes
  - backing up 163
  - obtaining performance statistics 346
- vxassist
  - used to add DCOs to volumes 186
- VxFS
  - performance tuning 359
  - tuning 347
- vxprint
  - verifying if volumes are prepared for instant snapshots 203
- vxsfadm
  - Database Storage Checkpoints configuration parameters 341
  - Database Storage Checkpoints supported operations 344
  - FileSnap configuration parameters 339
  - FileSnap supported operations 341
  - FlashSnap configuration parameters 333
  - FlashSnap supported operations 335
  - space-optimized snapshots configuration parameters 336
  - space-optimized snapshots supported operations 338
- vxsfadm command 329
- vxsnap
  - preparing volumes for instant snapshots 203
- vxstat
  - used to obtain volume performance statistics 346
- vxtunefs command 153, 362, 364
  - commands
    - vxtunefs 146
- VxVM
  - tuning 346

## W

- write\_nstream tunable parameter 350
- write\_pref\_io tunable parameter 350
- write\_throttle tunable parameter 354